

air prep

Proportional and Regulator Instrumentation



numatics®

Precision Instrumentation	3-22
Features and Benefits	3
E-22 Series	4-7
Electropneumatic Transducer	8-9
Economy Miniature Electropneumatic Transducer	10-11
Miniature Electropneumatic Transducer	12-13
Precision Regulator	14-15
High Flow Precision Regulator	16-17
Ratio Relay Volume Booster	18-19
Instrument Air Regulator	20-21
Replacement and Repair Kits	22



1. Precision Regulator

- Standard or High Relief

2. High Flow Precision Regulator

- 880 Series Regulator
- 881 Series Precision High Flow Exhaust Relief Regulator

3. Electropneumatic Transducer

- I/P or E/P Versions
- Magnet Coil Technology

4. Miniature Electropneumatic Transducer

- I/P or E/P Versions
- R84 Series Magnet Coil Technology
- R85 Series Piezo Electric Technology

5. Ratio Relay Volume Booster

- Precision Air Pilot Regulation
- 1:1 or 1:6 Ratios Available

6. Instrument Air Regulator


- Precision Regulator with Integral 5 Micron Filtration

7. Proportional Regulator

- E22 Series
- I/P or E/P Versions
- Microprocessor Controlled



E22 Series

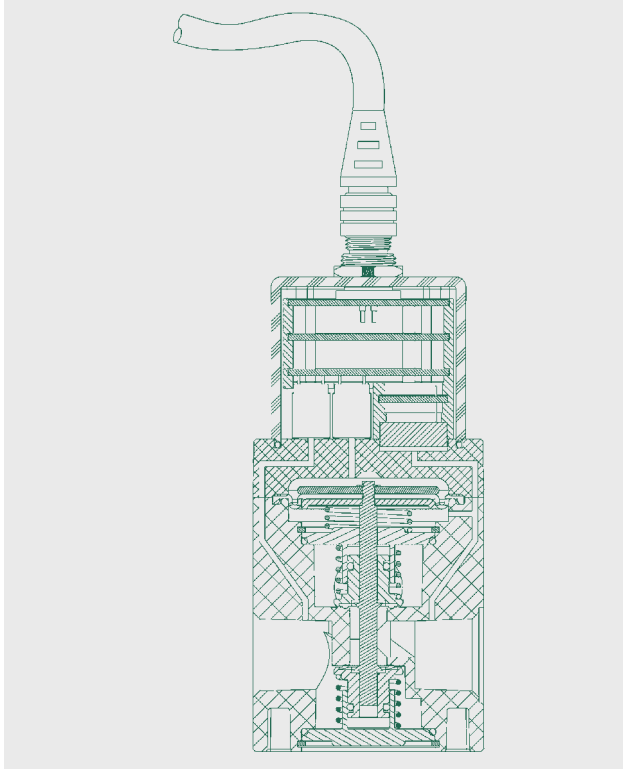

Electronic Proportional Regulator E22 Series

Application

The E22 Series electronic proportional regulator quickly and accurately adjusts output pressure in relation to an electrical control signal. It meets requirements of industrial environments including rapid cycling, high flow, quick response, and repeatability; which are found in paint, welding, packaging, textile, medical, and many other process applications.

The electrical control signal can be either analog or digital. The analog unit has infinite pressure settings directly proportional to the command signal of 4-20mA, 0-10VDC, or 0-5VDC. The digital unit has a 2 bit binary signal and has four discrete pressures that are user defined.

Features

- Available in 1/4, 3/8, and 1/2 NPT, BSPP, or BSPT threads.
- Three ways of mounting (integral mounting holes, bracket kit, and bottom mount).
- Modular to 22 Series FlexiBlok design.
- Three setable performance modes in a single unit (accurate, standard, and fast).
- Large digital display for easy reading.
- Designed to meet IP65 and NEMA 4 requirements.
- Fully ported 1/2 exhaust for optimal performance.


Specifications

Electronic Proportional Regulator E22 Series		
Minimum Supply Pressure		Set Pressure + 15 PSI (1 BAR)
Maximum Supply Pressure		Standard Pressure: 150 PSI (10 BAR) High Pressure: 190 PSI (13 BAR)
Regulating Pressure Ranges		Standard Pressure: 0-100 PSI (0-6.9 BAR) High Pressure: 0-150 PSI (0-10.2 BAR)
Power Supply	Voltage	24VDC ±10%
	Current Consumption	0.04 A
Input Signal	Current	4-20mA
	Voltage	0-5VDC, 0-10VDC
Input Impedance	Current	≤ 250 Ω
	Voltage	4.8 KΩ
Output Signal	Analog Output	0-5VDC 0-10VDC 4-20mA
	Switch Output	24VDC (NPN)
Linearity		≤ ±1% of span
Hysteresis		≤ ±.5% of span
Repeatability		≤ ±.5% of span
Sensitivity		≤ ±.2% of span
Temp Characteristics		±.5% of span /°C
Output Display	Accuracy	±.5% of span
	Minimum unit	PSI 0.1, BAR 0.01, kPa 001., kgf/cm² 0.01
Temperature Range		40-120°F 4-50°C
Enclosure		IP65 and NEMA 4 Equivalent
Weight		1.4lbs (0.64kg)



How it works

1. Microprocessor control circuit compares input signal to pressure sensor signal, which monitors the downstream regulated pressure. Microprocessor control circuit analyzes this data and energizes the appropriate control valve (supply or exhaust control valve)
2. If the regulated pressure is too low the microprocessor control circuit energizes the supply control valve, which allows supply pressure to increase the control pressure moving the rolling diaphragm downward opening the supply poppet allowing supply pressure downstream increasing regulated pressure.
3. If the regulated pressure is too high the microprocessor control circuit energizes the exhaust control valve, which allows the control pressure to vent to atmosphere, moving the rolling diaphragm upward opening the exhaust poppet and allowing downstream regulated pressure to decrease by exhausting to atmosphere

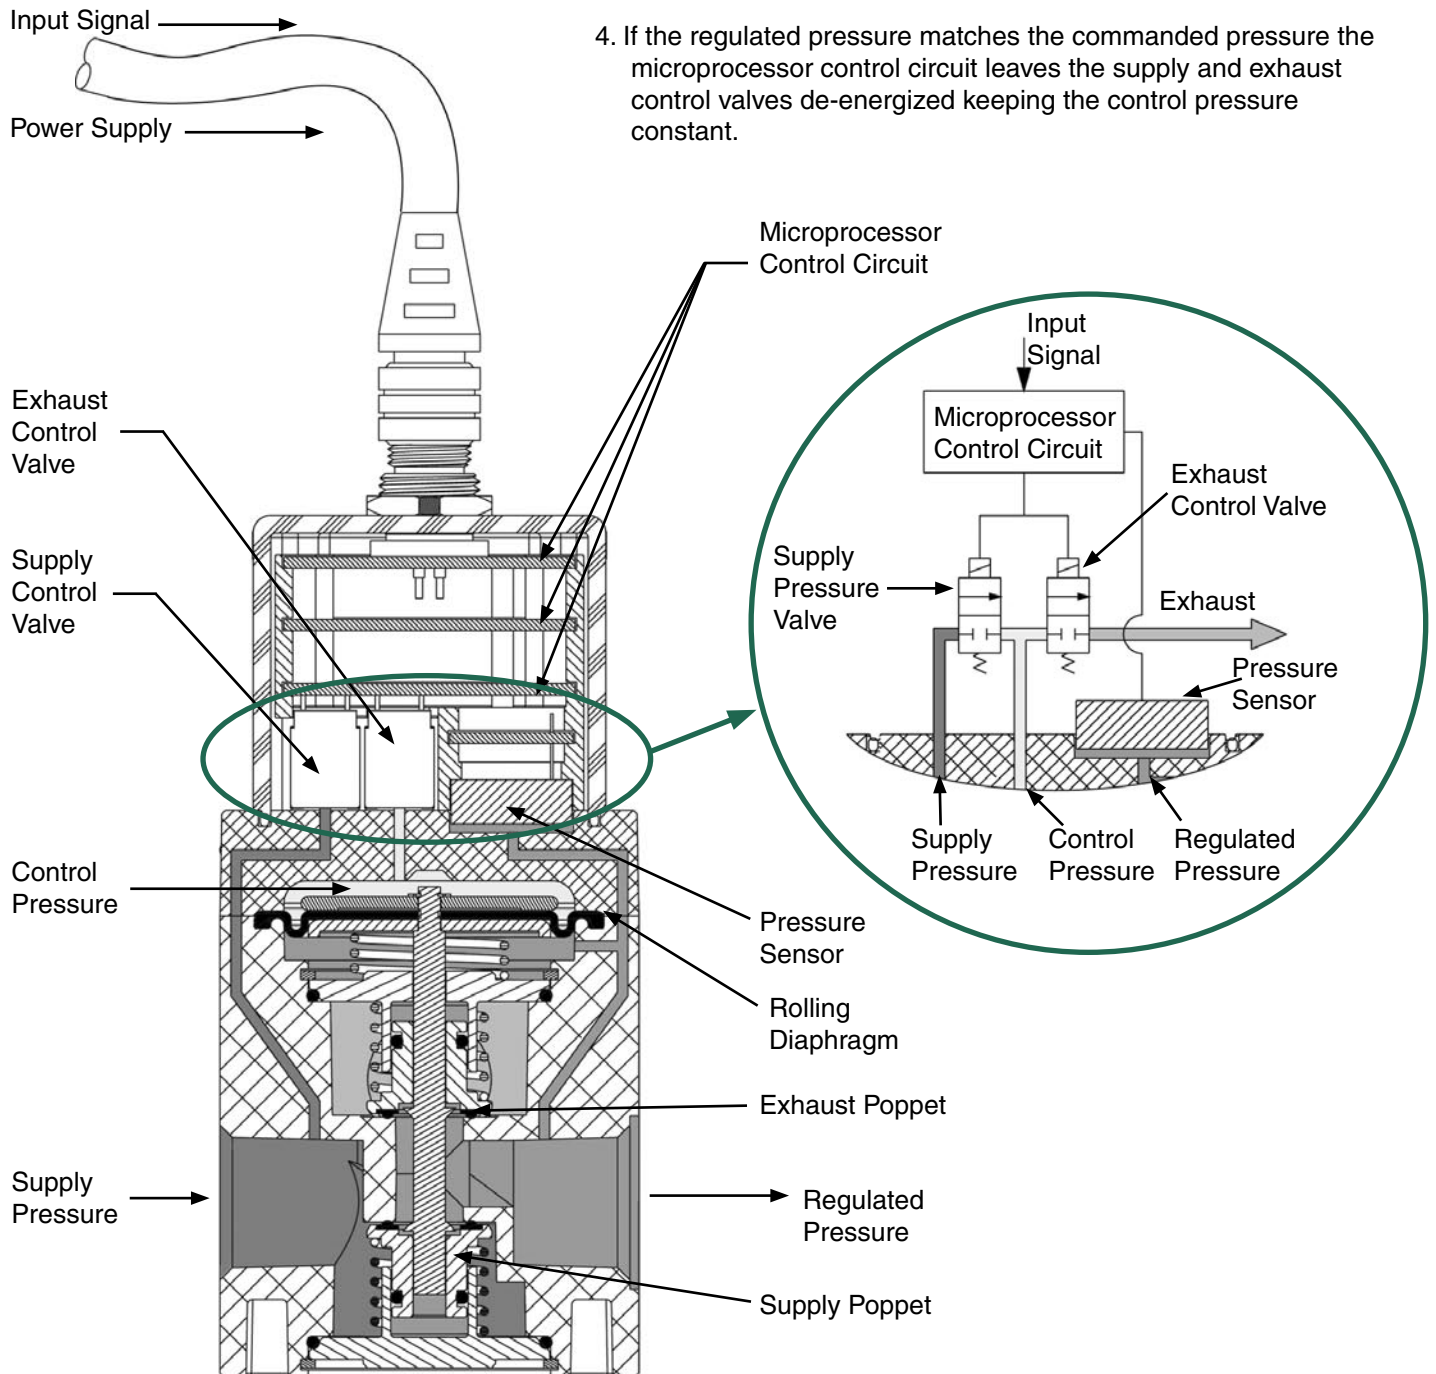



E22 Series

How to Order

E 22 3 - 04 3 H

Series

22 = 22 Series

Input Signal

- 1 = 4 - 20mA
- 2 = 0 - 5VDC
- 3 = 0 - 10VDC
- 9 = 2 bit, 4 pressure select (PNP sourcing)
- 0 = 2 bit, 4 pressure select (NPN sinking)

Thread Types

- = NPTF
- G = GTAP (BSPP)
- R = PT (BSPT)

Port Tap Size

- 02 = 1/4
- 03 = 3/8
- 04 = 1/2




Options

H = 0 - 150 PSI (10 BAR) regulating pressure range
(For 0-100 PSI standard unit no suffix necessary)



Feedback Signal

- 1 = 4 - 20mA
- 2 = 0 - 5VDC
- 3 = 0 - 10VDC
- 9 = 24VDC switch
- 0 = use with 2 bit, 4 pressure select
(type 9 or 0 input signal)

Performance Graphs

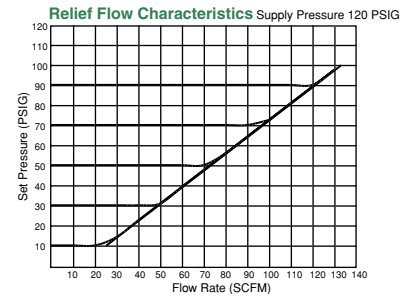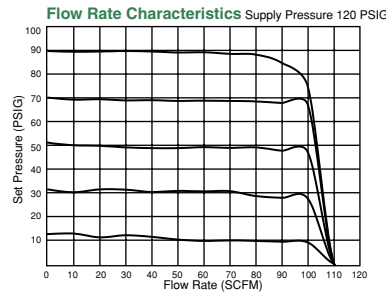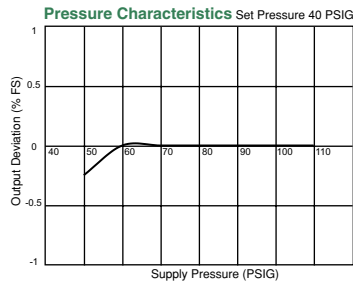

Dimensional Drawings

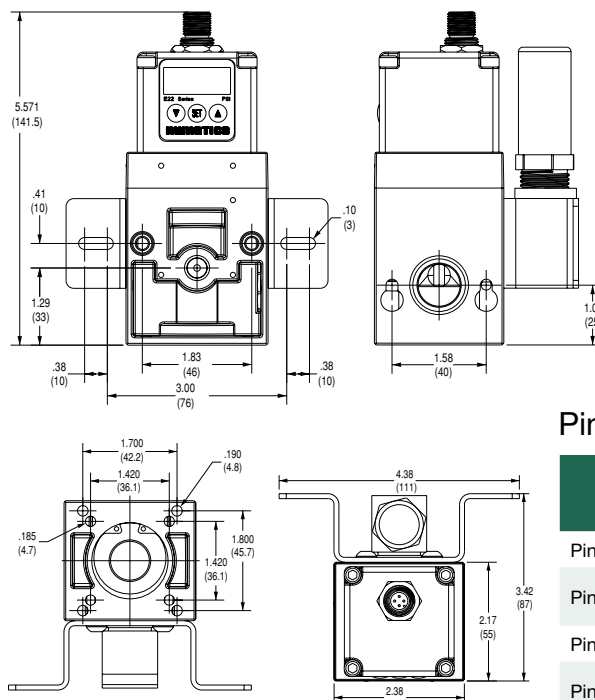


Pin Configuration

	Command Signal	
	Analog	Digital
Pin 1	+24VDC	
Pin 2	Command Signal	Input Signal 1
Pin 3	0VDC common	
Pin 4	Monitor Output	Input Signal 2




Accessories



MICRO FEMALE 4 POLE STRAIGHT 22 AWG EURO COLOR CODE

Unshielded		Shielded	
3 Meter - TC0403MIE0000000		3 Meter - TC0403MME0000000	
5 Meter - TC0405MIE0000000		5 Meter - TC0405MME0000000	




MICRO FEMALE 4 POLE 90 DEGREE 22 AWG EURO COLOR CODE

Unshielded		Shielded	
3 Meter - TD0403MIE0000000		3 Meter - TD0403MME0000000	
5 Meter - TD0405MIE0000000		5 Meter - TD0405MME0000000	




MICRO F/M 4 POLE STRAIGHT 22 AWG EURO COLOR CODE

Unshielded		Shielded	
3 Meter - TC0403MIETA04000		3 Meter - TC0403MMETA04000	
5 Meter - TC0405MIETA04000		5 Meter - TC0405MMETA04000	



MICRO F 90°/M STRAIGHT 22 AWG EURO COLOR CODE

Unshielded		Shielded	
3 Meter - TD0403MIETA04000		3 Meter - TD0403MMETA04000	
5 Meter - TD0405MIETA04000		5 Meter - TD0405MMETA04000	



BRACKET/MUFFLER KIT **

BRK-E22

** Bracket/Muffler kit consists of muffler (M4MN), bracket (E22-21), muffler fitting (E22-29)



Precision Instrumentation


Electropneumatic Transducer I/P, E/P R83 Series

Application

The Electropneumatic Transducer (I/P, E/P) converts a current or voltage input signal to a linearly proportional pneumatic output pressure. This versatile instrument is designed for control applications that require a high degree of reliability and repeatability at an economical cost. These units are used for applications that require the operation of valve actuators, pneumatic valve positioners, damper and louver actuators, final control elements, relays, air cylinders, web tensioners, clutches, and brakes.

Features

- Integral volume booster
- Compact size
- Low air consumption
- Field reversible
- Flexible zero and span adjustments
- Standard process inputs
- Split ranging
- FM - NEMA 4x
- CE Approved

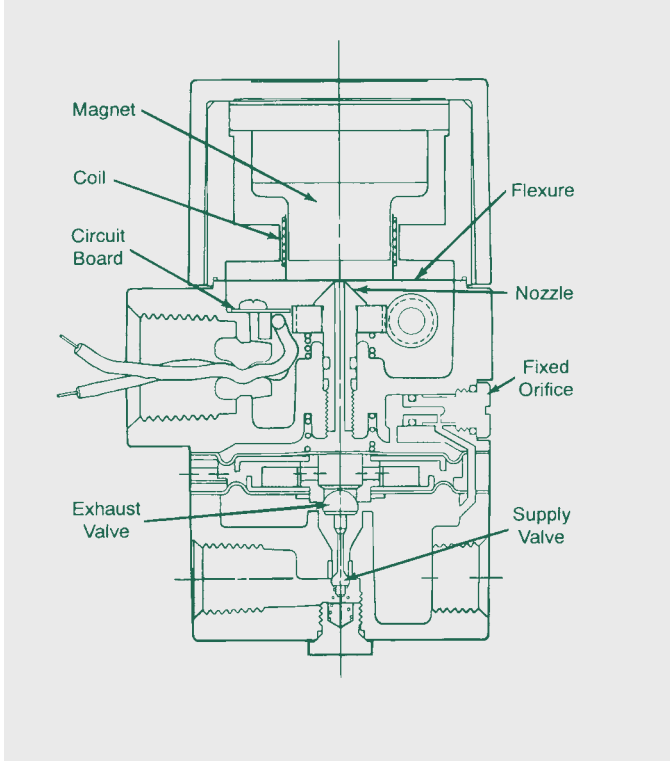


Specifications

	LOW OUTPUT RANGE (UP TO 30 PSIG)	HIGH OUTPUT RANGE (UP TO 120 PSIG)
Min./Max. Supply Pressure:	minimum 3 PSIG (21 kPa) above maximum output maximum 100 PSIG (700 kPa)	minimum 5 PSIG (35 kPa) above maximum output maximum 150 PSIG (1050 kPa)
Supply Pressure Sensitivity	< +/- .1% of span per PSIG (< +/- .15% of span per 10 kPa)	< +/- .004% of span per 1.0 PSIG (7 kPa)
Terminal Based Linearity	< +/- .75% of span	< +/- 1.5% of span typ., +/- 2.0% max
Repeatability:	< .5% of span	< .5% of span
Hysteresis	< 1.0% of span	< .5% of span
Response Time	dependent on pressure range, typically less than .25 sec. for 3 - 15 PSIG units	dependent on pressure range, typically less than .25 sec. for 3 - 15 PSIG units
Flow Rate	4.5 SCFM (7.6 m3/hr ANR) at 25 PSIG (175 kPa) supply 12 SCFM (20 m3/hr ANR) at 100 PSIG (700 kPa) supply	20 SCFM (34 m3/hr ANR) at 150 PSIG (1050 kPa) supply
Relief Capacity	2.0 SCFM (3.4 m3/hr) at 5 PSIG (35 kPa) above set point	2.0 SCFM (3.4 m3/hr) at 5 PSIG (35 kPa)
Maximum Air Consumption	.03 SCFM (.07 m3/hr) typical	.05 SCFM (.14 m3/hr) typical
Media	oil free, clean dry air filtered to 0.3 micron	oil free, clean dry air filtered to 0.3 micron
Temp. Range (operating)	-20°F to 140°F (-30°C to 60°C)	-20°F to 140°F (-30°C to 60°C)

NOTE: This unit, as is, is a Class 1, Division 2 hazardous location item (non-incendive). With the proper barrier it is a Class 1,2,3; Division 1; Groups C,D,E,F,G item (applies only to 4-20 Ma I/P).



How To Order

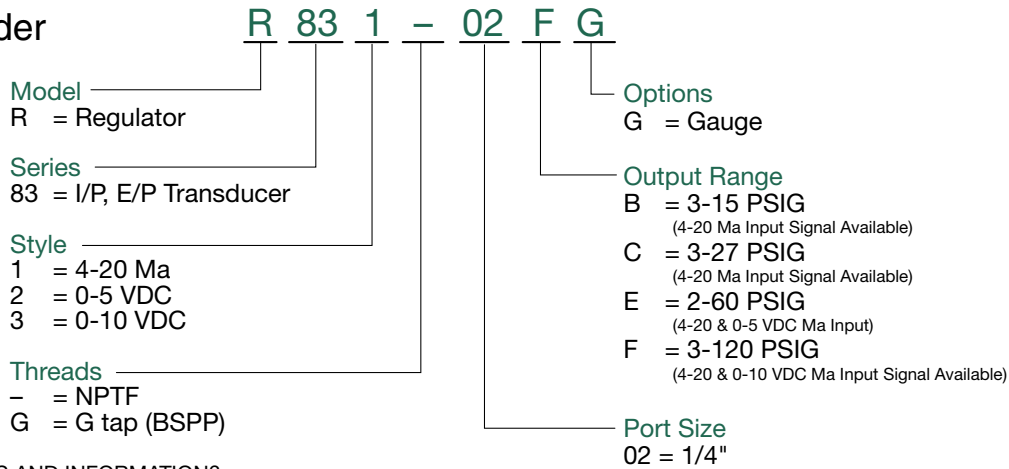

NEED MORE PARTS AND INFORMATION?

- See page 22 for information on ordering replacement parts.



Dimensions

top dimensions = inches


bottom dimensions (in parenthesis) = millimeters



R832-02E pictured

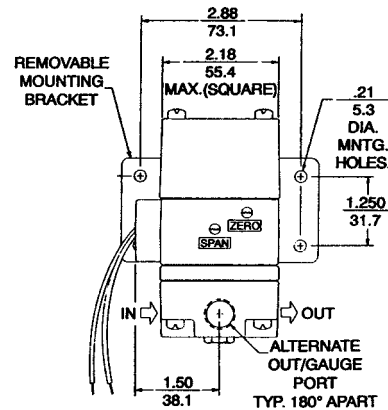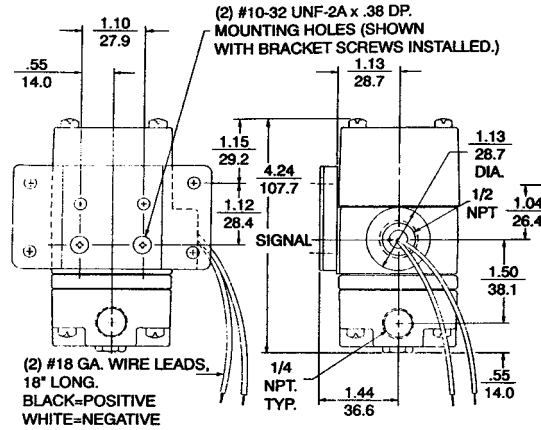

Electrical Schematic

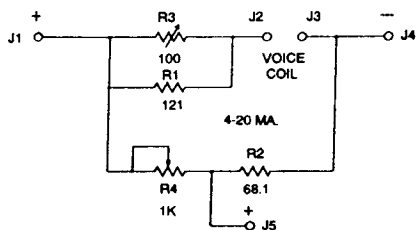

NOTE: FOR 4-20MA AND 10-MA USE J1 AS POSITIVE INPUT.

NOTE: Bracket included with each unit.



Precision Instrumentation

Economy Miniature Electropneumatic Transducer

R84 Series


Application

The R84 Series I/P, E/P transducers are compact electronic pressure regulators that convert an electrical signal (current or voltage) to a proportional pneumatic output. Its compact design and flexible porting make it an ideal choice for space-constrained DIN rail or manifold applications. A NEMA-4X housing with RFI/EMI protection will allow it to be used in demanding industrial environments.

The operating principle of the R84 is based on a rugged, field-tested force-balance design. A coil is suspended in a magnetic field by a flexure. Varying the electrical signal through the coil positions the flexure to a nozzle. This creates a back pressure that acts as a pilot to an integral volume booster. This provides a high flow which increases control speed in critical applications.

Features

- Compact size
- NEMA-4X housing
- Low air consumption
- High flow capacity
- Accessible external orifice
- Input and output ports on both front and back
- RFI/EMI protection
- External zero and span adjustments
- Field reversible
- Wall, panel, pipe or DIN rail mounting
- No separate power supply required
- CE Approved

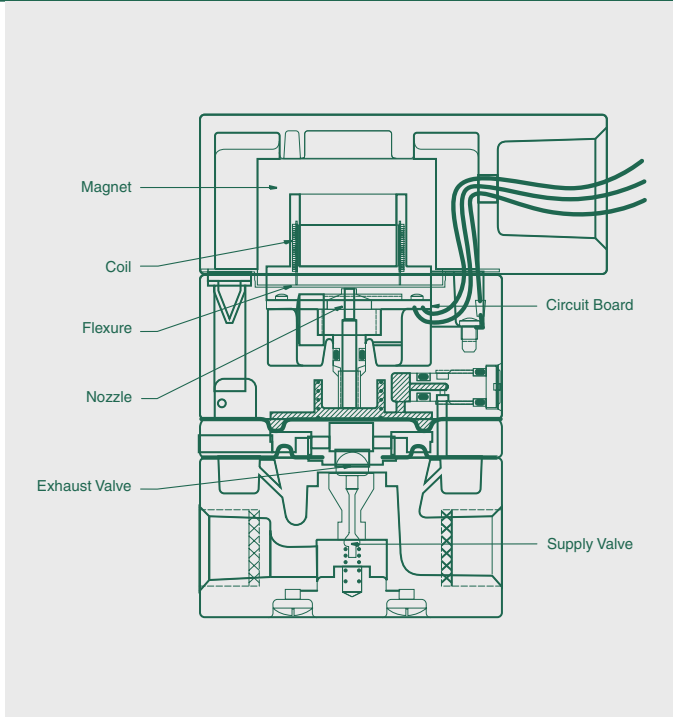

Specifications

Economy Miniature Electropneumatic Transducer R84 Series	
Linearity (independent)	> +/- 0.5% of span
Hysteresis and repeatability	>0.5% of span
Port sizes	Pneumatic = 1/4 NPT Electric = 1/2 NPT
Media	Clean, dry, oil-free, air filtered to 0.3 micron
Mounting	Wall, panel (included), 2" pipe (included) or DIN rail (optional)
Materials	Housing: Chromate treated aluminum with baked paint Elastomers: Buna-N Trim: Stainless Steel, brass, zinc plated steel
Weight	1.3 lbs (.59 KG)
Inputs	4-20 mA, 0-5V DC, 0-10 V DC
Outputs	3-15 psig, 3-27 psig, 2-60 psig, 3-120 psig
Air Consumption	1.8 SCFH (0.05 m3/hr) at mid Range typical
Supply pressure:	Outputs up to 30 psi: 100 psig (7 bar) maximum Outputs to 120 psig: 150 psig (10 bar) maximum
Flow Capacity at mid range	4.5 SCFM (7.6 m3/hr) at 25 psig (1.7 Bar) supply 12 SCFM (20 m3/hr) at 100 psig (7 Bar) supply
Relief Capacity	2 SCFM (3.4 m3/hr) at 5 psig (35kPa) above set point
Temperature Range	Operating: -40 to +160 F (-40 to +71 C) Storage: -40 to +200 F (-40 to + 93 C)

Notes:

Electrical Connections – For both I/P and E/P models, the 1/2" conduit electrical connections are made to the red (+) and black (-) leads. The green lead is used for case ground. For both I/P and E/P models, the 43650 DIN electrical connections are made to terminal 1 (+) and terminal 2 (-). Terminal 3 is not used. Ground is for case ground.



How To Order

R 84 1 - 02 E F R

Model

R = Regulator

Series

84 = I/P, E/P Economy Miniature Transducer

Input Signal

1 = 4-20 Ma
2 = 0-5 VDC
3 = 0-10 VDC

Threads

- = NPTF

Options

G = Gauge
R = DIN Rail Mount

Electrical Connection

A = 1/2 NPT Conduit w/ Pigtail
F = DIN 43650 Connector

Output Range

B = 3-15 PSIG
C = 3-27 PSIG
E = 2-60 PSIG
F = 3-100 PSIG

Port Size

02 = 1/4"

NEED MORE PARTS AND INFORMATION?

- See page 22 for information on ordering replacement parts.


Dimensions

top dimensions = inches


bottom dimensions (in parenthesis) = millimeters




R841-02EA pictured

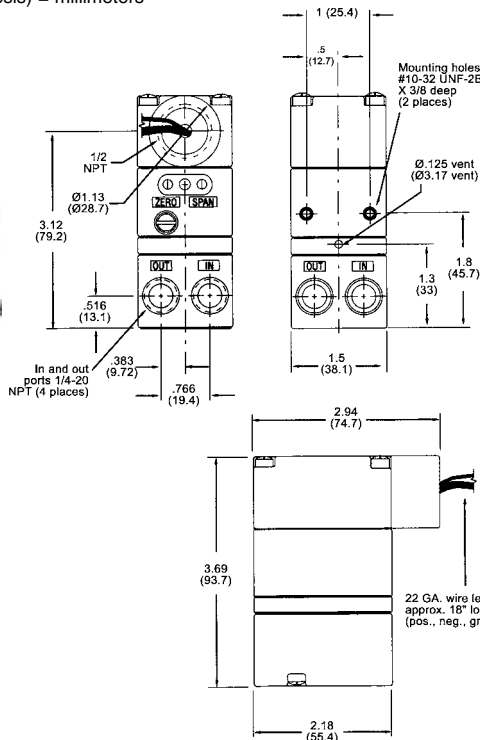



Panel Mounting (included with standard unit)

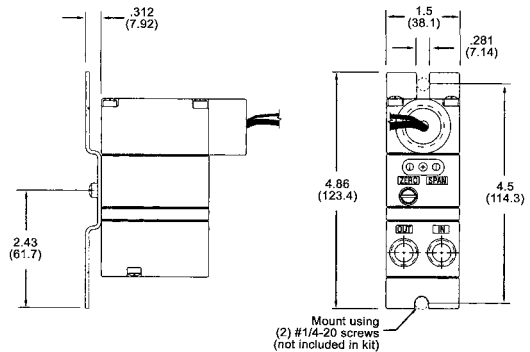

Pipe Mounting (included with standard unit)

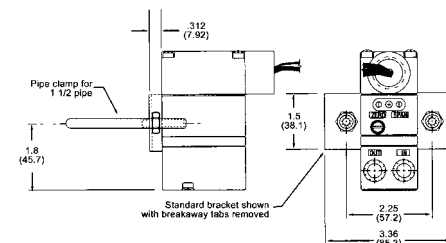

Flow Ratings

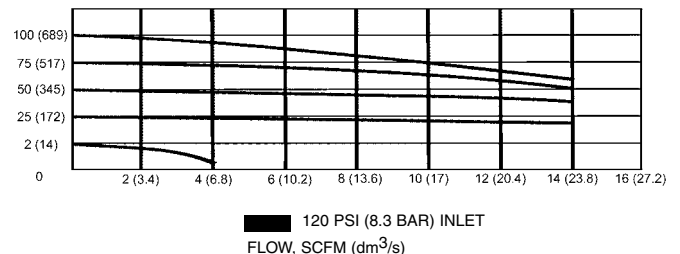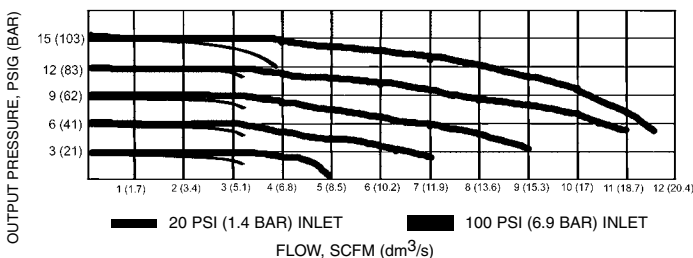



Precision Instrumentation

Miniature Electropneumatic Transducer I/P, E/P R85 Series


Application

The R85 Series I/P, E/P transducers are a series of compact electronic pressure regulators that convert an electrical signal (current or voltage) to a proportional pneumatic output. Utilizing internal solid-state feedback circuitry, the R85 provides precise, stable pressure outputs to final control elements. Immunity to the effects of vibration or mounting position, high tolerance to impure air, and low air consumption make this unit ideal for use in demanding applications.

The heart of this unique technology is a bimorph piezo actuator that is encapsulated in a protective skin. This protective skin provides defense against the humidity and contaminant often found in process operating environments.

Features

- Reliable in harsh environments
- Low air consumption - 3 SCFH typical
- High accuracy - +/-0.10% of span
- NEMA-4X (IP65) enclosure
- Vibration/position insensitive
- Compact size
- Wall, panel (included), pipe (included), or din rail mounting
- Supply pressures up to 100 PSIG
- Built-in volume booster - 10 SCFM flow
- Input/output ports on front and back
- Conduit fitting or din connector
- Split range operation
- Field reversible
- CE Approved

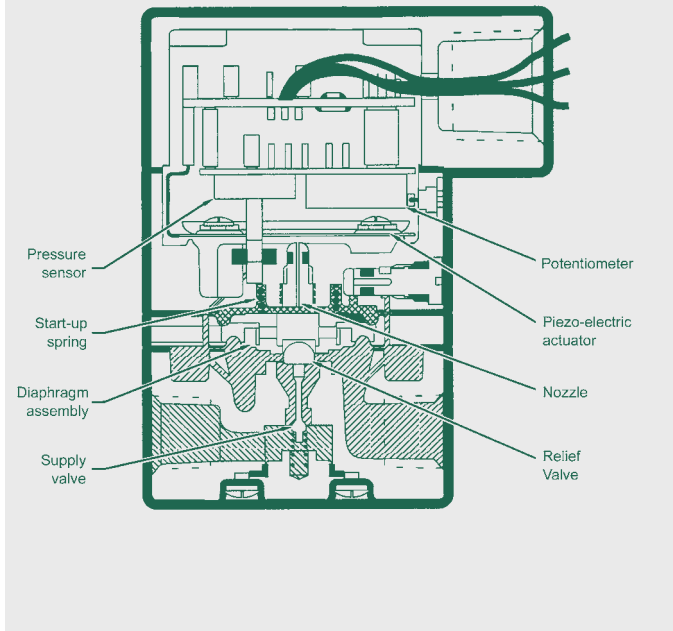

Specifications


Miniature Electropneumatic Transducer I/P, E/P R85 Series		
Port sizes	Pneumatic: 1/4 NPT Electric: 1/2 NPT	
Media	Clean, dry, oil-free, air filtered to 0.3 micron	
Mounting	Wall, Panel (included), 2" pipe (included), or DIN rail (optional)	
Materials	Housing: Chromate treated aluminum with baked paint. NEMA-4X (IP65) Elastomers: Buna-N Trim: Stainless steel, brass, zinc plated steel	
Weight:	13.0 oz (0.4 kg)	
Inputs	4-20mA	0-10 VDC 0-5 VDC
Outputs	3-15 PSIG 3-27 PSIG 2-60 PSIG 3-100 PSIG	0.21-1.03 BAR 0.21-1.86 BAR 0.14-4.14 BAR 0.21-6.89 BAR
Air Consumption	3.0 SCFH (0.11 m3/hr) at mid-range typical	
Supply pressure:	100 PSIG (7.0 BAR) maximum Note: Supply pressure must be at a minimum of 5 PSIG above maximum output	
Flow Capacity at mid range	4.5 SCFM (7.6 m3/hr) at 25 PSIG (1.7 BAR) supply 12 SCFM (20 m3/hr) at 100 PSIG (7 BAR) supply	
Relief Capacity	2.0 SCFM (3.4 m3/hr) at 5 PSIG (35 kPa) above set point	
Temperature limits	Operating: -40° to +160° F (-40° to +71° C) Storage: -40° to +200° F (-40° to +93° C)	
Loop load, I/P Transducer	7.5 VDC @ 20mA	
Supply Voltage, E/P Transducer	7-30 VDC, less than 3mA	
Signal impedance	7-30 VDC, less than 3mA	

Notes:

Electrical Connections – For both I/P and E/P models, the 1/2" conduit electrical connections are made to the red (+) and black (-) leads. The green lead is used for case ground. For both I/P and E/P models, the 43650 DIN electrical connections are made to terminal 1 (+) and terminal 2 (-). Terminal 3 is not used. Ground is for case ground.



How To Order

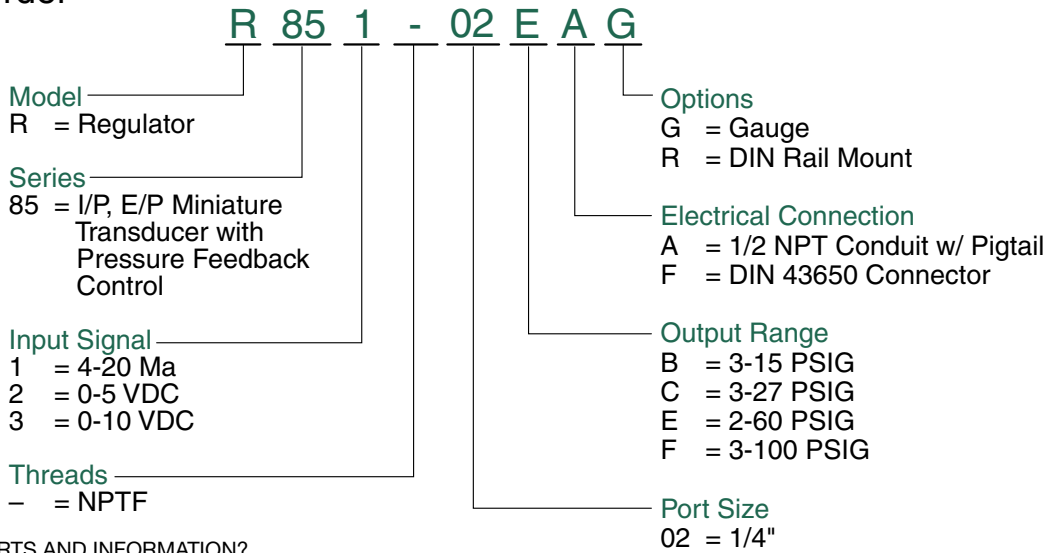

NEED MORE PARTS AND INFORMATION?


- See page 22 for information on ordering replacement parts.

Dimensions


top dimensions = inches
bottom dimensions (in parenthesis) = millimeters




R851-02EA pictured

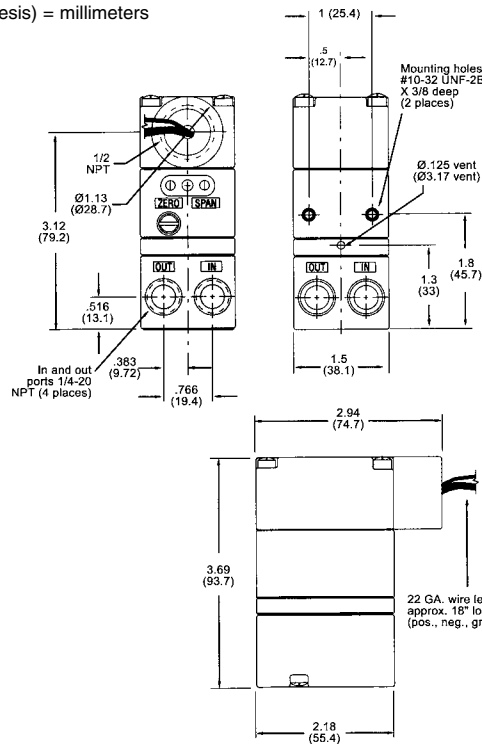



Panel Mounting (included with standard unit)

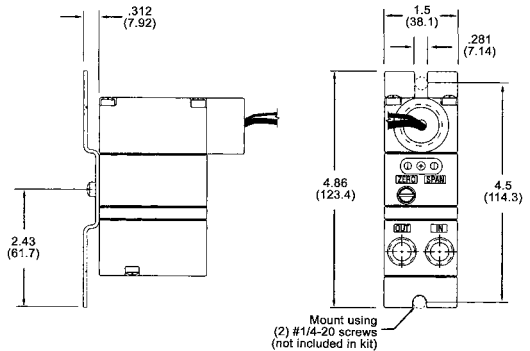

Pipe Mounting (included with standard unit)

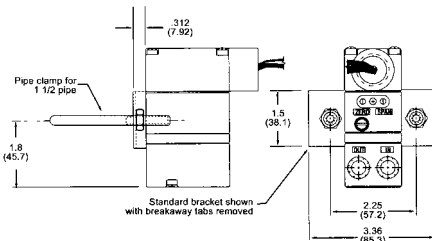

Flow Ratings

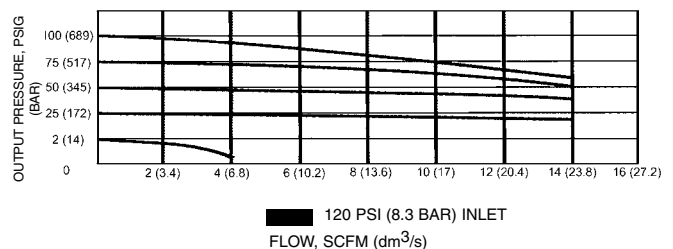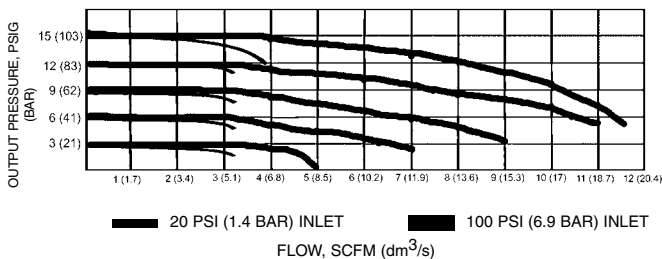



Precision Instrumentation


Precision Regulator R80/82 Series

Application

The 80 and 82 Series regulators are high-precision, multi-stage pressure regulators. The highest degree of regulation and repeatability are achievable by reacting to downstream pressure fluctuations as small as 0.01 PSIG (.07 kPa). Action occurs as downstream pressure is piloted to the control chamber to act on a finely tuned stainless steel volume capsule. A continuous bleed of less than 0.08 SCFM (.15 m³/hr) adjusts the pilot diaphragm causing appropriate movement of the supply valve or relief valve. Relief flows of up to 10 SCFM can be achieved through the large exhaust port located in the control diaphragm. Exhaust is achieved through the exhaust vents located in the side of the body.

Recommended Uses


- Air Gauging
- Gas Mixing
- Web Tensioning
- Roll Loading
- Air Hoists

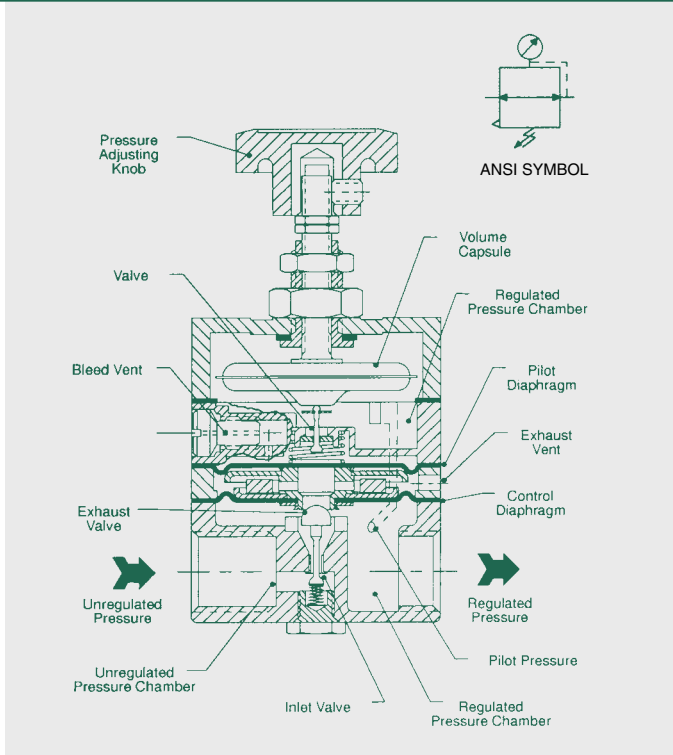

Specifications

Precision Regulator R80/82 Series	
Flow Capacity	14 SCFM (25m3/hr)
Exhaust Capacity	Model 80 - 2 SCFM (3.4 m3/hr) Model 82 - 10 SCFM (17.0 m3/hr)
Sensitivity	.125 inches (3.2 mm) water
Pilot Bleed Rate	.08 SCFM (.15 m3/hr)
Supply Pressure Variation	Less than .005 PSI (.03 kPa)@25 PSI variance
Maximum Supply Pressure	150 PSIG (1050 kPa)
Weight	1.4 lbs (.64 kg)
Materials	Body: Die Cast Zinc Diaphragms: Buna - N Knob: Phenolic Plastic

How To Order

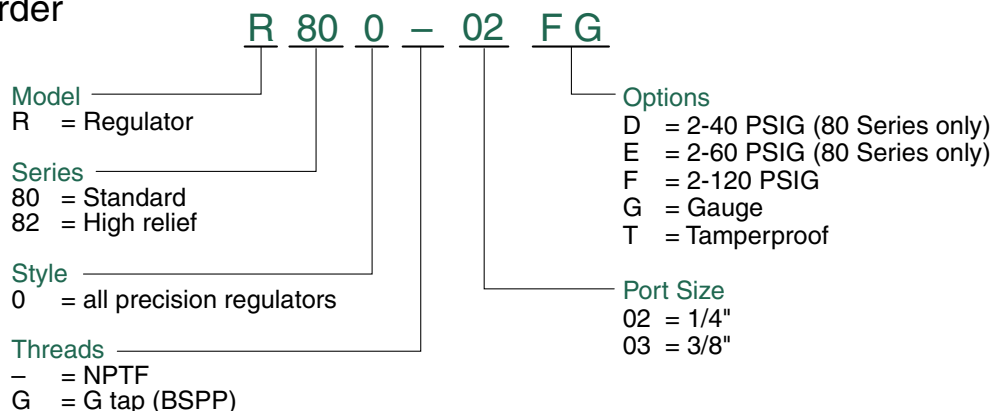

NEED MORE PARTS AND INFORMATION?


- See page 22 for information on ordering replacement parts.



Flow Ratings (based on 100 PSIG inlet)




R820-02F pictured

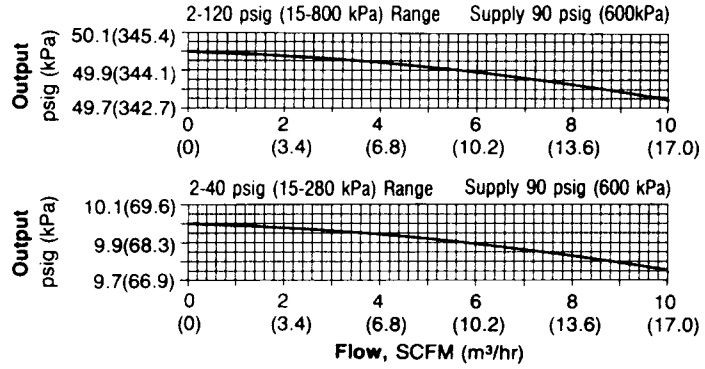


Dimensions

top dimensions = inches
bottom dimensions (in parenthesis) = millimeters

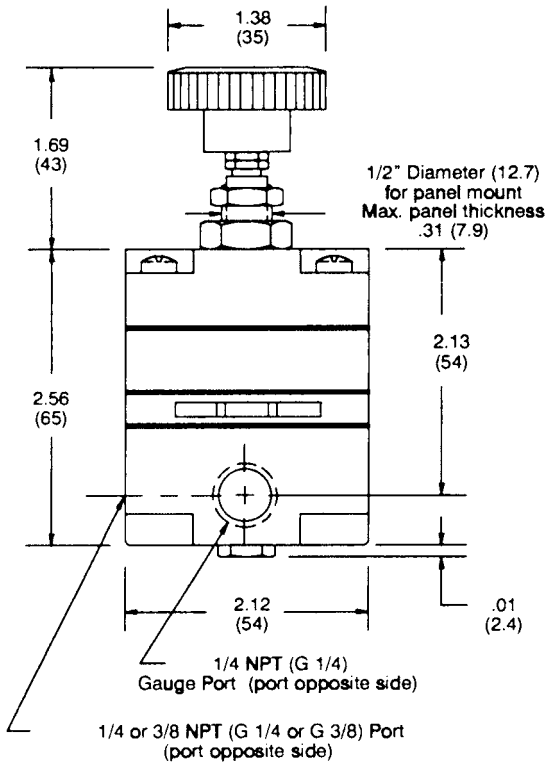


Tamperproof Model

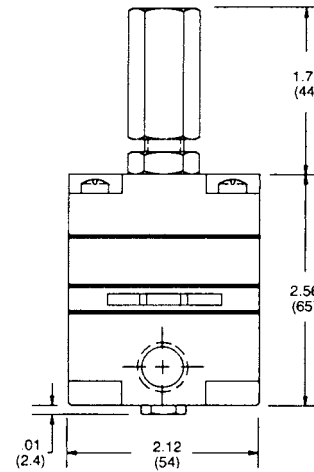



Precision Instrumentation

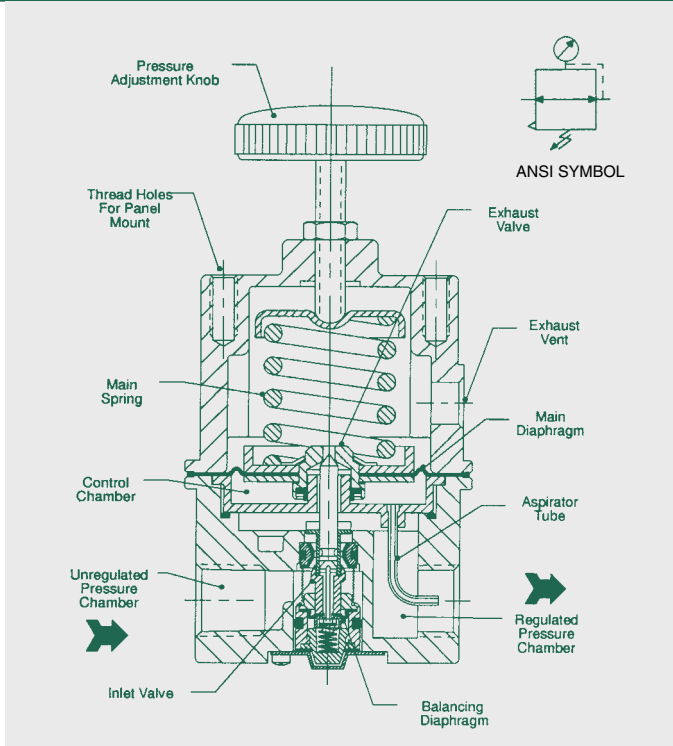

High Flow Precision Regulator R88 Series

Application

The 880 Series pressure control regulator is designed for high flow and accurate pressure control utilizing a rolling diaphragm to insure a constant output pressure. The 88 model maintains stability even with wide supply pressure variations.

The 881 Series back pressure regulator is a high flow, highly accurate pneumatic relief valve with an adjustable set point. It's primary function is to provide protection against over pressurization in the downstream portion of a pneumatic system. This precision unit is capable of handling flows up to 50 SCFM. A rolling diaphragm provides the sensitivity that causes the unit to vent to atmosphere in response to the slightest upstream changes.


Recommended Uses

- Test Equipment
- Roll Loading
- Web Tensioning
- Actuators
- Gas Mixing
- Test Panels
- Clutch and Brake Controls

Specifications

High Flow Precision Regulator R88 Series	
Flow Capacity	see flow characteristics (next page)
Exhaust Capacity	4 SCFM (6.7 m3/hr)
Sensitivity	.25 inches (6.33 mm) of water
Total Air Consumption	1.0 to 12.5 SCFH (.03 to .37 m3/hr), depending on output pressure
Supply Pressure Variation	.1 PSI (.7 kPa) @ 100 PSI (700 kPa) change
Maximum Supply Pressure	250 PSIG (1750 kPa)
Weight	1.6 lbs (.74 kg)
Materials	Body: Die Cast Zinc Diaphragms: Buna - N Volume Capsule: Stainless Steel Knob: Phanoloc Plastic

How To Order

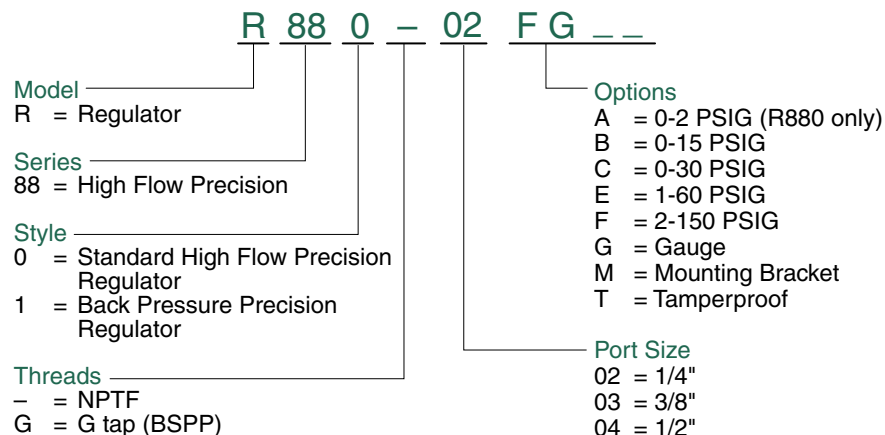

NEED MORE PARTS AND INFORMATION?

- See page 22 for information on ordering replacement parts.




Flow Ratings (based on 100 PSIG inlet)




R880-02F pictured

Standard Precision Regulator (R880 Series)

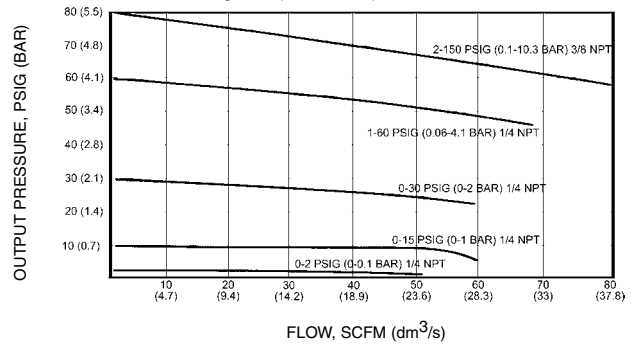



Back Pressure Precision Regulator (R881 Series)

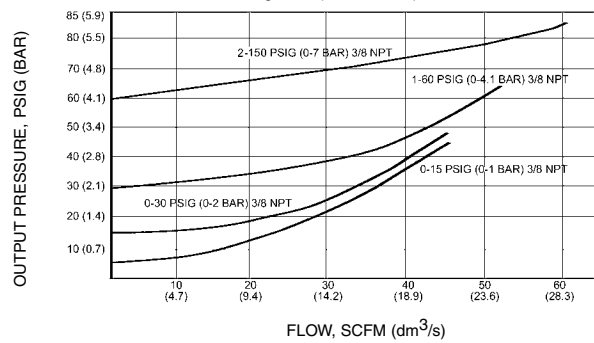

Dimensions


top dimensions = inches

bottom dimensions (in parenthesis) = millimeters

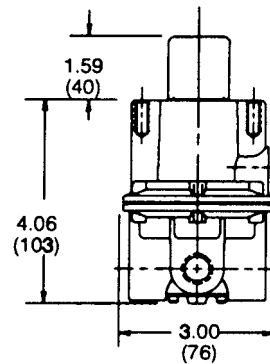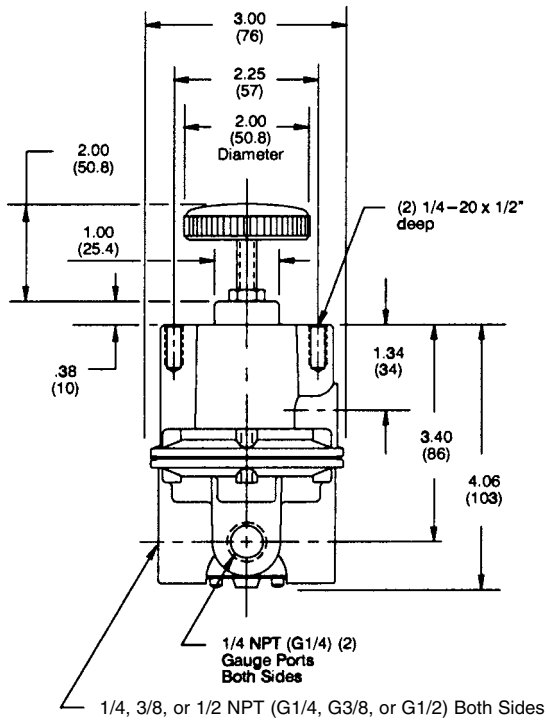



Precision Instrumentation

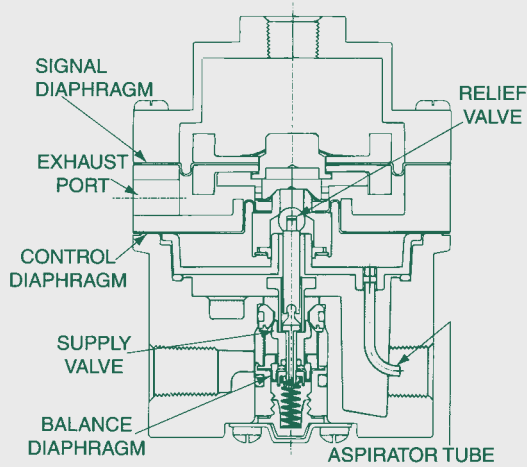

Ratio Relay Volume Booster

Applications

The 87 Series Volume Boosters are used extensively for increased flow capacity, pressure amplification, or remote pressure control applications. This includes web tensioning, roll loading, control valve actuators, I/P volume boosting, cylinder actuation, clutch and brake control, and gas flow control.

Features

- High flow capacity - allows flows up to 50 SCFM
- Amplified output - available in a signal to output pressure ratio of 1:6
- High exhaust capacity - large relief provides 15 SCFM flow capacity
- Stable output - Venturi aspirator maintains output pressure under varying flow conditions
- Balanced supply valve - rolling diaphragm design makes unit immune to supply pressure variation
- Negative bias - 4 PSI negative bias option allows “zero” of I/Ps

Specifications

	1:1 Ratio	1:6 Ratio
Flow capacity, SCFM (m3/hr) 100 PSIG (700 kPa) supply, 20 PSIG (140 kPa) output	50 (76.5)	50 (76.5)
Exhaust capacity, SCFM (m3/hr) Downstream 5 PSIG (35 kPa) above set pressure	15 (25.5)	7.5 (12.8)
Sensitivity, inches water (cm)	.25 (.64)	1.5 (3.8)
Ratio accuracy (%) of output span with 3-15 PSIG (20-105 kPa) signal	1.0	2.0
Zero error (%) - % of output span with 3-15 PSIG (21-105 kPa) signal	2.0	3.0
Effect of supply pressure change of 50 PSIG (350 kPa)	.1 PSI	.6 PSI
Maximum supply pressure, PSIG (kPa)	250 (1750)	250 (1750)
Maximum signal pressure, PSIG (kPa)	150 (1034)	25 (172)
Maximum Air Consumption	.03 SCFM (.07 m3/hr) typical	.05 SCFM (.14 m3/hr) typical
Ambient temperature limits, °F (°C)	-40 to 200 (-40 to 93)	-40 to 200 (-40 to 93)
Weight, lbs (gm)	1.4 (635)	1.4 (635)

Optional Fixed Negative Bias


The 87 Series Volume Booster is available with an optional 4±1 PSIG (30±7 kPa) less than the signal pressure (Z option).

This option allows zero output when utilizing I/P transducers that typically only are capable of providing pressures down to 3 PSI. Note that the negative bias has a tolerance of ±1 PSI. This means that actual bias will range from -3 PSI to -5 PSI. Use the zero adjustment of the I/P to reach desired setting.

Mounting Bracket

The mounting bracket for the R87 Series Ratio Relay Volume Booster, part number PK88, is included.

How To Order

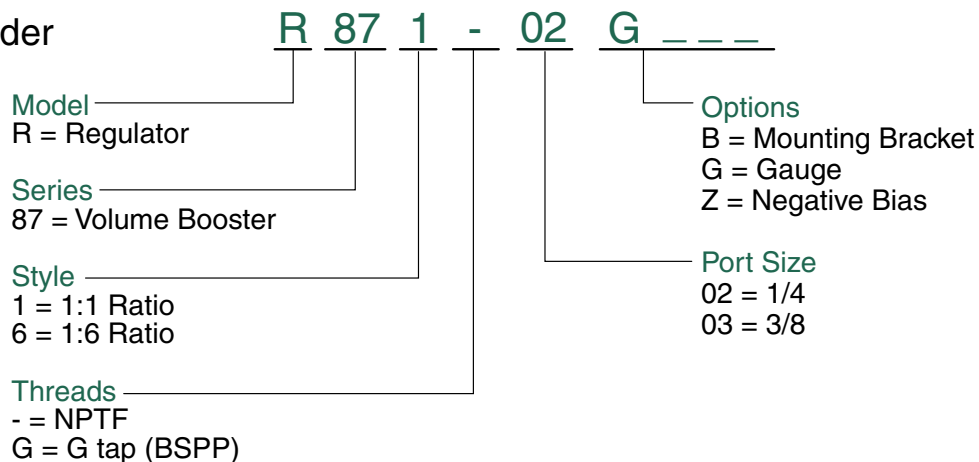

NEED MORE PARTS AND INFORMATION?


- See page 22 for information on ordering replacement parts.



Flow Ratings




R871-02 pictured

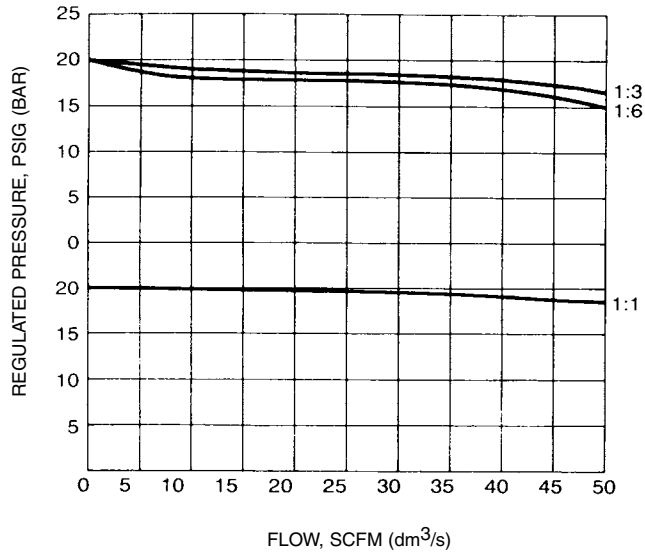



Dimensions

top dimensions = inches
bottom dimensions (in parenthesis) = millimeters

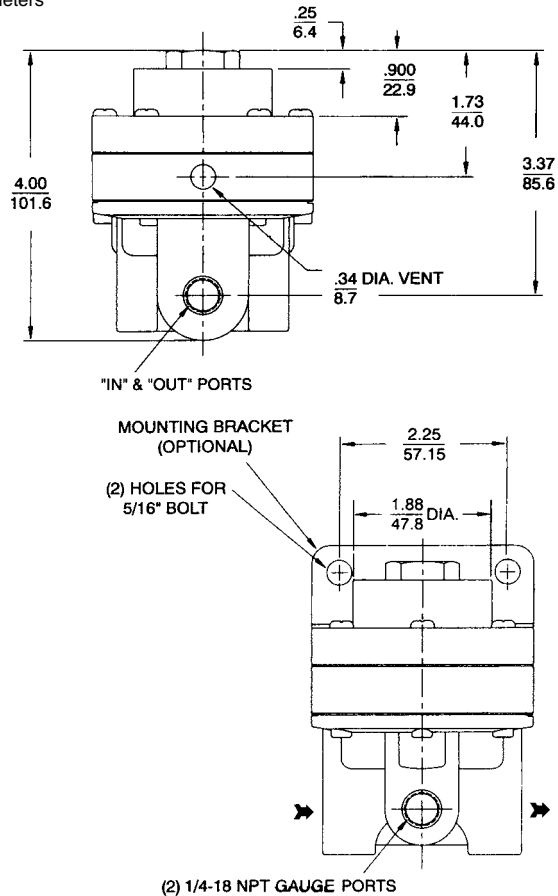



Precision Instrumentation

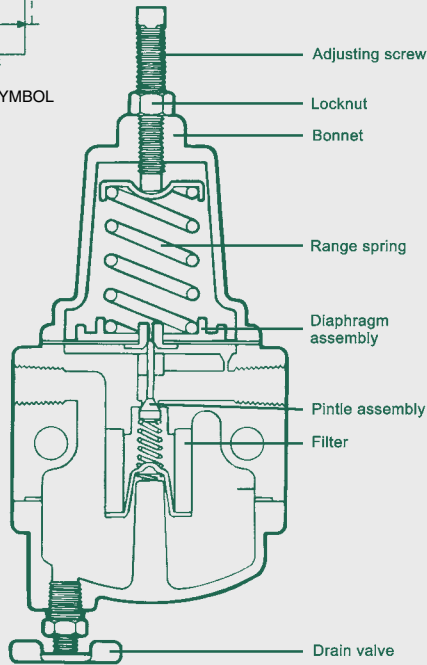

Instrument Air Regulator R89 Series

Application

The Instrument Air Regulator is designed to provide clean, accurate air pressure to instruments, valves, and other automatic control equipment. It is used extensively to supply air to pneumatic controllers, transmitters, transducers, valve positioners, air cylinders, and a wide range of pneumatic control systems.

Features

- Stable output and repeatability
- Corrosion-resistant construction
- 5 micron depth filter
- Self-relieving
- Low droop at high flow levels
- Tight shut off

Materials of Construction

Body: die cast aluminum alloy, irridite, baked epoxy finish

Filter: 5 micron phenolic impregnated cellulose

Diaphragms: nitrile elastomer and nylon fabric

Valve Seat Plug: nitrile elastomer

Additional Materials: brass, zinc, plated steel, acetal


Mounting Bracket

The mounting bracket for the R89 Series Instrument Air Regulator, part number PK89, is available and sold separately.

Specifications

Instrument Air Regulator R89 Series	
Port Size	1/4 NPT
Standard Output Pressure	0 - 120 PSIG (0 - 800 kPa)
Maximum Supply Pressure	250 PSIG (1700 kPa)
Mounting	pipe or integral mounting
Flow Capacity	see flow characteristics (next page)
Exhaust Capacity	.1 SCFM (.17 m ³ /hr) @ 5 PSIG (35 kPa) above set point
Sensitivity	1" (2.5 cm) of water
Air Consumption	less than 5 SCFH (.17 m ³ /hr)
Effect of Supply Pressure Variation:	less than .2 PSIG (1.4 kPa) @ 25 PSI (170 kPa) change
Weight	1.6 lbs (.74 kg)

How To Order

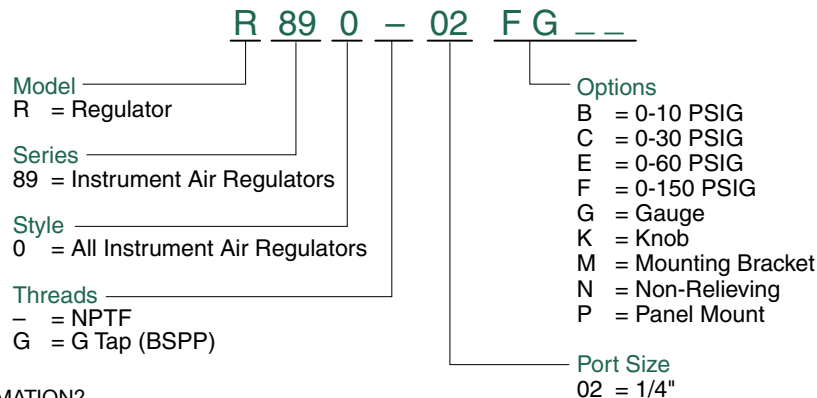

NEED MORE PARTS AND INFORMATION?


- See page 22 for information on ordering replacement parts.



Flow Ratings (based on 100 PSIG inlet)





R880-02F pictured

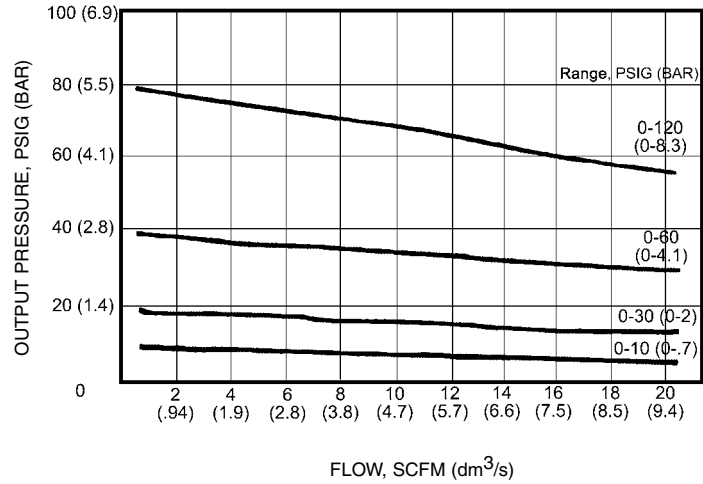

Dimensions

top dimensions = inches
bottom dimensions (in parenthesis) = millimeters

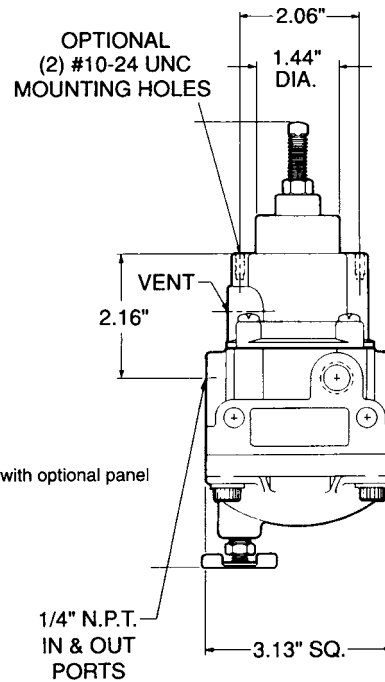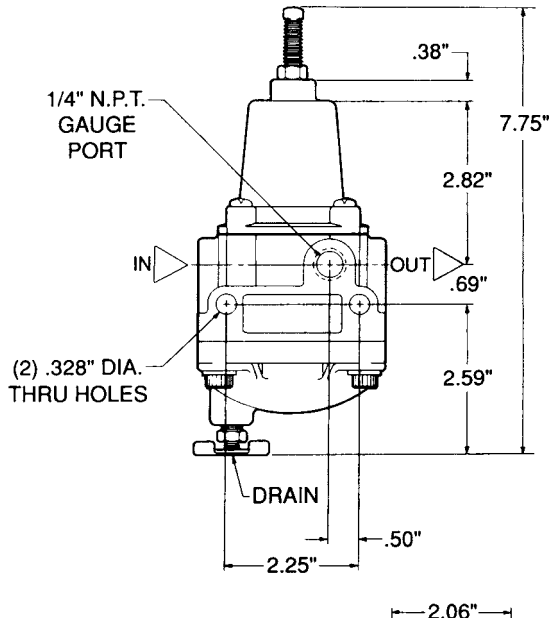

Note:
This view shown with optional panel mount capability.



Replacement Kits

Precision Regulators

> Precision Regulator Repair Kits

kit #	description
RKR800D	for 2-40 pressure range models
RKR800E	for 2-60 pressure range models
RKR800F	for 2-120 pressure range models
RKR820F	for 2-120 pressure range models

> Replacement Adjustment Knob Kits

kit #	description
RP8002	for R800 and R820 models

Electropneumatic Transducers

> Electropneumatic Transducer Repair Kits

kit #	description
RKR831BC	for 3-15 and 3-27 pressure range models
RKR831EF	for 2-60 and 3-120 pressure range models

High Flow Precision Regulators

> High Flow Precision Regulator Repair Kits

kit #	description
RKR880A	for 0-2 pressure range models
RKR880B	for 0-15 pressure range models
RKR880C	for 0-30 pressure range models
RKR880E	for 1-60 pressure range models
RKR880F	for 2-150 pressure range models
RKR881	for back pressure regulator

> Replacement Adjustment Knob Kits

kit #	description
RP81	for R880 models

Mounting Brackets

> High Flow Precision Regulator Repair Kits

kit #	description
PK80	80 & 82 Series Bracket
PK88	87 & 82 Series Bracket
PK89	89 Series Bracket

Instrument Air Regulators

> Instrument Air Regulator Repair Kits

kit #	description
RKR89	for all models

NUMATICS®

World Class Supplier
of Pneumatic Components



World Headquarters

Numatics Incorporated
Phone: 248-887-4111
Fax: 248-887-9190

UNITED STATES

Numatics – Air Preparation
Phone: 810-667-3900
Fax: 810-667-3902

Numatics – Valves

Phone: 248-887-4111
Fax: 248-887-9190

Numatics – Miniature Valves

Phone: 248-960-1400
Fax: 248-960-2160

Numatics – Cylinders

Phone: 615-771-1200
Fax: 615-771-1201

Numatics – Rodless Cylinders

Phone: 519-452-1777
Fax: 519-452-3995

Numatics – Automation

Phone: 440-934-3200
Fax: 440-934-2288

CANADA

Ontario
Numatics, Ltd.
Phone: 519-452-1777
Fax: 519-452-3995

Quebec

Numatics, Ltd.
Phone: 514-332-6444
Fax: 514-332-9273

British Columbia

Numatics, Ltd.
Phone: 604-574-0401
Fax: 604-574-3713

EUROPE

Germany – European Headquarters

Numatics GmbH
Phone: 011-49-22 41-31 60-0
Fax: 011-49-22 41-31 60 40

Hungary

Numatics Kft.
Phone: 011-36-13 82 21 35
Fax: 011-36-12 04 39 47

EUROPE

England
Numatics Limited
Phone: 011-44-1525-37 07 35
Fax: 011-44-1525-38 25 67

France

Numatics s.a.r.l.
Phone: 011-33-1 41 21 48 88
Fax: 011-33-1 41 21 48 89

Italy

Numatics srl
Phone: 011-39-030-373 19 99
Fax: 011-39-030-373 19 81

Netherlands

Numatics B.V.
Phone: 011-31-418-65 29 50
Fax: 011-31-418-65 29 43

Spain

Numatics Spain S.L.
Phone: 011-34-93-221 21 96
Fax: 011-34-93-221 35 14

AFRICA

South Africa
Numatics SA (Pty) Ltd.
Phone: 011-27-11-8 65 44 52
Fax: 011-27-11-8 65 42 90

LATIN & SOUTH AMERICA

Mexico
Numatics de Mexico S.A. de C.V.
Phone: 011-52-222-284 6176
Fax: 011-52-222-284 6179

Brazil

Valvair Comercial Ltda.
Phone: 011-55-12-351 2874
Fax: 011-55-12-351 1958

ASIA & PACIFIC

Australia
Numatics Australia Pty. Ltd.
Phone: 011-61-3-95 63 86 00
Fax: 011-61-3-95 63 85 11

Taiwan – Asian Headquarters

Numatics Co, Ltd. Asia
Phone: 011-886-2-29 15 16 05
Fax: 011-886-2-29 14 18 97

For a comprehensive listing of all Numatics production and distribution facilities worldwide, visit www.numatics.com