



VISHAY INTERTECHNOLOGY, INC.

INTERACTIVE

data book


SURGE SUPPRESSOR CAPACITORS

VISHAY ESTA

VSE-DB0104-0806

Notes:

1. To navigate:
 - a) Click on the Vishay logo on any datasheet to go to the Contents page for that section. Click on the Vishay logo on any Contents page to go to the main Table of Contents page.
 - b) Click on the products within the Table of Contents to go directly to the datasheet.
 - c) Use the scroll or page up/page down functions.
 - d) Use the Adobe® Acrobat® page function in the browser bar.
2. To search the text of the catalog use the Adobe® Acrobat® search function.



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components



VISHAY INTERTECHNOLOGY, INC.



DATA BOOK

SURGE SUPPRESSOR CAPACITORS

VISHAY ESTA

SEMICONDUCTORS

RECTIFIERS

- Schottky (single, dual)
- Standard, Fast, and Ultra-Fast Recovery (single, dual)
- Bridge
- Superectifier®
- Sinterglass Avalanche Diodes

HIGH-POWER DIODES AND THYRISTORS

- High-Power Fast-Recovery Diodes
- Phase-Control Thyristors
- Fast Thyristors

SMALL-SIGNAL DIODES

- Schottky and Switching (single, dual)
- Tuner/Capacitance (single, dual)
- Bandswitching
- PIN

ZENER AND SUPPRESSOR DIODES

- Zener (single, dual)
- TVS (TRANSZORB®, Automotive, ESD, Arrays)

FETs

- Low-Voltage TrenchFET® Power MOSFETs
- High-Voltage TrenchFET® Power MOSFETs
- High-Voltage Planar MOSFETs
- JFETs

RF TRANSISTORS

- Bipolar Transistors (AF and RF)
- Dual Gate MOSFETs
- MOSMICs®

OPTOELECTRONICS

- IR Emitters and Detectors, and IR Receiver Modules
- Optocouplers and Solid-State Relays
- Optical Sensors
- LEDs and 7-Segment Displays
- Infrared Data Transceiver Modules
- Custom Products

ICs

- Power ICs
- Analog Switches
- RF Transceivers and Receiver Modules
- ICs for Optoelectronics

MODULES

- Power Modules (contain power diodes, thyristors, MOSFETs, IGBTs)
- DC/DC Converters

PASSIVE COMPONENTS

RESISTIVE PRODUCTS

- Foil Resistors
- Film Resistors
 - Metal Film Resistors
 - Thin Film Resistors
 - Thick Film Resistors
 - Metal Oxide Film Resistors
 - Carbon Film Resistors
- Wirewound Resistors
- Power Metal Strip® Resistors
- Chip Fuses
- Variable Resistors
 - Cermet Variable Resistors
 - Wirewound Variable Resistors
 - Conductive Plastic Variable Resistors
- Networks/Arrays
- Non-Linear Resistors
 - NTC Thermistors
 - PTC Thermistors
 - Varistors

MAGNETICS

- Inductors
- Transformers

CAPACITORS

- Tantalum Capacitors
 - Molded Chip Tantalum Capacitors
 - Coated Chip Tantalum Capacitors
 - Solid Through-Hole Tantalum Capacitors
 - Wet Tantalum Capacitors
- Ceramic Capacitors
 - Multilayer Chip Capacitors
 - Disc Capacitors
- Film Capacitors
- Power Capacitors
- Heavy-Current Capacitors
- Aluminum Capacitors
- Silicon RF Capacitors

STRAIN GAGE TRANSDUCERS AND STRESS ANALYSIS SYSTEMS

- PhotoStress®
- Strain Gages
- Load Cells
- Force Transducers
- Instruments
- Weighing Systems
- Specialized Strain Gage Systems

Surge Suppressor Capacitors

Vishay ESTA

Vishay Electronic GmbH
Division ESTA
Hofmark-Aich-Strasse 36
D-84030 Landshut
Germany
Phone: +49 871 86-0
Fax: +49 871 862519
www.vishay.com

NOTICE

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.



Surge Suppressor Capacitors

DESCRIPTION

Applications	2
Construction	2
Standard Specifications	2
Current-Carrying Capacity	2
Technical Data	2
Capacitance Values to VDE 0675	2
Mode of Operation	2
Protection against Power-Frequency Voltages Transferred Capacitively	4
Connection	5

SINGLE PHASE TYPES	6
---------------------------------	---

THREE PHASE TYPES	10
--------------------------------	----

ZINC OXIDE RC-SURGE SUPPRESSOR (ZORC) FOR HV-MOTOR AND TRANSFORMERS M-TYPE AND PANEL MOUNTING P-TYPE	12
---	----

ZORC - TECHNICAL DATA	13
------------------------------------	----



APPLICATIONS

RC surge suppressors are designed to protect the windings of electrical machines and transformers against steep fronted and high voltage impulses which occur as a result of atmospheric discharges.

To reduce power-frequency voltages which are transferred capacitively to the secondary or tertiary side of the transformers in the event of an earth fault occurring on the primary side.

CONSTRUCTION

The RC surge suppressors can have either indoor or outdoor bushings. Their active parts are flat-type winding elements with two electrodes which are insulated from each other. The winding elements are incorporated into the capacitor casing. Both air and moisture are extracted under vacuum and at high temperature and all cavities are filled with an impregnant. The capacitor casings are either of aluminum or of stainless steel and are given two coatings of paint.

Capacitors for rated voltages of up to 24 kV form the basic units.

Those for 7.2 kV have two bushings. Capacitors for 12 kV and above have one bushing and the second pole is connected to the casing.

Capacitors to be used in systems with voltage higher than 24 kV are mounted on base insulators, with a maximum of two capacitors connected in series on the same insulator.

STANDARD SPECIFICATIONS

The capacitors are designed and tested related to VDE 0560, Part 3. The rated voltage U_N of capacitors to be connected between phases and earth are given in the same specifications.

In systems with an insulated neutral or earthed through arc-suppression coils, the rated voltage is U_{N1} equal to phase-to-phase voltage U_r , whereas in systems with an effectively earthed neutral, the rated voltage U_{N2} is equal to $U_r/\sqrt{3}$.

According to VDE 0111, paragraph 6, a system is effectively earthed if, in the event of a simple earth fault, the voltage of the healthy phases cannot exceed 80 % of the system (phase-to-phase) voltage. Not all the transformer neutral points of the system need to be earthed to achieve this.

In cases of doubt, it is recommended to choose capacitors whose rated voltage is equal to the system voltage.

CURRENT-CARRYING CAPACITY

RC surge suppressors installed in systems with an insulated neutral or earthed through arc-suppressions coils and in systems with a rigidly earthed neutral can be loaded continuously at 120 % rated voltage and used at frequencies of up to 60 Hz.

All the surge suppressors meet the insulation requirements for equipment rated at 1 kV and above (VDE 0111/12.66).

TECHNICAL DATA

Dielectric	All film polypropylene
Impregnant	Non PCB
Rated voltage	7.2 kV to 36 kV
Rated capacitance	0.05 μ F to 0.8 μ F
Temperature class	- 25 °C to + 50 °C
Installation	Indoor or outdoor

CAPACITANCE VALUES TO VDE 0675

U_N	kV	7.2	12	17.5	24	36
C_N	μ F	0.5	0.3	0.3	0.3	0.15

Other values of capacitance, voltage or temperature class are available upon request.

MODE OF OPERATION

Protection Against Steep-Fronted Voltage Impulses

Electrical machines connected to overhead lines without cables or transformers being interposed should be protected by capacitors (VDE 0675 - Guidelines for Surge Suppression Equipment). These surge suppressors are connected inter-turn faults.

Because of their energy storing capability, surge suppressors reduce the front steepness of voltage impulses (see Fig. 1).

This flattering effect also avoids any damaging impulse reflections on the equipment connected.

Moreover, the magnitude of the overvoltage is also reduced since the impulse entering the winding has a finite 'virtual time to half value on the tail'.

The capacitances stated in the above table have been calculated so that the front steepness of voltage impulse entering the winding is reduced to a maximum of 10 % winding test voltage per μ s.

This value is based on the assumption that the original front steepness of the impulse is very great and that voltage peaks are in the range of more than 50 % flashover voltage impulse for the overhead line insulators. The voltage across the surge suppressor and the time until - because of the flatter effect - the voltage becomes a maximum at the terminal can be seen from Fig. 2.

Both the voltage and time apply to an impulse with a very steep front and a tail which decreases as an exponential function.

The charts are based on the expression given below.

$$T_0 = 1.44 \times T_r$$

where T_0 = Time constant of the exponential decrease of the incoming impulse


T_r = Virtual time to half value on the incoming impulses (60 μ s approx.)

$$U_0 = \hat{U}_0 \times e^{-t/T_0}$$

where U_0 = Incoming impulse on base of time

\hat{U}_0 = Peak value of incoming impulse

T = Time in s

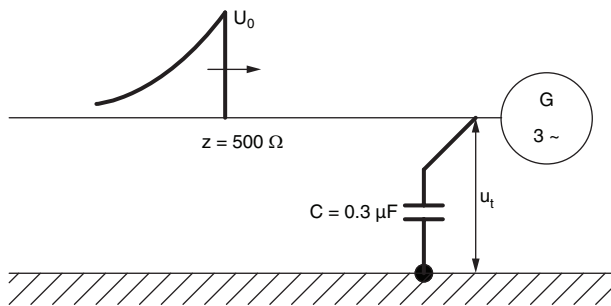

$$T_C = C \times Z$$

where T_C = Time constant of particulat system section

C = Capacitance of the protective capacitor

Z = Surge impedance of the overhead line (500 Ω approx.)

$$\frac{u_t}{U_0} = \frac{2}{1 - T_C/T_0} \times e^{-\left(\frac{t}{T_0} - \frac{t}{T_C}\right)}$$

where u_t = Voltage curve on a base at the line terminal

$$\frac{t_m}{T_0} = \frac{2}{1 - T_C/T_0} \times \ln \frac{T_C}{T_0}$$

where t_m = Time until voltage u_t becomes a maximum at the line terminal

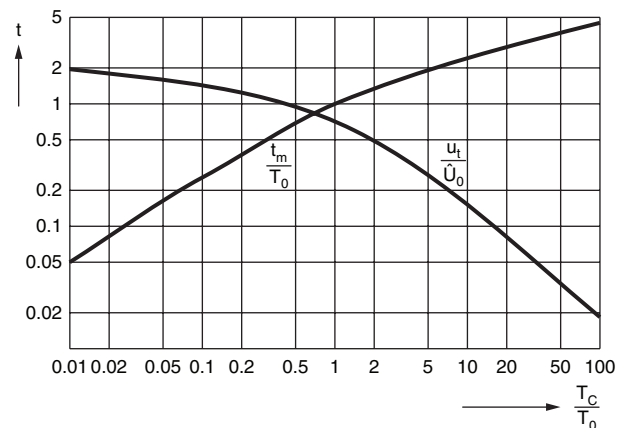


Fig. 2 - Reduction of voltage impulse by a protective capacitor at a line terminal

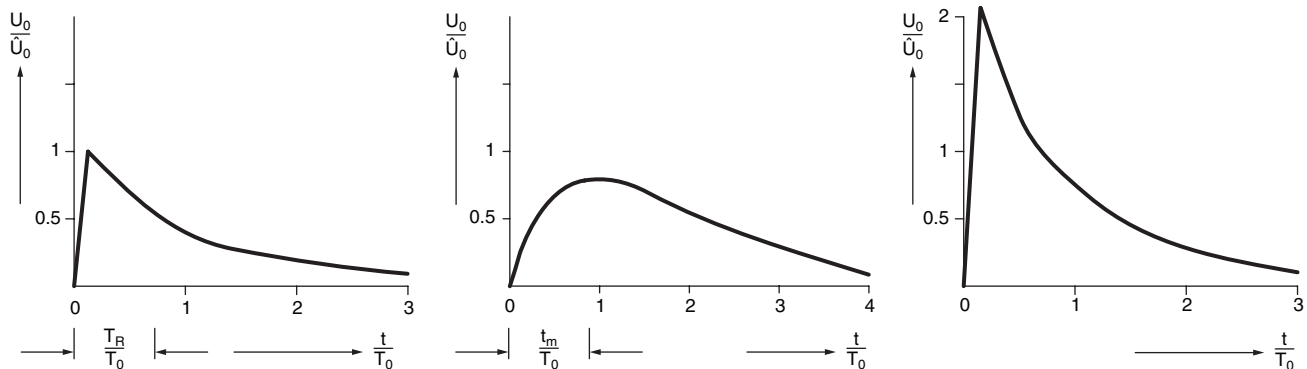


Fig. 1

Surge arresters used in conjunction with surge suppressor capacitors operates at a lower instantaneous value of the voltage than without such capacitors. This is because of the reduced front steepness of the impulse and the consequently lessened effect of 'delayed ignition'.

The obvious advantage is that the machine windings, which in most cases have weaker insulation than overhead lines, are better protected.

The machine arresters must, therefore, be designed for lower impulse and power-frequency sparkover voltages than the usual arresters.

On the other hand, since they are now likely to operate in the event of internal overvoltages as well, they must have a correspondingly higher discharge capacity.

In case of electrical equipment connected to overhead lines through cables, the capacitance of the surge suppressor capacitance can be reduced by roughly the amount corresponding to the operating of the cables.

The inductance's and capacitance's of the machines or transformers connected have little influence on the size of the protective capacitance's required, and inquires need therefore only be made if the zone ahead of the equipment to be protected is subject to special conditions.

EXAMPLE

Reduction of the voltage impulse on an overhead line by a surge protection capacitor.

Surge impedance Z of the overhead line: 500Ω

Capacitance C of the protective capacitors: $0.3 \mu\text{F}$

Time constant $T_C = C \times Z = 0.3 \times 500 = 150 \mu\text{s}$

Virtual time to half value on the tail, T_r , of the incoming impulse: $50 \mu\text{s}$

Thus:

$$T_0 = 1.44 \times T_r = 1.44 \times 50 = 72 \mu\text{s}$$

$$T_C/T_0 = 150/72 = 2.08$$

From the chart:

$$\hat{u}_t/\hat{U}_0 = 0.5 \text{ and } t_m/T_0 = 1.4$$

where \hat{u}_t = Voltage curve on a base at the line terminal

It can thus be seen that an incoming impulse with at peak (\hat{U}_0) of 1000 kV and a virtual time on half value on the tail (T_r) of $50 \mu\text{s}$ is reduced to a peak (\hat{U}_t) of 500 kV by the capacitor. Moreover, the voltage impulse u_t at the terminal does not attain its maximum until time $T_m = 1.4 \times 72 = 100 \mu\text{s}$.

This shows that the steepness of the incoming impulse has been reduced considerably.

PROTECTION AGAINST POWER-FREQUENCY VOLTAGES TRANSFERRED CAPACITIVELY

In the case of unloaded generator transformer with a high transformation ratio (e.g. 110 kV on the higher voltage side), unduly high power-frequency voltages may be transferred capacitively to the lower-voltage side (U_{2C}) if an earth fault occurs on the higher-voltage side. For a single-phase earth fault, this can be expressed at follows:

$$U_{2C} = \frac{C_1}{C_1 + C_2} U_0$$

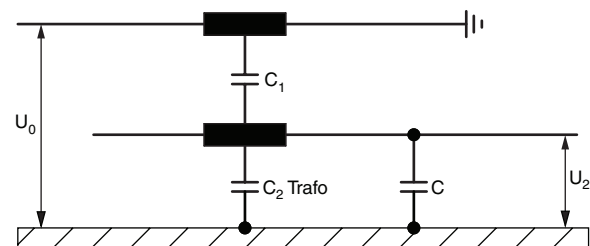


Fig. 3

U_0 = Voltage to earth on the higher voltages side

C_1 = Capacitance between higher and lower windings of one transformer phase (1 nF to 10 nF)

C_2 = Resulting capacitance of a lower voltage phase including that of the transformer lower-side to earth (1 nF to 10 nF), the capacitance of the protective capacitor and possibly that of a cable connecting the transformer with the generator and also the capacitance of the latter

In systems operated with a free neutral or earthed through an arc-suppression coil, the voltage to earth is equal to the phase-neutral voltage, i.e.

$$U_0 = U_Y$$

Whereas in rigidly earthed systems and under the most favourable conditions:

$$U_0 = \frac{2}{3} U_Y$$

Moreover, the lower-side systems voltage U_{2b} is superimposed on C_{2C} . The maximum phase-to-earth voltage U_2' can thus be expressed as follows:

$$U_2' \sim U_{2C}' + \frac{U_{2b}}{\sqrt{3}}$$

Capacitors of low rating. E.g. of $0.075 \mu\text{F}$ and $0.15 \mu\text{F}$, are best used for reducing power-frequency voltages transferred capacitively. It does not matter if their capacitance's are higher than those calculated since the protection afforded by these capacitors is higher because of their greater energy storing capability.

CONNECTION

The surge suppressor capacitors be connected at the shortest possible distance from the equipment to be protected.

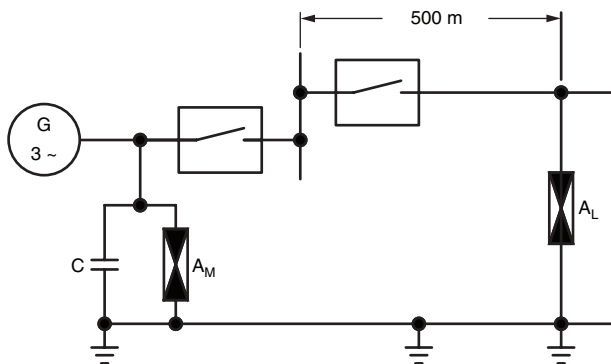


Fig. 4 - Surge suppression scheme for a generator which feeds an overhead line direct

C = Surge suppressor

A_L = Surge arrester on the overhead line

A_M = Generator arrester

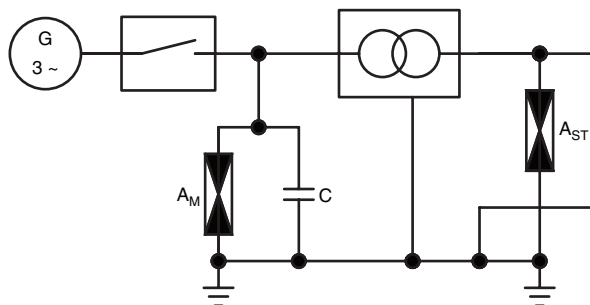


Fig. 5 - Surge suppression scheme for a generator which feeds an overhead line through a transformer. Capacitors afford protection against power-frequency voltages transferred capacitively.

A_{ST} = Station arrester

Single Phase Type

SURGE SUPPRESSOR					
TYPE	U_N kV	C_N μF	U_E kV/1 min	IMPULSE kV _P	DRAWING
Phaso 12/0.1 μF	12	0.1	28	75	
Phaso 12/0.15 μF		0.15			
Phaso 12/0.2 μF		0.2			
Phaso 12/0.25 μF		0.25			
Phaso 12/0.3 μF		0.3			
Phaso 12/0.4 μF		0.4			
Phaso 12/0.5 μF		0.5			
Phafso 17.5/0.1 μF	17.5	0.1	38	95	
Phafso 17.5/0.15 μF		0.15			
Phafso 17.5/0.2 μF		0.2			
Phafso 17.5/0.25 μF		0.25			
Phafso 17.5/0.3 μF		0.3			
Phafso 17.5/0.4 μF		0.4			
Phafso 17.5/0.5 μF		0.5			

Dimensions are depending on the losses of the capacitor.

SURGE SUPPRESSOR					
TYPE	U _N kV	C _N μF	U _E kV/1 min	IMPULSE kV _P	DRAWING
Phafso 24/0.1 μF	24	0.1	50	125	
Phafso 24/0.15 μF		0.15			
Phafso 24/0.2 μF		0.2			
Phafso 24/0.25 μF		0.25			
Phafso 24/0.3 μF		0.3			
Phafso 24/0.4 μF		0.4			
Phafso 24/0.5 μF		0.5			
US/36/0.1 μF	36	0.1	70	170	
US/36/0.15 μF		0.15			
US/36/0.2 μF		0.2			
US/36/0.25 μF		0.25			
US/36/0.3 μF		0.3			

Dimensions are depending on the losses of the capacitor.

RC-SURGE SUPPRESSOR						
TYPE	U _N kV	C _N μF	U _E kV/1 min	IMPULSE kV _p	R Ω	DRAWING
Phaso 12/0.1 μF/...	12	0.1	28	75	10 to 50	
Phaso 12/0.15 μF/...		0.15				
Phaso 12/0.2 μF/...		0.2				
Phaso 12/0.25 μF/...		0.25				
Phaso 12/0.3 μF/...		0.3				
Phaso 12/0.4 μF/...		0.4				
Phaso 12/0.5 μF/...		0.5				
Phafso 17.5/0.1 μF/...	17.5	0.1	38	95	10 to 50	
Phafso 17.5/0.15 μF/...		0.15				
Phafso 17.5/0.2 μF/...		0.2				
Phafso 17.5/0.25 μF/...		0.25				
Phafso 17.5/0.3 μF/...		0.3				
Phafso 17.5/0.4 μF/...		0.4				
Phafso 17.5/0.5 μF/...		0.5				

Dimensions are depending on the losses of the capacitor.
 Earth fault protection (T < 1 min)



RC-SURGE SUPPRESSOR WITH BUILT IN DAMPING RESISTOR						
TYPE	U _N kV	C _N μF	U _E kV/1 min	IMPULSE kV _P	R Ω	DRAWING
Phafso 24/0.1 μF/...	24	0.1	50	125	10 to 50	
Phafso 24/0.15 μF/...		0.15				
Phafso 24/0.2 μF/...		0.2				
Phafso 24/0.25 μF/...		0.25				
Phafso 24/0.3 μF/...		0.3				
Phafso 24/0.4 μF/...		0.4				
Phafso 24/0.5 μF/...		0.5				
RC/36/0.1 μF/...	36	0.1	70	170	10 to 50	
RC/36/0.15 μF/...		0.15				
RC/36/0.2 μF/...		0.2				
RC/36/0.25 μF/...		0.25				
RC/36/0.3 μF/...		0.3				

Surge suppressor 36 kV consists of:

- 2 x capacitors unit connected in series
- 1 x mounting plate
- 1 x post insulator 36 kV (70 kV/200 kV_P)

Dimensions are depending on the losses of the capacitor.
 Earth fault protection (T < 1 min)

Three Phase Type

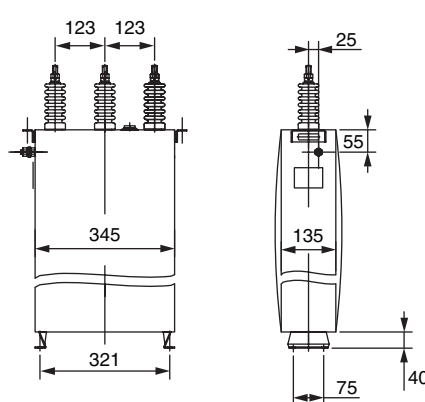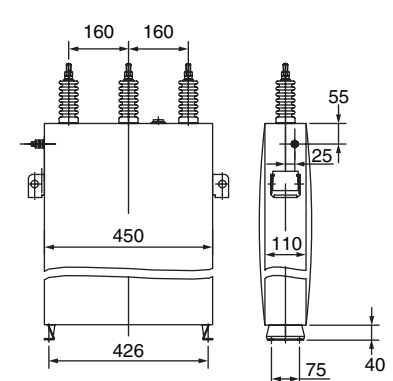SURGE SUPPRESSOR					
TYPE	U _N kV	C _N μF	U _E kV/1 min	IMPULSE kV _P	DRAWING
Phaso 7.2/3 x 0.25 μF	7.2	3 x 0.25	20	60	
Phaso 7.2/3 x 0.3 μF		3 x 0.3			
Phaso 7.2/3 x 0.4 μF		3 x 0.4			
Phaso 7.2/3 x 0.5 μF		3 x 0.5			
Phaso 7.2/3 x 0.6 μF		3 x 0.6			
Phaso 7.2/3 x 0.8 μF		3 x 0.8			
Phaso 12/3 x 0.1 μF	12	3 x 0.1	28	75	
Phaso 12/3 x 0.15 μF		3 x 0.15			
Phaso 12/3 x 0.2 μF		3 x 0.2			
Phaso 12/3 x 0.25 μF		3 x 0.25			
Phaso 12/3 x 0.3 μF		3 x 0.3			
Phaso 12/3 x 0.4 μF		3 x 0.4			
Phaso 12/3 x 0.5 μF		3 x 0.5			

Dimensions are depending on the losses of the capacitor.

RC SURGE SUPPRESSOR WITH BUILT IN DAMPING RESISTOR						
TYPE	U _N kV	C _N μF	U _E kV/1 min	IMPULSE kV _P	R Ω	DRAWING
Phaso 7.2/3 x 0.25 μF/...	7.2	3 x 0.25	20	60	10 to 50	
Phaso 7.2/3 x 0.3 μF/...		3 x 0.3				
Phaso 7.2/3 x 0.4 μF/...		3 x 0.4				
Phaso 7.2/3 x 0.5 μF/...		3 x 0.5				
Phaso 7.2/3 x 0.6 μF/...		3 x 0.6				
Phaso 7.2/3 x 0.8 μF/...		3 x 0.8				
Phaso 12/3 x 0.1 μF/...	12	3 x 0.1	28	75	10 to 50	
Phaso 12/3 x 0.15 μF/...		3 x 0.15				
Phaso 12/3 x 0.2 μF/...		3 x 0.2				
Phaso 12/3 x 0.25 μF/...		3 x 0.25				
Phaso 12/3 x 0.3 μF/...		3 x 0.3				
Phaso 12/3 x 0.4 μF/...		3 x 0.4				
Phaso 12/3 x 0.5 μF/...	3 x 0.5					

Dimensions are depending on the losses of the capacitor.

Earth fault protection (T < 1 min)

Zinc Oxide RC-Surge Suppressor (ZORC) for HV-Motor and Transformers M-Type and Panel Mounting P-Type

DESCRIPTION

ZORC's are RC surge suppressors with included varistors. The technology for the design of the ZORC's is the same as for all other capacitors in this catalogue.

ZORC's will protect transformers and motors from insulation failures. As all surge transients will be removed at source by the ZORC's. The lifetime of transformers and motors will be increased for many years.

ZORC's will be inside the curves defined by IEEE and CIRGRe for motor impulse withstand levels. To reach a comprehensive insulation coordination, independent what switching device or switching curve is used (air, vacuum, gas or oil).

ZORC's help to reduce costs of down time losses of transformers and motors and for replacements.

ZORC's will reduce significant the expenses for maintenance and insulation failures of motors and transformers, which user accept as normal.

ZORC's will eliminate connected with vacuum and other switchgears, all multiple striking (re- and pre-) transients.

So ZORC's prevents high frequency currents at zero in the contact gap of the switch.

APPLICATION

ZORC's are optimised to be mounted inside the motor or transformer terminal boxes to be connected to each phase and earth.

ZORC's will protect vacuum and other switchgears.

ZORC's connection diagrams in HV motor circuits:

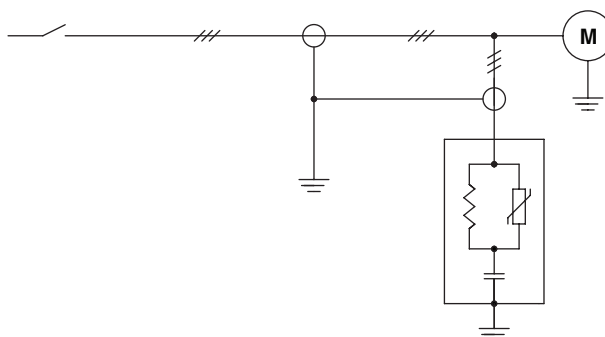


Fig. 1 - ZORC type M connected to motor terminals

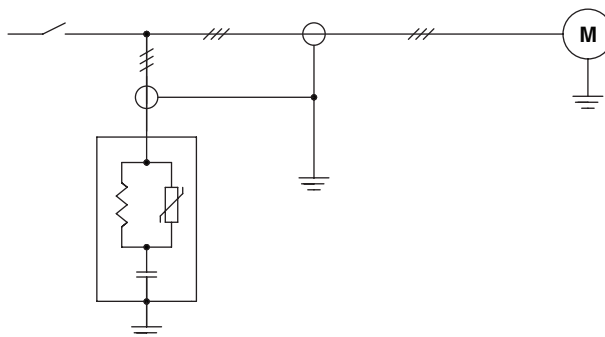


Fig. 2 - ZORC type P connected in switchgear panel

ZORC					
TYPE	U _N kV	C _N μF	PH	DIMENSION mm	DRAWING
Zoaso 3.3/0.1 μF/M	3.3	0.1	1	116 x 72 x 155	
Zoaso 6.6/0.1 μF/M	6.6				
Zoaso 3.3/3 x 0.2 μF/P	3.3	3 x 0.2	3	345 x 135 x 220	
Zoaso 3.3/3 x 0.2 μF/M					
Zoaso 6.6/3 x 0.2 μF/P	6.6				
Zoaso 6.6/3 x 0.2 μF/M					
Zoaso 11/3 x 0.2 μF/P	11	3 x 0.2	3	450 x 110 x 240	
Zoaso 11/3 x 0.2 μF/M					

Application:
M = Motor
P = Panel



ONLINE INFORMATION

For product information and a current list of sales offices,
representatives and distributors, visit our website:

www.vishay.com

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY
ASIA PTE LTD.
25 TAMPINES STREET 92
KEPPEL BUILDING #02-00
SINGAPORE 528877
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY TRADING (SHANGHAI) CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258-5000
FAX: +86-21-5258-7979

JAPAN

VISHAY JAPAN CO., LTD.
MG IKENOHATA BLDG. 4F
1-2-18, IKENOHATA
TAITO-KU
TOKYO 110-0008
JAPAN
PH: +81-3-5832-6210
FAX: +81-3-5832-6260

EUROPE

GERMANY

VISHAY EUROPE SALES GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2920
FAX: +33-4-9337-2997

UNITED KINGDOM

VISHAY LTD.
PALLION INDUSTRIAL ESTATE
SUNDERLAND SR4 6SU
UNITED KINGDOM
PH: +44-191-514-4155
FAX: +44-191-567-8262

One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

**World Headquarters**

Vishay Intertechnology, Inc.
63 Lancaster Avenue
Malvern, PA 19355-2143
United States

One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

© Copyright 2008 Vishay Intertechnology, Inc.
® Registered trademarks of Vishay Intertechnology, Inc.
All rights reserved. Printed in Germany.
Specifications subject to change without notice.

www.vishay.com

VSE-DB0104-0806