



Specifier's Guide

Line Installation and Protective Equipment Master Catalog
5 kV - 35 kV Electrical Distribution Systems

 **COOPER** Power Systems



Table of Contents

	Page
Standard Interfaces For Separable Connectors and Components	4
Certified Tests and Performance	5
Conductor Sizing	6
AEIC Insulation Diameter Chart	8
ICEA Insulation Diameter Chart	9
200 A Loadbreak Connectors	10
200 A Deadbreak Connectors	14
200 A Stacking Dimensions	16
Clēer 600 A Loadbreak Connectors	18
600/900 A Deadbreak Connectors	22
600/900 A Components & Replacement Parts	25
600/900 A Connector Systems	26
600 A Stacking Dimensions	28
Junction Bars/Cable Transition and Oil Stop Modules	30
Splices	36
Underground Surge Arresters	38
Tools & Maintenance	40
Bushings	44
Fusing	46
MagneX Single-Phase Interrupter	48
MagneX Three-Phase Interrupter	50
Faulted Circuit Indicators	52
Sectionalizing Cabinets	56
Part Number Index	58
Support Available When You Need It	61
Product Application Overhead and Underground Distribution Systems	62

Smart Solutions that Deliver Reliable Power Everyday --- Everywhere

Through our commitment to research and development, we continue to develop smart solutions for safe, reliable, environmentally friendly electrical power delivery. This Specifier's Guide contains all the information necessary to order what you need to complete your projects for 5 kV – 35 kV electrical distribution systems.

Let our Legacy Speak For Itself

From the Electric Century to the Information Age

Even a visionary like Thomas A. Edison could not have imagined the sophistication required of electrical transmission and distribution equipment a little more than a century after the invention of the incandescent electric light bulb and the beginning of the "Electric Century." Nor could he have anticipated all of the complex issues facing the electrical industry today.

Since its beginning, Cooper Power Systems has continued the commitment of its forebears to innovation. Our research and development lab, the Thomas A. Edison Technical Center, embodies Edison's philosophy of "finding a better way" – with innovative products that promote better power quality, reliability, safety, performance, and environmental stewardship. We're proud to trace our heritage back to the industry's pioneer.

Thomas A. Edison, Incorporated, one of Thomas Edison's original companies founded in 1910 and with corporate roots that go back to 1889, combined with McGraw Electric Company in 1957 to form McGraw-Edison. In 1985, McGraw-Edison™ became part of Cooper Power Systems. When RTE was acquired by Cooper Industries in 1988 and merged with McGraw-Edison Power Systems, Cooper Power Systems was formed. Cooper's product offerings expanded again through the acquisition of Kearney in 1997. When RTE received a patent on the 15 kV loadbreak elbow design in 1966, its potential growth was probably unrealized at the time. It is estimated that there are well over 10,000,000 such elbows in service today. As a leading innovator in the industry, Cooper Power Systems continues to introduce new products for underground distribution systems. Other innovative companies have played key roles in the development of modern distribution systems, and they have helped Cooper Power Systems become a leading manufacturer of electrical distribution equipment.



"There's a way to do it better – find it."
— Thomas A Edison

But Wait, There's More

In addition to rubber goods, we also supply surge arresters, tools, hotsticks, connectors, bushings, fusing, faulted circuit indicators, sectionalizing equipment and more. Now, you can get all of your products in one place – from one manufacturer – Cooper Power Systems! If you need more detail than what is contained in this easy to use Specifier's Guide, we have additional information available on the internet at www.cooperpower.com. You can also register to have access to Cooper Power Systems complete online catalog, product and service literature that is updated daily! You can view documents in real time as they are updated. To register, go to www.cooperpowercentral.com.

Technical Support When You Need It

If you cannot find what you're looking for, or need more detailed information, please contact technical support voicemail at 800-847-4584 (within domestic USA), or email your questions to info@cooperpowercentral.com. Technical support and application information are readily available. Cooper Power Systems can also provide practical, hands-on training using actual products so you can learn the easiest way to fit our products into your application.

Quality Policy

Employees of Cooper Industries are committed and empowered to provide products and services that exceed our internal and external customers' expectations. We work together to achieve world-class quality with relentless drive for continuous improvement. ISO 9001 supports our ongoing commitment to quality by strengthening internal processes and procedures. Commitment to quality assists us in ensuring that our customers are delighted.



Following is additional information available to you from a variety of resources.

Cooper Power Systems Website

One Cooper | www.cooperpower.com | Online

Additional Industry Websites

IEEE® industry standards

<http://www.ieee.org/web/standards/home/index.html>

IEEE®

<http://www.ieee.org>

Specific energy statistics from the U.S. government

<http://www.eia.doe.gov/>


U.S. Department of Energy

<http://www.energy.gov/>

Standard Interfaces for Separable Connectors and Components

The following diagram specifies the IEEE Std 386™ standard interfaces supplied by Cooper Power Systems for various applications to ensure interchangeability of any mating components.

Interface Description Per IEEE Std 386™ – 2006 standard

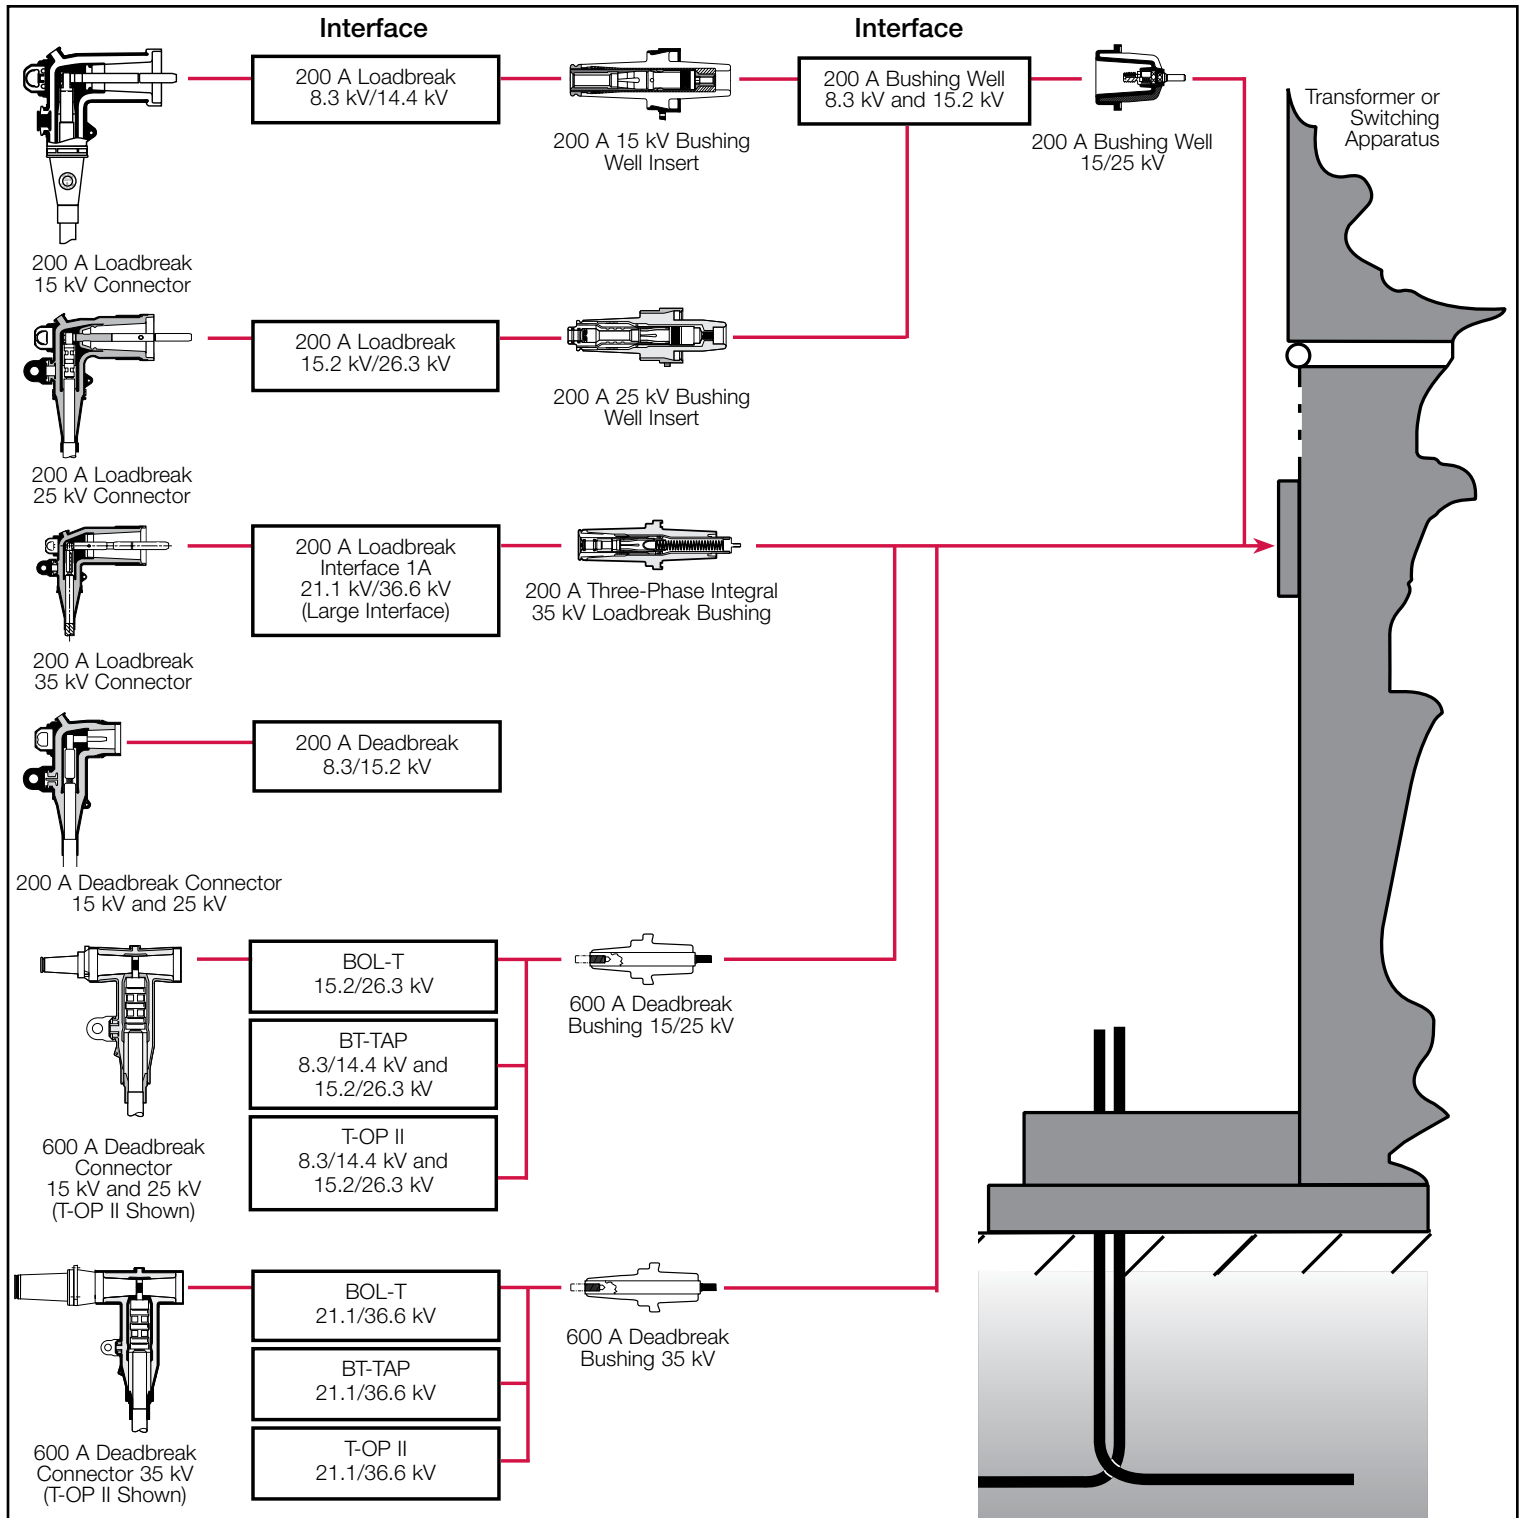

Certified Tests and Performance

Cooper Power Systems Connectors, Splices, Underground Surge Arresters, Tools, Bushings, Fusing, Faulted Circuit Indicators and Sectionalizing Equipment have been designed and tested per applicable portions of Institute of Electrical and Electronics Engineers, Inc. (IEEE®), American National Standards Institute (ANSI®), National Electrical Manufacturers Association (NEMA) and other industry standards including:

- IEEE Std 386™ standard for Separable Connectors
- IEEE Std 404™ standard for Cable Joints and Splices
- IEEE Std C62.11™ standard for Metal Oxide Surge Arresters
- IEEE Std C37.41™ standard for Current-Limiting Fuses
- IEEE Std 592™ standard for Exposed Semi-conducting Shields
- ANSI C119.4 Standard for Copper and Aluminum Conductor Connectors
- AEIC CS5, CS6 and CS8 Standards for XLP and EPR Insulated Cables
- ICEA S-94-649 Standard for XLP and EPR Insulated Cables

Cooper Power Systems Separable Connectors are rated for 15 kV, 25 kV and 35 kV systems in accordance with the following ratings.

Splice Voltage Ratings in Accordance with IEEE Std 404™ standard

Voltage Ratings and Characteristics			
Description	Voltage		
Standard Voltage Class (kV)	15	25	35
Maximum Rating Phase-to-Ground (kV rms)	8.7	14.4	20.2
AC 60 Hz 1 Minute Withstand (kV rms)	35	52	69
DC 15 Minute Withstand (kV)	70	100	125
BIL and Full Wave Crest (kV peak)	110	150	200
Minimum Corona Voltage Level (kV)	13	22	31

Splice Current Ratings in Accordance with IEEE Std 404™ standard

Current Ratings and Characteristics	
Description	Amperes
Continuous	Equal to the current rating of the cable per IEEE Std 404™ standard
Short Time	Equal to the current rating of the cable per IEEE Std 404™ standard

200 A Loadbreak Connector Ratings in Accordance with IEEE Std 386™ standard

Voltage Ratings	15 kV	25 kV	35 kV
Standard Voltage Class	15	25	35
Maximum Rating Phase-to-Phase	14.4	26.3	36.6
Maximum Rating Phase-to-Ground	8.3	15.2	21.1
AC 60 Hz 1 Minute Withstand	34	40	50
DC 15 Minute Withstand	53	78	103
BIL and Full Wave Crest	95	125	150
Minimum Corona Voltage Level	11	19	26
Current Ratings	15 kV	25 kV	35 kV
Continuous	200 A rms	200 A rms	200 A rms
Switching	10 make/break operations at 200 A rms at 14.4 kV	10 make/break operations at 200 A rms at 26.3 kV	10 make/break operations at 200 A rms at 36.6 kV
Fault Closure	10,000 A rms sym. at 14.4 kV for 0.17s after 10 switching operations	10,000 A rms sym. at 26.3 kV for 0.17s after 10 switching operations	10,000 A rms sym. at 36.6 kV for 0.17s after 10 switching operations
Short Time	10,000 A rms sym. for 0.17s 3,500 A rms sym. for 3.0s	10,000 A rms sym. for 0.17s 3,500 A rms sym. for 3.0s	10,000 A rms sym. for 0.17s 3,500 A rms sym. for 3.0s

600 A Deadbreak Connector Ratings in Accordance with IEEE Std. 386™ standard

Voltage Ratings	15 kV	25 kV	35 kV
Standard Voltage Class	25	25	35
Maximum Rating Phase-to-Ground	15.2	15.2	21.1
AC 60 Hz 1 Minute Withstand	40	40	50
DC 15 Minute Withstand	78	78	103
BIL and Full Wave Crest	125	125	150
Minimum Corona Voltage Level	19	19	26
Current Ratings	15 kV	25 kV	35 kV
600 A Interface**			
Continuous	600 A rms	600 A rms	600 A rms
24 Hour Overload	1,000 A rms	1,000 A rms	1,000 A rms
Short Time	25,000 A rms sym. for 0.17 s 10,000 A rms sym. for 3.0 s	25,000 A rms sym. for 0.17 s 10,000 A rms sym. for 3.0 s	25,000 A rms sym. for 0.17 s 10,000 A rms sym. for 3.0 s
200 A Interface On Loadbreak Reducing Tap Plug (L RTP)*			
Continuous	200 A rms	200 A rms	200 A rms
Switching	10 make/break operations at 200 A rms at 14.4 kV	10 make/break operations at 200 A rms at 26.3 kV	10 make/break operations at 200 A rms at 36.6 kV
Fault Closure	10,000 A rms sym. at 14.4 kV for 0.17s after 10 switching operations	10,000 A rms sym. at 26.3 kV for 0.17s after 10 switching operations	10,000 A rms sym. at 36.6 kV for 0.17s after 10 switching operations
Short Time	10,000 A rms sym. for 0.17 s 3,500 A rms sym. for 3.0s	10,000 A rms sym. for 0.17 s 3,500 A rms sym. for 3.0s	10,000 A rms sym. for 0.17 s 3,500 A rms sym. for 3.0s

Notes:

* System design and protection must recognize the ratings of 200 A interface.

** Optional 900 A rating is available. Refer to 600/900 A Deadbreak Connector section for more detail.

Part Number Selection Process for Cable Sensitive Products

The Cooper Power Systems 200 A and 600 A connector products are designed for applications on XLPE, EPR or other solid dielectric insulated underground electrical cables. In order to maintain a reliable termination, the cable accessories must be sized correctly with the cable conductor size and cable insulation diameter.

The cable conductor size is used to determine the compression connector used. Proper sizing is important to ensure reliable current transfer from the underground cable conductor to the elbow connector. Conductor diameters are dependent on the conductor size in AWG or kcmil, and conductor type (stranded, compressed, compact or solid).

The cable insulation diameter (the diameter over the insulation) is critical because it is important to maintain a tightly sealed fit between the cable insulation and the elbow housing at the cable entrance. As the insulation thickness changes, so must the range of the cable accessory. Cable insulation diameter can be determined from the cable manufacturer's specification, or by referring to pages 8 (for cable made to the AEIC Standard including the ± 0.030 inch tolerance) or 9 (for cable made to the ICEA Standard) for minimum and maximum diameters.

EXAMPLE: PROPER ELBOW PART NUMBER SELECTION

Select a Cooper Power Systems 15 kV 200 A Loadbreak Elbow with optional integral jacket seal and test point for an AEIC standard tape-shielded 15 kV cable with 133% insulation and 1/0 compact stranded conductor with an outer jacket diameter of 1.07".

Step 1 – Base Part Number Selection

Select base part number of **LEJ215** from page 11 for 15 kV voltage class. Note that on page 11 reference is also made to tables CR1 and CC1.

Step 2 – Determine Insulation Outside Diameter Range

Since cable is made to AEIC Standards, refer to page 8. 133% 15 kV cable corresponds to 220 mil insulation wall thickness. The AEIC table gives a range of 0.805" to 0.865" for 1/0 compact 220 mil cable.

Step 3 – Elbow Cable Range Selection

Refer to CR1 Table on page 13 and select a cable range code of "**AB**" with a range of 0.610" to 0.970" to cover 0.805" to 0.865".

LEJ215

CABLE RANGE
CODE (CR1)

Step 4 – Elbow Connector Selection

Refer to CC1 Table on page 13 and select a conductor code of "**05**" which applies to the specified 1/0 compact conductor.

LEJ215

AB

CONDUCTOR
CODE (CC1)

Step 5 – Optional Test Point Selection

In accordance with Note 1 on page 11, for an elbow with test point, add a "**T**" after the cable range and conductor code.

LEJ215

AB

05

T

Step 6 – Optional Ground Strap

Tape-shielded cable requires a ground strap and bleeder wire to terminate. Add "GS" after test point option.

LE215

AB


05

TGS


Step 7 – Ordering

Therefore, order Cooper Power Systems part number

LEJ215AB05TGS

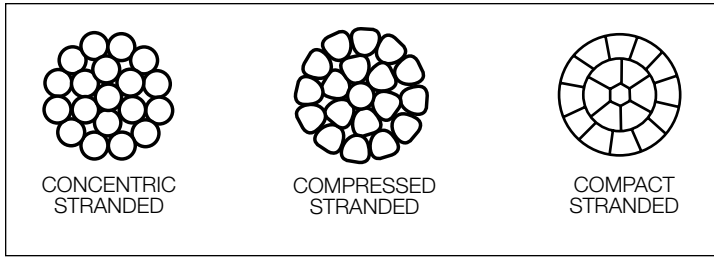

Types of Stranded Conductor

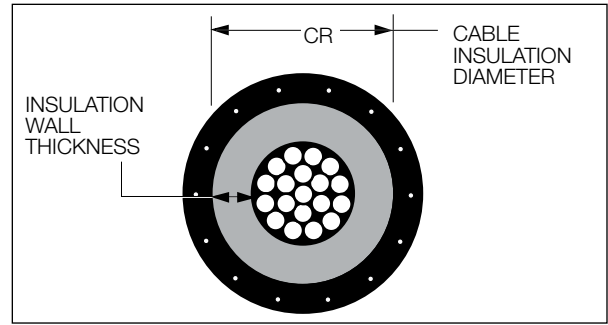

Cable insulation

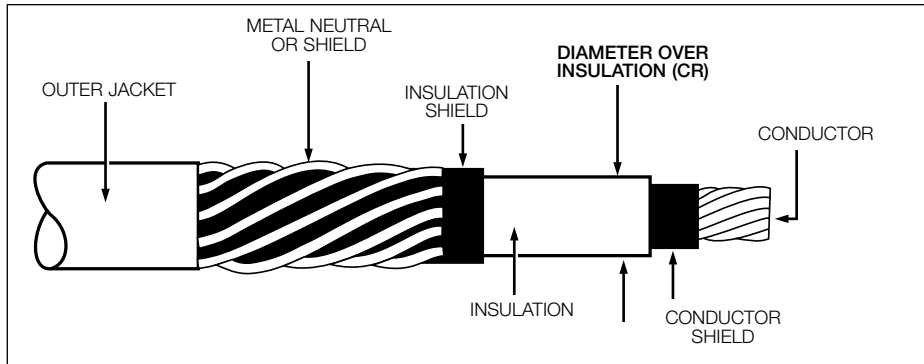


Illustration showing typical construction of medium voltage underground cable.

Cable Conductor Reference

Conductor Size AWG or kcmil	No. of Strands and their Nom. Strand Dia. (in.)	Cross-sectional Area		Stranded Conductors (inches)	Compressed Conductors (inches)	Compact Conductors (inches)	Solid Conductors (inches)
		Square Inches	mm ² Conversion				
14	7 x 0.0242	0.0032	2.08	0.073	-	-	0.064
12	7 x 0.0305	0.0051	3.31	0.092	-	-	0.081
10	7 x 0.0385	0.0082	5.26	0.116	-	-	0.102
8	7 x 0.0486	0.0130	8.37	0.146	-	-	0.129
6	7 x 0.0612	0.0206	13.30	0.184	-	-	0.162
4	7 x 0.0772	0.0328	21.15	0.232	-	-	0.204
2	7 x 0.0974	0.0521	33.62	0.292	0.283	0.268	0.258
1	19 x 0.0664	0.0657	42.41	0.332	0.322	0.299	0.289
1/0	19 x 0.0745	0.0829	53.49	0.373	0.362	0.336	0.325
2/0	19 x 0.0837	0.1045	67.43	0.418	0.405	0.376	-
3/0	19 x 0.0940	0.1318	85.01	0.470	0.456	0.423	-
4/0	19 x 0.1055	0.1662	107.2	0.528	0.512	0.475	-
250	37 x 0.0822	0.1964	127	0.575	0.558	0.520	-
350	37 x 0.0973	0.2749	177	0.681	0.661	0.616	-
500	37 x 0.1162	0.3927	253	0.813	0.789	0.736	-
600	61 x 0.0992	0.4712	304	0.893	0.866	0.813	-
700	61 x 0.1071	0.5498	355	0.964	0.935	0.877	-
750	61 x 0.1109	0.5891	380	0.998	0.968	0.908	-
800	61 x 0.1145	0.6283	405	1.031	1.000	0.938	-
900	61 x 0.1215	0.7069	456	1.094	1.061	0.999	-
1000	61 x 0.1280	0.7854	507	1.152	1.117	1.060	-

AEIC Insulation Diameter Chart

Cable Insulation Diameters for Standard AEIC Cables with 175, 220, 260, and 345 mil Insulation Wall Thickness

Insulation AWG or kcmil	Wall Thickness* (Inches)	Voltage Class kV	Concentric Stranded		Compressed Stranded		Compact Stranded		Solid	
			Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)
#2	.175	15	0.670	0.730	0.665	0.725	0.650	0.710	0.640	0.700
	.220	15	0.760	0.820	0.775	0.815	0.740	0.800	0.730	0.790
	.260	25	—	—	—	—	—	—	—	—
	.345	35	—	—	—	—	—	—	—	—
#1	.175	15	0.710	0.770	0.700	0.760	0.680	0.740	0.670	0.730
	.220	15	0.800	0.860	0.790	0.850	0.770	0.830	0.760	0.820
	.260	25	0.880	0.940	0.870	0.930	0.850	0.910	0.840	0.900
	.345	35	—	—	—	—	—	—	—	—
1/0	.175	15	0.755	0.815	0.740	0.800	0.715	0.775	0.705	0.765
	.220	15	0.845	0.905	0.830	0.890	0.805	0.865	0.795	0.855
	.260	25	0.925	0.985	0.910	0.970	0.885	0.945	0.875	0.935
	.345	35	1.095	1.155	1.080	1.140	1.055	1.115	1.045	1.105
2/0	.175	15	0.800	0.860	0.785	0.845	0.755	0.815	0.805	0.905
	.220	15	0.890	0.950	0.875	0.935	0.845	0.905	0.835	0.895
	.260	25	0.970	1.030	0.955	1.015	0.925	0.985	0.915	0.975
	.345	35	1.140	1.200	1.125	1.185	1.095	1.155	1.085	1.145
3/0	.175	15	0.850	0.910	0.835	0.895	0.805	0.865	0.850	0.940
	.220	15	0.940	1.000	0.925	0.985	0.895	0.955	0.880	0.940
	.260	25	1.020	1.080	1.005	1.065	0.975	1.035	0.960	1.020
	.345	35	1.190	1.250	1.175	1.235	1.145	1.205	1.130	1.190
4/0	.175	15	0.910	0.970	0.890	0.950	0.855	0.915	0.900	0.990
	.220	15	1.000	1.060	0.980	1.040	0.945	1.005	0.930	0.990
	.260	25	1.080	1.140	1.060	1.120	1.025	1.085	1.010	1.070
	.345	35	1.250	1.310	1.230	1.290	1.195	1.255	1.180	1.240
250	.175	15	0.965	1.025	0.950	1.010	0.910	0.970	—	—
	.220	15	1.055	1.115	1.040	1.100	1.000	1.060	—	—
	.260	25	1.145	1.205	1.130	1.190	1.095	1.150	—	—
	.345	35	1.320	1.380	1.305	1.365	1.265	1.325	—	—
350	.175	15	1.070	1.130	1.050	1.110	1.005	1.065	—	—
	.220	15	1.160	1.220	1.140	1.200	1.095	1.155	—	—
	.260	25	1.250	1.310	1.230	1.290	1.185	1.245	—	—
	.345	35	1.425	1.485	1.405	1.465	1.360	1.420	—	—
500	.175	15	1.205	1.265	1.180	1.240	1.125	1.185	—	—
	.220	15	1.295	1.355	1.270	1.330	1.215	1.275	—	—
	.260	25	1.385	1.445	1.360	1.420	1.305	1.365	—	—
	.345	35	1.560	1.620	1.535	1.595	1.480	1.540	—	—
600	.175	15	1.295	1.355	1.265	1.325	1.215	1.275	—	—
	.220	15	1.385	1.445	1.355	1.415	1.305	1.365	—	—
	.260	25	1.475	1.535	1.445	1.505	1.395	1.455	—	—
	.345	35	1.650	1.710	1.625	1.680	1.570	1.630	—	—
700	.175	15	1.365	1.425	1.335	1.395	1.275	1.335	—	—
	.220	15	1.455	1.515	1.425	1.485	1.365	1.425	—	—
	.260	25	1.545	1.605	1.515	1.575	1.455	1.515	—	—
	.345	35	1.720	1.780	1.690	1.750	1.630	1.690	—	—
750	.175	15	1.400	1.460	1.370	1.430	1.310	1.370	—	—
	.220	15	1.490	1.550	1.460	1.520	1.400	1.460	—	—
	.260	25	1.580	1.640	1.550	1.610	1.490	1.550	—	—
	.345	35	1.755	1.815	1.725	1.785	1.665	1.725	—	—
800	.175	15	1.430	1.490	1.400	1.460	1.340	1.400	—	—
	.220	15	1.520	1.580	1.490	1.550	1.430	1.490	—	—
	.260	25	1.610	1.670	1.580	1.640	1.520	1.580	—	—
	.345	35	1.785	1.845	1.755	1.815	1.695	1.755	—	—
900	.175	15	1.495	1.555	1.460	1.520	1.400	1.460	—	—
	.220	15	1.585	1.645	1.550	1.610	1.490	1.550	—	—
	.260	25	1.675	1.735	1.640	1.700	1.580	1.640	—	—
	.345	35	1.850	1.910	1.815	1.875	1.755	1.815	—	—
1000	.175	15	1.550	1.610	1.515	1.575	1.460	1.520	—	—
	.220	15	1.640	1.700	1.605	1.665	1.550	1.610	—	—
	.260	25	1.730	1.790	1.695	1.755	1.640	1.700	—	—
	.345	35	1.850	1.955	1.815	1.920	1.760	1.865	—	—

* See table below for standard insulation thickness.

175 mil is 100% insulated cable at 15 kV.
 220 mil is 133% insulated cable at 15 kV.
 260 mil is 100% insulated cable at 25 kV.
 345 mil is 133% insulated cable at 25 kV.
 345 mil is 100% insulated cable at 35 kV.

ICEA Insulation Diameter Chart

Cable Insulation Diameters for Standard ICEA Cables with 175, 220, 260, and 345 mil Insulation Wall Thickness

AWG or kcmil	Insulation Wall Thickness* (Inches)	Voltage Class kV	Concentric Stranded		Compressed Stranded		Compact Stranded		Solid	
			Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)	Min. Dia. (inches)	Max. Dia. (inches)
#2	.175	15	0.645	0.730	0.635	0.720	0.620	0.705	0.610	0.695
	.220	15	0.735	0.825	0.725	0.815	0.710	0.800	0.700	0.790
	.260	25	-	-	-	-	-	-	-	-
	.345	35	-	-	-	-	-	-	-	-
#1	.175	15	0.685	0.770	0.675	0.760	0.655	0.735	0.645	0.725
	.220	15	0.775	0.865	0.765	0.855	0.745	0.830	0.735	0.820
	.260	25	0.845	0.935	0.835	0.925	0.815	0.905	0.805	0.895
	.345	35	-	-	-	-	-	-	-	-
1/0	.175	15	0.725	0.810	0.715	0.800	0.690	0.775	0.680	0.760
	.220	15	0.815	0.905	0.805	0.895	0.780	0.865	0.770	0.855
	.260	25	0.885	0.980	0.875	0.965	0.850	0.940	0.835	0.925
	.345	35	1.055	1.155	1.045	1.145	1.020	1.120	1.010	1.110
2/0	.175	15	0.775	0.855	0.760	0.845	0.730	0.815	0.715	0.800
	.220	15	0.865	0.950	0.850	0.935	0.820	0.905	0.805	0.895
	.260	25	0.935	1.025	0.920	1.010	0.890	0.980	0.875	0.965
	.345	35	1.105	1.200	1.090	1.190	1.060	1.160	1.045	1.145
3/0	.175	15	0.825	0.905	0.810	0.895	0.775	0.860	0.765	0.845
	.220	15	0.915	1.000	0.900	0.985	0.865	0.955	0.855	0.940
	.260	25	0.985	1.075	0.970	1.060	0.935	1.030	0.925	1.015
	.345	35	1.155	1.255	1.140	1.240	1.105	1.205	1.095	1.195
4/0	.175	15	0.880	0.965	0.865	0.950	0.830	0.910	0.815	0.895
	.220	15	0.970	1.060	0.955	1.045	0.920	1.005	0.905	0.990
	.260	25	1.040	1.135	1.025	1.115	0.990	1.080	0.975	1.065
	.345	35	1.210	1.310	1.195	1.295	1.160	1.260	1.145	1.245
250	.175	15	0.935	1.020	0.920	1.005	0.880	0.965	-	-
	.220	15	1.025	1.115	1.010	1.100	0.970	1.060	-	-
	.260	25	1.095	1.190	1.080	1.175	1.040	1.135	-	-
	.345	35	1.265	1.370	1.250	1.350	1.210	1.315	-	-
350	.175	15	1.045	1.130	1.025	1.110	0.980	1.065	-	-
	.220	15	1.135	1.220	1.115	1.200	1.070	1.155	-	-
	.260	25	1.205	1.295	1.185	1.275	1.140	1.230	-	-
	.345	35	1.375	1.475	1.355	1.455	1.310	1.410	-	-
500	.175	15	1.175	1.260	1.150	1.235	1.100	1.185	-	-
	.220	15	1.265	1.355	1.240	1.330	1.190	1.275	-	-
	.260	25	1.335	1.430	1.310	1.405	1.260	1.350	-	-
	.345	35	1.505	1.605	1.480	1.580	1.430	1.530	-	-
600	.175	15	1.265	1.350	1.235	1.325	1.185	1.270	-	-
	.220	15	1.355	1.445	1.325	1.415	1.275	1.365	-	-
	.260	25	1.425	1.520	1.395	1.490	1.345	1.440	-	-
	.345	35	1.595	1.695	1.565	1.670	1.515	1.615	-	-
700	.175	15	1.335	1.420	1.305	1.390	1.245	1.335	-	-
	.220	15	1.425	1.515	1.395	1.485	1.335	1.430	-	-
	.260	25	1.495	1.590	1.465	1.560	1.405	1.500	-	-
	.345	35	1.665	1.765	1.635	1.740	1.575	1.680	-	-
750	.175	15	1.370	1.455	1.340	1.425	1.280	1.365	-	-
	.220	15	1.460	1.550	1.430	1.520	1.370	1.460	-	-
	.260	25	1.530	1.625	1.500	1.595	1.440	1.535	-	-
	.345	35	1.700	1.800	1.670	1.770	1.610	1.710	-	-
800	.175	15	1.400	1.490	1.370	1.455	1.310	1.395	-	-
	.220	15	1.490	1.580	1.460	1.550	1.400	1.490	-	-
	.260	25	1.560	1.655	1.530	1.625	1.470	1.565	-	-
	.345	35	1.730	1.835	1.700	1.805	1.640	1.740	-	-
900	.175	15	1.465	1.550	1.430	1.520	1.370	1.455	-	-
	.220	15	1.555	1.645	1.520	1.610	1.460	1.550	-	-
	.260	25	1.625	1.720	1.590	1.685	1.530	1.625	-	-
	.345	35	1.795	1.895	1.760	1.865	1.700	1.800	-	-
1000	.175	15	1.520	1.610	1.485	1.575	1.430	1.515	-	-
	.220	15	1.610	1.705	1.575	1.670	1.520	1.610	-	-
	.260	25	1.680	1.775	1.645	1.740	1.590	1.685	-	-
	.345	35	1.850	1.955	1.815	1.920	1.760	1.865	-	-

* See table below for standard insulation thickness.

175 mil is 100% insulated cable at 15 kV.
 220 mil is 133% insulated cable at 15 kV.
 260 mil is 100% insulated cable at 25 kV.
 345 mil is 133% insulated cable at 25 kV.
 345 mil is 100% insulated cable at 35 kV.

200 A Loadbreak Connectors

Our 200 A 15, 25, and 35 kV Loadbreak Elbow Connectors and Accessories are submersible, fully-shielded and insulated plug-in terminations, ideal for connecting underground cable to transformers, switchgear, sectionalizing cabinets and junctions. These connectors are molded using high-quality, peroxide-cured EPDM insulation for reliable field performance.

15 kV and 25 kV loadbreak elbows are available with an integral jacket seal for use with concentric neutral and other types of shielded cables.

All 200 A loadbreak connectors meet the electrical, mechanical, and dimensional requirements of IEEE Std 386™ standard and are designed to be fully interchangeable with other major manufacturers currently complying with IEEE Std 386™ standard.

25 kV POSI-BREAK Elbow and Cap

Our POSI-BREAK™ Elbow and Cap is an engineered solution that increases strike distance and improves reliability. The added features solve problems, such as:

- **Partial Vacuum Flashovers** – Under certain conditions during 25 kV switching, a partial vacuum can decrease the dielectric strength of the air inside the elbow/bushing or cap/bushing. This increases the possibility of a flashover from the elbow or cap's probe along the bushing interface to the grounded collar on the mating bushing product. The POSI-BREAK design eliminates the possibility of partial vacuum flashovers during switching because of the increased strike distance.
- **Contamination** – The field-proven interface seal prevents the ingress of moisture or contaminants. However, contamination introduced during installation or switching operations can reduce the strike distance along the interface. The increased insulation of the POSI-BREAK design counteracts the effect of contamination, increasing system reliability.



35 kV Large Interface Elbow Bushing System*

Our 35 kV 200 A Large Interface Elbow Bushing System is a reliable, field proven design. This system has over 25 years of field experience while being used on large 35 kV distribution systems. Features of the Large Interface System include:

- Increased strike distance to provide greater reliability and overall performance.
- Reliable loadbreak switching and fault closure capability.
- Full line of large interface accessory products.

* Refer to bushing section on page 44 for more information on the bushing.

35 kV Elbow and Accessories Specification Information


To capitalize on the benefits of our 35 kV Large Interface Elbow include the following information in your specification:

- The 200 A Elbows and Accessories shall be 21.1 kV/36.6 kV three-phase rated, meeting the requirements of IEEE Std 386™ standard interface No. 1A (large 35 kV class interface).

25 kV POSI-BREAK Elbow and Cap Specification Information








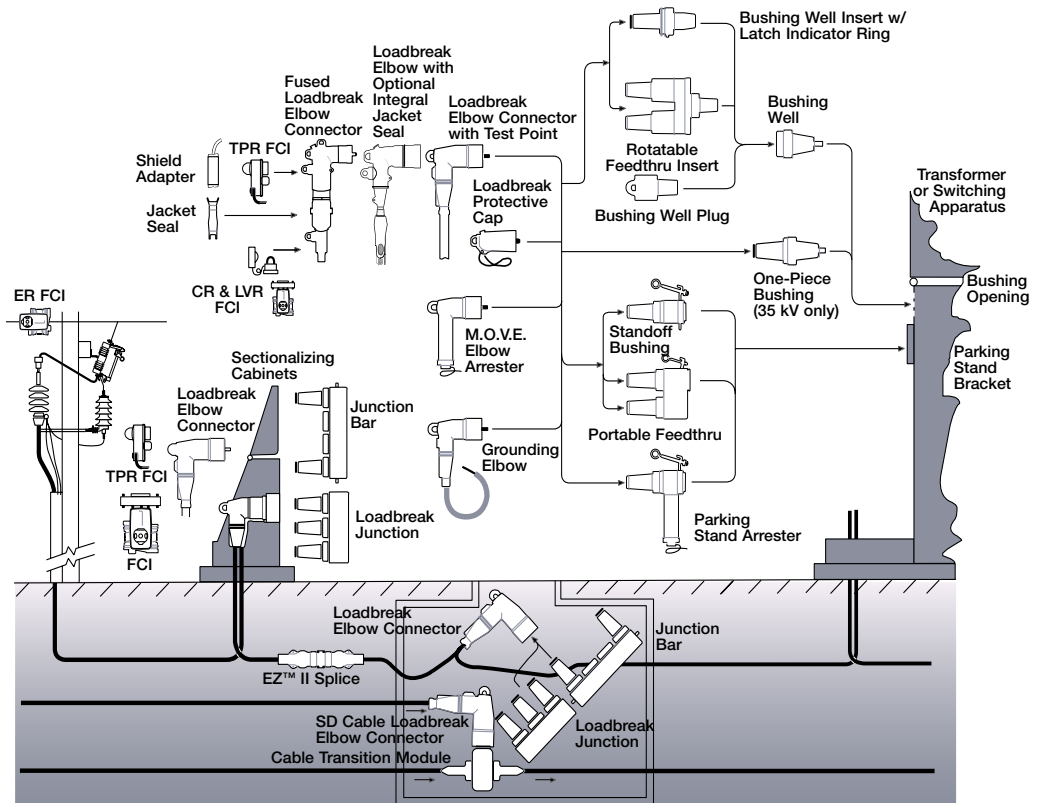










To capitalize on the benefits of the POSI-BREAK Elbow and Cap, include the following information for both the 25 kV 200 A Loadbreak Elbow and Insulated Protective Cap in your specification:

- Both elbow and cap must fully comply with IEEE Std 386™ standard.
- Strike distance from energized component to ground shall be at least 5.6" at 1/2" interface separation.
- Both elbow and cap shall have an insulated probe and conductive Faraday Cage for relief of electrical stress and prevention of partial discharge.
- Semi-conductive insert shall be completely surrounded with EPDM insulating rubber.



200 A Loadbreak & Deadbreak Connectors

- For an elbow **with test point**, add a "T" after the conductor code (CC1).
- For an elbow kit with a **hold down bail assembly** included, insert a "B" after the test point option code. 15 kV only.
- For optional braided ground strap/bleeder wire for termination tape and wire shielded cable, insert "GS" after test point and/or bail option code.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To include the **SA Series Cold Shrinkable Metallic Shield Adapters Kit** or **CS Series Cold Shrink Cable Sealing Kit**, add the appropriate suffix "SA1", "SA2", "SA3", "SA4" or "CS1", "CS2", or "CS3" to the end of the loadbreak elbow catalog number. Refer to Tables CJ1 and CJ2 on Page 13.
- To order the **long version** (extended) of the **bushing insert**, put in an "L" as the seventh character in the part number.
- Specify the number of **interfaces** by inserting a "2", "3", or "4" directly after the base part number.
- To add a **stainless steel bracket**, insert a "B" as the last character in the part number, or to add **U-straps**, insert a "U" as the last character in the part number.
- To substitute a **stainless steel bracket**, insert a "S" as the last character in the part number.
- Each **CS Series Cold Shrink Cable Sealing Kit** includes:
 - Cold Shrinkable Sleeve
 - Mastic Sealing Strips
 (1) Installation Instructions
 For use on Concentric Neutral Cable.
- For use with tape shield, drain wire, linear corrugated and Unishield® cable.
- Each **SA Series Kit** includes:
 - Cold Shrinkable Sleeve
 - Tinned Copper Ground Strap with attached elbow drain wire
 - Constant Force Spring
 - Semi-Conductive Tape
 - Mastic Sealing Strips
 - Installation Instructions
- Probe kit includes probe, installation tool, silicone lubricant and installation instructions.
- For 200 A loadbreak inserts only.
- 5 kV cable for luse in 15 kV and 25 kV "CC" size elbow only.
- Fuses sold separately. See Table 500-110 on page 13. Reference Cat. 240-97.










Catalog Section	Description	kV Class	Base Part Number	Notes
 500-10-7	Loadbreak Elbow	15 kV	LE215 CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 2, 4, 5
 500-10-7	Loadbreak Elbow with Integral Jacket Seal	15 kV	LEJ215CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 2, 3, 5
 500-28-7	Loadbreak Elbow	25 kV	LE225 CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 4, 5
 500-28-7	Loadbreak Elbow with Integral Jacket Seal	25 kV	LEJ225CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 3, 5
 500-29-7	POSI-BREAK Loadbreak Elbow	25 kV	PLE225 CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 4, 5
 500-29-7	POSI-BREAK Loadbreak Elbow with Integral Jacket Seal	25 kV	PLEJ225CR1 CC1 (see CR1 & CC1 Tables Pg. 13)	1, 3, 5
 500-110	Fused Loadbreak Elbow Connector	15 kV	LFEP215TFEC CR3 CC2 AT (see CR3 and CC2 Tables on page 13 (see Table 500-110 on page 13 for Fuse Ratings and Catalog Numbers)	16
 500-111	Fused Loadbreak Elbow Connector	25 kV	LFEP225TFEC CR3 CC2 AT (see CR3 and CC2 Tables on page 13 (see Table 500-110 on page 13 for Fuse Ratings and Catalog Numbers)	16
 500-41	Loadbreak Elbow	35 kV	LE235 CR2 CC1 (see CR2 & CC1 Tables Pg. 13)	1, 4, 5
 500-12	Loadbreak Bushing Insert	15 kV	LBI215	5
 500-26	Loadbreak Bushing Insert	25 kV	LBI225	5, 6
 500-13 500-30	Loadbreak Feedthru Insert	15 kV 25 kV	LFI215 LFI225	
 500-14	Loadbreak Portable Feedthru	15 kV	horizontal LPF215H vertical LPF215V universal LPF215U	
 500-31	Loadbreak Portable Feedthru	25 kV	horizontal LPF225H vertical LPF225V universal LPF225U	
 500-49	Loadbreak Portable Feedthru	35 kV	horizontal LPF235H vertical LPF235V	
 500-15 500-32 500-51	Loadbreak Junction	15 kV 25 kV 35 kV	LJ215C _ LJ225C _ LJ235C _	7, 8 7, 8 7, 8
 500-20 500-38	Insulated Bushing Well Plug	15/25 kV	IBWP225	
 500-21	Loadbreak Protective Cap	15 kV	LPC215	5






(continued next page)

200 A Loadbreak & Deadbreak Connectors

200 A Loadbreak & Deadbreak Connectors

(continued from previous page)

Catalog Section	Description	kV Class	Base Part Number	Notes
 500-39	Loadbreak Protective Cap	25 kV	LPC225	5
 500-37	POSI-BREAK Loadbreak Protective Cap	25 kV	PLPC225	5
 500-65	Loadbreak Protective Cap	35 kV	LPC235	5
 500-22	Insulated Standoff Bushing	15 kV	ISB215	9
 500-40	Insulated Standoff Bushing	25 kV	ISB225	9
 500-66	Insulated Standoff Bushing	35 kV	ISB235	9
	SA Series Cold Shrinkable Metallic Shield Adapter Kit	15/25/35 kV	SA C J2 (see CJ2 Table Pg. 13)	4, 11, 12
	CS Series Cold Shrink Cable Seal Kit	15/25/35 kV	CS C J1 (see CJ1 Table Pg. 13)	4, 10
 500-10-7 500-28-7 500-29-7 500-41	Coppertop Connector 200 A, 2.88" Long Bi-Metal	15/25/35 kV	CC2C C C1 T (see CC1 Table Pg. 13)	
500-10-7	200 A Loadbreak Probe Kit	15 kV	PK215	13
500-28-7		25 kV	PK225	13
500-29-7		35 kV	PKPB225 (POSI-BREAK)	13
500-41		35 kV	PK235	13
500-10-7 500-28-7 500-29-7 500-41	Silicone Lubricant Cooper 117 (for Elbows and Splices)	15/25/35 kV	2603393A03 (0.175 oz., 5 g packet) 2605670A02M (5.25 oz., 150 g tube)	

Catalog Section	Description	kV Class	Base Part Number	Notes
 500-12	Installation and Torque Tool	15/25 kV	LBITOOL	14
500-10-7	Cable Adapter, 5 kV 0.495" - 0.585" 0.575" - 0.685"		CA225A	15
			CA225B	15
 500-15 500-32 500-51	U-Strap Kit with Hardware (1 strap) for Loadbreak Junction	15 kV	2625439A16B	
		25 kV	2625439A17B	
		35 kV	2637570A01B	
 500-15 500-32 500-51	2-way Stainless Steel Bracket Assembly for Loadbreak Junction	15 kV	2637172B01BS	
		25 kV	2637160B01BS	
		35 kV	2604688B01B	
 500-15 500-32 500-51	3-way Stainless Steel Bracket Assembly for Loadbreak Junction	15 kV	2637172B02BS	
		25 kV	2637160B02BS	
		35 kV	2604688B02B	
 500-15 500-32 500-51	4-way Stainless Steel Bracket Assembly for Loadbreak Junction	15 kV	2637172B03BS	
		25 kV	2637160B03BS	
		35 kV	2604688B03B	

- For an elbow with test point, add a "T" after the conductor code (CC1).
- For an elbow kit with a hold down bail assembly included, insert a "B" after the test point option code. 15 kV only.
- For optional braided ground strap/bleeder wire for termination tape and wire shielded cable, insert "GS" after test point and/or bail option code.
- To include the SA Series Cold Shrinkable Metallic Shield Adapters Kit or CS Series Cold Shrink Cable Sealing Kit, add the appropriate suffix "SA1", "SA2", "SA3", "SA4" or "CS1", "CS2", or "CS3" to the end of the loadbreak elbow catalog number. Refer to Tables CJ1 and CJ2 on Page 13.
- For individually packaged product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To order the long version (extended) of the bushing insert, put in an "L" as the seventh character in the part number.
- Specify the number of interfaces by inserting a "2", "3", or "4" directly after the base part number.
- To add a stainless steel bracket, insert a "B" as the last character in the part number, or to add U-straps, insert a "U" as the last character in the part number.
- To substitute a stainless steel bracket, insert a "S" as the last character in the part number.
- Each CS Series Cold Shrink Cable Sealing Kit includes:
 - Cold Shrinkable Sleeve
 - Mastic Sealing Strips
 - Installation Instructions
 For use on Concentric Neutral Cable.
- For use with tape shield, drain wire, linear corrugated and Unishield® cable.
- Each SA Series Kit includes:
 - Cold Shrinkable Sleeve
 - Tinned Copper Ground Strap with attached elbow drain wire
 - Constant Force Spring
 - Semi-Conductive Tape
 - Mastic Sealing Strips
 - Installation Instructions
- Probe kit includes probe, installation tool, silicone lubricant and installation instructions.
- For 200 A loadbreak inserts only.
- 5 kV cable for use in 15 kV and 25 kV "CC" size elbow only.

**Use for
Base Number**

LE215
LEJ215
LE225
LEJ225
PLE225
PLEJ225

**TABLE CR1
Cable Diameter (Insulation) Range**

Cable Diameter Range		CABLE RANGE CODE
Inches	Millimeters	
0.495-0.585	12.6-14.9	CCA*
0.575-0.685	14.6-17.4	CCB*
0.610-0.970	15.5-24.6	AB
0.750-1.080	19.1-27.4	CC
0.890-1.220	22.6-30.0	DD

* Uses 5 kV cable adapter. (For use with "CC" range elbow only.)

**Use for
Base Number**

LE235

**TABLE CR2
Cable Diameter (Insulation) Range**

Cable Diameter Range		CABLE RANGE CODE
Inches	Millimeters	
0.825-1.000	21.00-25.40	B
0.995-1.180	25.20-30.00	D
1.180-1.340	30.00-34.00	F

**Use for
Base Number**

LFEP215
LFEP225

**TABLE CR3
Cable Diameter (Insulation) Range for Fused Loadbreak Elbow**

Cable Diameter Range		CABLE RANGE CODE
Inches	Millimeters	
0.610-0.820	15.5-20.8	A
0.740-0.980	18.8-24.9	B
0.910-1.180	23.10-29.9	C

**Use for
Base Number**

LE215
LEJ215
LE225
LEJ225
PLE225
PLEJ225
LE235
CC2C

**TABLE CC1
Conductor Size and Type**

Concentric or Compressed		Compact or Solid		CONDUCTOR CODE
AWG	mm ²	AWG	mm ²	
No Connector				00
#6	16	#4	-	01
#4	-	#3	25	02
#3	25	#2	35	03
#2	35	#1	-	04
#1	-	1/0	50	05
1/0	50	2/0	70	06
2/0	50	3/0	-	07
3/0	-	4/0	95	08
4/0	95	250	120	09
250*	120	300	-	10

* Compressed stranding only.

**Table 500-110
Fused Loadbreak Elbow Connector Fuse Electrical Ratings and Catalog Numbers**

Nominal System Voltage Class - kV	Nominal Fuse Voltage Rating kV	Nominal Fuse Current rating in Amperes	Fuse Catalog Number	Maximum Continuous Current			Minimum Melt I ² t (A ² s)	Maximum Total I ² t (A ² s)
				25° C	40° C	65° C		
15.5	8.3	6	FEF083A006	8.9	8.5	8.0	710	3,800
		8	FEF083A008	12.1	11.7	10.9	1,000	5,425
		10	FEF083A010	15.0	14.4	13.5	1,200	5,825
		12	FEF083A012	16.6	16.0	15.0	1,200	5,825
		18	FEF083A018	21.9	21.1	19.7	1,500	8,000
		20	FEF083A020	25.5	24.6	23.0	2,425	12,000
		25	FEF083A025	34.5	33.2	31.1	4,500	20,500
		30	FEF083A030	40.1	38.7	36.2	6,000	26,200
25	15.5	40	FEF083A040	45.5	43.8	41.0	9,700	39,750
		6	FEF155A006	8.3	8.5	8.0	710	3,800
		8	FEF155A008	11.3	11.7	10.9	1,000	5,435
		10	FEF155A010	13.9	14.4	13.5	1,200	5,500
		12	FEF155A012	15.5	16.0	15.0	1,200	5,500
		18	FEF155A018	20.4	21.1	19.7	1,500	7,800
		20	FEF155A020	23.7	24.6	23.0	2,425	12,000

Note: Peak arc voltage levels found during testing were within the values specified for Distribution-Class Current-Limiting Fuses in ANSIS[®] C37.47 Standard - latest edition.

**Use for
Base Number**

CS

**TABLE CJ1
Jacketed Concentric Neutral Cable**

Minimum Seal Diameter Inches	Maximum Installed Diameter (Inches)	CODE
0.950	1.94	1
1.28	2.67	2
1.60	3.50	3

**Use for
Base Number**

SA

**TABLE CJ2
Cable Jacket (Outside Diameter) Range**

Cable Jacket OD (Inches)	JACKET CODE
0.590-1.050	1
0.830-1.640	2
1.270-2.170	3
1.600-2.600	4

**Use for
Base Number**

LFEP215
LFEP225
FECC

**TABLE CC2
Conductor Size and Type for Fused Loadbreak Elbow**












Class B Stranded or Compressed		Compact or Solid		CONDUCTOR CODE
AWG	mm ²	AWG	mm ²	
No Connector				00
		#2	35	03
#2	35	#1	-	04
#1	-	1/0	50	05
1/0	50	2/0	70	06
2/0	70	3/0	-	07
3/0	-	4/0	95	08
4/0	95	-	-	09
250*	120	-	-	10

* Compressed stranding only.

Note: Coppertop compression connector may be used on both aluminum and copper cable conductors.

200 A Loadbreak & Deadbreak Connectors

1. Bail assembly included in kit.
2. Bail assembly is ordered separately.
3. See following for appropriate junction strap. For DJ250-2 and DJ250-T1, order 2639524B01. For DJ250-T2, order 2638617C01. For DJ250-4, consult factory.

Catalog Section	Description	kV Class	Base Part Number	Notes
 550-10	Deadbreak Elbow	15/25 kV	DE225 CR4 CC3 T (see CR4 & CC3 Tables, page 15)	1
 550-12	Deadbreak Straight	15/25 kV	DS225 CR4 CC3 T (see CR4 & CC3 Tables, page 15)	1
 I550-12	Deadbreak Junction	15/25 kV	DJ250-4 (4-way)	2, 3
		15/25 kV	DJ250-T1 (3-way, Type 1)	2, 3
		15/25 kV	DJ250-T2 (3-way, Type 2)	2, 3
		15/25 kV	DJ250-2	2, 3
 I550-13	Insulated Deadend Plug	15/25 kV	DPD250	3
 I550-13	Insulated Standoff Bushing	15/25 kV	DPS250	3
 I550-13	Grounded Standoff Bushing	15/25 kV	DPE250	3
 I550-13	Deadbreak Protective Cap	15/25 kV	DRC250	1
 I550-13	Coppertop Connectors for Deadbreak Elbows	15/25 kV	CC2C CC3 T (see CC3 Table, page 15)	
 I550-13	Crimp Connectors for Deadbreak Straight	15/25 kV	CC2C CC3 S (see CC3 Table, page 15)	
 I550-13	Probe and Probe Wrench for Deadbreak Elbow	15/25 kV	2638370C01EX (Probe) 2639205B01 (Probe Wrench)	
 550-10	Bail Assembly for DE225	15/25 kV	2638409C06B	

**Use for
Base Number**

DE225
DS225

**TABLE CR4
Cable Diameter (Insulation) Range**

Cable Diameter Range		CABLE RANGE CODE
Inches	Millimeters	
0.531-0.685	13.5-17.4	BA
0.640-0.820	16.3-20.8	DA
0.770-0.950	19.6-24.1	FA
0.910-1.130	23.1-28.7	HA
1.100-1.320	27.9-33.5	JA

**Use for
Base Number**


DE225
DS225
CC2C

**TABLE CC3
Conductor Size and Type**


Concentric or Compressed		Compact or Solid		CONDUCTOR CODE
AWG	mm ²	AWG	mm ²	
No Connector				00
#6	16	#4	-	01
#4	-	#3	25	02
#3	25	#2	35	03
#2	35	#1	-	04
#1	-	1/0	50	05
1/0	50	2/0	70	06
2/0	70	3/0	-	07
3/0	-	4/0	95	08
4/0	95	250	120	09
250*	120	300	-	10

*Compressed stranding only.


200 A Stacking Dimensions

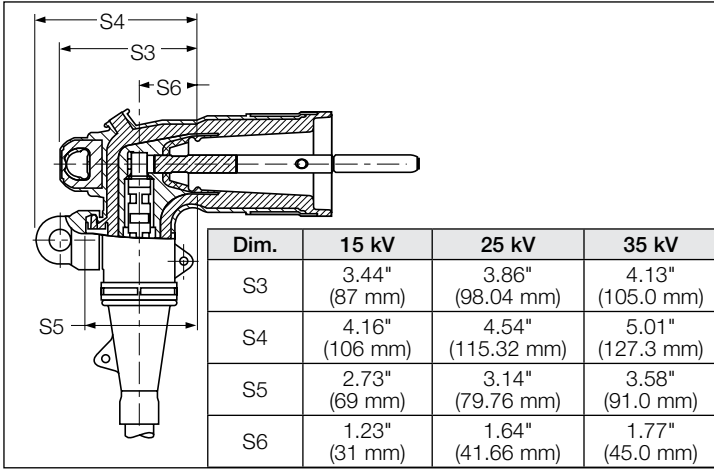



Elbow Connector (25 kV POSI-BREAK shown)

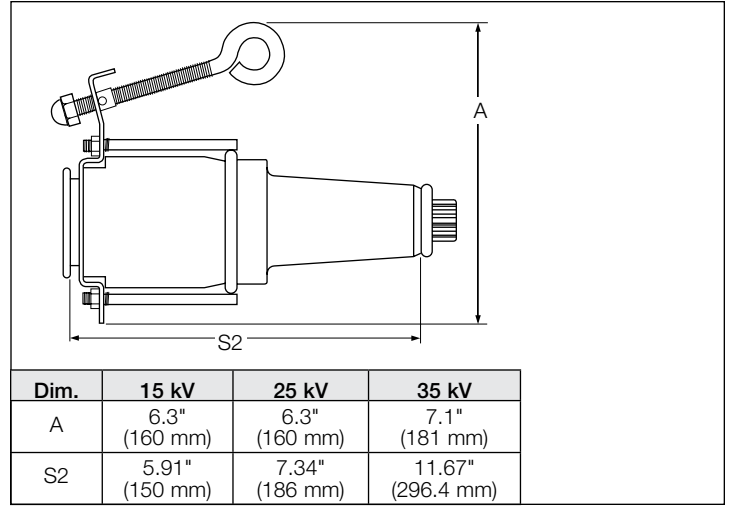


Insulated Standoff Bushing (25 kV shown)

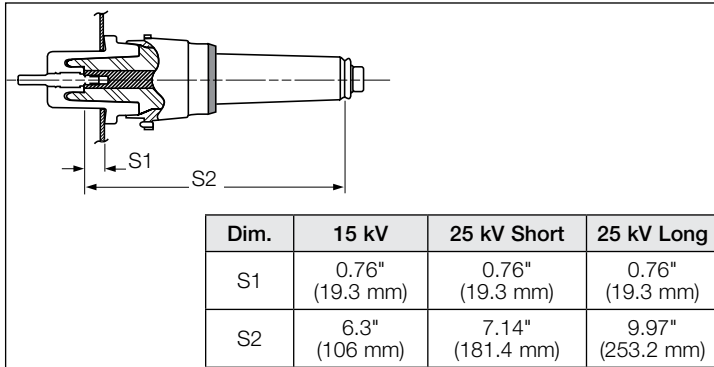


Bushing Insert with Latch Ring Indicator (25 kV shown)

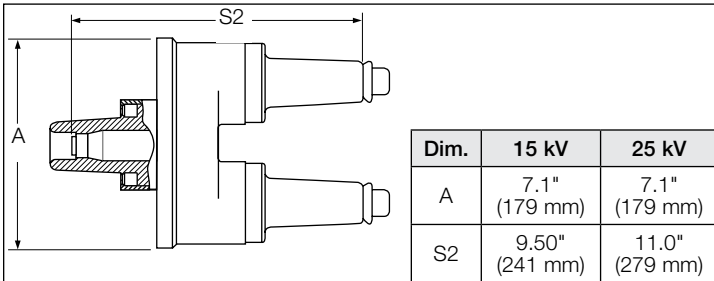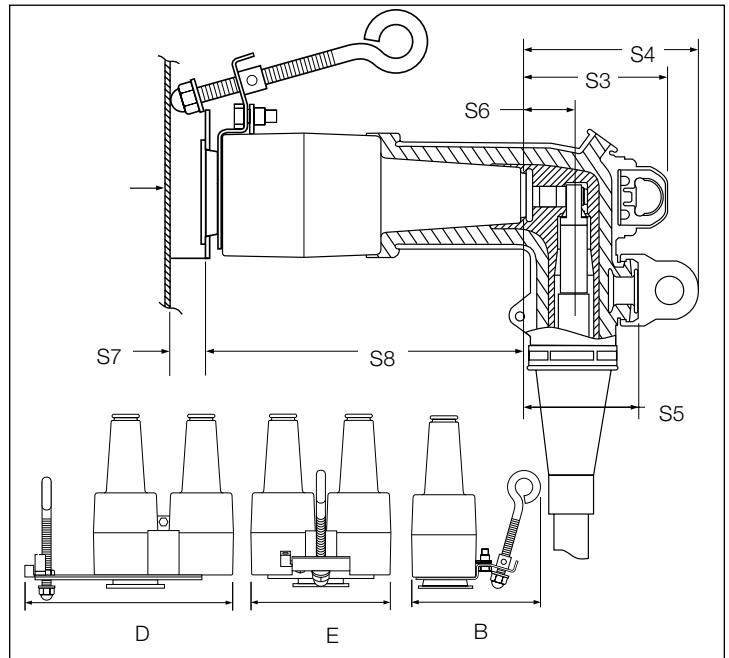

Rotatable Feedthru Insert (25 kV shown)

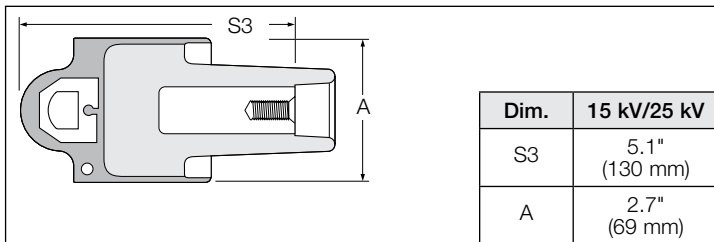


Insulated Bushing Well Plug

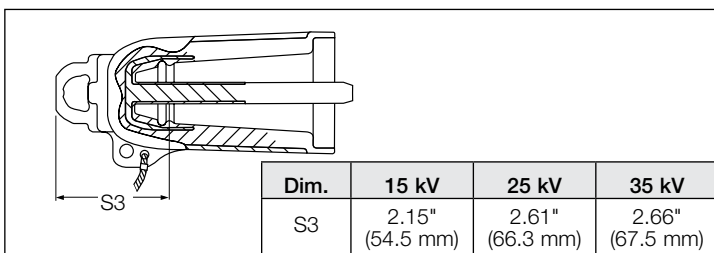

Loadbreak Protective Cap (25 kV POSI-BREAK shown)

Dim.	15 kV		25 kV		35 kV	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
B	5.6" (142.2 mm)	-	5.6" (142.2 mm)	-	7.2" (182.9 mm)	-
D	-	8.9" (226 mm)	-	8.9" (226 mm)	-	11.6" (294 mm)
E	6.0" (153 mm)	-	6.7" (171 mm)	-	8.8" (224 mm)	-
S3	3.44" (87 mm)	3.44" (87 mm)	3.86" (98 mm)	3.86" (98 mm)	4.13" (105 mm)	4.13" (105 mm)
S4	4.16" (106 mm)	4.16" (106 mm)	4.54" (115 mm)	4.54" (115 mm)	5.01" (127.3 mm)	5.01" (127.3 mm)
S5	2.73" (69 mm)	2.73" (69 mm)	3.14" (80 mm)	3.14" (80 mm)	3.58" (91 mm)	3.58" (91 mm)
S6	1.23" (31 mm)	1.23" (31 mm)	1.64" (42 mm)	1.64" (42 mm)	1.77" (45 mm)	1.77" (45 mm)
S7	0.75" (19 mm)	0.75" (19 mm)	0.75" (19 mm)	0.75" (19 mm)	0.75" (19 mm)	0.75" (19 mm)
S8	7.07" (180 mm)	7.20" (183 mm)	8.63" (219 mm)	8.77" (223 mm)	11.8" (300 mm)	11.8" (300 mm)

Loadbreak Portable Feedthru (15 kV shown)

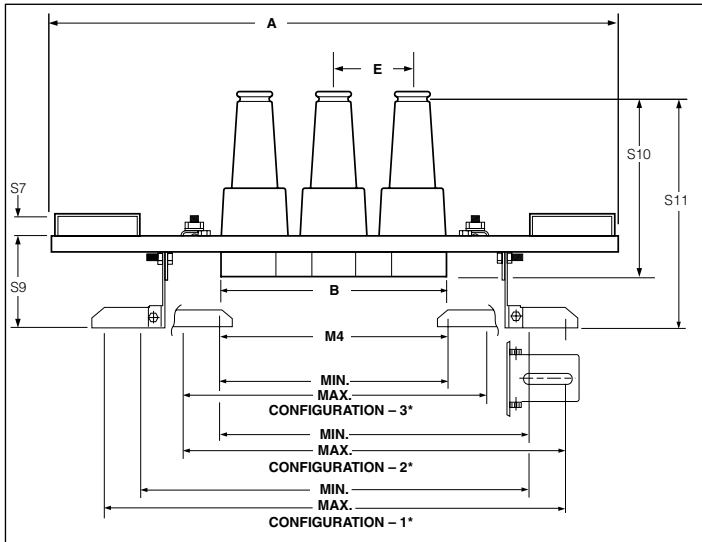

Dim.	15 kV	25 kV	35 kV
E	3.25" (83 mm)	4.0" (102 mm)	5.0" (127 mm)
S7	0.75" (19 mm)	0.75" (19 mm)	1.02" (26 mm)
S9	4.38" (111 mm)	4.38" (111 mm)	5.46" (139 mm)
S10	6.77" (172 mm)	8.34" (212 mm)	11.8" (299 mm)
S11	9.20" (234 mm)	10.77" (274 mm)	13.9" (163 mm)
M4	See Table 15 kV	See Table 25 kV	See Table 35 kV

TABLE 15 kV

Number of Interfaces	Physical Dimensions in./mm		M4 Mounting Dimensions in./mm					
			Configuration 1		Configuration 2		Configuration 3	
	A	B	Min.	Max.	Min.	Max.	Min.	Max.
2	12.5" (318 mm)	6.0" (152 mm)	10.8" (275 mm)	14.4" (366 mm)	7.2" (183 mm)	7.2" (275 mm)	3.6" (92 mm)	7.2" (183 mm)
3	19.6" (498 mm)	9.2" (230 mm)	14.7" (374 mm)	18.3" (465 mm)	11.1" (282 mm)	14.7" (374 mm)	7.4" (188 mm)	11.1" (282 mm)
4	22.9" (582 mm)	12.4" (315 mm)	17.9" (455 mm)	21.5" (547 mm)	14.3" (364 mm)	17.9" (455 mm)	10.7" (272 mm)	14.3" (364 mm)

Configuration 1. Both feet turned out.
 Configuration 2. One foot turned out, one in.
 Configuration 3. Both feet turned in.

TABLE 25 kV

Number of Interfaces	Physical Dimensions in./mm		M4 Mounting Dimensions in./mm					
			Configuration 1		Configuration 2		Configuration 3	
	A	B	Min.	Max.	Min.	Max.	Min.	Max.
2	14.2" (361 mm)	6.7" (170 mm)	11.9" (302 mm)	15.6" (396 mm)	8.0" (203 mm)	11.7" (297 mm)	4.2" (107 mm)	7.8" (198 mm)
3	23.0" (584 mm)	10.7" (272 mm)	16.8" (427 mm)	20.4" (518 mm)	12.9" (328 mm)	16.5" (419 mm)	9.0" (229 mm)	12.6" (320 mm)
4	27.0" (686 mm)	14.7" (373 mm)	20.8" (528 mm)	24.4" (620 mm)	16.9" (429 mm)	20.5" (521 mm)	13.0" (330 mm)	16.6" (422 mm)


Configuration 1. Both feet turned out.
 Configuration 2. One foot turned out, one in.
 Configuration 3. Both feet turned in.

TABLE 35 kV

Number of Interfaces	Mounting Dimensions in./mm			
	A	B	C	D
2	23.1" (587 mm)	8.8" (223 mm)	**	**
3	33.3" (846 mm)	13.8" (350 mm)	**	**
4	38.5" (978 mm)	18.8" (477 mm)	**	**

** Refer to Catalog Section 500-51 for detailed drawing of 35 kV junction.

Loadbreak Junctions (15 kV shown)

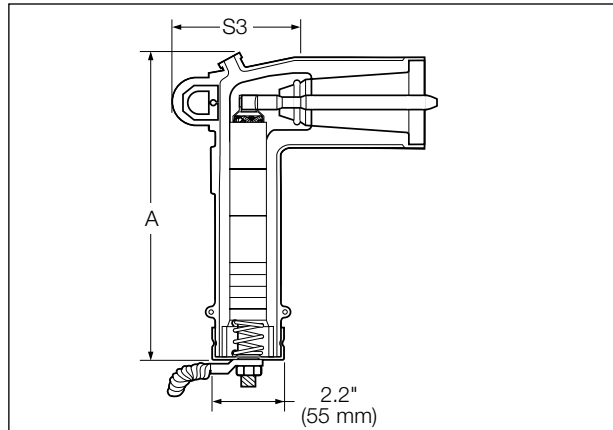


M.O.V.E. Arrester

Dim.	Duty Cycle (kV)	15 kV/25 kV	35 kV
A	9-15	8.5" (216 mm)	-
	18-27	10.9" (276 mm)	13.3" (338 mm)
S3	9-27	4.2" (107 mm)	4.7" (120 mm)

M.O.V.E. Arrester

Dim.	Duty Cycle (kV)	15 kV/25 kV	35 kV
A	3-27	8.5" (216 mm)	13.3" (338 mm)
S3	3-27	4.2" (107 mm)	4.7" (120 mm)

Underground Surge Arresters

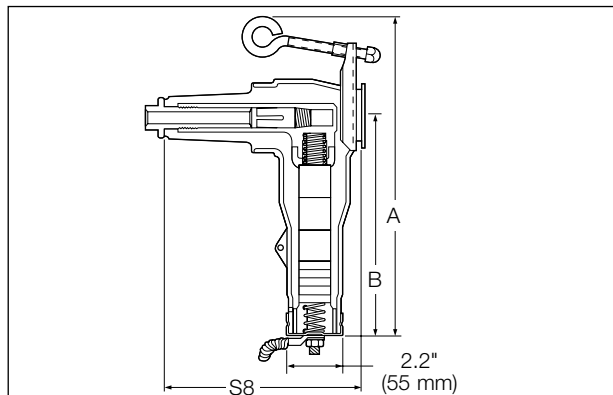

MOV Parking Stand Arrester

Dim.	Duty Cycle (kV)	15 kV	25 kV
A	9-15	11.9" (302 mm)	11.9" (302 mm)
	18-21	14.5" (368 mm)	14.5" (368 mm)
B	9-15	8.0" (203 mm)	8.0" (203 mm)
	18-21	10.6" (269 mm)	10.6" (269 mm)
S8	9-21	7.4" (188 mm)	7.4" (188 mm)

MOV Parking Stand Arrester

Dim.	Duty Cycle (kV)	15 kV	25 kV
A	3-21	11.9" (302 mm)	11.9" (302 mm)
B	3-21	8.0" (203 mm)	8.0" (203 mm)
S8	3-21	7.4" (188 mm)	7.4" (188 mm)

Parking Stand Arresters

Clēer Loadbreak Connector: New 600 Amp Loadbreak Technology Provides Efficient, Reliable Visible Break and Visible Ground



Clēer Loadbreak Connector System

The Clēer™ Loadbreak Connector System is a 600 A loadbreak device rated for operation on 15 and 25 kV class systems. It is used to provide a visible break and visible ground on 600 A network and distribution systems without having to remove 600 A terminations and move heavy cable. The Clēer Loadbreak connector System is fully shielded, submersible and meets the applicable requirements of IEEE Std 386™-2006 standard - "Separable Insulated Connector Systems".

Many configurations are possible with this connector system. Under normal operating conditions, the current path is through one of the 600 A loadbreak/deadbreak 2-position junctions (DLJ6_ _), through the 600 A loadbreak "C" (LCN) connector and through the second 600 A loadbreak/deadbreak junction.

When isolating underground cable, with the system energized or de-energized, with or without rated load current, with the use of a clampstick, the LCN connector can be removed. A 600 A loadbreak protective cap (LPC6_ _) can then be installed on the two exposed loadbreak interfaces. All bushings of the connector system are then insulated and deadfront. If a 600 A termination with a 200 A reducing tap plug is used on the IEEE Std 386™-2006 standard 600 A 15/25 kV deadbreak interfaces of the junction, a grounding elbow can be installed, providing a visible ground. It is then safe to perform work on the underground cable.

Once an underground circuit is sectionalized, for maximum safety, a visible break and visible ground must be achieved prior to performing any repair or maintenance. Distribution feeders can easily retrofit the Clēer Loadbreak Connector System into 600 A applications, allowing operators confidence when working on a piece of underground equipment or cable as they can clearly see the open circuit.

Clēer Loadbreak Connectors allow the operator to safely pull the loadbreak interface while the system is energized to sectionalize the system into smaller segments to prevent taking longer outages. The Clēer 600 A Loadbreak Connector makes this easy:

- The C-shaped connector breaks the circuit in two places for twice the contact separation.
- The new Clēer Loadbreak Connector incorporates field-proven Cooper Power Systems POSI-BREAK™ technology which provides:
 - Increased strike distance, greatly reducing the possibility of partial vacuum flashovers
 - Added dielectric strength along the probes for superior switching performance and reliability
- The remainder of this simple system consists of:
 - Two Cooper Power Systems 600 A loadbreak interfaces
 - Two IEEE Std 386™-2006 standard 600 A deadbreak interfaces
- A yellow latch indicator is included to assure positive connection
- Fully submersible, and exceeds the applicable requirements of IEEE Std 386™-2006 standard for use in above- and underground environments prone to flooding
- When using BT-TAP or T-OP II connectors a visible ground can be achieved by connecting a grounding elbow directly to a 200 A loadbreak reducing tap plug.

15 kV Class 600 A Clēer Loadbreak Connector System Ratings






600 A Loadbreak Interface	
Continuous Current	600 A rms
Loadbreak Switching	Ten make and break operations at 600 A at 14.4 kV Phase-Phase
	Three make and break operations at 900 A at 14.4 kV Phase-Phase
Fault Closure	16 kA rms symmetrical at 14.4 kV Phase-Phase after ten 600 A loadbreak switching operations for 0.17 seconds
	16 kA rms symmetrical at 14.4 kV Phase-Phase after three 900 A loadbreak switching operations for 0.17 seconds
4 Hour Overload Current	900 A rms
Short Time Current	16 kA rms symmetrical for 0.17 seconds (limited by fault closure rating)
	10 kA rms symmetrical for 3.0 seconds
IEEE Std 386™ -2006 standard 600 A, 15/25 kV Deadbreak Interface	
Continuous Current	600 A rms
4 Hour Overload Current	900 A rms
Short Time Current	16 kA rms symmetrical for 0.17 seconds
	10 kA rms symmetrical for 3.0 seconds

25 kV Class 600 A Clēer Loadbreak Connector System Ratings

600 A Loadbreak Interface	
Continuous Current	600 A rms
Loadbreak Switching	Five make and break operations at 600 A at 26.3 kV Phase-Phase
	One make and break operation at 900 A at 26.3 kV Phase-Phase
Fault Closure	10 kA rms symmetrical at 26.3 kV Phase-Phase after five 600 A loadbreak switching operations for 0.17 seconds
	10 kA rms symmetrical at 26.3 kV Phase-Phase after one 900 A loadbreak switching operations for 0.17 seconds
4 Hour Overload Current	900 A rms
Short Time Current	10 kA rms symmetrical for 0.17 seconds (limited by fault closure rating)
	10 kA rms symmetrical for 3.0 seconds
IEEE Std 386™ -2006 standard 600 A, 15/25 kV Deadbreak Interface	
Continuous Current	600 A rms
4 Hour Overload Current	900 A rms
Short Time Current	10 kA rms symmetrical for 0.17 seconds
	10 kA rms symmetrical for 3.0 seconds

Current ratings and characteristics are in accordance with applicable IEEE Std 386™-2006 standard requirements.


600 A Loadbreak Connectors


Catalog Section	Description	kV Class	Base Part Number	Notes
	Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in an In-Line SS Bracket	15 kV	LCN2DLJ615__ILB	
	Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in a Square SS Bracket		LCN2DLJ615__SQB	
	Loadbreak "C" Connector		LCN615	
600-100	Loadbreak Protective Cap		LPC615	
	Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in an In-Line SS Bracket	25 kV	LCN2DLJ625__ILB	
	Loadbreak Connector Assembly includes: two loadbreak/deadbreak junctions with loadbreak "C" connector assembled in a Square SS Bracket		LCN2DLJ625__SQB	
	Loadbreak "C" Connector		LCN625	
600-101	Loadbreak Protective Cap		LPC625	
Accessories:				
	Loadbreak Standoff Bushing (Parking Stand Mount)	15/25 kV	PS625CLEER	
	Loadbreak Standoff Bushing (Direct Wall Mount)	15/25 kV	PS625CLEERDM	
Clēer SecTER				Notes
	12 Gauge Steel Tank 1-Phase	15 kV	SEC1P15CLEERA2 (30H x 24W x 22D)	1, 2
			SEC1P15CLEERA2DP (30H x 24W x 30D)	1, 2
	12 Gauge Steel Tank 3-Phase		SEC3P15CLEERA2 (30H x 66W x 22D)	1, 2
			SEC3P15CLEERA2DP (30H x 66W x 30D)	1, 2
	Aluminum 1-Phase		SEC1P15CLEERA2L (30H x 24W x 22D)	1, 2
			SEC1P15CLEERA2DPL (30H x 24W x 30D)	1, 2
	Aluminum 3-Phase		SEC3P15CLEERA2L (30H x 66W x 22D)	1, 2
			SEC3P15CLEERA2DPL (30H x 66W x 30D)	1, 2
	12 Gauge Steel Tank 1-Phase	25 kV	SEC1P25CLEERA2 (30H x 24W x 22D)	1, 2
			SEC1P25CLEERA2DP (30H x 24W x 30D)	1, 2
	12 Gauge Steel Tank 3-Phase		SEC3P25CLEERA2 (30H x 66W x 22D)	1, 2
			SEC3P25CLEERA2DP (30H x 66W x 30D)	1, 2
Aluminum 1-Phase		SEC1P25CLEERA2L (30H x 24W x 22D)	1, 2	
		SEC1P25CLEERA2DPL (30H x 24W x 30D)	1, 2	
Aluminum 3-Phase		SEC3P25CLEERA2L (30H x 66W x 22D)	1, 2	
		SEC3P25CLEERA2DPL (30H x 66W x 30D)	1, 2	
1000-20				

1. Recessed base allows for an additional 1-1/2" stacking from backplate.
2. A 30" deep SectER cabinet is required if a 200 A fused loadbreak elbow is installed.

Clēer Ground Sleeves continued on Page 20


600 A Loadbreak Connectors

Catalog Section	Description	kV Class	Base Part Number	Notes
Clear GROUND SLEEVES				
	Fiberglass Ground Sleeve 1-Phase	15/25 kV	00400L00K02G (18H x 24W x 22D) 00400L00K05G (30H x 24W x 22D) 00450L00K32G (18H x 24W x 30D)	
	Mild Steel Ground Sleeve 1-Phase		0400L00K10GM (24H x 24W x 22D)	
	Fiberglass Ground Sleeve 3-Phase	15/25 kV	00450L00K05G (18H x 66W x 22D) 00450L00K08G (30H x 66W x 22D) 00450L00K35G (18H x 66W x 30D)	
	Mild Steel Ground Sleeve 1-Phase		0450L00K18GM (24H x 66W x 22D)	
1000-20				

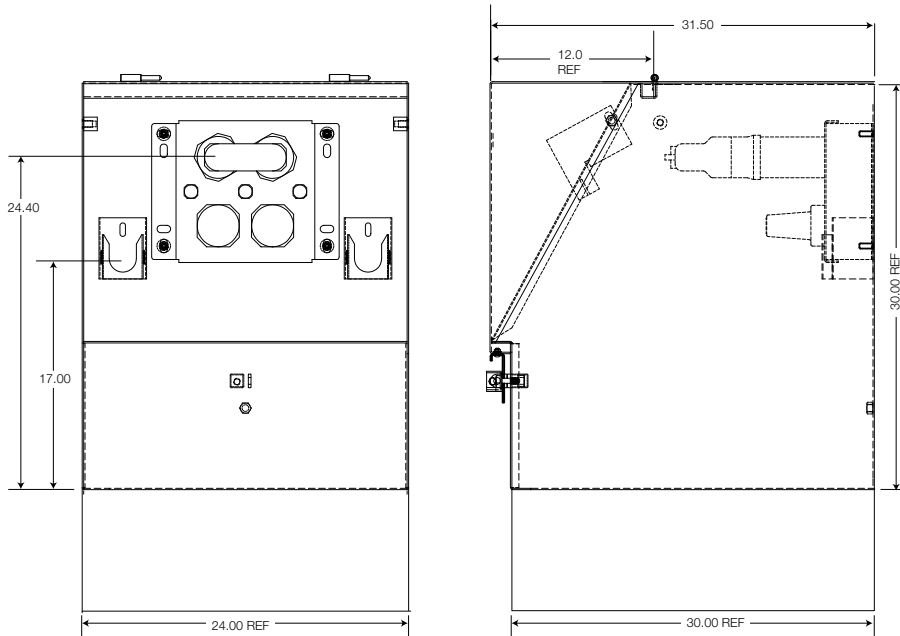

IMPORTANT: A 30" deep SecTER cabinet is required if a 200 A fused loadbreak elbow is installed.

Single-phase SecTER Cabinet, Catalog Number SEC1P__CLEERA2DP.

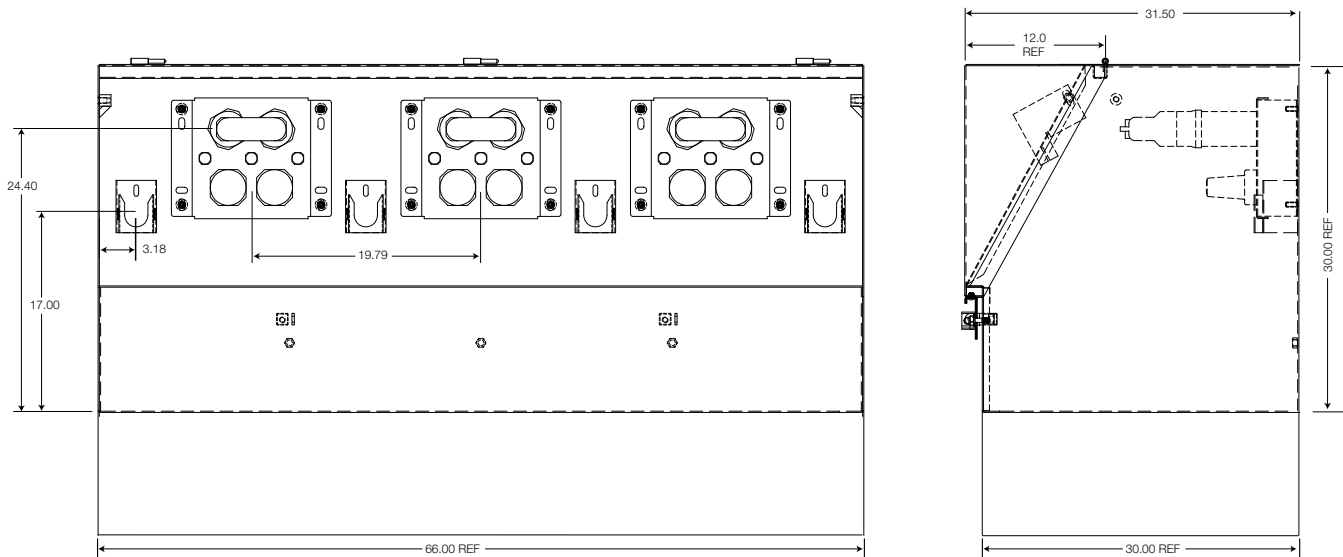

Three-phase SecTER Cabinet, Catalog Number SEC3P__CLEERA2DP.

600/900 A Deadbreak Connectors

Our 600/900 A Deadbreak Connector Systems are designed to fill the demand for a deadfront underground installation in 600/900 A main and lateral feeders. They provide a completely shielded, deadfront, fully submersible cable connection for high-voltage apparatus – such as transformers, switchgear, large motors, etc., and can also be used to make splices, junctions, taps and deadends for main underground, distribution feeders. They provide the same high degree of operating flexibility and reliability as our 200 A products. All components fit together easily and assembly variations are available.

These connector systems are designed for installation on various types of cables. The entire system can be applied to concentric neutral cable, and with our CS & SA Series Shield Adapter Kits to almost any other type of cable.

All of our Deadbreak Connectors meet the electrical, mechanical and dimensional requirements of IEEE Std 386™ standard and are designed to be fully interchangeable with those currently available from other major manufacturers.

900 A RATING

A 900 A continuous rating can be achieved with BOL-T™, BT-TAP™ and T-OP™ II Systems when used with a coppertop compression connector and all copper mating components including apparatus bushing or junction. (See note 1 on page 23 for details when selecting a system.)

BOL-T Connector System

Our BOL-T Deadbreak Connector System is designed for use on applications where the terminations would not be operated after installation, would not need a 200 A interface for grounding or arrester provisions, and would not require direct conductor testing or the use of a hotstick. It is a bolted design that is interchangeable with other manufacturers' bolted 600/900 A systems and requires no special tools for installation.

BT-TAP Connector System

Our BT-TAP Deadbreak Connector System includes a 200 A loadbreak tap instead of the standard insulated plug. The other components of BT-TAP are the same as BOL-T, making it an ideal option to retrofit existing BOL-T (or other bolted systems that use unthreaded compression connectors) systems with a 200 A loadbreak tap for testing, grounding, or overvoltage protection.

T-OP II Connector System

Our T-OP II Deadbreak Connector System also has a 200 A loadbreak tap and has all the advantages of the BT-TAP System. In addition, the T-OP II is single-person hotstick operable, making it ideal for terminations that may require moving or sectionalizing to achieve a visible open or visible ground. The T-OP II design offers added reliability (900 A rated all copper alloy current path and copper top connector) and has several assembly/operating advantages.

PUSH-OP Connector System

Our PUSH-OP™ Deadbreak Connector System is essentially a T-OP II Termination with a non-bolted design for use on any deadfront apparatus where the terminations may be operated frequently. The PUSH-OP 600 A deadbreak probe and finger




contact design eliminates cross-threading and normal thread wear during repeated sectionalizing operations. It is the only available system that allows operators to move the terminator while it is fully grounded. The PUSH-OP System provides stainless steel bracketry and a mechanical lever for the fastest and easiest one-person hotstick operation possible. The PUSH-OP System requires special apparatus bushings, which makes it suitable for new installations only.

U-OP Connector System













Our U-OP™ Deadbreak Connector System is used with T-OP II and designed to provide a visible break and visible ground without having to move large 600 A cable. The U-OP System requires special apparatus bracketry, which makes it suitable for new installations only.

Note: 600 A Separable Splice kits can be found in the splice section starting on page 36.

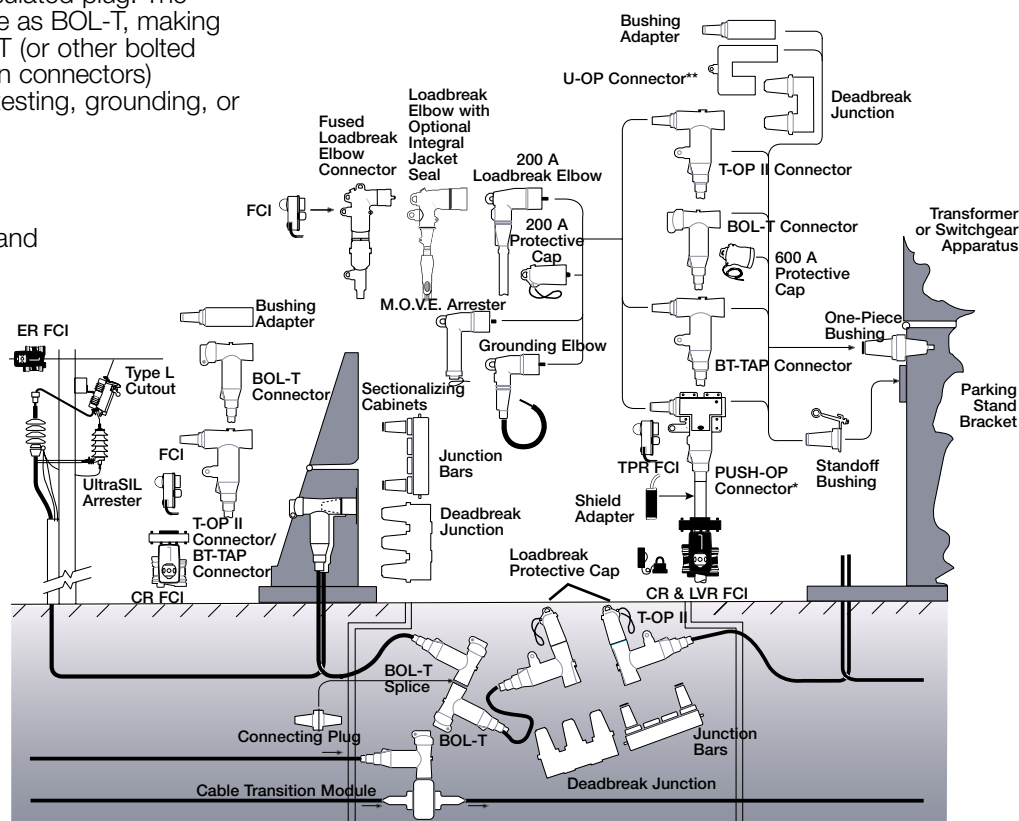

* PUSH-OP requires modified bushing and tank hardware.

** U-OP requires frontplate stud provisions. Refer to Installation Instructions S600-14-1 for details.

Catalog Section	Description	kV Class	Base Part Number	Notes
 600-10 600-30 600-50	BOL-T Connector Kit	15/25 kV	BT625 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	1, 2, 3, 4, 13, 14
		35 kV	BT635 CR6 CC4 (see CR6 & CC4 Tables pg. 24)	1, 2, 3, 4, 13, 14
		15 kV	BTP615 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	1, 2, 3, 4, 6, 13, 14
 600-15 600-35 600-55	BT-TAP Connector Kit	25 kV	BTP625 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	1, 2, 3, 4, 6, 13, 14
		35 kV	BTP635 CR6 CC4 (see CR6 & CC4 Tables pg. 24)	1, 2, 4, 6, 13, 14
		15 kV	TP615 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
 600-12 600-32 600-52	T-OP II Connector Kit	25 kV	TP625 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
		35 kV	TP635 CR6 CC4 (see CR6 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
		15 kV	POP615 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
 600-13 600-33 600-53	PUSH-OP Connector Kit	25 kV	POP625 CR5 CC4 (see CR5 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
		35 kV	POP635 CR6 CC4 (see CR6 & CC4 Tables pg. 24)	2, 5, 6, 13, 14
		15/25 kV	UOP625	
600-34	U-OP Connector Kit			
 600-18 600-38 600-59	Bushing Adapter with LRTP (Stud-T Included)	15 kV	DBA615	6
		25 kV	DBA625	6
		35 kV	DBA635	6
 600-19 600-39 600-58	PUSH-OP Bushing Adapter	15 kV	PDBA615	6
		25 kV	PDBA625	6
		35 kV	PDBA635	6
 600-44 600-64	Standoff Bushings	15/25 kV	ISB625A (Aluminum) ISB625C (Copper)	7 7, 8
		35 kV	ISB635A (Aluminum) ISB635C (Copper)	7, 8 7
		15/25 kV	PISB625 PISB625HP (with hitch pin)	
 600-25 600-45 600-65	PUSH-OP Standoff Bushings	35 kV	PISB635 PISB635HP (with hitch pin)	
		15/25 kV	DPC625	9
 600-43 600-63	Standard Protective Cap (with Permanent Stud)	35 kV	DPC635	9
		15/25 kV	DPC625UT	9
 600-43 600-63	Protective Cap for T-OP II and U-OP	35 kV	DPC635UT	9
		15/25 kV	DJ625A (Aluminum) DJ625C (Copper)	10, 11 10, 11
 600-42 600-62	Deadbreak Junctions	35 kV	DJ635A (Aluminum) DJ635C (Copper)	10, 11 10, 11
		15/25/35 kV	SA CJ3 (see CJ3 Table pg. 24)	12, 13, 14
500-95	SA Series Cold Shrinkable Metallic Shield Adapter Kit			
	CS Series Cold Shrinkable Metallic Cable Seal Kit	15/25/35 kV	CS CJ4 (see CJ4 Table pg. 24)	13, 14

- Determine whether all aluminum components or all copper components are required:
BOL-T Kit with 600 A Rating - Insert "A" in digit 10 for Aluminum.
BT-TAP Kit with 600 A Rating - Insert "A" in digit 11 for Aluminum.
BOL-T Kit with 900 A Rating - Insert "C" in digit 10 for Copper (includes coppertop compression connector).
BT-TAP Kit with 900 A Rating - Insert "C" in digit 11 for Copper (includes coppertop compression connector).
- To specify an **ALL copper connector**, add 50 to the conductor code from Table CC4 (page 24). **Example:** CC6C11T becomes CC6C61T.
- To specify a **stud**:
BOL-T Kit - insert a "1" in digit 11 to include stud, or a "2" in digit 11 for kit without stud.
BT-TAP Kit - insert "S" in digit 12 to include standard length stud or "L" in digit 12 to include extended length stud.
- To specify T-Body with test point (optional):
BOL-T Kit - insert a "T" in digit 12.
BT-TAP Kit (15 & 25 kV) - insert a "T" in digit 13.
BT-TAP Kit (35 kV) - insert a "T" in digit 11.
- For T-OP II and PUSH-OP kits only, to specify a T-body with test point, add "T" after the conductor code.
- To specify a **BOL-T, BT-TAP or T-OP II** kit with a **loadbreak protective cap**, insert a "C" after the test point/non-test point option. **Bushing Adapters** - insert a "C" as the last character of the part number. **Note:** 25 kV kits include a **POSI-BREAK protective Cap**.
- To specify stud in kit, add "SA" for aluminum stud (only available with aluminum interface); add "SC" for copper stud; add "ST" for T-OP II stud; or add "SU" for U-OP stud as the last characters in the part number.
- To specify a **grounded standoff bushing**, replace the "I" with a "G" as the first character in the part number.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- It is required to specify the number of interfaces by inserting a "2", "3", or "4" directly after the base part number.
- To add a **stainless steel bracket**, insert a "B"; or to add **U-straps**, insert a "U" as the last character in the part number.
- For use with tape shield, drain wire, linear corrugated, and Unishield® cable.
- To add a **CS Series Sealing kit** or a **SA Series Adapter kit** to the 600 A connector kit, add a "CS _" or "SA _" at end of catalog number. Refer to Table CJ3 or CJ4 on page 24.
- Each **SA Series Kit** includes:
(1) Cold Shrinkable Sleeve (1) Tinned Copper Ground Strap with attached elbow drain wire (1) Constant Force Spring (1) Semi-Conductive Tape (3) Mastic Sealing Strips (1) Installation Instructions.
Each CS Series Sealing Kit includes:
(1) Cold shrinkable sleeve, (3) Mastic sealing strips, and (1) Installation Instructions.

600/900 A Components & Replacement Parts

Use for Base Number

BT625
BTP615
BTP625
TP615
TP625
POP615
POP625
CA625

TABLE CR5
Cable Diameter (Insulation) Range

Cable Diameter Range		
Inches	mm	CABLE RANGE CODE
0.610-0.970	15.5-24.6	AB
0.750-1.080	19.1-27.4	CC
0.970-1.310	24.6-33.3	DD
1.090-1.470	27.7-37.3	EE
1.260-1.640	32.0-41.7	FF
1.360-1.710	34.5-43.4	GG
1.510-1.850	38.4-47.0	HH
1.700-1.970	43.2-50.0	JJ

Use for Base Number

BT635
BTP635
TP635
POP635
CA635

TABLE CR6
Cable Diameter (Insulation) Range

Cable Diameter Range		
Inches	mm	CABLE RANGE CODE
0.875-0.985	22.2-25.0	D
0.930-1.040	23.6-26.4	E
0.980-1.115	24.9-28.3	F
1.040-1.175	26.4-29.8	G
1.095-1.240	27.8-31.5	H
1.160-1.305	29.5-33.1	J
1.220-1.375	31.0-34.9	K
1.285-1.395	32.5-35.4	L
1.355-1.520	34.4-38.6	M
1.485-1.595	37.7-40.5	N
1.530-1.640	38.9-41.7	P
1.575-1.685	40.0-42.8	Q
1.665-1.785	42.3-45.3	R
1.755-1.875	44.6-47.9	S
1.845-1.965	46.9-50.0	T
1.960-2.210	49.8-56.1	U

Use for Base Number

BT625
BT635
BTP615
BTP625
BTP635
TP615
TP625
TP635
POP615
POP625
POP635
CC6A _ U
CC6C _ T
CC6C _ U

TABLE CC4
Conductor Size and Type

Concentric or Compressed		Compact or Solid		CONDUCTOR CODE
AWG or kcmil	mm ²	AWG or kcmil	mm ²	
No Connector				00
#2	35	1	—	11
#1	—	1/0	50	12
1/0	50	2/0	70	13
2/0	70	3/0	—	14
3/0	—	4/0	95	15
4/0	95	250	120	16
250	120	300	—	17
300	—	350	—	18
350	—	400	185	19
400	185	450	—	20
450	—	500 ^a	240	21
500	240	600	300	22
600	300	700	—	23
650 ^b	—	750 ^c	—	24
750 ^d	—	900	—	25
900	—	1000	500	26
1000	500	—	—	27
1250	630	—	—	28

- a. Also accepts 550 kcmil compact conductor.
b. Also accepts 700 kcmil compressed conductor.
c. Also accepts 800 kcmil compact conductor.
d. Also accepts 700 kcmil concentric conductor.

Use for Base Number

SA

TABLE CJ3
Cable Jacket (Outside Diameter) Range



















Cable Jacket OD (Inches)	JACKET CODE
0.590-1.050	1
0.830-1.640	2
1.270-2.170	3
1.600-2.600	4

Use for Base Number

CS

TABLE CJ4
Jacketed Concentric Neutral Cable

Minimum Seal Diameter (Inches)	Maximum Installed Diameter (Inches)	CODE
.950	1.94	1
1.28	2.67	2
1.60	3.50	3

Catalog Section	Description	kV Class	Base Part Number	Notes
	T-Body	15/25 kV	DT625	1, 2
		35 kV	DT635	1, 2
600-46 600-66				
	Cap for Insulating Plug	15/25/35 kV	DIPCAP	
600-46 600-66				
	Insulating Plug w/o Stud (cap included)	15/25 kV	DIP625A (Aluminum) DIP625C (Copper)	3, 7
		35 kV	DIP635A (Aluminum) DIP635C (Copper)	3, 7
600-46 600-66				
	Connecting Plug w/o Stud	15/25 kV	DCP625A (Aluminum) DCP625C (Copper)	3, 7
		35 kV	DCP635A (Aluminum) DCP635C (Copper)	3, 7
600-46 600-66				
	BOL-T Stud	15/25 kV	STUD-A (Aluminum) STUD-C (Copper)	
		35 kV	STUD635-A (Aluminum) STUD635-C (Copper)	
600-46 600-66				
	T-OP II/BT-TAP Stud	15/25/35 kV	STUD-T	4
600-46 600-66				
	U-OP Stud	15/25/35 kV	STUD-U	5
600-46 600-66				
	1 1/16 in. Unthreaded Aluminum Compression Connector	15/25/35 kV	CC6A CC4 U (see CC4 Table pg. 24)	
600-46 600-66				
	15/16 in. Threaded Coppertop Compression Connector	15/25/35 kV	CC6C CC4 T (see CC4 Table pg. 24)	6
600-46 600-66				
	1 1/16 in. Unthreaded Coppertop Compression Connector	15/25/35 kV	CC6C CC4 U (see CC4 Table pg. 24)	6
600-46 600-66				
	Cable Adapter	15/25 kV	CA625 CR5 (see CR5 Table pg. 24)	
		35 kV	CA635 CR6 (see CR6 Table pg. 24)	
600-46 600-66				
	BT-TAP and T-OP II Installation and Torque Tool	15/25 kV	TQHD625 (15/25 kV-T-OP II Only)	8
		35 kV	TQHD635 (35 kV T-OP II Only)	
600-46 600-66				
	T-OP II Combination Operating, Test, and Torque Tool (For single person hotstick operation)	15 kV	OTTQ615	9
		25 kV	OTTQ625	9
		35 kV	OTTQ635	9
600-46 600-66				
	T-WRENCH for BT-TAP/T-OP II	15/25/35 kV	TWRENCH	10
600-46 600-66				
	5/16" Hex Shaft with 3/8" Socket Drive Tool	15/25 kV	HD625	11
		35 kV	HD635	11
600-18 600-38 600-59				
	Bushing Extender	15/25 kV	DBE625	2
		35 kV	DBE635	2
600-18 600-38 600-59				
	Loadbreak Reducing Tap Plug for T-OP II (Stud-T included)	15 kV	LRTP615	
		25 kV	LRTP625	
		35 kV	LRTP635	
600-18 600-38 600-59				
	BOL-T Loadbreak Reducing Tap Plug for BT-TAP	15 kV	BLRTP615	12, 13
		25 kV	BLRTP625	12, 13
		35 kV	BLRTP635	
600-18 600-38 600-59				

- To specify a **test point** insert a "T" in the sixth digit.
- To add stud to kit, add a "SA" for an **aluminum stud**, or a "SC" for a **copper stud** as the last characters in the part number.
- To add **STUD** to kit, add a "S" after the base part number. Material of stud supplied will match with material of the plug conductor ordered.
- Copper alloy stud for use with BT-TAP or T-OP II Connectors only.
- Copper stud for use with U-OP Connector only.
- To specify an **all copper connector**, add **50** to the conductor code from Table CC4 (page 24). Example: CC6C11T becomes CC6C61T.
- Stud comes loose in kit, add a "P" as the last character for permanent **factory installation**.
- TQHD6_ allows for installation of either BT-TAP or T-OP II Connector to 600 A bushing.
- OTTQ6_ allows for installation and single hotstick operation of either the BT-TAP or T-OP II Connector.
- TWRENCH allows for installation of loadbreak reducing tap plug for BT-TAP or T-OP II Connector.
- HD6_ allows for installation of connecting plug in 600 A Separable Splices.
- Specify "A" for 600 A rating or "C" for 900 A rating in digit 9.
- To add standard length stud to kit, add "S" to end of part number. To add an extended length stud to kit add "L" to end of part number.

BOL-T Connector System

The BOL-T Deadbreak Connector System is designed for use on applications that will not be operated, do not need grounding or arrester provisions, and do not require direct conductor testing or the use of a hotstick. It is a bolted design that is interchangeable with other manufacturers' bolted 600 A systems that require no special tools for installation.

The capacitive test point on the insulating plug provides a means of confirming an energized circuit without disturbing the bolted connection. In addition to the capacitive test point feature on the insulating plug, we offer a capacitive test point on the T-Body. This allows the use of our Type "TPR" Series Faulted Circuit Indicators, and provides a means of confirming that a circuit is energized when used with high impedance voltage sensing devices designed for test points.

Refer to Figure 1 for BOL-T Connector Kit Components.

Installation of BOL-T on a 600/900 A Bushing

The BOL-T Connector is installed on any 600/900 A bushing using a standard 1-inch socket. No special tools are required.

BOL-T Specification Information

To specify the BOL-T Connector System, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- All cable adapters, insulating plugs, compression connectors and other component parts must be interchangeable with other manufacturers.
- For 900 A rating, full copper current carrying path with coppertop compression connector, copper stud and insulating plug with copper insert.
- BOL-T Connector System base part number BT625 for 15 kV and 25 kV systems and BT635 for 35 kV systems.

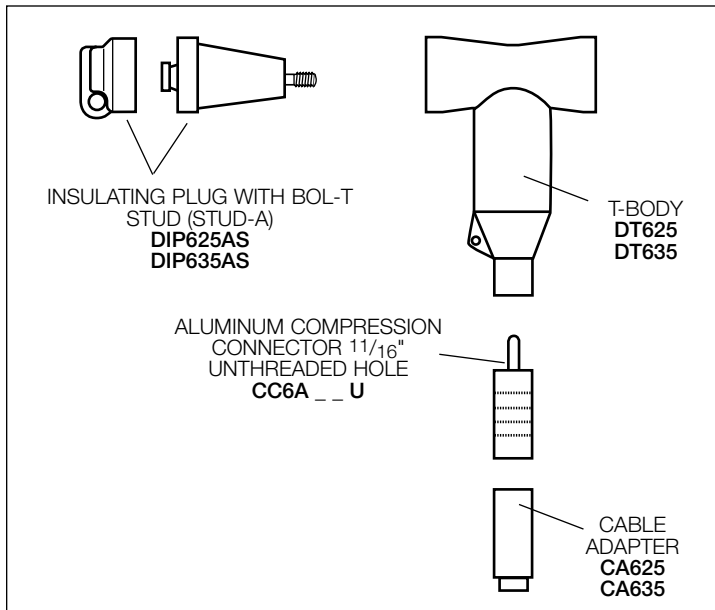


Figure 1. BOL-T Connector Kit (BT6_5) Components. For more details, see catalog sections 600-10, 600-30 and 600-50.

BT-TAP Connector System

The BT-TAP Deadbreak Connector System is designed for use on applications where a 200 A interface is required for testing, grounding, or overvoltage protection. It is primarily used in retrofit applications of existing 600 A or 900 A BOL-T installations (or other bolted systems that use unthreaded compression connectors).

The BT-TAP Connector System uses the standard unthreaded compression connector, which makes it ideal for retrofitting existing BOL-T installations into a system with a 200 A tap.

The BT-TAP provides the following features:

- Visible ground and visible break
- 200 A Interface for:
 - addition of our M.O.V.E. Arresters for overvoltage protection
 - addition of our Grounding Elbows
 - access for direct conductor phasing and testing
 - hipot testing of switch or cables

Refer to Figure 2 for BT-TAP Connector Kit Components.

Installation of BT-TAP on a 600 A Bushing

The BT-TAP Connector is installed on an apparatus bushing using a 600 A Torque Tool.

BT-TAP Specification Information

To specify a BT-TAP Connector System, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- The connector system must provide operation with hot line tools, direct conductor phasing and testing.
- It must provide a location to add overvoltage arresters and access for direct conductor phasing or hipot testing of switch or cables.
- Must be easy to install with proper torque such that concern for cross threading is eliminated.
- Loadbreak reducing tap plug must include latch indicator ring.
- BT-TAP Connector System base part number BTP615 (A) (C) for 15 kV, BTP625 (A) (C) for 25 kV and BTP635 for 35 kV.

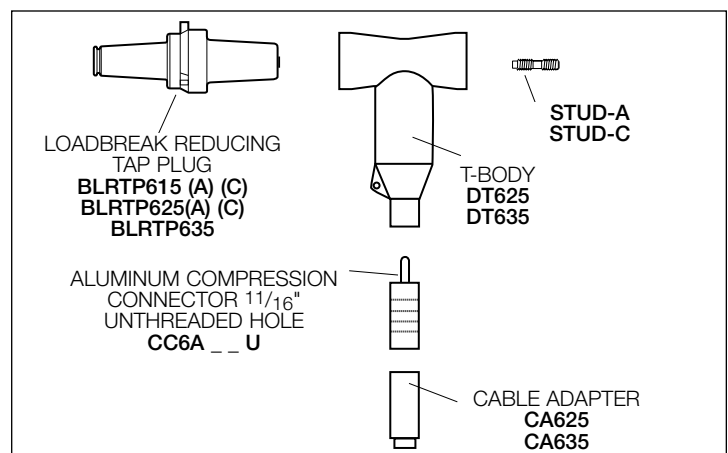


Figure 2. BT-TAP Connector Kit (BTP6_5) Components. For more details, see catalog sections 600-15, 600-35 and 600-55.

T-OP II Connector System

The T-OP II Deadbreak Connector System is designed for use on applications where a 200 A interface is required for testing, grounding, or overvoltage protection. It is single person hotstick operable and is ideal for terminations that may require moving to achieve a visible open or visible ground. One person can move the T-OP II Deadbreak Terminator from the apparatus bushing to a standoff bushing using a hotstick and Operating Test and Torque Tool (OTTQ6_5).

The T-OP II Connector System uses a threaded coppertop (bi-metal) compression connector for a threaded connection. It also has an alignment segment and internal rotating nut feature in the loadbreak reducing tap plug which, along with the extended length stud, eliminates cross threading and ensures proper torque.

The T-OP II system provides the following features:

- Single person hotstick operable
- Mechanical assist
- Copper alloy current path and copper-top connector
- 900 A continuous current rating
- Visible ground and visible break
- 200 A Interface for:
 - addition of our M.O.V.E Arresters for overvoltage protection
 - addition of our Grounding Elbows
 - access for direct conductor phasing and testing
 - hipot testing of switch or cables

Refer to Figure 3 for T-OP II Connector Kit Components.

Installation of T-OP II on a 600/900 A Bushing

The T-OP II Connector is installed on an apparatus bushing using a T-Wrench and a 600 A Torque Tool.

T-OP II Specification Information

To specify a 900 A T-OP II System, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- Must include an all copper alloy current path and copper-top connector.
- System must include disconnecting back-off feature.
- The connector system must provide operation with live line tools, direct conductor phasing and testing, visible ground and visible break.
- It must provide a location to add overvoltage arresters and access for direct conductor phasing or hipot testing of switch or cables.
- Must be one-person hotstick operable and easy to install with proper torque such that concern for cross threading is eliminated.
- Loadbreak reducing tap plug must include extended length stud, internal rotating nut and an alignment segment feature to eliminate cross threading of this compression connector and ensure proper torque.
- Loadbreak reducing tap plug must include latch indicator ring.
- T-OP II Connector System base part number TP615 for 15 kV, TP625 for 25 kV and TP635 for 35 kV.

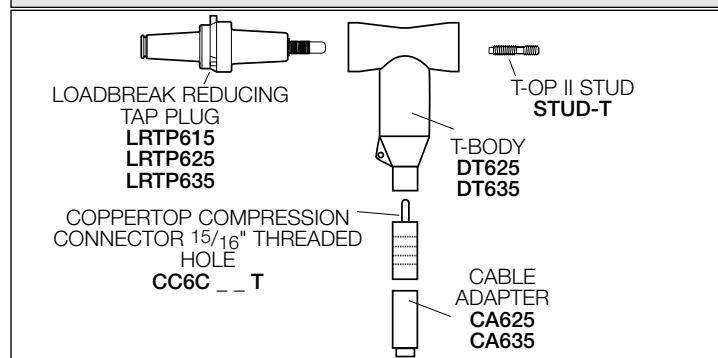


Figure 3. T-OP II Connector Kit (TP6_5) Components. For more details, see catalog sections 600-12, 600-32 and 600-52.

U-OP Connector System

The U-OP Connector System is used to provide a visible break and visible ground on 600 A distribution systems without having to move the heavy cable. The U-OP Connector is a deadbreak system rated for operation on 15 or 25 kV class equipment, including transformers, switches, switchgear, and other apparatus.

Under normal operating conditions, the current path is through the apparatus bushing, through the U-connector, through a two-way 600 A deadbreak junction, and through a T-OP II 600 A Connector (sold separately) to the underground cable. When isolating underground cable, a grounded standoff bushing can be put in the parking stand (with the system de-energized). The U-connector can then be removed, rotated 90°, and re-installed over the apparatus bushing and grounded standoff bushing, to ground the apparatus bushing.

A grounding elbow can be installed on the 200 A interface of the T-OP II Connector to ground the cable. A 600 A U-OP Protective Cap can then be put on the upper bushing of the deadbreak junction to insulate that bushing. Since all bushings of the connector system are then insulated or grounded, and if the cable is grounded on the other end, it is safe to perform work on the underground cable. See Figure 4 for a typical U-OP Connector configuration.

U-OP Specification Information

To specify a 600 A U-OP Connector System that achieves a visible break and visible ground without having to move heavy cable, include in your specification:

- The system must fully comply with IEEE Std 386™ standard.
- The system must provide a visible break and visible ground without having to move 600 A cable.
- A U-connection shall remain connected on the equipment even while performing repair to the underground cable to ensure the interfaces are not exposed to the environment and thus potentially contaminated.
- U-OP Connector System base part number UOP625 for both 15 and 25 kV.



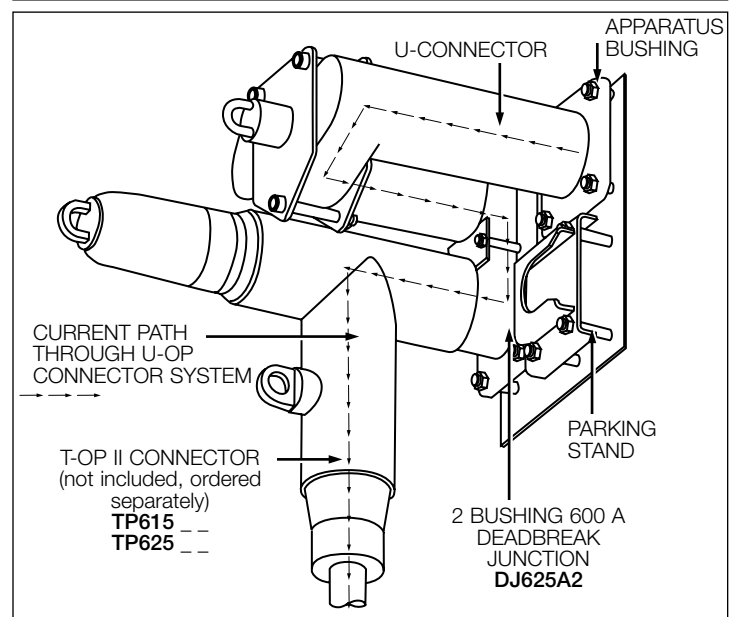


Figure 4. U-OP Connector Kit (UOP625) Components. For more details, see catalog section 600-34.


600 A Stacking Dimensions

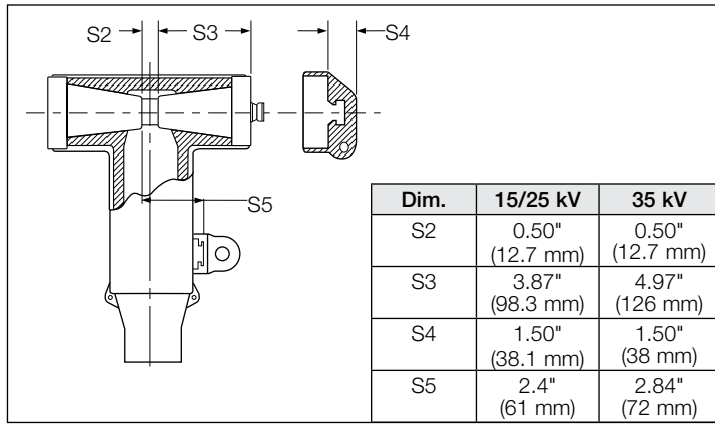


BOL-T Deadbreak Connector

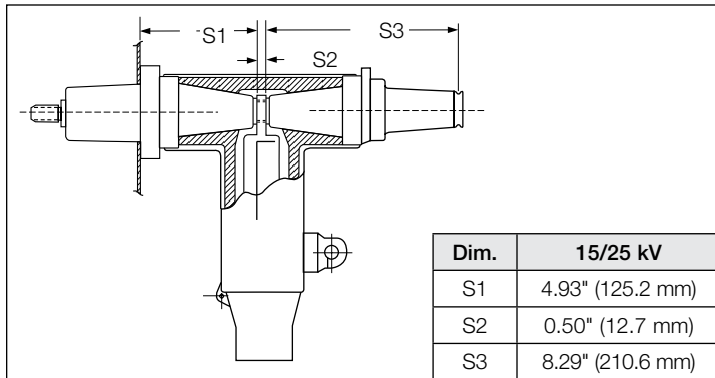


BT-TAP and T-OP II Deadbreak Connector 15 kV and 25 kV

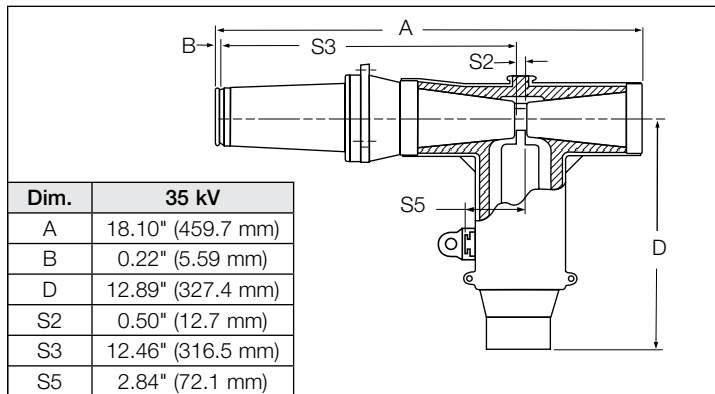


BT-TAP and T-OP II Deadbreak Connector 35 kV

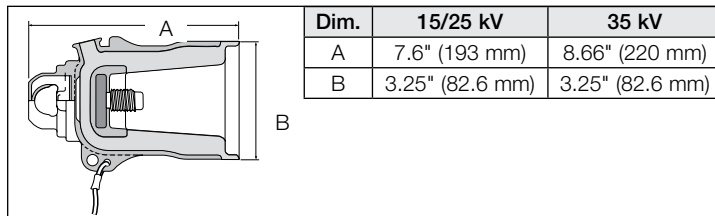


Standard Protective Cap

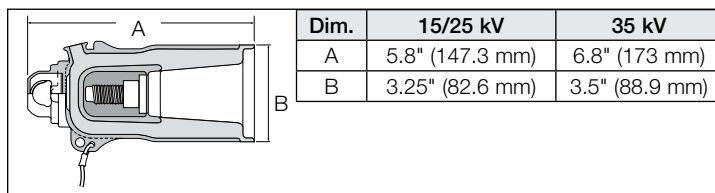


Protective Cap for T-OP II and U-OP (15/25 kV shown)

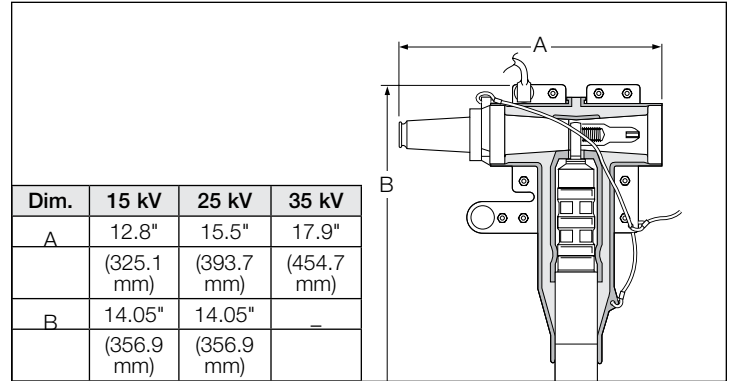


PUSH-OP Deadbreak Connector (15 kV shown)

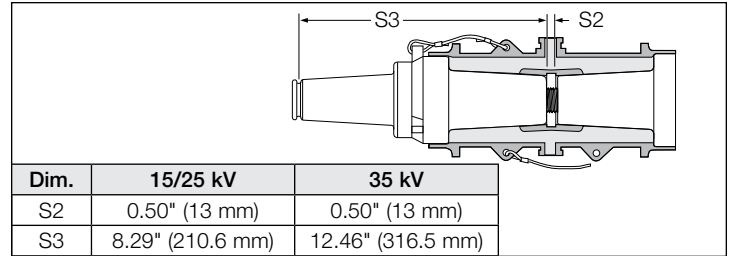


Bushing Adapter with LRTP (15 kV shown)

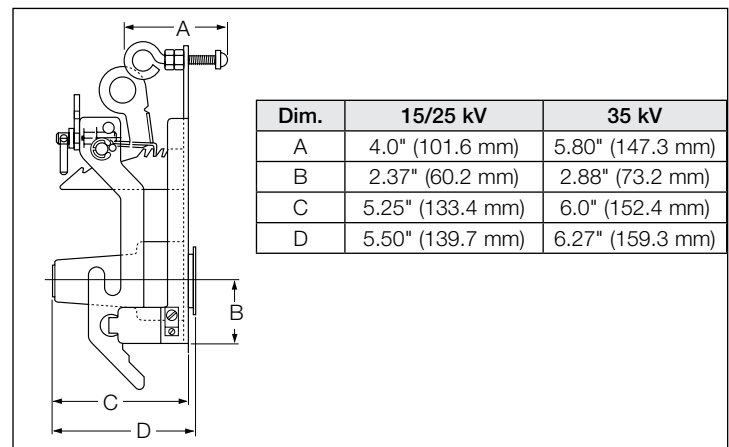


PUSH-OP Standoff Bushing (15/25 kV shown)

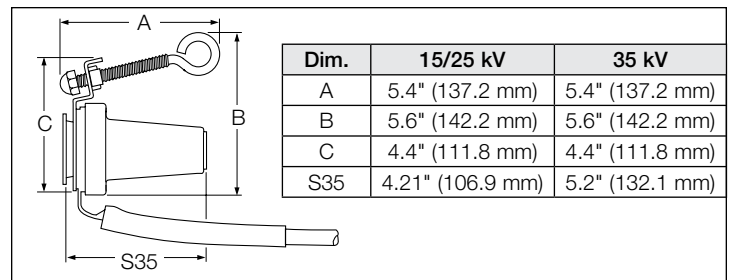

Standoff Bushing

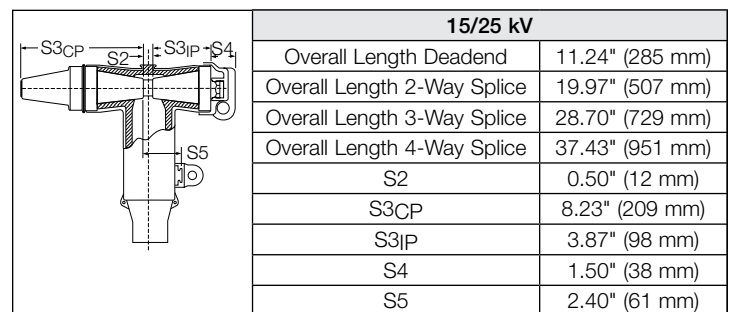

Separable Splice

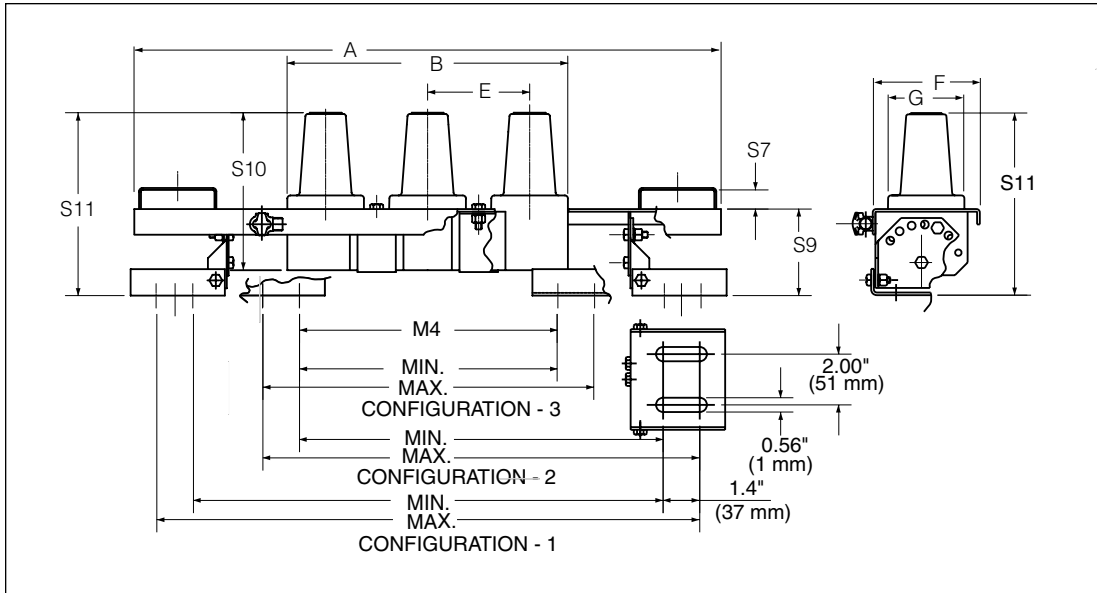


Deadbreak Junction (15/25 kV shown)

Dim.	15/25 kV
E	4.0" (101 mm)
F	4.1" (102 mm)
G	3.0" (76 mm)
S7	0.75" (19 mm)
S9	3.4" (86 mm)
S10	6.2" (157 mm)
S11	7.2" (182 mm)

TABLE 15/25 kV

Number of Interfaces	Physical Dimensions in./(mm)		M4 Mounting Dimensions in./(mm)					
			Configuration 1		Configuration 2		Configuration 3	
			Min.	Max.	Min.	Max.	Min.	Max.
2	19.0" (483 mm)	7.0" (178 mm)	14.1" (358 mm)	16.9" (429 mm)	9.7" (248 mm)	12.5" (318 mm)	5.6" (142 mm)	8.4" (213 mm)
3	23.0" (584 mm)	11.0" (279 mm)	18.6" (472 mm)	21.4" (544 mm)	14.2" (361 mm)	17.0" (432 mm)	10.1" (257 mm)	12.9" (328 mm)
4	27.1" (686 mm)	15.0" (381 mm)	24.1" (612 mm)	26.9" (686 mm)	19.7" (500 mm)	22.5" (572 mm)	15.6" (396 mm)	18.4" (467 mm)

Configuration 1. Both feet turned out.
 Configuration 2. One foot turned out, the other in.
 Configuration 3. Both feet turned in.

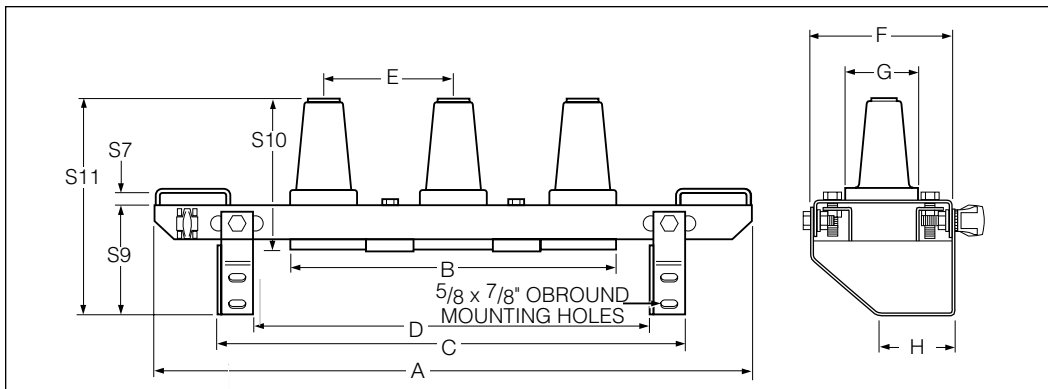

Deadbreak Junction (35 kV shown)

Dim.	35 kV
E	6.0" (152 mm)
F	6.2" (158 mm)
G	3.0" (76 mm)
H	3.8" (96 mm)
S7	0.75" (19 mm)
S9	5.55" (141 mm)
S10	7.0" (178 mm)
S11	10.4" (264 mm)

TABLE 35 kV

Number of Interfaces	Physical Dimensions in. (mm)		Mounting Dimensions in. (mm)	
	A	B	C	D
2	21.5" (546 mm)	9.0" (229 mm)	15.5" (394 mm)	12.5" (318 mm)
3	27.5" (699 mm)	15.0" (381 mm)	21.5" (546 mm)	18.5" (470 mm)
4	33.5" (851 mm)	21.0" (533 mm)	27.5" (699 mm)	24.5" (622 mm)

Note: C and D are minimum and maximum stud centerline separations for mounting.

Junction Bars/Cable Transition & Oil Stop Modules

Cooper Power Systems Junction Bars are designed for vault or apparatus applications and can be used for looping, tapping, and sectionalizing.

Cable Transition Modules (CTMs) and Oil Stop Modules (OSMs) are designed for splicing paper insulated lead cable (PILC) into solid dielectric cable.

Junction bars and cable transition modules are fully shielded, submersible, resistant to harsh materials, and are designed and manufactured in accordance with IEEE Std 386™ standard - "Separable Insulated connector Systems".

Junction bars and cable transition and oil stop modules are manufactured in 200 A, 600 A or 900 A configurations. The 200 A designs incorporate a universal bushing well design making it possible to use either a 200 A loadbreak or deadbreak bushing well insert.



Junction Bar Catalog Numbering Key

- "JBI" = Junction Bar, In-Line
- "JBL" = Junction Bar, "L" Splice
- "JBY" = Junction Bar, "Y" Splice
- "JBS" = Junction Bar, Stacked
- "25" = 15/25 kV Rating
- "35" = 35 kV Rating***
- "335" = Three-Phase, 35 kV Rating
- "U" = With U-Straps
- "PS" = Bracket with (2) Parking Stands
- "W" = 200 A Well
- "B" = 600 A Bushing
- "S" = 600 A Straight Interface Bushing
- "C" = Copper
























Available Mounting Provisions

Junction Type	S.S. Mtg. Bracket 0-60° Mtg. Angles	Non-Adjustable S.S. Flush Mtg. Bracket	S.S. U-Straps*	S.S. Mtg. Bracket with (2) Parking Stands**
In-Line Junction Bar	Std.		Yes	Yes
Stacked Junction Bar		Std.	No	Yes
"L" Splice	Std.		Yes	Yes
"Y" Splice		Std.	No	No

* For U-straps add suffix U on the end of the standard catalog number.

** For Parking Stand Bracket add suffix PS on the end of the standard catalog number.

15/25 and 35 kV In-Line Junction Bars with Stainless Steel Bracket






Catalog Section	Description	kV Class	Base Part Number	Notes
650-10				
	2 Point 200 A	15/25 kV 35 kV	JB125C2W JB135C2W	1,2
	3 Point 200 A	15/25kV 35 kV	JB125C3W JB135C3W	1,2
	4 Point 200 A	15/25kV 35 kV	JB125C4W JB135C4W	1,2
	5 Point 200 A	15/25kV 35 kV	JB125C5W JB135C5W	1,2
	6 Point 200 A	15/25kV 35 kV	JB125C6W JB135C6W	1,2
	2 Point 600/900 A*	15/25kV 35 kV	JB125C2B JB135C2B	1,2
	3 Point 600/900 A*	15/25kV 35 kV	JB125C3B JB135C3B	1,2
	4 Point 600/900 A*	15/25kV 35 kV	JB125C4B JB135C4B	1,2
	5 Point 600/900 A*	15/25kV 35 kV	JB125C5B JB135C5B	1,2
	6 Point 600/900 A*	15/25kV 35 kV	JB125C6B JB135C6B	1,2
	3 Point 1 x 200 A 2 x 600 A	15/25kV 35 kV	JB125C1W2B JB135C1W2B	1,2
	3 Point 1 x 600 A 1 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C1B1W1B JB135C1B1W1B	1,2
	3 Point 2 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C2W1B JB135C2W1B	1,2
	4 Point 1 x 200 A 3 x 600 A	15/25kV 35 kV	JB125C1W3B JB135C1W3B	1,2
	4 Point 2 x 200 A 2 x 600 A	15/25kV 35 kV	JB125C2W2B JB135C2W2B	1,2
	4 Point 3 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C3W1B JB135C3W1B	1,2
	4 Point 1 x 600 A 2 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C1B2W1B JB135C1B2W1B	1,2
	5 Point 1 x 200 A 4 x 600 A	15/25kV 35 kV	JB125C1W4B JB135C1W4B	1,2
	5 Point 2 x 200 A 3 x 600 A	15/25kV 35 kV	JB125C2W3B JB135C2W3B	1,2
	5 Point 4 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C4W1B JB135C4W1B	1,2
	5 Point 1 x 600 A 3 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C1B3W1B JB135C1B3W1B	1,2
	6 Point 3 x 200 A 3 x 600 A	15/25kV 35 kV	JB125C3W3B JB135C3W3B	1,2
	6 Point 1 x 600 A 4 x 200 A 1 x 600 A	15/25kV 35 kV	JB125C1B4W1B JB135C1B4W1B	1,2

1. For U-Straps, add "U" on end of catalog number.
2. For (2) parking stand brackets add "PS" to end of catalog number.








* A 900 A rating can be achieved when mated with comparably rated separable connectors.

15/25 kV and 35 kV L-Splices and Y-Splices with Stainless Steel Brackets

1. for U-Straps, add "U" on end of catalog number.
2. For (2) parking stand brackets add "PS" to end of catalog number.

Catalog Section	Description	kV Class	Base Part Number	Notes
650-10	L-SPLICES 15/25 AND 35 KV WITH STAINLESS STEEL BRACKETS			
	3 Point Single-Phase 2 x 200 A 1 x 200 A	15/25 kV 35 kV	JBL25C2W1W JBL35C2W1W	1, 2
	6 Point Single-Phase 4 x 200 A 2 x 600 A	15/25 kV 35 kV	JBL25C4W2B JBL35C4W2B	1, 2
650-10	Y SPLICES, THREE-PHASE 15/25 KV WITH STAINLESS STEEL BRACKETS			
	9 Point Three-Phase 3 x 200 A Per Phase	15/25 kV 35 kV	JBY325C3W JBY335C3W	
	9 Point Three-Phase 2 x 600 A 1 x 200 A Per Phase	15/25 kV 35 kV	JBY325C1W2B JBY335C1W2B	
	12 Point Three-Phase 3 x 600 A 1 x 200 A Per Phase	15/25 kV 35 kV	JBY325C1W3B JBY335C1W3B	















15/25 & 35 kV Stacked Junction Bars with Stainless Steel Brackets

Catalog Section	Description	kV Class	Base Part Number	Notes
650-10				
	5 Point 5 x 200 A	15/25 kV 35 kV	JBS25C2W3W JBS35C2W3W	1
	5 Point 2 x 200 A 3 x 600 A	15/25 kV 35 kV	JBS25C2W3B JBS35C2W3B	1
	5 Point 2 x 600 A 1 x 200 A 2 x 600 A	15/25 kV 35 kV	JBS25C2B1W2B JBS35C2B1W2B	1
	6 Point 6 x 200 A	15/25 kV 35 kV	JBS25C3W3W JBS35C3W3W	1
	6 Point 3 x 200 A 1 x 600 A 2 x 200 A	15/25 kV 35 kV	JBS25C3W1B2W JBS35C3W1B2W	1
	6 Point 3 x 200 A 1 x 200 A 2 x 600 A	15/25 kV 35 kV	JBS25C3W1W2B JBS35C3W1W2B	1
	8 Point 8 x 200 A	15/25 kV 35 kV	JBS25C4W4W JBS35C4W4W	1




1. For (2) parking stand brackets add "PS" to end of catalog number.

15 and 25 kV Cable Transition Modules

1. Cable Lug Size required at time of order.

Catalog Section	Description	kV Class	Base Part Number	Notes
650-20	STRAIGHT THROUGH			
	3 Point 200 A	15 kV and 25 kV	CTM005A	1
	3 Point 600 A	15 kV and 25 kV	CTM012A	1
650-20	TAP			
	3 Point 200 A	15 kV and 25 kV	CTM015A	1
	6 Point 200 A	15 kV and 25 kV	CTM025A	1
	3 Point 600 A	15 kV and 25 kV	CTM011A	1
	6 Point 600 A	15 kV and 25 kV	CTM020A	1
650-20	STRAIGHT THROUGH AND TAP			
	3 Point 200 A	15 kV and 25 kV	CTM010A	1
	6 Point 200 A	15 kV and 25 kV	CTM024A	1
	3 Point 600 A	15 kV and 25 kV	CTM009A	1
	6 Point 600 A	15 kV and 25 kV	CTM019A	1
	3 Point 200 A	15 kV and 25 kV	CTM029A	1
	3 Point 600 A	15 kV and 25 kV	CTM030A	1
650-20	ACCESSORIES			
	Wiping Sleeve	15 kV and 25 kV	WS1112 WS1118	
	Wiping Flange	15 kV and 25 kV	WS12	

15 and 25 kV Cable Transition & Oil Stop Modules

Catalog Section	Description	kV Class	Base Part Number	Notes
650-20	MOUNTING BRACKET			
	Saddle	15 kV and 25 kV	BRK469	
650-20	OIL STOP MODULES			
	Three-Phase 600 A PILC to PILC Splice	15 kV and 25 kV	OSM004	1
	Tap Transition, Paper Insulated Lead Cable (PILC) Run to 3 Point 200 A and 3 Point 600 A Tap	15 kV and 25 kV	CTM035A	1

1. Cable Lug Size required at time of order.

Splices

We offer various types of splices for your underground needs on 200 A and 600 A systems. The EZ II One-Piece Splices at 15, 25, and 35 kV include advantages for typical applications of repair, replacement, or extension of high voltage underground cables. These all peroxide-cured EPDM rubber splices provide a highly reliable, permanent, fully shielded, and submersible cable joint with a current rating equal to that of the mating cable. EZ II Splices can be installed in conduit, direct buried or in vault applications. The EZ II Splice line meets or exceeds all requirements of IEEE Std 404™ standard.

We offer a full line of 600/900 A Separable Splice kits for application on feeder circuits. These use standard BOL-T type components along with a peroxide-cured EPDM rubber connecting plug that allows for installation of multiple way splices. Separable splices are used to splice multiple cables or to deadend a single cable. The splices are rated for 600 A (900 A ratings are available) and are suitable for the repair or extension of underground feeders. Separable splice kits meet or exceed the requirements of IEEE Std 386™ standard.

EZ II Splices


The EZ II One-Piece Splices offer a number of features and benefits, including:

Easiest to Install – The design features of the EZ II Splice including the tapered cable entrance, smooth bore, relieved conductive insert, and reformulated rubber provide for easier field installation. EZ II Splices have been shown to be 30% easier to install than other manufacturers' splices.

Wide Range Taking – The wide range taking cable entrances are sized to accept all common cable insulation diameters. The wider cable ranges increase installation flexibility.

Sure Grip – The contoured EZ II Splice body provides an easy gripping location during installation.

Long Term Reliability – The EZ II Splice has successfully passed all requirements of the IEEE Std 404™ standard and our exclusive field-proven multi-stress test to show the long term reliability of the design.

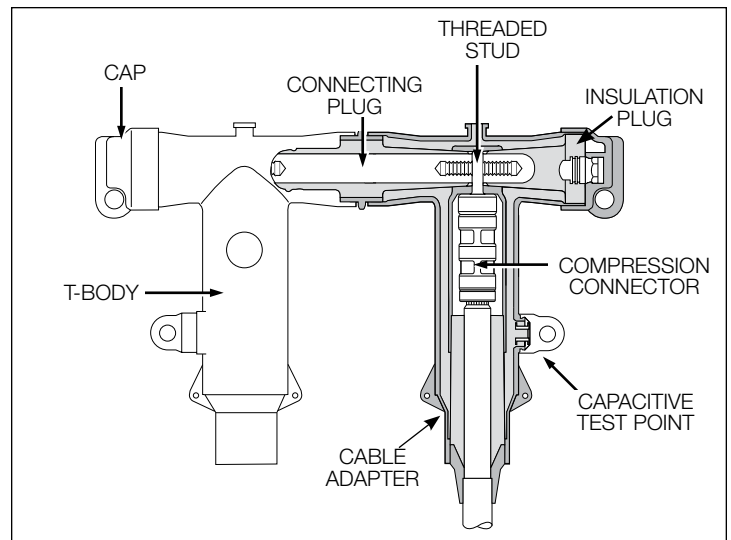



Typical components of a 600 A 2-way separable splice.

EZ II Splice Specification Information

To ensure you have the most reliable, economical, installation friendly premolded one-piece splice available, your specification for EZ II Splice should include:

- Manufactured in full compliance with all applicable IEEE Std 404™ standard.
- Manufactured from peroxide-cured EPDM rubber.
- Tapered ribs of the inside diameter of the conductive insert.
- Molded in compression connector diameters.
- Conductive insert ends encapsulated with insulating rubber.

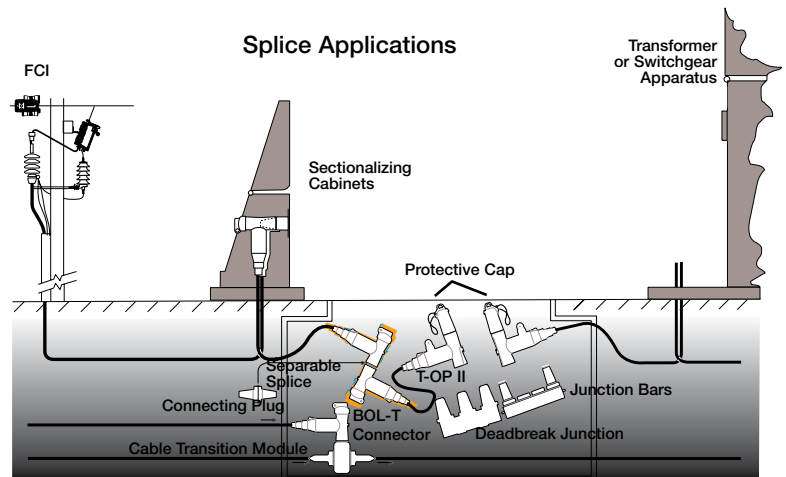

Catalog Section	Description	kV Class	Base Part Number	Notes
	EZ II Splice	15 kV	SP15 CR6 CC5 (see CR6 & CC5 Tables Below)	1, 2, 3, 4
		25 kV	SP25 CR6 CC5 (see CR6 & CC5 Tables Below)	1, 2, 3, 4
		35 kV	SP35 CR6 CC5 (see CR6 & CC5 Tables Below)	1, 2, 3, 4

700-15

Use for Base Number (both tables)
SP15 SP25 SP35

TABLE CR6
Cable Diameter (Insulation) Range



Cable Diameter Range		CABLE RANGE CODE	Voltage Class
Inches	Millimeters		
0.640-0.910	16.3-23.1	A	15 kV
0.750-1.010	19.1-25.7	B	15 & 25 kV
0.890-1.140	22.6-29.0	C	
0.840-1.110	21.3-28.2	D	15, 25 & 35 kV
1.000-1.310	25.4-33.3	E	
1.140-1.450	29.0-36.8	F	

TABLE CC5
Conductor Size and Type

Stranded or Compressed		Compact or Solid		CONDUCTOR CODE
AWG	mm ²	AWG	mm ²	
#3	25	#2	35	001
#2	35	#1	-	002
#1	-	1/0	50	003
1/0	50	2/0	70	004
2/0	70	3/0	-	005
3/0	-	4/0	95	006
4/0	95	250	120	007
250*	120	-	-	008

* Compressed stranding only

- For an **all copper connector**, change digit six from a "0" to a "C".
- For a **splice with a single-piece** re-jacketing kit, insert a "S" or a **2-piece** re-jacketing kit, insert a "D" as the ninth character in the part number.
- For **individually packaged** product in a corrugated cardboard box, insert an "X" as the last character in the part number.
- To splice different sized cables, refer to transition splice information in catalog section 700-15.
- For **900 A rating** (copper components) replace the "A" with a "C".
- For T-bodies with **test points**, insert a "T" directly after the base part number.
- Studs are bagged and loose in kit. To have **studs permanently installed** at the factory, add a "P" after the test point designation (if applicable) or after the base part number.
- Installation requires a standard 5/16" hex key (HD625).
- To include **200 A loadbreak protective cap**, add a "C" as the last character in the part number.

	600 A Separable Splices (Kits Do Not Include Cable Adapters or Compression Connector. Refer to 600 A Replacement Parts Page 25)	15/25 kV Deadend Kit	SSPL625A1	5, 6, 7, 8
		2-way Splice Kit	SSPL625A2	5, 6, 7, 8
		3-way Splice Kit	SSPL625A3	5, 6, 7, 8
		4-way Splice Kit	SSPL625A4	5, 6, 7, 8
	35 kV Separable Splices (Kits Do Not Include Cable Adapters or Compression Connector. Refer to 600 A Replacement Parts Page 25)	35 kV Deadend Kit	SSPL635A1	5, 6, 7, 8
		2-way Splice Kit	SSPL635A2	5, 6, 7, 8
		3-way Splice Kit	SSPL635A3	5, 6, 7, 8
		4-way Splice Kit	SSPL635A4	5, 6, 7, 8

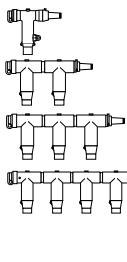










	T-OP II 600 A Separable Splices with 200 A Tap (Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25)	15 kV T-OP II Deadend Kit	SSPLT615A1	5, 6, 7, 8, 9
		T-OP II 2-way Splice Kit	SSPLT615A2	5, 6, 7, 8, 9
		T-OP II 3-way Splice Kit	SSPLT615A3	5, 6, 7, 8, 9
		T-OP II 4-way Splice Kit	SSPLT615A4	5, 6, 7, 8, 9
	25 kV T-OP II Separable Splices with 200 A Tap (Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25)	T-OP II Deadend Kit	SSPLT625A1	5, 6, 7, 8, 9
		T-OP II 2-way Splice Kit	SSPLT625A2	5, 6, 7, 8, 9
		T-OP II 3-way Splice Kit	SSPLT625A3	5, 6, 7, 8, 9
		T-OP II 4-way Splice Kit	SSPLT625A4	5, 6, 7, 8, 9
	35 kV T-OP II Separable Splices with 200 A Tap (Kits Do Not Include Required Threaded and Unthreaded Compression Connectors or Cable Adapters. Refer to 600 A Replacement Parts Page 25)	T-OP II Deadend Kit	SSPLT635A1	5, 6, 7, 8, 9
		T-OP II 2-way Splice Kit	SSPLT635A2	5, 6, 7, 8, 9
		T-OP II 3-way Splice Kit	SSPLT635A3	5, 6, 7, 8, 9
		T-OP II 4-way Splice Kit	SSPLT635A4	5, 6, 7, 8, 9

TABLE 4
Separable Splice Kits

Assembly	Splice Kit Contents						Order Separately (Refer to pg 25)		
	T-Body	Insulating Plug w/Cap	Insulating Plug w/Cap and Stud	Connecting Plug w/Stud	Loadbreak Reducing Tap Plug (Includes STUD-T)	Cable Adapter	Unthreaded Compression Connector	Threaded Coppertop Connector	
 Deadend	1	1	1	-	-	1	1	-	
 2-Way Splice	2	1	1	1	-	2	2	-	
 3-Way Splice	3	1	1	2	-	3	3	-	
 4-Way Splice	4	1	1	3	-	4	4	-	
 T-OP II Deadend	1	1	-	-	1	1	-	1	
 T-OP II 2-Way Splice	2	1	-	1	1	2	1	1	
 T-OP II 3-Way Splice	3	1	-	2	1	3	2	1	
 T-OP II 4-Way Splice	4	1	-	3	1	4	3	1	

Underground Surge Arresters

Our Metal Oxide Varistor Elbow (M.O.V.E.) and Parking Stand Arresters are used in pad-mounted transformer and entry cabinets, vaults, switching enclosures and other installations to provide shielded deadfront arrester protection. These arresters are designed for use with 200 A loadbreak interfaces to limit overvoltages to acceptable levels, protect equipment and extend cable life.

POSI-BREAK M.O.V.E. Elbow Arrester

The POSI-BREAK M.O.V.E. Arrester provides the same safety benefits of the POSI-BREAK connector system with over-voltage protection. Cooper Power Systems is the only manufacturer to offer a solution to the partial vacuum flashover in elbow arresters.

The POSI-BREAK M.O.V.E. Arrester is available for 9-21 kV for 25 kV class interfaces.

M.O.V.E. DirectConnect Elbow Arrester

M.O.V.E. DirectConnect Elbow Arresters are used on underground systems in pad-mounted transformer and entry cabinets, vaults, switching enclosures and other installations to provide shielded deadfront arrester protection. They are designed for use with 600 A, 35 kV Class deadbreak interfaces that conform to IEEE Std 386™ standard to limit overvoltages to acceptable levels, protect equipment and extend cable life.



M.O.V.E. DirectConnect Elbow Arrester Specification Information

Design Tests


- IEEE Std 386™-2006 standard, Separable Insulated Connector Systems
- IEEE Std C62.11 standard, Metal Oxide Surge Arresters for AC Power Circuits



DirectConnect Elbow Arrester.

TABLE 1
Commonly Applied Voltage Ratings of M.O.V.E. and Parking Stand Arresters

System Voltage (V rms)		Commonly Applied Arrester Duty-cycle (MCOV) Voltage Rating (kV rms) on Distribution Systems		
Nominal Voltage	Maximum Voltage	4-Wire Multigrounded Neutral Wye	3-Wire Low Impedance Grounded	Delta and 3-Wire High Impedance Grounded
2400	2540	–	–	3 (2.55)
4160 Y/2400	4400 Y/2540	3 (2.55)	6 (5.1)	6 (5.1)
4260	4400	–	–	6 (5.1)
4800	5080	–	–	6 (5.1)
6900	7260	–	–	9 (7.65)
8320 Y/4800	8800 Y/5080	6 (5.1)	9 (7.65)	–
12000 Y/6930	12700 Y/7330	9 (7.65)	12 (10.2)	–
12470 Y/7200	13200 Y/7620	9 (7.65) or 10 (8.4)	15 (12.7)	–
13200 Y/7620	13970 Y/8070	10 (8.4)	15 (12.7)	–
13800 Y/7970	14520 Y/8388	10 (8.4) and 12 (10.2)	15 (12.7)	–
13800	14520	–	–	18 (15.3)
20780 Y/12000	22000 Y/12700	15 (12.7)	21 (17.0)	–
22860 Y/12000	22000 Y/12700	15 (12.7)	21 (17.0)	–
24940 Y/14400	26400 Y/15240	18 (15.3)	27 (22.0)	–
27600 Y/15935	29255 Y/16890	21 (17.0)	–	–
34500 Y/19920	36510 Y/21080	27 (22.0) or 30 (24.4)	–	–
46000 Y/26600	48300 Y/28000	36 (29.0)	–	–

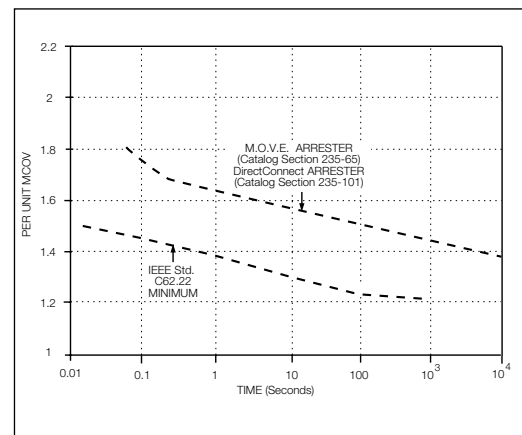

Temporary overvoltage curve. No prior duty at 85° C ambient.

The following notes apply to all part numbers on this page.

■ Digits 9 & 10 designate duty cycle voltage rating. For other protective characteristics, refer to Table 2 for M.O.V.E. and Parking Stand Arresters and Table 3 for DirectConnect Elbow Arresters.

■ Refer to page 17 for dimensional information or referenced catalog section.




Catalog Section	Description	kV Class	Base Part Number	MCOV (kV)	
	Metal Oxide Elbow (M.O.V.E.) Arrester	15 kV	3238018C03M	2.55	
			3238018C06M	5.1	
			3238018C09M	7.65	
			3238018C10M	8.4	
			3238018C12M	10.2	
			3238018C15M	12.7	
		25 kV	3238018C18M	15.3	
			3238019C09M	7.65	
			3238019C10M	8.4	
			3238019C12M	10.2	
			3238019C15M	12.7	
			3238019C18M	15.3	
		25 kV POSI-BREAK Elbow Arrester	3238019C21M	17.0	
			PLEA225N03	2.55	
			PLEA225N06	5.1	
			PLEA225N09	7.65	
			PLEA225N10	8.4	
			PLEA225N12	10.2	
		35 kV (Interface 1A Large Interface per IEEE Std 386™ standard)	PLEA225N15	12.7	
			PLEA225N18	15.3	
PLEA225N21	17.0				
3238020C18M	15.3				
3238020C21M	17.0				
3238020C24M	19.5				
235-65			3238020C27M	22.0	
			3238020C30M	24.4	
			3238020C33M	27	
			3238020C36M	29	
	Metal Oxide (MOV) Parking Stand Arrester	15 kV	3237686C03M	2.55	
			3237686C06M	5.1	
			3237686C09M	7.65	
			3237686C10M	8.4	
			3237686C12M	10.2	
			3237686C15M	12.7	
		25 kV	3237686C18M	15.3	
			3237758C09M	7.65	
			3237758C10M	8.4	
			3237758C12M	10.2	
			3237758C15M	12.7	
			3237758C18M	15.3	
235-68			3237758C21M	17.0	
			DCEA635M27	22.0	
			DCEA635M30	24.4	
			DCEA635M33	27.0	
235-101	M.O.V.E. DirectConnect Elbow Arrester	35 kV	DCEA635M36	29.0	
					

TABLE 2
M.O.V.E. and Parking Stand Arrester Protective Characteristics

Duty Cycle Voltage Rating (kV)	MCOV (kV)	Equivalent Front-of-Wave (kV crest)*	Maximum Discharge Voltage (kV crest) 8/20 μs Current Wave				
			1.5 kA	3 kA	5 kA	10 kA	20 kA
3	2.55	11	9	9.7	10.7	11.4	13
6	5.1	22	18.0	19.4	20.8	22.7	26
9	7.65	31.7	26	28	30	32.8	37.4
10	8.4	33	27	29.1	31.2	34.1	38.9
12	10.2	41.5	33.9	36.6	39.2	42.9	48.9
15	12.7	51.8	42.4	45.7	49	53.6	61.1
18	15.3	62.2	50.9	54.9	58.8	64.3	73.4
21	17.0	66	54.0	58.2	62.4	68.2	77.9
24	19.5	77	63.0	67.9	72.8	79.6	90.8
27	22.0	87.2	71.4	76.9	82.4	90.1	103
30	24.4	97.1	79.5	85.7	91.8	100.0	115.0
33	27	108	87.8	95.1	102	112	127
36	29	116	95.3	103	110	120	137

* Equivalent front-of-wave voltage is the expected discharge voltage of the arrester when tested with a 5 kA current surge cresting in 0.5 μs.

TABLE 3
M.O.V.E. DirectConnect Elbow Arrester Electrical Ratings and Characteristics

Duty Cycle Voltage Rating (kV)	MCOV (kV)	Front-of-Wave Protective Level* (kV crest)	Maximum Discharge Voltage 8/20 μs Current Wave (kV crest)				
			1.5 kA	3 kA	5 kA	10 kA	20 kA
27	22.0	105.0	75.0	82.0	87.4	96.2	110.0
30	24.4	112.0	79.5	85.7	91.8	100.0	115.0
33	27	108	87.8	95.1	102	112	127
36	29	116	95.3	103	110	120	137

* Equivalent front-of-wave voltage is the expected discharge voltage of the arrester when tested with a 5 kV current surge cresting in 0.5 μs.

Tools & Maintenance

Cooper Power Systems, Kearney operation offers a wide variety of Hi-Line™ Tools and maintenance equipment including Insulated Sticks, Fit-On™ Tools, Tree Trimmers, Fuse Pullers, Support and Tension Products, Tool Bags and Tool Racks, Cover-up Equipment, Jumpering/Grounding Equipment, Compression Tools, Cutters and Accessories.

Kearney also offers a wide range of connectors. Products include:

- Aqua Seal™ and Airseal™ Insulating and Sealing Material
- Compression Squeezon™ Connectors, Tee-Taps, Stirrups, Terminals, Grounding Lugs, Spacers
- Secondary Terminal Connectors, and a wide variety of sleeves

O-Tool Dies	
Catalog Number	
30554CPS	B
26994	D
48410	J
40495CPS	K
26993	O
30611CPS	P
40493CPS	T
30084	737
30450	781
30124	840
36181CPS	3/16
30154	1/4
30043	5/16
30042	3/8
30041	1/2
26958	9/16
30914	19/32
26992CPS	5/8-1
40114	11/16
Non-Bow Dies	
100625CPS	500
100600CPS	510
100613	620
100601	635
100618	702
100602	747
100609	845
100606	980
EEI Dies	
100603-7	7A
100603-9	9A
100603-11	11A
Other Dies & Accessories	
30744	BU-C
49341	Orange
36559	Plum
Wire Cutter Die for 2/0 ACSR Max	
30500	Plum























WH3 & PH13 Dies	
Catalog Number	
36457	D
36459-3	N
36467*	O
36472	U
36474*	15/16
36476*	840
36478*	781
36480*	737
36482CPS*	635
36484*	5/8-1
36486*	19/32
36488*	9/16
36490CPS*	1/2
36494CPS*	3/8
36496*	5/16
36498*	1/4
36828CPS*	P
36830CPS	C
36832CPS*	B-K-T
36834CPS*	747
36836*	572
36838*	510
40063*	727
40151CPS*	11/16
40517	1 1/4 (Hex)
49435*	3/4 (Hex)
49437*	29/32 (Hex)
100370CPS	15/16 (Hex)
100399	1-2 (Hex)
100400	1 1/8-2 (Hex)
100433CPS	1 5/16 (Hex)
100434CPS	1 1/2 (Hex)
100455	9/16 Wide
100456	840 Wide

* These dies may be used with adapter #100096 in PH3, PH4 and PH15 tools.

PH4 & PH15 Dies	
Catalog Number	
100472	D
100473	N
100474	U
100057	R
100470	1-2
100471	1-1/8-2
100440	1-5/16
100460	1-1/2
100459	1-5/8
100075	1-3/4
100096	Adapter
PH25 DIES	
100005	Die Holder
100006	3/8
100006-4	5/8-1
100006-6	11/16
100006-13	7/8
100006-14	15/16
100006-16	1- 1/8-1
100006-7	727
100006-8	737
100006-9	747
100006-12	840
100006-15	1.00 (Hex)
100006-18	D
100007-1	1 9/32 (Hex)
100007-2	1 5/16 (Hex)
100007-3	1 1/2 (Hex)
100007-4	1 5/8 (Hex)
100007-6	1 3/4 (Hex)
100007-9	2 1/8 (Hex)
100007-12	2 1/2 (Hex)
100007-13	N
100007-14	U
100007-23	R



Tool Bags and Cases for O-Tools			
For Tool Model	Description	Catalog Number	Net Wt. Each
O-60 Series	Steel Carrying Case	26962-5	9 lbs.
O-60 Series	Die Case	30642CPS	1 lb.

Catalog Section	Description	kV Class	Base Part Number	Notes
	TYPE "OS" TOOLS			
	 5/8 Fixed Die		OS50	
	 620 Fixed Die		OS-620	
K-SEC 131	Vinyl Holster		36692	
	TYPE O-62 TOOLS 5/8" FIXED NOSE DIE			
	 17" Straight Handles – Non-Insulated Head		O-62F	1, 4, 8
	 21" Straight Handles – Non-Insulated Head		O-62-21F	2, 4, 8
K-SEC 131	 17" Bent Handles – Non-Insulated Head		O-62-50F	3, 4, 8
	TYPE O-63 TOOLS WITH FIXED "O" NOSE DIE			
	 17" Straight Handles – Non-Insulated Head		O-63F	4, 5, 8
	 21" Straight Handles – Non-Insulated Head		O-63-21F	2, 4, 8
K-SEC 131	 17" Bent Handles – Non-Insulated Head		O-63-50F	3, 4, 8
	TYPE O-620 TOOLS WITH FIXED 620 NOSE DIE			
	 17" Straight Handles – Non-Insulated Head		O-620F	4, 7, 8
	 21" Straight Handles – Non-Insulated Head		O-620-21F	2, 4, 8
K-SEC 131	 17" Bent Handles – Non-Insulated Head		O-620-50F	3, 4, 8
	TYPE O-65 TOOLS WITH FIXED 5/8" AND "D" DIE			
	 17" Straight Handles – Non-Insulated Head		O-65FB	8, 9
	 21" Straight Handles – Non-Insulated Head		O-65-21FB	2, 8
K-SEC 131	 17" Bent Handles – Non-Insulated Head		O-65-50FB	3, 8
	TYPE O-68 TOOLS WITH FIXED "O" AND "D" DIE			
	 17" Straight Handles – Non-Insulated Head		O-68FB	8, 10
	 21" Straight Handles – Non-Insulated Head		O-68-21FB	2, 8
K-SEC 131	 17" Bent Handles – Non-Insulated Head		O-68-50FB	3, 8
	WH SERIES 12-TON COMPRESSION TOOLS			
	 Type WH3 12 Ton Compression Tool		WH3	11, 12, 13
K-SEC 131	12" Handles w/Case			
	PH13 SERIES 12-TON REMOTE HYDRAULIC TOOLS			
	 12 Ton, 4,000 PSI Remote Hydraulic Tool w/Case – 13" length		PH13-4	11
K-SEC 131	 12 Ton, 10,000 PSI Remote Hydraulic Tool w/Case – 12" length		PH13-10	11
K-SEC 131	 RH15 Remote Head, 15 Ton, 10,000 PSI		RH15-10	14
K-SEC 131	 PH25 Ton Power Operated Head 4,000 PSI w/Carrying Case		100017	

1. For an **insulated head**, insert a "-3" between the "2" and the "F". Example: 0-62-3F.
2. For an **insulated head**, replace the "1" with a "2".
3. For an **insulated head**, replace the "50" with a "53".
4. To include "D" insert die, add a "B" as the last character in the part number.
5. For an **insulated head**, insert a "-3" between the "3" and the "F". Example: 0-63-3F.
6. Consult customer service for availability.
7. For an **insulated head**, insert a "-3" between the "0" and the "F". Example: 0-620-3F.
8. Accepts Burndy® Type "W" dies.
9. For an **insulated head**, insert a "-3" between the "5" and the "F". Example: 0-65-3FB.
10. For an **insulated head**, insert a "-3" between the "8" and the "F". Example: 0-68-3FB.
11. For **tool without case**, insert a "K" as the first character in the part number.
12. For tool with **18" handles**, add a "-18" at the end of the part number or for **24" handles**, add a "-24".
13. Case standard is 12" handles. For 18" or 24" handles, case is replaced with a vinyl bag.
14. To add a **complete set of die holder assemblies**, insert a "K" as the first character in the part number.

Tools & Maintenance

1. Cutting capacity – Aluminum
1.2" O.D., Copper 600 kcmil.
2. Cutting capacity – Aluminum
1.75" O.D., Copper 750 kcmil.


Catalog Section	Description	kV Class	Base Part Number	Notes
Hand Operated Cutters				
	General Purpose Center Cut		0190FC 0113C (Cutter Head)	
	Heavy-Duty		0290MCX 0213CX (Cutter Head)	
	Ratchet – Type Soft Cable		8690FSK 8613FSK (Cutter Head)	
	Ratchet – Type Hard Cable		8690FH 8613FH (Cutter Head)	
	Ratchet – Type Guy Strand		8690CK 8613CK (Cutter Head)	
	Ratchet – Type Wire Rope		8690TN 8613TN (Cutter Head)	
	ACSR Wire Rope and Cable		0290FHJ	
	Shear – Type Hand Operated		0290FCS 0213CSS (Cutter Head)	
	Compact Electric Cable		0890CSJ	
K-SEC 131	Compact Ratcheting Cable		6990FHL	
Ratchet Cable Cutters				
K-SEC 131	Cable Cutting Tool		CK500A CK750A	1 2
	Clampstick		See Table 1	
	Clampstick, Cam-EL™		See Table 1	
	Clampstick, Hinged		See Table 1	
325-30	Clampstick Leverage Tool		CS125UFLTOOL	



18" Fit-On Leverage tool provides mechanical advantage during loadbreak switching.

Note: Use external rod clampsticks only.



Table 1 Clampstick Significant Digit Catalog Number System

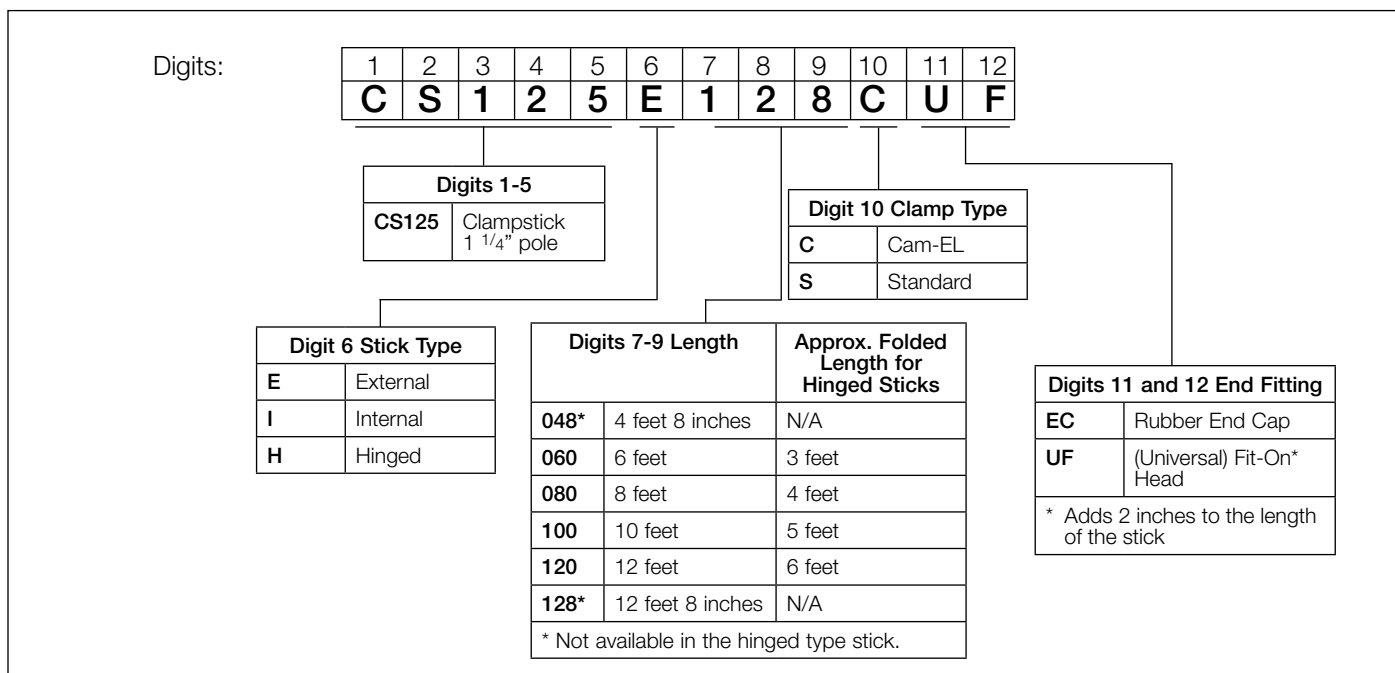

Catalog Section	Description	kV Class	Base Part Number	Notes
Temporary Grounding Sets				
	Single-Phase Three-Clamp Set Pad-mounted		133040 (1/0 Black Cable)	
	Three-Phase Four-Clamp Set Pad-mounted		133040-1 (1/0 Black Cable) 133040-2 (2/0 Black Cable)	
	Single Replacement Clamp for 1/0 Cable		133045CPS	
K-SEC 200	Single Replacement Clamp for 2/0 Cable		133045Z20	
GROUNDING ELBOWS				
	Grounding Elbow	15 kV	GE215-1Y06-1/0 Cable GE215-2Y06-2/0 Cable	1
		25 kV	GE225-1Y06-1/0 Cable GE225-2Y06-2/0 Cable	1
		35 kV	GE235-1Y06-1/0 Cable GE235-2Y06-2/0 Cable	1
K-SEC 200				
	Grounding Kit	15 kV	GE215-1Y06-K1	2
			GE215-2Y06-K1	3
			GE215-1Y06-K3	4
			GE215-2Y06-K3	5
		25 kV	GE225-1Y06-K1	2
			GE225-2Y06-K1	3
35 kV	GE225-1Y06-K3	4		
	GE225-2Y06-K3	5		
K-SEC 200		GE235-1Y06-K1 GE235-2Y06-K1	2 3	
INSULATING AND SEALING MATERIALS				
Aqua Seal				
	3 3/4" x 3 3/4" Pads – 25 per Box		104742-2	6
	3 3/4" x 10' Roll		104742	6
Air Seal				
325-24	4" x 4" Pads – 25 per Box		18415-8	6
	4" x 10' Roll		18415-3	6
KEARNALEX™ INHIBITOR				
Specification 118 (Non-Petroleum Base)				
	4 oz. Plastic Dispenser Bottle		30584-25	
	8 oz. Plastic Dispenser Bottle		30584-3	
	8 oz. Plastic Dispenser Bottle – Gritless		30584-30	
CONDUCTOR CLEANING BRUSHES				
	Hand Element and Replacement Brush for Fit-On Head – 477 kcmil ACSR MAX		48900	
	Hand Element and Replacement Brush for Fit-On Head– 954 kcmil ACSR MAX		48900-2	
	V-Brush with Handle and Guard		118004	
325-30	Single Replacement Brush for V-Brush		19100	

1. Clamp and ferrule are not included with the grounding elbow.
2. Single kit with (1) elbow with 1/0 cable, (1) portable feedthru, (1) protective cap and (1) test probe in a carrying bag.
3. Single kit with (1) elbow with 2/0 cable, (1) portable feedthru, (1) protective cap and (1) test probe in a carrying bag.
4. Triple kit with (3) elbows with 1/0 cable, (3) portable feedthrus, (3) protective caps and (1) test probe in a carrying bag.
5. Triple kit with (3) elbows with 2/0 cable, (3) portable feedthrus, (3) protective caps and (1) test probe in a carrying bag.
6. Other material sizes available.

Bushings

Cooper Power Systems has a full line of one-piece bushings, bushing wells, bushing well inserts, and feed-thru inserts for installation on transformers and/or sectionalizing cabinets. The 15 kV and 25 kV class bushing inserts use a knurled piston providing maximum copper-to-copper current transfer and maximum thermal stability. After fault close operation, it locks the piston in the outward position, providing a visible indication against dangerous repetitive fault closure.

Type Primary Bushings	Current Rating (A)	Voltage Rating (kV)
Bushing wells	200	15, 25, 35
Integral loadbreak bushing 3Ø rated	200	35
Deadbreak apparatus bushing	600	15/25, 35
Deadbreak PUSH-OP Apparatus Bushing	600	15/25, 35



200 A Integral Loadbreak Bushing Specification Information


- 200 A, 35 kV three-phase rated integral load-break bushing meeting the requirements of IEEE Std 386™ standard No. 1A (large 35 kV class interface).
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

600 A PUSH-OP Deadbreak Bushing Specification Information


- 600 A Deadbreak Apparatus Bushing shall be compatible with Cooper 600 A PUSH-OP Connectors.
- Complete with plated copper finger contacts to accept PUSH-OP probe, to achieve a non-bolted connection.
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

200 A HTN Tri-Clamp Bushing Well Specification Information

- Molded-In Semi-Conductive Shield.
- 35 kV, 150 kV BIL.
- HTN Material.
- Removable stud shall have provisions for easy removal of broken parts from both the bushing well and insert.
- Voltage and current ratings in accordance with IEEE Std 386™ standard.

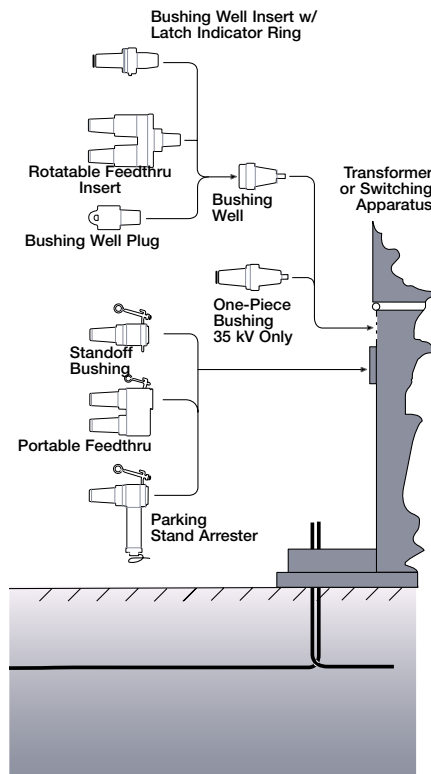

200 A Applications

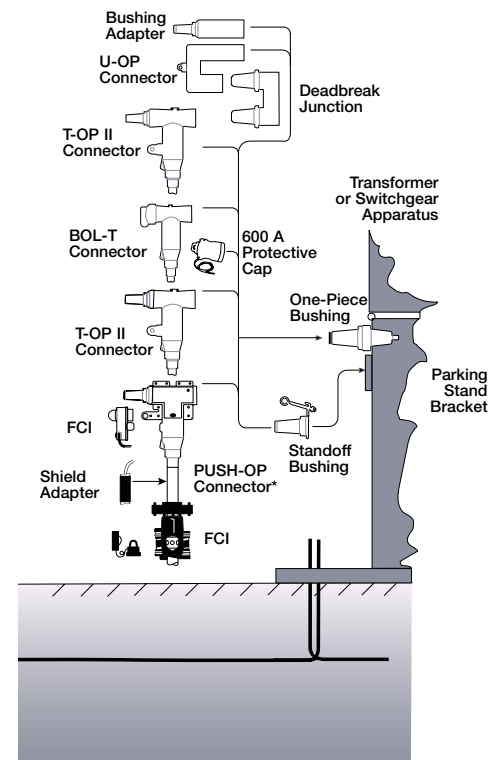

600 A Applications

Catalog Section	Description	kV Class	Base Part Number	Notes
 800-32	200 A Plastic (HTN) TRI-Clamp Bushing Well 2 9/16" Dia Hole Size	15/25/35 kV	BW150F (with fixed stud) BW150R (with removable stud)	2
 800-33	200 A Plastic (HTN) Bushing Well 2 9/16" Dia.Hole Size	15/25/28 kV	2638372C01 (with fixed stud) 2638372C02R (with removable stud)	1, 2, 5 1, 2, 5
 800-34	200 A Epoxy Bushing Well 2 9/16" Dia.Hole Size	15/25/28 kV	2603973B02T (with fixed stud) 2603973B02R (with removable stud)	1, 2 1, 2
 800-39	200 A Three-Phase Integral Loadbreak Bushing	35 kV	2637024C01M (Externally Clamped – 2 3/4")	3
 800-45 800-47	600 A Deadbreak Bushing (Externally Clamped without Stud)	15/25 kV	2637019B02 (Aluminum)	3
		15/25 kV	2637019B04 (Copper)	3
		35 kV	2637459C01 (Aluminum) (2 9/16")	3
		35 kV	2637459C02 (Copper) (2 9/16")	3
 800-46 800-48	600 A Deadbreak PUSH-OP Bushing (Externally Clamped)	15/25 kV	2637604C01 (2 9/16")	4
		35 kV	2637939C01	4
3-STUD CLAMPS				
 800-33 800-34	4.688 B.C. w/flange 4 Bail Tabs	15/25/35 kV	2085399A01 2085399A02 (Stainless Steel)	
4-STUD CLAMPS				
 800-33 800-34	3.25 C-C 2 Bail Tabs	15/25/28 kV	2606821A01 2606823A02	
800-39 800-45 800-46 800-47	3.25 C-C 4 Bail Tabs	15/25/28 kV	2606823A04	
800-48	3.90 C-C	35 kV	2603989B01	
800-32 800-33	3.43 C-C (600 A) 2 9/16" Dia. Hole Gasket	15/25/35 kV	2637023B01 0537980C22	
800-34	2 9/16" Dia. Hole Gasket	15/25 kV	0537980C07	
800-39	2 3/4" Dia. Hole Gasket	35 kV	0537980C12	
800-45 800-46 800-47 800-48	2 9/16" Dia. Hole Gasket	15/25/35 kV	0537980C06	
800-32 800-33 800-34	Red Shipping Cap	15/25/35 kV	2638640C01	
800-39	Red Shipping Cap	35 kV	2606754A03	
800-45 800-46 800-47 800-48	Red Shipping Cap	15/25/35 kV	2637700B02	
800-32 800-33 800-34	Removable Stud (Well) Replacement Kit	15/25/28/35 kV	2639081B01B	
800-45 800-47	Removable Threaded Stud (600 A Bushings)	15/25 kV	STUD-A (Aluminum) STUD-C (Copper)	
		35 kV	STUD635-A (Aluminum) STUD635-C (Copper)	
800-39	Contact Tube Assembly	35 kV	2637407B03B	
800-39	Contact Tool Replacement Tool	35 kV	2637585B01	
800-46 800-48	PUSH-OP Bail Bracket Assembly	15/25/35 kV	2638772B03M	6
800-46 800-48	PUSH-OP Bracket Alignment Fixture	15/25/35 kV	2637904C01	
800-32	Grounding tab	15/25/35 kV	0739658A02	

1. Clamp must be ordered separately.
2. Bushing includes gasket and shipping cap.
3. Clamp and gasket must be ordered separately.
4. Clamp, gasket and bracket assembly must be ordered separately.
5. For **35 kV (150 kV BIL)** add "S" to end of the part number.
6. Latch handle standard on left side. For **latch handle on right side**, change digit 10 from a "3" to a "5".

Cooper Power Systems offers fuses under multiple tradenames: Cooper, Kearney, McGraw-Edison and Combined Technologies™. We have the broadest range of overcurrent protective devices to meet your application needs.

Bay-O-Net Fuse Assembly

In the late 1960s, we introduced the Bay-O-Net Assembly and links to the industry for pad-mounted transformer protection. The Bay-O-Net Fuse has grown into the industry standard protection package for single- and three-phase transformers. The assembly combines the ease of hotstick operation with the safety of deadfront construction and is used with an isolation link to prevent line personnel from closing into a fault when replacing a blown Bay-O-Net Link. Alternately, a backup, current-limiting fuse can be used in place of the isolation link to increase interrupting ratings to 50 kA.



Flapper™ Valve Bay-O-Net Assembly Specification Information

- Bay-O-Net Assembly shall include a valve that will shut when the inner holder is removed from the housing and minimize oil from spilling out of the Bay-O-Net Assembly.








TransFusion™ Coordination Program

This free, web-based, easy-to-use coordination tool makes transformer protective device selection for pad-mounted transformers effortless. By simply inputting a few pieces of data and selecting the desired level of protection, you can quickly find the right Cooper Power Systems ELSP fuse, Bay-O-Net fuse, or MagneX Interrupter for your application. The TransFusion Coordination Program provides you the flexibility of trying various combinations before deciding on the one that best fits your application needs. A simple click of the print button allows you to print your TCC curves and part numbers.

Go to this site for your coordination program
www.coopertransfusion.com.

TABLE 1
ELSP Fuse Combinations

Voltage (kV)	Current Rating (A)	ELSP Part Numbers	Description
8.3	30	CBUC08030C100	8.3 kV 30 A
	40	CBUC08040C100	8.3 kV 40 A
	50	CBUC08050C100	8.3 kV 50 A
	65	CBUC08065C100	8.3 kV 65 A
	80	CBUC08080C100	8.3/9.9 kV 80 A
	100	CBUC08100C100	8.3/9.9 kV 100 A
	125	CBUC08125C100	8.3 kV 125 A
	150	CBUC08150D100	8.3 kV 150 A
	165	CBUC08165D100	8.3 kV 165 A
	180	CBUC08180D100	8.3 kV 180 A
9.9	250	CBUC08250D100	8.3 kV 250 A
	30	CBUC09030C100	9.9 kV 30 A
	40	CBUC09040C100	9.9 kV 40 A
	50	CBUC09050C100	9.9 kV 50 A
15.5	65	CBUC09065C100	9.9 kV 65 A
	30	CBUC15030C100	15.5 kV 30 A
	40	CBUC15040C100	15.5 kV 40 A
	50	CBUC15050C100	15.5 kV 50 A
	65	CBUC15065C100	15.5 kV 65 A
	80	CBUC15080C100	15.5/17.2 kV 80 A
	100	CBUC15100C100	15.5/17.2 kV 100 A
	125	CBUC15125C100	15.5/17.2 kV 125 A
	150	CBUC15150D100	15.5 kV 150 A
17.2	165	CBUC15165D100	15.5 kV 165 A
	180	CBUC15180D100	15.5 kV 180 A
	30	CBUC17030C100	17.2 kV 30 A
	40	CBUC17040C100	17.2 kV 40 A
23	50	CBUC17050C100	17.2 kV 50 A
	65	CBUC17065C100	17.2 kV 65 A
	30	CBUC23030C100	23 kV 30 A
	40	CBUC23040C100	23 kV 40 A
	50	CBUC23050C100	23 kV 50 A
	65	CBUC23065C100	23 kV 65 A
	80	CBUC23080C100	23 kV 80 A
	100	CBUC23100C100	23 kV 100 A
23 kV fuse for use on 35 kV systems	125	CBUC23125D100	23 kV 125 A
	150	CBUC23150D100	23 kV 150 A
	165	CBUC23165D100	23 kV 165 A
	150	CBUC35150D100	23 kV 150 A fuse for use on a 35 kV System

Catalog Section	Description	kV Class	Base Part Number	Notes
SIDE- AND COVER-MOUNTED BAY-O-NET FUSE ASSEMBLY				
	Flapper Side Wall-Mount		4000361C99FV	
	Side Wall		4000361C99MC	
	w/o Flapper Valve			
	Cover-Mount (Short)		40001177B51MC	
240-40	Cover-Mount (Long)		40001177B53MC	
CURRENT SENSING BAY-O-NET FUSE LINK				
	6 A		4000353C04	1, 3, 4
	10 A		4000353C06	1, 3, 4
	15 A		4000353C08	1, 3, 4
	25 A		4000353C10	1, 3, 4
	40 A		4000353C12	1, 3, 4
	65 A		4000353C14	1, 3, 4
	100 A		4000353C16	1, 3, 4
	240-45	140 A		4000353C17
DUAL SENSING BAY-O-NET FUSE LINK				
	3 A		4000358C03	1, 3, 4
	8 A		4000358C05	1, 3, 4
	15 A		4000358C08	1, 3, 4
	25 A		4000358C10	1, 3, 4
	50 A		4000358C12	1, 3, 4
	65 A		4000358C14	1, 3, 4
	100 A		4000358C16CB	1, 3, 4
	240-46	140 A		4000358C18CB
DUAL ELEMENT BAY-O-NET FUSE LINK				
	5 A		4038108C03	1, 3, 4
	6 A		4038108C04	1, 3, 4
	8 A		4038108C05	1, 3, 4
	12 A		4038108C06	1, 3, 4
	15 A		4038108C07	1, 3, 4
	25 A		4038108C09	1, 3, 4
	40 A		4038108C11	1, 3, 4
	50 A		4038108C12	1, 3, 4
	240-48	65 A		4038108C14
HIGH AMPERE OVERLOAD BAY-O-NET FUSE LINK				
	65 A		4038361C03CB	2, 3, 4
	100 A		4038361C04CB	2, 3, 4
	125 A		4038361C05CB	2, 3, 4
	240-49	Shorting Bar (Solid Link)		4038361C10CB
ISOLATION LINK				
240-47			3001861A_ _ _	3
ELSG FULL RANGE				
	240-82	Current-Limiting Fuse	359_ _ _M_ _M (See Table 2 Below)	
	ELSP BACKUP			
	240-98	Current-Limiting Fuse	CBUC_ _ _ _ _ (See Table 1 Page 46)	

1. Add suffix "B" to order **individual fuse**; add "M" to order **bag of 50**.
2. When ordering high ampere overload Bay-O-Net Fuse Link, a silver-plated Bay-O-Net Fuse Assembly, part number 4038804B03M, must be ordered.
3. To coordinate an isolation link with a Bay-O-Net Fuse when an ELSP Fuse is not used, see Catalog Section 240-47.
4. For recommended ELSP backup CLF ratings, see Catalog Section 240-98 or TransFusion Coordination Program.

TABLE 2
E-rated ELSG Fuse Ordering Information for 15 kV Wetwell Holder*

E-Rating	Continuous Current Rating (A)	Fuse kV and Catalog Number		E-Rating	Continuous Current Rating (A)	Fuse kV and Catalog Number	
		8.3 kV	15.5 kV			8.3 kV	15.5 kV
4	9	3593004M02M	3594004M83M	65	92	-	3594065M83M
8	14	3593008M02M	3594008M83M	65	95	3593065M01M	-
12	18	3593012M02M	3594012M83M	80	106	-	3594080M83M
15	24	3593015M02M	3594015M83M	80	125	3593080M01M	-
20	34	3593020M02M	3594020M83M	100	130	-	3594100M83M
25	35	3593025M02M	3594025M83M	100	155	3593100M01M	-
30	46	3593030M02M	3594030M83M	120	150	-	3594120M83M
40	53	3593040M02M	3594040M83M	125	180	3593125M01M	-
50	65	3593050M02M	3594050M83M	150	200	-	3594150M83M
60	76	3593060M02M	3594060M83M				

* 15 kV Wetwell Holder part numbers KP3437322C1M (mild steel). For 25 kV and 35 kV ordering information, refer to Catalog Section 240-82.

MagneX Single-Phase Interrupter

The MagneX™ Single-Phase Interrupter offers a solution to the utility wanting to eliminate oil exposure in the field when operation occurs due to transformer overloads. There is no need for replacement fuse links, resulting in economic value to the user. In addition, a MagneX Interrupter in series with a back-up, current-limiting fuse offers additional protection.

TABLE 1
Voltage Ratings and Characteristics

Description	Rating
Impulse 1.2x50 Microsecond Wave	150 kV
60 Hz-1 Minute Voltage Withstand	50 kV
Continuous Current Rating	42 A
Switching Load Currents, 200 Times	42 A
Magnetizing Current Switching	200 Times

Continuous current ratings and dielectric testing are in accordance with ANSI/IEEE Std C57.12™ standard. Switching and Fault Close IEEE Std C37.41™ standard. Overload Protection IEEE Std C57.41™ standard.


TABLE 2
Interrupting Rating

Voltage kV-LG	RMS Symmetric (A)	RMS Asymmetric (A)
8.3	2800	4200
15.5	1500	2250
23.0	500	750



TABLE 3
MagneX Significant Digit Catalog Number System

Example: To order a single-phase MagneX Interrupter without indicator, single-phase trip, with float and E12 sensor, the catalog number would be **MX1BN1SYE12**. (Refer to Catalog Section 240-34.)

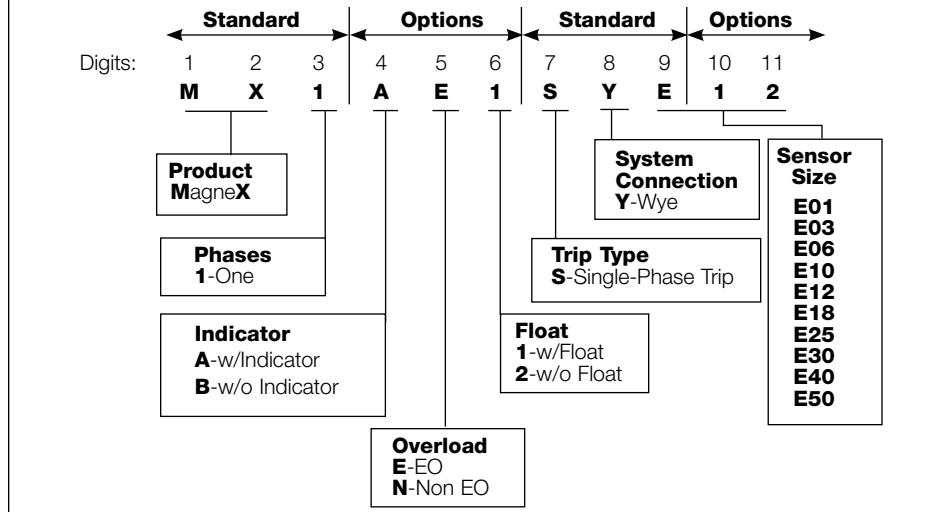

To select the correct isolation link, use Table 1 to cross reference the isolation link to the selected MagneX sensor. **An isolation link is required if the MagneX is not in series with a current-limiting fuse.**

TABLE 4
Isolation Link - MagneX Correlation Chart

Sensor Number	Isolation Link
E01	3637803B01
E03	3637803B08
E06	3637803B02
E10	3637803B09
E12	3637803B10
E18	3637803B03
E25	3637803B03
E30	3637803B05
E40	3637803B05
E50	3637803B05

ORDERING INFORMATION

Use Table 6 to determine the correct MagneX Interrupter suffix (sensor number) for the application.

Use Table 3 to determine the catalog number.

When ordering a MagneX Interrupter with a standard handle, a hardware kit must be ordered separately. Use Table 7 to determine the hardware kit catalog number.

To select the correct isolation link, use Table 4 to cross reference the isolation link to the selected MagneX Interrupter.

An isolation link is required if the MagneX is not in series with a current-limiting fuse.

Example – MagneX Interrupter with an emergency overload, indicator, and a float in series with an ELSP Current-Limiting Fuse for a single-phase, 7.2 kV phase-to-ground, 25 kVA transformer, specify:

- 1 – 40 A ELSP Fuse 3543040M61M
- 1 – MagneX Interrupter MX1AE1SYE06
- 1 – Hardware Kit (with Emergency Overload, indicator, and no adaptor) 3638535A05

See the following Catalog Sections for further information:

ELSP Fuse Holder 240-53

ELSP Current-Limiting Backup Fuse 240-98

MagneX with Current-Limiting Fuse

To order a MagneX Interrupter and current-limiting fuse combination, see Table 5.

TABLE 5
Hardware Kits

Description	Catalog Number
Without emergency overload	3638535A04
With emergency overload	3638535A05
With adaptor without emergency overload	3638535A07
With adaptor with emergency overload	3638535A08
Hotstick adaptor only	3639585A01

Using TCC Curves

To determine or confirm the MagneX Interrupter will coordinate with upstream and down stream system requirements, use the time-current characteristic curves (See R240-91-310). For full size TCC curves, contact your Cooper Power systems representative.



MagneX with hotstick adapter and indicator

TABLE 6
Single-Phase Transformer (Phase-to-Ground) Applications Correlation Chart

kVA/kV	Primary Voltage kV										
	2.4	4.16	4.8	6.9	7.2	7.62-7.97	8.32	12.00	12.47-13.2	13.8-14.4	19.92
10	E06	E06	E03	E03	E03	E03	E03	E01	E01	E01	E01
15	E10	E06	E06	E03	E03	E03	E03	E03	E03	E03	E03
25	E18	E10	E10	E06	E06	E06	E06	E03	E03	E03	E03
37.5	E25	E18	E12	E10	E10	E10	E10	E06	E06	E06	E06
50	E30	E18	E18	E12	E12	E12	E10	E06	E06	E06	E06
75	E50	E30	E25	E18	E18	E18	E18	E10	E10	E10	E06
100	-	E40	E30	E25	E25	E25	E18	E12	E12	E12	E10
167	-	-	E50	E40	E40	E30	E30	E18	E18	E18	E12

Notes:

Recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves, R240-91-310.
- Deration factor of 0.5% per °C above 25 °C.
- Allowable loading greater than 140% for four hours in accordance with IEEE Std C57.91™-1981 standard Guide for Loading Distribution Transformers, Table 6.

TABLE 7
Recommended MagneX Interrupter Sensor and ELSP Current-Limiting Fuse Combinations

Nominal Single Phase (kV Phase-to-ground)	8.3 kV			15.5 kV		23 kV
	2.4	4.16-4.8	6.9-8.0	12.0-14.4	16.34	19.92
10 kVA ELSP Rating with Emergency Overload MagneX Element	30 E06	30 E03	30 E03	30 E01	30 E01	30 E01
15 kVA ELSP Rating with Emergency Overload MagneX Element	50 E10	30 E06	30 E03	30 E03	30 E01	30 E01
25 kVA ELSP Rating with Emergency Overload MagneX Element	80 E18	50 E10	30 E06	30 E03	30 E03	30 E03
37.5 kVA ELSP Rating with Emergency Overload MagneX Element	100 E18	80 E12	50 E10	30 E06	30 E03	30 E03
50 kVA ELSP Rating with Emergency Overload MagneX Element	150 E30	100 E18	50 E12	30 E06	30 E06	30 E03
75 kVA ELSP Rating with Emergency Overload MagneX Element	150 E40	125 E25	100 E18	40 E10	30 E06	30 E06
100 kVA ELSP Rating with Emergency Overload MagneX Element	250 E50	165 E40	100 E18	50 E12	40 E10	30 E06
167 kVA ELSP Rating with Emergency Overload MagneX Element	- -	180 E50	150 E40	80 E18	80 E18	50 E12

Notes:

Table shows minimum recommended ELSP Fuse ratings. Recommended ELSP Backup Fuse (described in Catalog Section 240-98) will coordinate with the MagneX Interrupter and melt on internal transformer faults. The MagneX Interrupter recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves R240-91-310.
- Deration factor of 0.5% per °C above 25°C.
- Allowable loading greater than 140% for four hours in accordance with IEEE Std C57.41™-1981 standard guide for Loading Distribution Transformers, Table 6.

MagneX Three-Phase Interrupter

The Three-Phase MagneX Interrupter offers a solution to the utility wanting to eliminate oil exposure in the field when operation occurs due to transformer overloads. There is no need for replacement fuse links, resulting in economic value to the user. In addition, a MagneX Interrupter in series with a back-up, current-limiting fuse offers additional protection.

MagneX Interrupter Specification Information

- Breaker shall be installed on the primary side of transformer.
- Breaker shall have the capability to energize and de-energize the 3Ø transformer by one hotstick operation.

TABLE 1
Voltage Ratings and Characteristics

Description	kV	Rating
Impulse 1.2x50 Microsecond Wave	150 kV	-
60 Hz-1 Minute Voltage Withstand	50 kV	-
Continuous Current Rating	-	42
Switching Load Currents	-	42

Continuous current ratings and dielectric testing are in accordance with IEEE Std C57.12™ standard.
Switching and Fault Close IEEE Std C37.41™ standard.
Overload Protection IEEE Std C57.41™ standard.

TABLE 2
Interrupting Rating


Voltage kV-LG (A)	RMS Symmetric (A)	RMS Asymmetric (A)
8.3	2800	4200
15.5	1500	2250
23.0	500	750

TABLE 3
Hardware Kits

Description	Catalog Number
Standard Handle Kit & Hardware without Emergency Overload	3638535A09

TABLE 4
MagneX Significant Digit Catalog Number System

Example: To order a two- or three- phase MagneX Interrupter without indicator, single- and three-phase trip, with float and E12 sensor, the catalog number would be **MX3BN1SYE12**. (Refer to Catalog Section 240-33.)

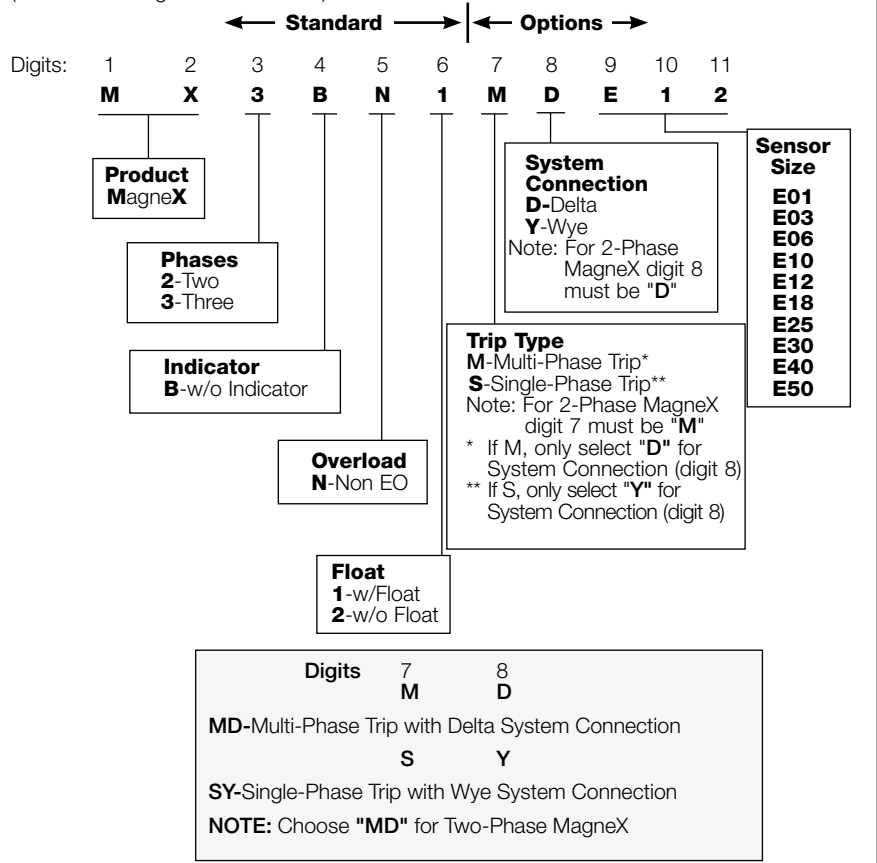

ORDERING INFORMATION

Use Table 6 to determine the correct MagneX Interrupter suffix (sensor number) for the application.

Use Table 3 to determine the catalog number.

When ordering a MagneX Interrupter with a standard handle, a hardware kit must be ordered separately. Use Table 7 to determine the hardware kit catalog number.

To select the correct isolation link, use Table 4 to cross reference the isolation link to the selected MagneX Interrupter. An isolation link is recommended if the MagneX is not in series with a current-limiting fuse.

TABLE 9
Isolation Link – MagneX Correlation Chart

Sensor Number	Isolation Link	Sensor Number	Isolation Link
E01	3637803B01	E18	3637803B03
E03	3637803B08	E25	3637803B03
E06	3637803B02	E30	3637803B05
E10	3637803B09	E40	3637803B05
E12	3637803B10	E50	3637803B05

TABLE 7
Two-Phase MagneX Recommendations

kVA/kV	Primary Voltage kV										
	2.4	4.16	4.8	6.9	7.2	7.62-7.97	8.32	12.00	12.47-13.2	13.8-14.4	19.92
10 15	E06 E10	E06 E06	E03 E06	E03 E03	E03 E03	E03 E03	E03 E03	E01 E03	E01 E03	E01 E03	E01 E01
25 37.5	E18 E25	E10 E18	E10 E12	E06 E10	E06 E10	E06 E10	E06 E10	E03 E06	E03 E06	E03 E06	E03 E03
50 75	E30 E50	E18 E30	E18 E25	E12 E18	E12 E18	E12 E18	E10 E18	E06 E10	E06 E10	E06 E10	E06 E06
100 167	- -	E40 -	E30 E50	E25 E40	E25 E40	E25 E30	E18 E30	E12 E18	E12 E18	E12 E18	E10 E12

Notes:

Recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves, **R240-91-310**.
- Deration factor of 0.5% per °C above 25 °C.
- Allowable loading greater than 140% for four hours in accordance with IEEE Std C57.91™-1981 standard Guide for Loading Distribution Transformers, Table 6.

TABLE 8
Recommended Two-Phase MagneX Interrupter and ELSP Current-Limiting Fuse Combinations

Nominal Single Phase (kV Phase-to-ground)	8.3 kV			15.5 kV		23 kV
	2.4	4.16-4.8	6.9-8.0	12.0-14.4	16.34	19.92
10 kVA ELSP Rating with Emergency Overload MagneX Element	30 E06	30 E03	30 E03	30 E01	30 E01	30 E01
15 kVA ELSP Rating with Emergency Overload MagneX Element	50 E10	30 E06	30 E03	30 E03	30 E01	30 E01
25 kVA ELSP Rating with Emergency Overload MagneX Element	80 E18	50 E10	30 E06	30 E03	30 E03	30 E03
37.5 kVA ELSP Rating with Emergency Overload MagneX Element	100 E18	80 E12	50 E10	30 E06	30 E03	30 E03
50 kVA ELSP Rating with Emergency Overload MagneX Element	150 E30	100 E18	50 E12	30 E06	30 E06	30 E03
75 kVA ELSP Rating with Emergency Overload MagneX Element	150 E40	125 E25	100 E18	40 E10	30 E06	30 E06
100 kVA ELSP Rating with Emergency Overload MagneX Element	250 E50	165 E40	100 E18	50 E12	40 E10	30 E06
167 kVA ELSP Rating with Emergency Overload MagneX Element	- -	180 E50	150 E40	80 E18	80 E18	50 E12

Notes:

Table shows minimum recommended ELSP Fuse ratings. Recommended ELSP Backup Fuse (described in Catalog Section 240-98) will coordinate with the MagneX Interrupter and melt on internal transformer faults. The MagneX Interrupter recommendations are based on:

- Minimum trip curves, and Maximum trip and clear curves **R240-91-310**.
- Deration factor of 0.5% per °C above 25°C.
- Allowable loading greater than 140% for four hours in accordance with IEEE Std C57.41™-1981 standard guide for Loading Distribution Transformers, Table 6.

Faulted Circuit Indicators

Cooper Power Systems offers a wide variety of faulted circuit indicators (FCIs) ranging from basic circuitry models in the Delayed Reset style to the more sophisticated circuitry of the Test Point Reset and Electrostatic Reset types. Our S.T.A.R.™ Faulted Circuit Indicator product line offers six basic types of FCIs and each unit is tailored to be the most reliable for the intended application. Each type varies by reset method and the type of system it connects to.

Standard S.T.A.R. features include:

- **LO/Hi Trip Rating Selection** – Innovative trip ratings greatly simplify FCI selection application
- **Current Transformer Sensing Design** – For maximum trip accuracy and elimination of false tripping on adjacent cable events
- **Inrush Restraint** – Eliminates false tripping by ignoring inrush currents caused by reclosing operations of protective devices on the system. A dead time of 200 ms will activate the inrush restraint feature.
- **Low-Pass Filter Technology** – Prevents false tripping due to capacitive cable discharge
- **Design Tested to IEEE Std 495™ standard and Manufactured in ISO 9001 Facility** – To ensure highest performance and quality


In addition to the above features, the Pathfinder™ FCIs include:

- **Variable Trip Technology** – Single trip rating for one-size-fits-all application
- **Auto Adjusting Trip Technology** – Detects average load current over time above or below 75 A and adjusts trip rating to 200 A or 800 A automatically.
- **Self Adjusting Reset Restraint** (test point mounted model) – “Learns” your system voltage and won’t allow false resetting due to backfeed voltage
- **BLOC™** – Battery Life Optimization Circuitry for maximizing battery life
- **Remote Fiber Optic Cable** (test point mounted model) – Optional remote for convenient remote indication











Pathfinder Test Point Faulted Circuit Indicator Specification Information

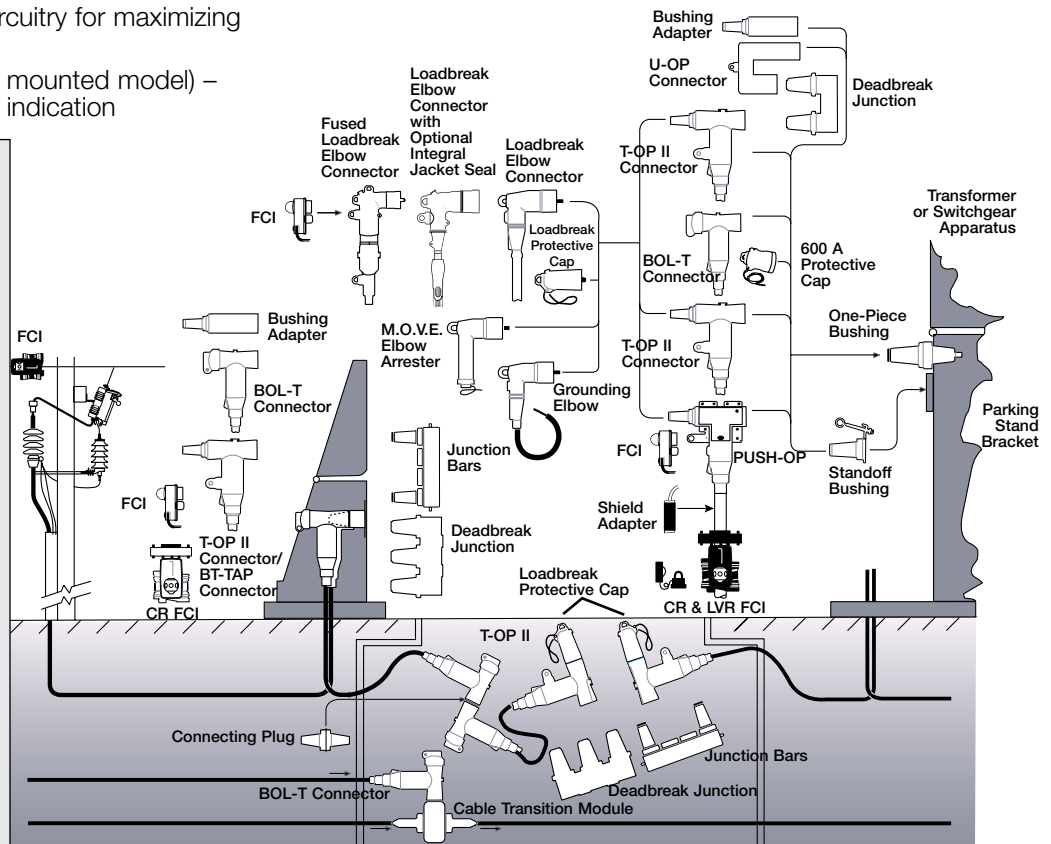- Fault indication on minimum 200 A di/dt within 100 ms (variable trip).
- Response time of 3 ms or less, for coordination with current-limiting fuses (fixed trip).
- Inrush restraint to prevent false tripping due to current inrush conditions.
- Low pass filter specifically tuned to prevent false tripping on high frequency transients, but to allow proper indication on systems using current-limiting fuses.
- Temperature compensation for accurate and reliable performance over a temperature range of -40 °C to +85 °C.
- Reset restraint to prevent false reset due to excessive voltage feedback levels up to 80% of nominal system voltage (STVT).
- Installation using single hotstick.



For 15 kV, 25 kV and 35 kV Class


Catalog Section	Description	Base Part Number	Notes
	TEST POINT RESET		
	Adapter Kit	STAK	4
	High (HI)-Trip	STHI	1
	High (HI)-Trip w/Aux. Contact	STHIA	1
	High (HI)-Trip w/Adapter Kit	STHIK	
	Low (LO)-Trip	STLO	1
	Low (LO)-Trip w/Aux. Contact	STLOA	1
320-40	Low (LO)-Trip w/Adapter Kit	STLOK	
	PATHFINDER TEST POINT RESET		
	Variable Trip	STVT	
	Variable Trip w/Aux. Contact	STVTA	
	Fiber Optic Remote Cable (6 ft.)	SFOC	2
	Reset Tool	SMRT	4
	Adapter Kit	STAK	4
320-42			
	LOW VOLTAGE RESET		
	High (HI)-Trip	SLHI	3
	High (HI)-Trip w/Aux. Contact	SLHIA	3
	Low (LO)-Trip	SLLO	3
	Low (LO)-Trip w/Aux. Contact	SLLOA	3
320-50			
	ELECTROSTATIC RESET		
	High (HI)-Trip	SEHI	
	High (HI) Trip with LED (Light Emitting Diode) Indication	SEHIL	
	Low (LO)-Trip	SELO	
	Low (LO) Trip with LED (Light Emitting Diode) Indication	SELOL	
	Replaceable Battery	SRPB	4
320-60			
	CURRENT RESET		
	High (HI)-Trip	SCHI	1
	Low (LO)-Trip	SCLO	1
	High (HI) Trip with Auxiliary Contacts	SCHIA	1
	Low (LO) Trip with Auxiliary Contacts	SCLOA	1
320-75			
	PATHFINDER CURRENT RESET		
	Variable Trip	SCVT	1
	Variable Trip with Auxiliary Contacts	SCVTA	1
320-77			
	TEST POINT HOT LINE INDICATOR		
	Hot Line Indicator	STHL	
	Adapter Kit	STAK	4
320-80			
	PROGRAMMABLE DELAYED RESET		
	Auto Adjusting Trip, Programmable Reset 2, 4, 8, 24-Hour Reset	SDOH	
	Reset Tool	SMRT	4
320-95			

Notes:

- To add remote FISHEYE™ display add an "R" as the last character in the part number, or a "S" for the small remote display.
- SFOC (Star Fiber Optic Cable) standard length is 6 ft. add "09F" for 9 ft. fiber optic display, "12" for 12 ft., "25" for 25 ft.
- To add universal power supply (120, 208 or 277 VAC power connection), add a "U" as the last character in the part number.
- Accessories to be ordered separately.

Faulted Circuit Indicators

Type Description	Typical System Application	Physical Mounting Location	Voltage/Current Requirements
Test Point Reset	Underground	On the test point of the connector	Min. 5 kV L-G (2.4 kV for Pathfinder)
Low-Voltage Reset	Underground	On the URD shielded cable below the connector	A secondary voltage source (min. 105 volts)
Electrostatic Reset	Overhead	On bare or insulated non-shielded cable	Min. 6.9 kV L-G (2.4 kV for Pathfinder)
Programmable Delayed Reset	Overhead	On overhead bare or insulated non-shielded cable	None (Lithium battery powered with programmable reset)
Current Reset	Underground and Overhead	On the URD shielded cable below the connector and on overhead bare or insulated non-shielded cable	Min. 2.4 A continuous

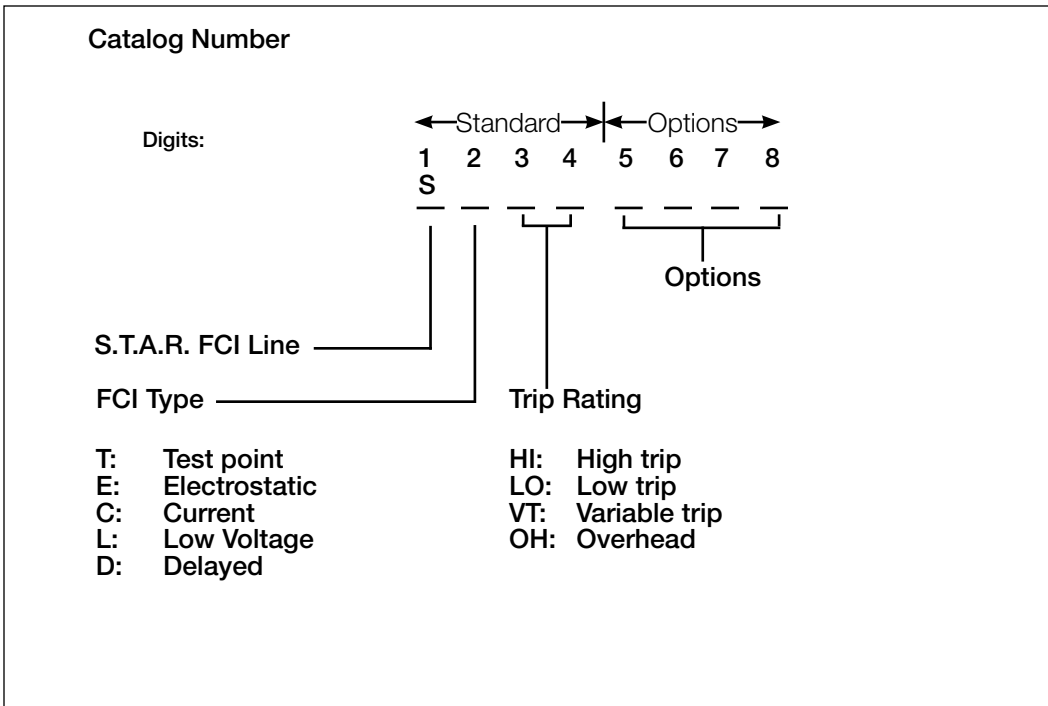

S.T.A.R. Faulted Circuit Indicators Features

	Model/Type	Test Point Reset	Pathfinder Test Point	Low Voltage Reset	Electrostatic Reset	Programmable Delayed Reset	Current Reset	PATHFINDER Current Reset
	Base Part Numbers	STLO STHI	STVT	SLLO SLHI	SELO SEHI	SDOH	SCLO SCHI	SCVT
	Catalog Section	320-40	320-42	320-50	320-60	320-95	320-75	320-77
Application	Overhead							
	Underground/Pad-mounted	•	•	•			•	•
Trip Rating	High/Low Trip Rating	•		•	•		•	
	Variable Trip Rating (Pathfinder™)		•			•		•
	Auto Adjusting Trip					•		
Standard Features	Inrush Restraint	•	•	•	•	•	•	•
	Temperature Compensation	•	•	•	•			
	Low Pass Filter	•	•	•	•	•	•	•
	Battery Life Optimization Circuitry		•			•		
	Reset Restraint		•	•				
	Single Hot-Stick Installation	•	•	•	•	•	•	•
	Automatic Reset	•	•	•	•	•	•	•
	Open-Core CT Design	•	•	•	•	•		
Display Type	Closed-Core CT Design						•	•
	LED Display		•		Optional	•		
	FISHEYE Display			•	•		•	•
Available Options	Flag Display	•						
	Auxiliary Contacts for SCADA	•	•	•				•
	Remote FISHEYE Display	•		Standard			•	•
	Small Remote Display	•					•	•
	Remote Fiber Optic Display		•					
	Manual Testing/Reset Tool		•			•		
	Test Point Adapter Kit	•	•					
Power Requirements	Universal Power Supply			•				
	Battery Powered		•			•		
	Line Powered	•			•		•	•
	Secondary Source			•				
Reset Requirements	Externally Replaceable Battery				Optional			
	2.4 kV L-G		•					
	5 kV L-G	•						
	7.2 kV L-G				•			
	90 VAC			•				
	2.4 Amps Continuous						•	
	2.0 Amps Continuous							•
Other						Programmable		

 Product/Feature unique to the Cooper Power Systems S.T.A.R. Faulted Circuit Indicators

Sectionalizing Cabinets

Our single- and three-phase SecTER™ Sectionalizing Cabinets and single-phase sectionalizing pedestals are designed as cable sectionalizing centers, or as permanent or temporary transformer pad covers.

The aesthetic low profile design provides unobtrusive installations for sectionalizing, tapping, or terminating underground cable. They are available in various sizes for use on 15 kV through 35 kV, 200 A or 600/900 A single-phase and three-phase rated systems. For highly corrosive environments, either stainless steel or aluminum is also available. Heavy mild steel gauge designs along with a continuous seam welding ensures a sturdy, smooth, long lasting cabinet.

Universal mounting plates with optional our two-, three- or four-way junctions can be factory installed. Junction installations are available in either 200 A or 600 A versions.

SecTER features:


- Munsell Green, TGIC powder paint finish
- Designed for easy one-person opening and improved access to interior terminations
- Door stop prevents accidentally closing
- Seams are designed to exceed ANSI tamperproof standards
- Optional installed junctions








SecTER Specification Information

To capitalize on the benefits of our SecTER Sectionalizing Cabinets, include the following information in your specification:

- Diagonally cut removable cover and cabinet.
- Munsell Green TGIC powder paint finish.
- All welded, continuous seam construction.
- Cooper Power Systems 200 A or 600/900 A junctions or junction bars installed.

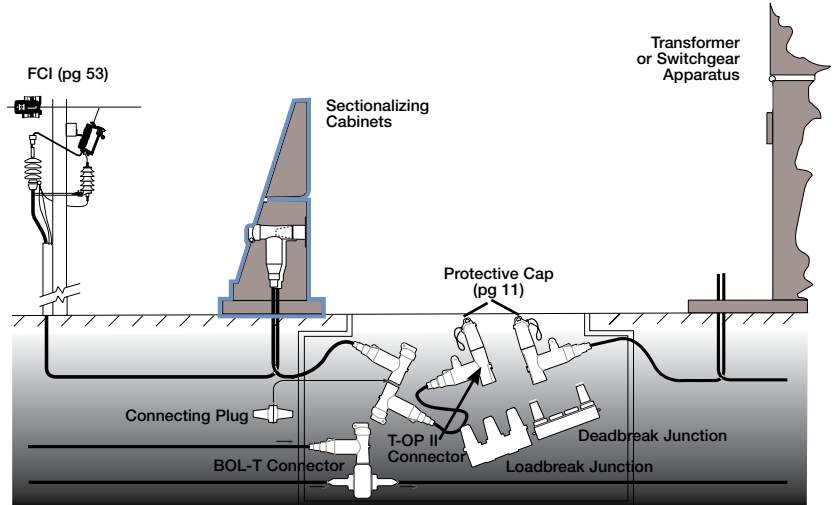

Catalog Number (cabinet only)	Dimensions	Cabinets with Junctions Installed											
		Single-Phase Cabinets Include (1) Junction, Three-Phase Cabinets Include (3) Junctions											
		15 KV			25 KV			35 KV			600 A 15/25 KV		
	LJ215C2U	LJ215C3U	LJ215C4U	LJ225C2U	LJ225C3U	LJ225C4U	LJ235C2U	LJ235C3U	LJ235C4U	DJ625A2U	DJ625A3U	DJ625A4U	
	15 KV LBC-2	15 KV LBC-3	15 KV LBC-4	25 KV LBC-2	25 KV LBC-3	25 KV LBC-4	35 KV LBC-2	35 KV LBC-3	35 KV LBC-4	VBJ-2	VBJ-3	VBJ-4	
SERIES I SecTER 15/25/35 KV Class, 12 Gauge Steel Tank													
Single-Phase													
00400L00K54A	30H x 24W x 22D	00400L01K49A	00400L01K29A	00400L02K35B	00400L02K87A	00400L02K88A	00400L00K35A	00400L00K12D	00400L00K22D	00400L00K32D	00400L01K38A	00400L01K58A	00400L01K68A
00400L00K58A	30H x 30W x 22D	00400L02K24E	00400L02K37B	00400L02K81B	00400L02K17B	00400L02K27B	00400L02K47B	00400L00K72D	00400L00K82C	00400L00K92C	00400L01K22J	00400L01K32J	00400L01K42J
00400L00K62A	30H x 36W x 22D	00400L02K76A	00400L02K42B	00400L02K80B	00400L01K28A	00400L01K48A	00400L01K50A	00400L00K62D	00400L00K95D	00400L00K62C	00400L01K12M	00400L01K22M	00400L01K32M
Three-Phase													
00450L00K02A	30H x 48W x 22D	00450L00K21E	00450L00K14D	-	00450L00K29C	00450L00K83C	-	00450L00K28D	-	-	00450L01K71A	00450L00K01D	-
00450L00K06A	30H x 66W x 22D	00450L00K36D	00450L00K10D	00450L00K15D	00450L00K09D	00450L00K19D	00450L01K53A	00450L00K08D	00450L00K18D	-	00450L00K35C	00450L00K97B	00450L01K63A
00450L00K10A	30H x 84W x 22D	00450L00K82D	00450L00K92D	00450L00K33C	00450L00K74E	00450L00K84E	00450L00K84C	00450L00K96C	00450L00K97C	00450L00K36C	00450L00K55A	00450L01K65A	00450L00K41E
SERIES II SecTER 15/25 kv Class, 14 Gauge Steel Tank													
Single-Phase													
00400L00K72A	30H x 24W x 15D	00400L02K62A	00400L02K51A	00400L02K44A	00400L02K71A	00400L02K26A	00400L02K45A	-	-	-	-	-	-
00400L00K73A	30H x 30W x 18D	00400L02K57A	00400L01K10A	00400L01K44A	00400L02K91A	00400L01K16A	00400L02K55A	-	-	-	-	-	-
Three-Phase													
00450L00K28A	30H x 48W x 15D	00450L01K54A	00450L00K05C	-	00450L00K56B	00450L00K96B	-	-	-	-	-	-	-
00450L00K30A	30H x 60W x 15D	00450L00K89C	00450L00K04C	00450L00K80B	00450L00K66B	00450L00K86B	00450L00K64B	-	-	-	-	-	-
00450L00K29A	30H x 48W x 18D	00450L01K67A	00450L00K63B	-	00450L00K76B	00450L00K81B	-	-	-	-	-	-	-
00450L00K31A	30H x 60W x 18D	00450L00K49D	00450L00K82B	00450L00K83B	00450L00K36A	00450L01K26A	00450L00K54B	-	-	-	-	-	-
Single-Phase													
00400L02K12A	48H x 18W x 18D	00400L01K39P	00400L01K23A	00400L02K61A	00400L02K46N	00400L02K56B	00400L02K64B	-	-	-	-	-	-

Catalog Section	Description	kV Class	Base Part Number	Notes
 1000-05	SERIES I SecTER			
	12 Gauge Steel Tank 1-Phase	15/25/35 kV	00400L00K54A (30H x 24W x 22D)	1
			00400L00K58A (30H x 30W x 22D)	1
			00400L00K62A (30H x 36W x 22D)	1
	12 Gauge Steel Tank 3-Phase	15/25/35 kV	00450L00K02A (30H x 48W x 22D)	1
			00450L00K06A (30H x 66W x 22D)	1
		00450L00K10A (30H x 84W x 22D)	1	
 1000-05	SERIES II SecTER			
	14 Gauge Steel Tank 1-Phase	15 kV	00400L00K72A (30H x 24W x 15D)	1
		15/25 kV	00400L00K73A (30H x 30W x 18D)	1
	14 Gauge Steel Tank 3-Phase	15 kV	00450L00K28A (30H x 48W x 15D)	1
			00450L00K30A (30H x 60W x 15D)	1
		15/25 kV	00450L00K29A (30H x 48W x 18D)	1
		00450L00K31A (30H x 60W x 18D)	1	
 1000-05	SERIES I GROUND SLEEVES			
	Ground Sleeve 1-Phase	15/25/35 kV	00400L00K02G (18H x 24W x 22D) (Fiberglass)	2, 3
			00400L00K05G (30H x 24W x 22D) (Fiberglass)	2, 4
			0400L00K10GM (24H x 24W x 22D) (Steel)	2, 5
	Ground Sleeve 3-Phase	15/25/35 kV	00450L00K04G (18H x 48W x 22D) (Fiberglass)	2, 6
			00450L00K07G (30H x 48W x 22D) (Fiberglass)	2, 7
		0450L00K17GM (24H x 48W x 22D) (Steel)	2, 8	
 1000-05	SERIES II GROUND SLEEVES			
	Ground Sleeve 1-Phase Fiberglass	15/25/35 kV	00400L00K00G (18H x 24W x 15D)	2
			00400L00K01G (18H x 30W x 18D)	2
	Ground Sleeve 3-Phase Fiberglass	15/25/35 kV	00450L00K00G (18H x 48W x 15D)	2
			00450L00K02G (18H x 60W x 15D)	2
			00450L00K01G (18H x 48W x 18D)	2
			00450L00K03G (18H x 60W x 18D)	2
	Ground Sleeve Steel 1-Phase	15/25/35 kV	0400L00K13GM (18H x 24W x 15D)	2
			0400L00K14GM (18H x 30W x 18D)	2
			0400L00K16GM (24H x 30W x 18D)	2
	Ground Sleeve Steel 3-Phase	15/25/35 kV	0450L00K20GM (18H x 48W x 15D)	2, 9
		0450L00K22GM (18H x 48W x 18D)	2, 10	
		0450L00K26GM (24H x 48W x 18D)	2, 11	
 1000-10	SECTIONALIZING PEDESTAL			
	14 Gauge Steel 1-Phase	15/25 kV	00400L02K12A (48H x 18W x 18D)	

Notes:

- For **stainless steel tank** change the "A" in digit 12 to a "S". For **aluminum tank** change the "A" in digit 12 to a "L".
- Width and depth dimensions must be matched to corresponding SecTER dimensions.
- To **change width** of fiberglass ground sleeve, change digit 11 from a "2" to a "3" for **30" width**, to a "4" for **36" width**.
- To **change width** of fiberglass ground sleeve, change digit 11 from a "5" to a "6" for **30" width** and to a "7" for **36" width**.
- To **change width** of steel ground sleeve, change digit 10 from a "0" to a "1" for **30" width** and a "2" for **36" width**.
- To **change width** of fiberglass ground sleeve, change digit 11 from a "4" to a "5" for **66" width** or to a "6" for **84" width**.
- To **change width** of fiberglass ground sleeve, change digit 11 from a "7" to a "8" for **66" width** or to a "9" for **84" width**.
- To **change width** of steel ground sleeve, change digit 10 from a "7" to a "8" for **66" width** or a "9" for **84" width**.
- To **change width** of steel ground sleeve, change digit 10 from a "0" to a "1" for **60" width**.
- To **change width** of steel ground sleeve, change digit 10 from a "2" to a "3" for **60" width**.
- To **change width** of steel ground sleeve, change digit 10 from a "6" to a "7" for **60" width**.

Note: Clēer SecTER Cabinet information can be found on page 19.

Part Number Index

Base Part Number	Page	Base Part Number	Page	Base Part Number	Page	Base Part Number	Page	Base Part Number	Page
0113C	42	00400L00K02G	20	0450L00K17GM	57	49341	40	2603973B02R	45
0190FC	42	00400L00K05G	20	0450L00K18GM	20	49435	40	2603973B02T	45
0213CSS	42	00450L00K00G	57	0450L00K20GM	57	49437	40	2603989B01	45
0213CX	42	00450L00K01D	56	0450L00K22GM	57	100005	40	2604688B01B	12
0290FCS	42	00450L00K01G	57	0450L00K26GM	57	100006	40	2604688B02B	12
0290FHJ	42	00450L00K02A	56, 57	0890CSJ	42	100006-4	40	2604688B03B	12
0290MCX	42	00450L00K02G	57	6990FHL	42	100006-6	40	2605670A02M	12
359_ _ _ _M_ _M	47	00450L00K03G	57	8613CK	42	100006-7	40	2606754A03	45
00400L00K00G	57	00450L00K04C	56	8613FH	42	100006-8	40	2606821A01	45
00400L00K01G	57	00450L00K04G	57	8613FSK	42	100006-9	40	2606823A02	45
00400L00K02G	57	00450L00K05C	56	8613TN	42	100006-12	40	2606823A04	45
00400L00K05G	57	00450L00K05G	20	8690CK	42	100006-13	40	2625439A16B	12
00400L00K12D	56	00450L00K06A	56, 57	8690FH	42	100006-14	40	2625439A17B	12
00400L00K22D	56	00450L00K07G	57	8690FSK	42	100006-15	40	2637019B02	45
00400L00K32D	56	00450L00K08D	56	8690TN	42	100006-16	40	2637019B04	45
00400L00K35A	56	00450L00K08G	20	18415-3	43	100006-18	40	2637023B01	45
00400L00K54A	56, 57	00450L00K09D	56	18415-8	43	100007-1	40	2637024C01M	45
00400L00K58A	56, 57	00450L00K10A	56, 57	19100	43	100007-2	40	2637160B01BS	12
00400L00K62A	56, 57	00450L00K10D	56	26958	40	100007-3	40	2637160B02BS	12
00400L00K62C	56	00450L00K14D	56	26962-5	40	100007-4	40	2637160B03BS	12
00400L00K62D	56	00450L00K15D	56	26992CPS	40	100007-6	40	2637172B01BS	12
00400L00K72A	56, 57	00450L00K18D	56	26993	40	100007-9	40	2637172B02BS	12
00400L00K72D	56	00450L00K19D	56	26994	40	100007-12	40	2637172B03BS	12
00400L00K73A	56, 57	00450L00K21E	56	30041	40	100007-13	40	2637407B03B	45
00400L00K82C	56	00450L00K28A	56, 57	30042	40	100007-14	40	2637459C01	45
00400L00K92C	56	00450L00K28D	56	30043	40	100007-23	40	2637459C02	45
00400L00K95D	56	00450L00K29A	56, 57	30084	40	100017	41	2637570A01B	12
00400L01K10A	56	00450L00K29C	56	30124	40	100057	40	2637585B01	45
00400L01K12M	56	00450L00K30A	56, 57	30154	40	100075	40	2637604C01	45
00400L01K16A	56	00450L00K31A	56, 57	30450	40	100096	40	2637700B02	45
00400L01K22J	56	00450L00K32G	20	30500	40	100370CPS	40	2637904C01	45
00400L01K22M	56	00450L00K33C	56	30554CPS	40	100399	40	2637939C01	45
00400L01K23A	56	00450L00K35C	56	30584-3	43	100400	40	2638370C01EX	14
00400L01K28A	56	00450L00K35G	20	30584-25	43	100433CPS	40	2638372C01	45
00400L01K29A	56	00450L00K36A	56	30584-30	43	100434CPS	40	2638372C02R	45
00400L01K32J	56	00450L00K36C	56	30611CPS	40	100440	40	2638409C06B	14
00400L01K32M	56	00450L00K36D	56	30642CPS	40	100455	40	2638640C01	45
00400L01K38A	56	00450L00K41E	56	30744	40	100456	40	2638772B03M	45
00400L01K39P	56	00450L00K49D	56	30914	40	100459	40	2639081B01B	45
00400L01K42J	56	00450L00K54B	56	36181CPS	40	100460	40	2639205B01	14
00400L01K44A	56	00450L00K55A	56	36457	40	100470	40	3001861A_ _ _	47
00400L01K48A	56	00450L00K56B	56	36459	40	100471	40	3237686C03M	39
00400L01K49A	56	00450L00K63B	56	36467	40	100472	40	3237686C06M	39
00400L01K50A	56	00450L00K64B	56	36472	40	100473	40	3237686C09M	39
00400L01K58A	56	00450L00K66B	56	36474	40	100474	40	3237686C10M	39
00400L01K68A	56	00450L00K74E	56	36476	40	100600CPS	40	3237686C12M	39
00400L02K12A	56, 57	00450L00K76B	56	36478	40	100601	40	3237686C15M	39
00400L02K17B	56	00450L00K80B	56	36480	40	100602	40	3237686C18M	39
00400L02K24E	56	00450L00K81B	56	36482CPS	40	100603-7	40	3237758C09M	39
00400L02K26A	56	00450L00K82B	56	36484	40	100603-9	40	3237758C10M	39
00400L02K27B	56	00450L00K82D	56	36486	40	100603-11	40	3237758C12M	39
00400L02K35B	56	00450L00K83B	56	36488	40	100606	40	3237758C15M	39
00400L02K37B	56	00450L00K83C	56	36490CPS	40	100609	40	3237758C18M	39
00400L02K42B	56	00450L00K84C	56	36494CPS	40	100613	40	3237758C21M	39
00400L02K44A	56	00450L00K84E	56	36496	40	100618	40	3238018C03M	39
00400L02K45A	56	00450L00K86B	56	36498	40	100625CPS	40	3238018C06M	39
00400L02K46N	56	00450L00K89C	56	36559	40	104742	43	3238018C09M	39
00400L02K47B	56	00450L00K92D	56	36692	41	104742-2	43	3238018C10M	39
00400L02K51A	56	00450L00K96B	56	36828CPS	40	118004	43	3238018C12M	39
00400L02K55A	56	00450L00K96C	56	36830CPS	40	133040	43	3238018C15M	39
00400L02K56B	56	00450L00K97B	56	36832CPS	40	133040-1	43	3238018C18M	39
00400L02K57A	56	00450L00K97C	56	36834CPS	40	133040-2	43	3238019C09M	39
00400L02K61A	56	00450L01K26A	56	36836	40	133045CPS	43	3238019C10M	39
00400L02K62A	56	00450L01K53A	56	36838	40	133045Z20	43	3238019C12M	39
00400L02K64B	56	00450L01K54A	56	40063	40	0537980C06	45	3238019C15M	39
00400L02K71A	56	00450L01K63A	56	40114	40	0537980C07	45	3238019C18M	39
00400L02K76A	56	00450L01K65A	56	40151CPS	40	0537980C12	45	3238019C21M	39
00400L02K80B	56	00450L01K67A	56	40493CPS	40	0537980C22	45	3238020C18M	39
00400L02K81B	56	00450L01K71A	56	40495CPS	40	0739658A02	45	3238020C21M	39
00400L02K87A	56	0400L00K10GM	57, 20	40517	40	2085399A01	45	3238020C24M	39
00400L02K88A	56	0400L00K13GM	57	48410	40	2085399A02	45	3238020C27M	39
00400L02K91A	56	0400L00K14GM	57	48900	43	2603393A03	12	3238020C30M	39
		0400L00K16GM	57	48900-2	43				

Base Part Number	Page	Base Part Number	Page	Base Part Number	Page	Base Part Number	Page	Base Part Number	Page
3238020C33M	39	4038361C05CB	47	CS125UFLT00L	42	FEF155A008	13	JB135C4W1B	31
3238020C36M	39	4038361C10CB	47	CTM005A	34	FEF155A010	13	JB135C5B	31
3593004M02M	47	40001177B51MC	47	CTM009A	34	FEF155A012	13	JB135C5W	31
3593008M02M	47	40001177B53MC	47	CTM010A	34	FEF155A018	13	JB135C6B	31
3593012M02M	47	BLRTP615	25, 26	CTM011A	34	FEF155A020	13	JB135C6W	31
3593015M02M	47	BLRTP625	26	CTM012A	34	GE215-1Y06	43	JBL25C2W1W	32
3593020M02M	47	BLRTP635	25, 26	CTM015A	34	GE215-1Y06-K1	43	JBL25C4W2B	32
3593025M02M	47	BRK469	35	CTM019A	34	GE215-1Y06-K3	43	JBL35C2W1W	32
3593030M02M	47	BT625	23, 24	CTM020A	34	GE215-2Y06	43	JBL35C4W2B	32
3593040M02M	47	BT635	23, 24	CTM024A	34	GE215-2Y06-K1	43	JBS25C2B1W2B	33
3593050M02M	47	BTP615	23, 24	CTM025A	34	GE215-2Y06-K3	43	JBS25C2W3B	33
3593060M02M	47	BTP625	23, 24	CTM029A	34	GE225-1Y06	43	JBS25C2W3W	33
3593065M01M	47	BTP635	23, 24	CTM030A	34	GE225-1Y06-K1	43	JBS25C3W1B2W	33
3593080M01M	47	BW150F	45	CTM035A	35	GE225-1Y06-K3	43	JBS25C3W1W2B	33
3593100M01M	47	BW150R	45	DB250	14	GE225-2Y06	43	JBS25C3W3W	33
3593125M01M	47	CA225A	12	DB250L	14	GE225-2Y06-K1	43	JBS25C4W4W	33
3594004M83M	47	CA225B	12	DB250S	14	GE225-2Y06-K3	43	JBS35C2B1W2B	33
3594008M83M	47	CA625	24, 25, 26, 27	DBA615	23	GE235-1Y06	43	JBS35C2W3B	33
3594012M83M	47	CA635	24, 25, 26, 27	DBA625	23	GE235-1Y06-K1	43	JBS35C2W3W	33
3594015M83M	47	CBUC	47	DBA635	23	GE235-2Y06	43	JBS35C3W1B2W	33
3594020M83M	47	CBUC08030C100	46	DBE625	25	GE235-2Y06-K1	43	JBS35C3W1W2B	33
3594025M83M	47	CBUC08040C100	46	DBE635	25	HD625	25	JBS35C3W3W	33
3594030M83M	47	CBUC08050C100	46	DCEA635M27	39	HD635	25	JBS35C4W4W	33
3594040M83M	47	CBUC08065C100	46	DCEA635M30	39	IBWP225	11	JBY325C1W2B	32
3594050M83M	47	CBUC08080C100	46	DCEA635M33	39	ISB215	12	JBY325C1W3B	32
3594060M83M	47	CBUC08100C100	46	DCEA635M36	39	ISB225	12	JBY325C3W	32
3594065M83M	47	CBUC08125C100	46	DCP625A	25	ISB235	12	JBY335C1W2B	32
3594080M83M	47	CBUC08150D100	46	DCP625C	25	ISB625A	23	JBY335C1W3B	32
3594100M83M	47	CBUC08165D100	46	DCP635A	25	ISB625C	23	JBY335C3W	32
3594120M83M	47	CBUC08180D100	46	DCP635C	25	ISB635A	23	KP3437322C1M	47
3594150M83M	47	CBUC08250D100	46	DE225	15	ISB635C	23	LBI215	11
3637803B01	48, 51	CBUC09030C100	46	DE225_T	14	JB125C1B1W1B	31	LBI225	11
3637803B02	48, 51	CBUC09040C100	46	DIP625A	25	JB125C1B2W1B	31	LBITOOL	12
3637803B03	48, 51	CBUC09050C100	46	DIP625AS	26	JB125C1B3W1B	31	LCN2CLJ615_SQB	19
3637803B05	48, 51	CBUC09065C100	46	DIP625C	25	JB125C1B4W1B	31	LCN2DLJ615_ILB	19
3637803B08	48, 51	CBUC15030C100	46	DIP635A	25	JB125C1W2B	31	LCN2CLJ625_SQB	19
3637803B09	48, 51	CBUC15040C100	46	DIP635AS	26	JB125C1W3B	31	LCN2DLJ625_ILB	19
3637803B10	48, 51	CBUC15050C100	46	DIP635C	25	JB125C1W4B	31	LCN615	19
3638535A04	48	CBUC15065C100	46	DIPCAP	25	JB125C2B	31	LCN625	19
3638535A05	48	CBUC15080C100	46	DJ250-2	14	JB125C2W	31	LE215	11, 13
3638535A07	48	CBUC15100C100	46	DJ250-4	14	JB125C2W1B	31	LE225	11, 13
3638535A08	48	CBUC15125C100	46	DJ250-T1	14	JB125C2W2B	31	LE235	11, 13
3638535A09	50	CBUC15150D100	46	DJ250-T2	14	JB125C2W3B	31	LEJ215	11, 13
3639585A01	48	CBUC15165D100	46	DJ625A_	23	JB125C3B	31	LEJ225	11, 13
4000353C04	47	CBUC15180D100	46	DJ625A2	27	JB125C3W	31	LFEP215	13
4000353C06	47	CBUC17030C100	46	DJ625C_	23	JB125C3W1B	31	LFEP215TFEC	11
4000353C08	47	CBUC17040C100	46	DJ635A_	23	JB125C3W3B	31	LFEP225	13
4000353C10	47	CBUC17050C100	46	DJ635C_	23	JB125C4B	31	LFEP225TFEC	11
4000353C12	47	CBUC17065C100	46	DLJ615A2	19	JB125C4W	31	LFI215	11
4000353C14	47	CBUC23030C100	46	DPC625	23	JB125C4W1B	31	LFI225	11
4000353C16	47	CBUC23040C100	46	DPC625UT	23	JB125C5B	31	LJ215C—	11
4000353C17	47	CBUC23050C100	46	DPC635	23	JB125C5W	31	LJ225C—	11
4000358C03	47	CBUC23065C100	46	DPC635UT	23	JB125C6B	31	LJ235C—	11
4000358C05	47	CBUC23080C100	46	DPD250	14	JB125C6W	31	LPC215	11
4000358C08	47	CBUC23100C100	46	DPE250	14	JB135C1B1W1B	31	LPC225	12
4000358C10	47	CBUC23125D100	46	DPS250	14	JB135C1B2W1B	31	LPC235	12
4000358C12	47	CBUC23150D100	46	DRC250	14	JB135C1B3W1B	31	LPC615	19
4000358C14	47	CBUC23165D100	46	DS225	15	JB135C1B4W1B	31	LPD625	19
4000358C16CB	47	CBUC35150D100	46	DS225_T	14	JB135C1W2B	31	LPF215H	11
4000358C18CB	47	CC2C	13, 15	DT625	25, 26, 27	JB135C1W3B	31	LPF215U	11
4000361C99FV	47	CC2C_S	14	DT635	25, 26, 27	JB135C1W4B	31	LPF215V	11
4000361C99MC	47	CC2C_T	12, 14	FECC	13	JB135C2B	31	LPF225H	11
4038108C03	47	CC6A__U	26	FEF083A006	13	JB135C2W	31	LPF225U	11
4038108C04	47	CC6A_U	24	FEF083A008	13	JB135C2W1B	31	LPF225V	11
4038108C05	47	CC6A_U	25, 26	FEF083A010	13	JB135C2W2B	31	LPF235H	11
4038108C06	47	CC6C_T	24	FEF083A012	13	JB135C2W3B	31	LPF235V	11
4038108C07	47	CC6C_T	25, 27	FEF083A018	13	JB135C3B	31	L RTP615	25, 27
4038108C09	47	CC6C_U	24	FEF083A020	13	JB135C3W	31	L RTP625	25, 27
4038108C11	47	CC6C_U	25	FEF083A025	13	JB135C3W1B	31	L RTP635	25, 27
4038108C12	47	CK500A	42	FEF083A030	13	JB135C3W3B	31	O-62-21F	41
4038361C03CB	47	CK750A	42	FEF083A040	13	JB135C4B	31	O-62-50F	41
4038361C04CB	47	CS	12, 13, 23, 24	FEF155A006	13	JB135C4W	31	O-62F	41
								O-63-21F	41

Part Number Index

Base Part Number	Page	Base Part Number	Page
O-63-50F	41	SEC3P25CLEERA2DP	19
O-63F	41	SEC3P25CLEERA2L	19
O-65-21FB	41	SEC3P25CLEERA2DPL	19
O-65-50FB	41	SEHI	53
O-65FB	41	SEHIL	53
O-68-21FB	41	SELO	53
O-68-50FB	41	SELOL	53
O-68FB	41	SFOC	53
O-620-21F	41	SLHI	53
O-620-50F	41	SLHIA	53
O-620F	41	SLLO	53
OS50	41	SLLOA	53
OS-620	41	SMHI	53
OSM004	35	SMLO	53
OTTQ615	25	SMRT	53
OTTQ625	25	SP15	37
OTTQ635	25	SP25	37
PDBA615	23	SP35	37
PDBA625	23	SRPB	53
PDBA635	23	SSPL625A1	37
PH13-4	41	SSPL625A2	37
PH13-10	41	SSPL625A3	37
PISB625	23	SSPL625A4	37
PISB625HP	23	SSPL635A1	37
PISB635	23	SSPL635A2	37
PISB635HP	23	SSPL635A3	37
PK215	12	SSPL635A4	37
PK225	12	SSPLT615A1	37
PK235	12	SSPLT615A2	37
PKPB225	12	SSPLT615A3	37
PLE225	11, 13	SSPLT615A4	37
PLEA225N03	39	SSPLT625A1	37
PLEA225N06	39	SSPLT625A2	37
PLEA225N09	39	SSPLT625A3	37
PLEA225N10	39	SSPLT625A4	37
PLEA225N12	39	SSPLT635A1	37
PLEA225N15	39	SSPLT635A2	37
PLEA225N18	39	SSPLT635A3	37
PLEA225N21	39	SSPLT635A4	37
PLEJ225	11, 13	STAK	53, 54
PLPC225	12	STHI	53
POP615	23, 24	STHIA	53
POP625	23, 24	STHIK	53
POP635	23, 24	STHL	54
PS625CLEER	19	STLO	53
PS625CLEERDM	19	STLOA	53
RH15-10	41	STLOK	53
SA	12, 13, 23, 24	STUD635-A	25, 45
SCHI	54	STUD635-C	25, 45
SCHIA	54	STUD-A	25, 26, 45
SCLO	54	STUD-C	25, 26, 45
SCLOA	54	STUD-T	25, 27, 37
SCVT	54	STUD-U	25
SCVTA	54	STVT	53
SDOH	53	STVTA	53
SEC1P15CLEERA2	19	TP615	23, 24, 27
SEC1P15CLEERA2DP	19	TP625	23, 24, 27
SEC1P15CLEERA2L	19	TP635	23, 24
SEC1P15CLEERA2DPL	19	TQHD625	25
SEC1P25CLEERA2	19	TQHD635	25
SEC1P25CLEERA2DP	19	TWRENCH	25
SEC1P25CLEERA2L	19	UOP625	23
SEC1P25CLEERA2DPL	19	WH3	41
SEC3P15CLEERA2	19	WS12	34
SEC3P15CLEERA2DP	19	WS1112	34
SEC3P15CLEERA2L	19	WS1118	34
SEC3P15CLEERA2DPL	19		
SEC3P25CLEERA2	19		

Cooper Power Systems On-Line

Cooper Power Systems offers two distinct websites for our customers.

1. Our primary site, www.cooperpower.com, provides visitors with up-to-date information about products, solutions, and events, and is fully searchable using the site search powered by Google.
2. Cooper PowerCentral requires registration and provides customers with software and user guide downloads.


www.cooperpower.com



Our primary site features the following:

- Updated daily with new products, catalog, and service information
- Submit questions or request a quote
- Disaster Response Plan and 24-Hour Emergency contact list
- Events Calendar to see schedule of training classes and workshops. Register on-line
- Get information on trade shows in your region
- Locate most up-to-date product and service literature via Google search

www.cooperpowercentral.com

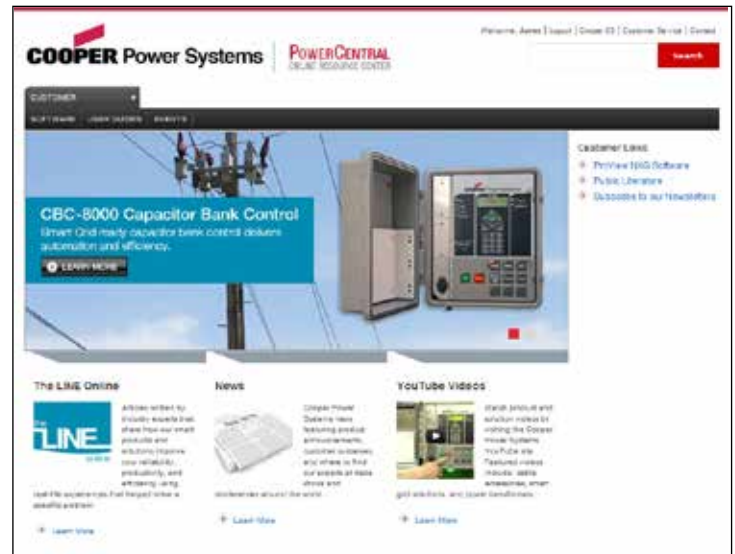

Registering for Cooper PowerCentral provides access to the following:

- Software and Firmware Downloads
- User Guides
- Event Features and Highlights

The LINE online


<http://theline.cooperpower.com>




The LINE online magazine features articles written by Cooper Power Systems industry experts and our customers. These stories share how our smart products and solutions improve your reliability, productivity, and efficiency using real-life experiences that helped solve a specific problem. Our goal is to make your Smart Grid even smarter.

- Improved access to industry application news
- Easily share stories with colleagues
- Enhance the story with your experience and knowledge through the comment feature on article pages

PRODUCT APPLICATION OVERHEAD AND UNDERGROUND

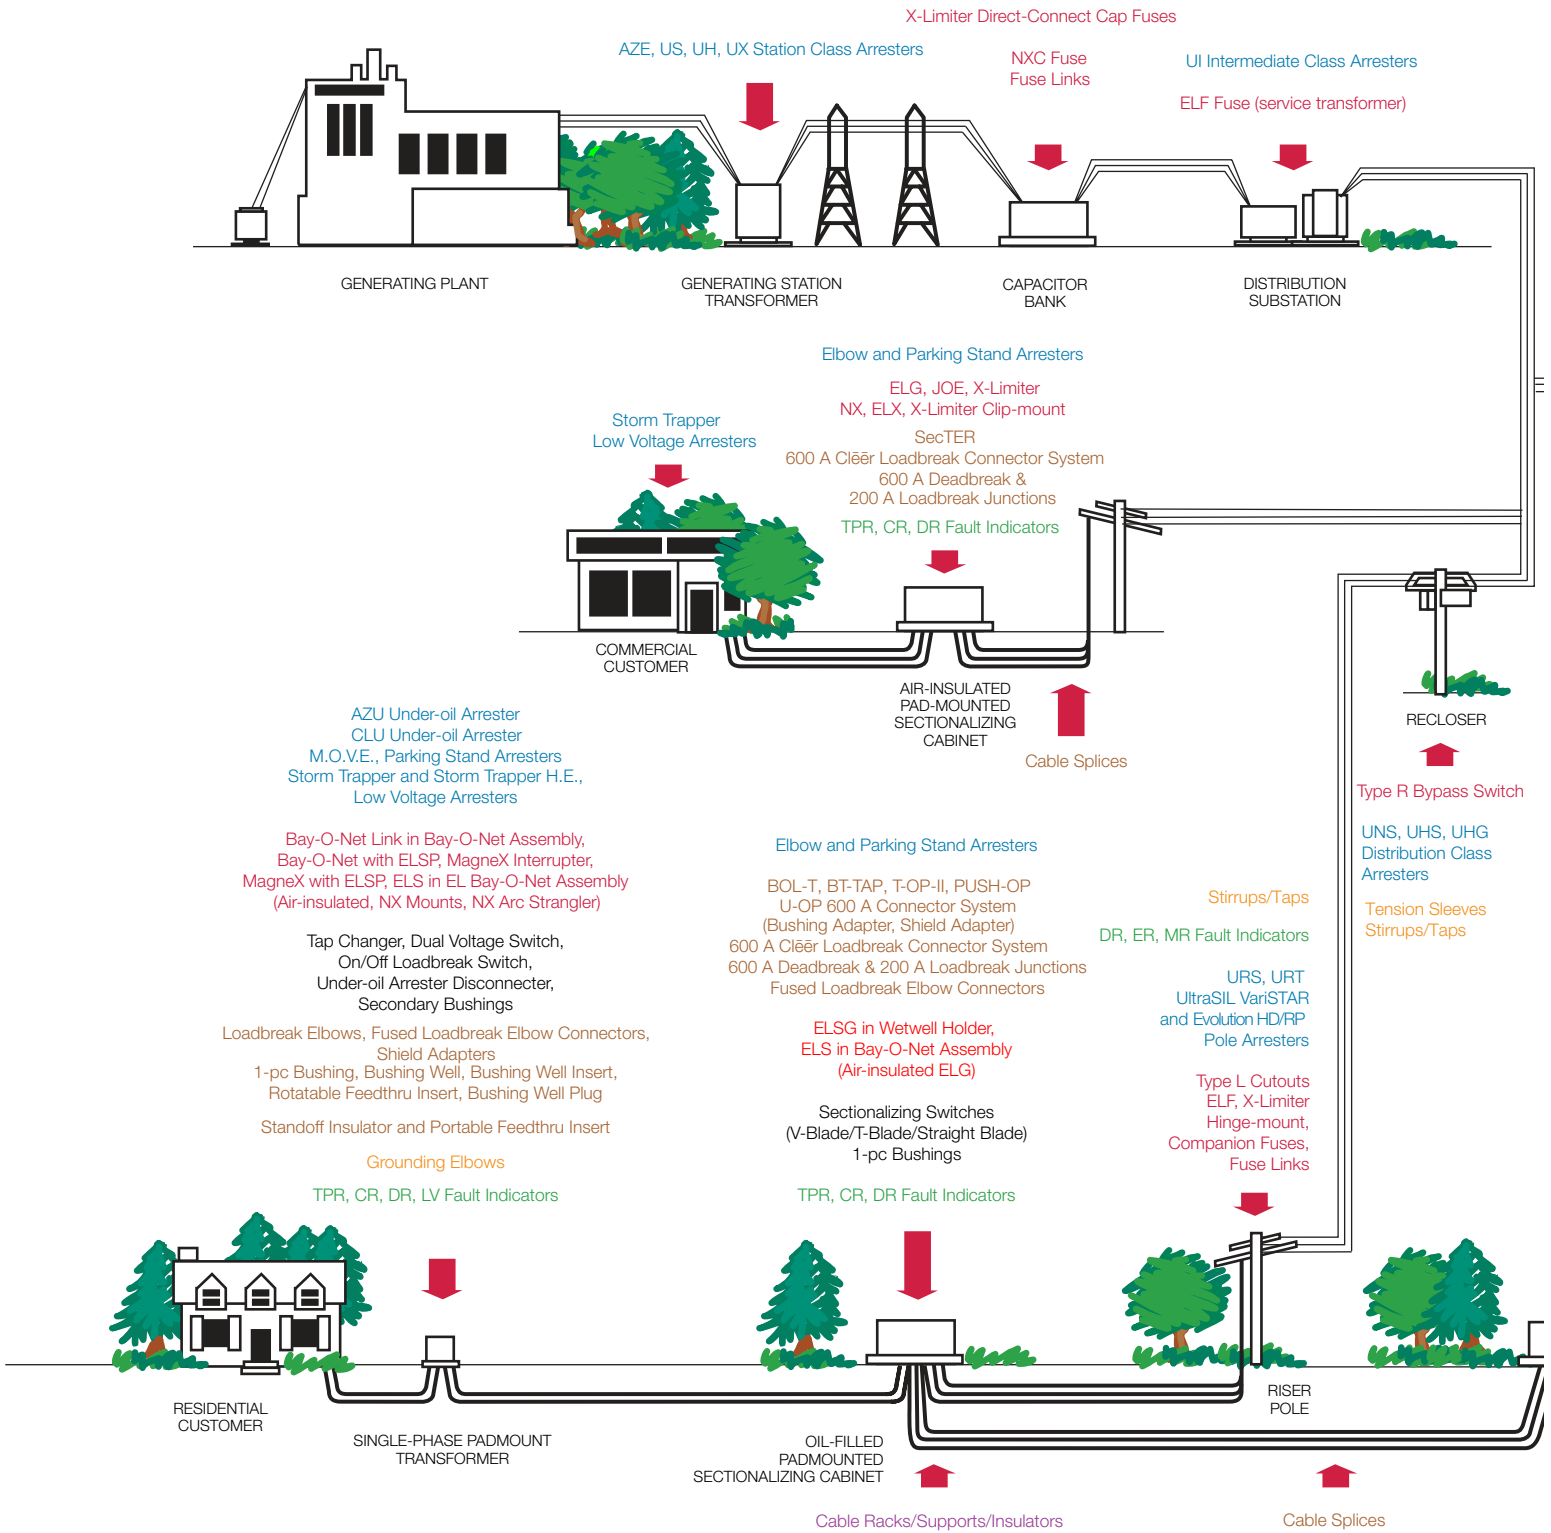

DISTRIBUTION SYSTEMS

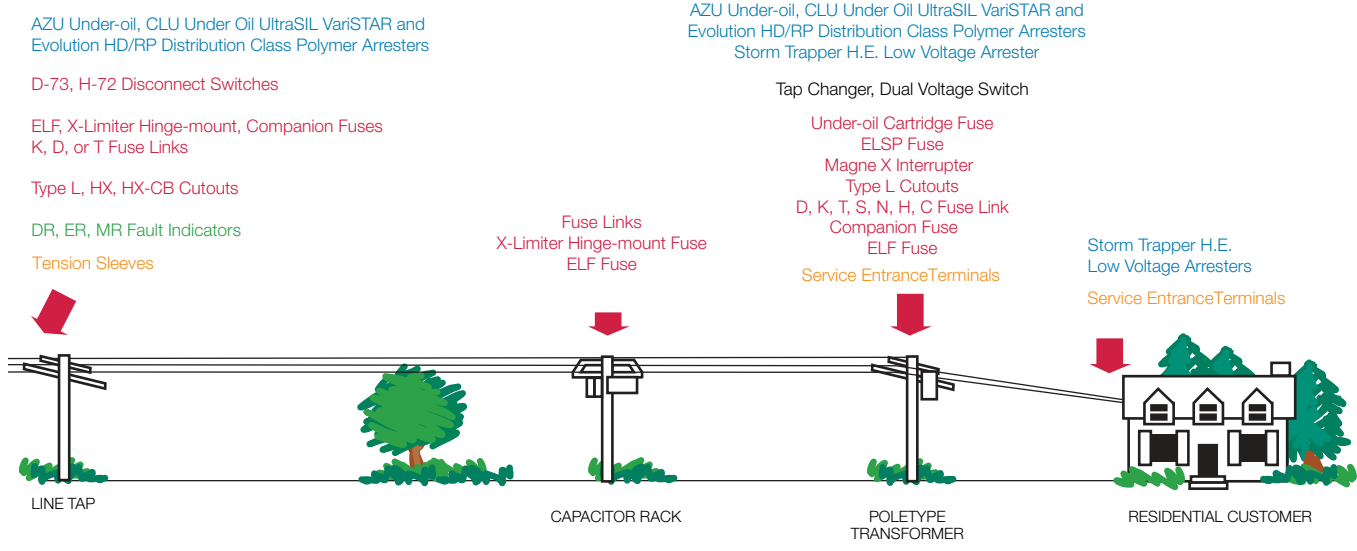

Cooper Power Systems
2300 Badger Drive
Waukesha, WI 53188
P: 877-CPS-INFO

One Cooper | www.cooperpower.com | Online
email info@cooperpowercentral.com

Cooper Power Systems, POSI-BREAK, BOL-T, BT-TAP, T-OP, U-OP, SectER, S.T.A.R., Kearnelex, Pathfinder, BLOC, Kearney, FISHEYE, Combined Technologies, Cam-EL, PUSH-OP, EX, Aqua Seal, Airseal, Squeezon, MagneX, Flapper, Hi-Line, Fit-On, Storm Trapper, Companion, NX, ELF, X-Limiter, JOE, NXC, ELX, Cleer, and McGraw-Edison are valuable trademarks of Cooper Industries in the U.S. and other countries. You are not permitted to use the Cooper Trademarks without the prior written consent of Cooper Industries.

IEEE Std 386™, IEEE Std 404™, IEEE Std 495™, IEEE Std 592™, IEEE Std C62.11™, IEEE Std C57.91™ standards are trademarks of the Institute of Electrical and Electronics Engineers, Inc., (IEEE). This publication/product is not endorsed or approved by the IEEE.

ANSI® is a registered trademark of the American National Standards Institute.

Unishield® is a registered trademark of Unitech, LLC.

Burndy® is a registered trademark of FCI.

© 2012 Cooper Industries. All Rights Reserved.

Your Authorized Cooper Power Systems Distributor is:

