

Chromalox[®]

PRECISION HEAT AND CONTROL

Precision Electric Heating Components, Controls, Cable,
and Systems Technologies for Industrial Applications





INTRODUCTION

Chromalox® Has the Electric Heating and Control Technologies for Your Applications!

Our High-Quality Systems Are Used Across a Broad Spectrum of Industries

With the broadest product line in the industry, Chromalox provides heat and control systems for more processes than anyone in the world. We meet the needs of industries as diverse as transportation, pharmaceuticals, chemical processing, and the military. Chromalox systems and components have earned more third-party approvals than any other company—from ISO 9001, UL, FM, and VDE to CE and BASEEFA.

Our Stock and Delivery Capabilities Keep Your Operation Up and Running

Chromalox maintains an inventory of nearly one million items. We also operate the fastest delivery system in the business. We can ship any component or system we stock within 24 hours through our chromalox.com electronic direct order entry system. Orders entered in our website by 4:00 P.M. CT can be shipped the same day. In addition, factory offices, stocking representatives, and over 2,000 authorized distributors carry Chromalox systems and components for same-day pickup.

Local Technical Support Helps You Get the Job Done

We don't just provide products. We provide support. The industry's largest and most experienced group of engineers is right there in the field with you. The majority of our 300+ field sales representatives are degreed engineers, and all are experienced with all Chromalox heating products and applications. Our innovative design engineers are ready to work with your local Chromalox representative to custom-build a precision heating and control system for any application need you have.

Chromalox Service Solutions Help Ensure Optimum Performance and Extended Product Life

As the world's most comprehensive manufacturer of electric heat and control products, Chromalox offers customized service solutions ranging from start-up and training, to ongoing maintenance diagnostics, to emergency response. As the designer and manufacturer, we have complete knowledge of your product. We know your systems from the component parts on up. So who better can maximize your investment with proper maintenance and assessment strategies than Chromalox?

INDUSTRIAL PROCESS HEAT AND CONTROL 4

Heat Transfer Systems 4

- HOT OIL AND WATER SYSTEMS
- COMPACT HOT OIL AND WATER SYSTEMS
- BOILERS AND STEAM GENERATORS
- HORIZONTAL ELECTRIC VAPORIZERS
- LARGE TANK HEATERS
- IMPEDANCE HEATING SYSTEMS

Process Heaters 6

- SCREW PLUG IMMERSION
- FLANGED IMMERSION
- OVER-THE-SIDE CORROSION-RESISTANT IMMERSION
- CIRCULATION
- PROCESS AIR
- PROCESS RADIANT

Heat Trace and Controls 8

- SELF-REGULATING, LOW-TEMPERATURE CABLE
- CONSTANT-WATTAGE CABLE
- MINERAL-INSULATED CABLE
- SELF-REGULATING FREEZE PROTECTION CABLE
- INSTALLATION KITS AND ACCESSORIES
- CLASS 1, DIVISION 1 CABLE AND ACCESSORIES
- MODULAR HEAT TRACE CONTROL SYSTEMS
- HEAT TRACE SYSTEMS DESIGN SOFTWARE

Controls 10

- TEMPERATURE CONTROLS
- MONITORS AND OVERTEMPERATURE CONTROLLERS
- SCR POWER CONTROL COMPONENTS
- STANDARD POWER CONTROL PANELS
- CUSTOM POWER CONTROL PANELS
- INTELLIPANEL CONTROL PANEL
- SENSORS AND ACCESSORIES

INDUSTRIAL COMFORT HEATERS 12

- GENERAL-PURPOSE BLOWERS
- GENERAL-PURPOSE CONVECTION
- HEAVY-DUTY BLOWER
- HAZARDOUS DUTY
- RADIANT HEATERS
- PORTABLE HEATERS

COMPONENT HEATERS 14

- TUBULAR ELEMENTS
- STRIP/RING/DISC ELEMENTS
- CARTRIDGE ELEMENTS
- BAND ELEMENTS
- THIN BLADE HEATER ELEMENTS
- SILICONE LAMINATE/FLEXIBLE ELEMENTS

HEAT TRANSFER SYSTEMS

Chromalox heat transfer systems are safe, versatile, user-friendly heating systems for process heating applications requiring closely controlled process temperatures. Pre-engineered and constructed with carefully matched components, these systems provide easy installation and trouble-free operation in the end-user's application.

Typical applications include:

- Jacketed vessels and tanks
- Heated rolls
- Heat exchangers
- Platens, dies, and molds
- Sterilization

HOT OIL AND WATER SYSTEMS



- Power ratings: 9 - 1,200 kW
- Voltages: 208 - 575 V, single- or 3-phase

Chromalox hot oil and water systems are self-contained heating and cooling packages that provide direct or indirect process heating to temperatures of 750°F. These systems meet ASME codes and are pre-engineered to include temperature and power controls, expansion tanks, heat exchangers, pumps, valves, gauges, and all necessary piping. This eliminates component selection and assembly. Select from oil or water temperature control systems for circulation in a closed-loop process.

COMPACT HOT OIL AND WATER SYSTEMS

- Power ratings: 4 - 48 kW
- Voltages: 240 or 480 V, single- or 3-phase

Chromalox compact hot oil and water systems are fully equipped, portable packages capable of reaching operating temperatures of 550°F. Available in a wide variety of sizes, kW ratings, and voltages for many process. Choose from the latest state-of-the-art solid state controls. Many models in stock.



BOILERS AND STEAM GENERATORS



- Power ratings: 3 - 1,600 kW (10.2 - 5,459 BTU/hr)
- Voltages: 120 - 575 V, single- or 3-phase
- Capacities: Up to 5,000 lb of steam/hr @ 250 psig

Constructed to ASME or PED code of carbon or stainless steel with fiberglass insulation, Chromalox boilers and steam generators are efficient energy management systems that provide low- or high-pressure hot water or steam for industrial processes and comfort heating. NPT or flanged connections are available. Optional transformers, water feed, and blow-down equipment are also available and in stock. Chromalox has the engineering expertise to design and manufacture large-capacity electric boilers to meet a variety of applications.

HORIZONTAL ELECTRIC VAPORIZERS



- Power ratings: 15 - 300 kW
- Voltages: 208 - 575 V, single- or 3-phase

Chromalox horizontal electric vaporizers are designed for use with Dowtherm,* Therminol,* and other organic fluids to transfer heat at high temperatures and low pressures. They are pre-engineered, pre-wired, and pre-piped packages designed for flexible, dependable, and efficient operation. All units are ASME-certified to 150 psi at 750°F with 300 lb construction throughout. Seal-welded element design eliminates leaks and improves serviceability on the heater. Units available with over-pressure, process, remote, or skid-mounted controls. Optional NEMA weather- and explosion-resistant enclosures are also available.


LARGE TANK HEATING SYSTEMS



- Power ratings: Up to 240 kW
- Voltages: 208 - 575 V, single- or 3-phase

Chromalox tank heaters are pre-engineered packages employing metal-sheath tubular or ceramic-insulated, open-coil pipe insert heating components for use in 2- and 3-inch nominal pipe sizes. This unique construction allows heating elements to be changed without draining the tank. These heating components are combined with temperature and power controls and safety cutouts for a complete tank heating system. Chromalox tank heaters are well-suited for applications in the chemical/petrochemical industry, including bulk oil storage and asphalt heating. NEMA-type control enclosures are available. Options include special ratings, lengths to 40 feet, replacement parts, and back-up controls. Separate insert heaters are also available.

IMPEDANCE HEATING SYSTEMS

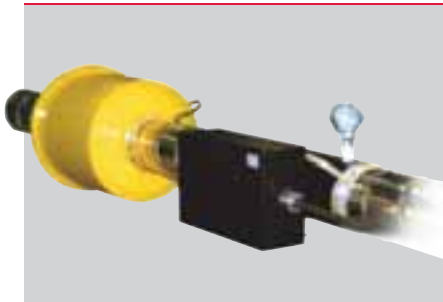

- Power ratings: 1 kW to several MW
- Voltages: <50 V (After transformer step-down of 480 V)
- Temperatures: Up to 1,800°F

Impedance heating employs the "Joule Effect" to produce and directly transfer heat from the entire circumference and length of pipe to the material being heated. It can be used for proper temperature maintenance as well as to raise fluid temperature. Utilizing the pipe itself and minimum equipment, installation is simple. Temperature control is highly accurate—to within $\pm 1^\circ$ F—and higher watt densities—up to 190 W/in.²—can be used due to increased velocities with lower pressure drops.

*Dowtherm is a registered trademark of The Dow Chemical Company.
Therminol is a registered trademark of Monsanto Company.

PROCESS HEATERS

Heat processing applications vary widely from industry to industry. Chromalox has a process heating solution for nearly every application: immersion heaters that can apply heat at virtually 100% efficiency to water, oils, viscous materials, solvents, process solutions, and gases; circulation heaters that are designed to heat a flowing medium using in-line or side-arm piping configurations; process air heaters that can apply heat not only by electrically heated air, but even special atmospheres such as argon or nitrogen; and process radiant heaters that transfer energy through space, without the presence of a medium, for maximum efficiency.

SCREW PLUG IMMERSION HEATERS



- Screw plug size: 1/2", 3/4", 1", 1 1/4", 2", and 2 1/2" NPT
- Power ratings: Up to 40 kW
- Screw plug material: Brass, steel, or stainless steel
- Sheath material: Copper, steel, stainless steel or INCOLOY.*

Screw plug immersion heaters consist of tubular elements in a threaded hex plug. Some models are provided with a thermowell for the temperature control sensor and a variety of electrical enclosures for electrical connections. They screw directly through threaded openings in tank walls to heat liquids, viscous fluids, forced air, and gases by direct contact. A patented 360° rotatable housing is available on most models to facilitate easy conduit connections. Many models in stock.

FLANGED IMMERSION HEATERS

- Length: Up to 240"
- Power ratings: Up to 2,000 kW
- Flange material: Brass, steel, or stainless steel
- Sheath material: Copper, steel, stainless steel, or INCOLOY*

Ideal for generating steam and heating gases and liquids in pressure vessels and tanks, flanged immersion heaters are hairpin-bent tubular elements welded or brazed into a flange and provided with electrical enclosures. Chromalox flanged immersion heaters are available in a wide selection of flange sizes and with a variety of electrical enclosures. Most units are UL-listed and CSA-certified or can have ATEX certification. ASME or PED code construction is also available for high-pressure applications. Chromalox can also rebuild large flanged heaters to save you money. Many models in stock.



OVER-THE-SIDE CORROSION-RESISTANT IMMERSION HEATERS



- Heating element material: Copper, steel, stainless steel, cast iron, INCOLOY,* titanium, Teflon* (fluoropolymer), quartz, and ceramic
- Mounting configurations: L-shaped, side/top mount, and deep tank installation
- Power ratings: Up to 200 kW

Over-the-side immersion heaters are designed for installation in the top of the tank with the heated portion directly immersed along the side or at the bottom. They take up little space, eliminate the need for tank penetrations, are easily removed for service, and provide ample working space inside the tank. Custom-configured elements evenly distribute heat by direct contact in numerous applications, including acid and alkali solutions. Many models in stock.

CIRCULATION HEATERS



- Pressure resistance: to 5,000 psi
- Maximum temperature: Up to 1,400°F
- Power ratings: Up to 2,000 kW

Chromalox circulation heaters are packaged units consisting of a screwplug or flanged immersion heater mounted in a thermally insulated heating chamber for efficient heating of a flowing medium by in-line or side-arm operation. Thermocouple sensors can be provided to connect to most any controller. Select from many terminal enclosures, sheath and vessel materials, flanged connections, and controls. Chromalox offers optional ASME or PED certification. Many models in stock.

PROCESS AIR HEATERS

- Maximum temperature: 1,200°F
- Power ratings: Up to 3.2 MW
- Voltage: Up to 600 V

Process air heaters in stock and custom designs are employed in heating air or other gases in ducts, autoclaves, or ovens. Sheathed tubular, finned tubular, and finned strip elements consistently outperform gas, oil, and open coil electric units in both heating efficiency and safety. Elements are available separately for use in OEM equipment. Special materials and custom designs are available for marine applications, power plants, or hazardous applications.



Typical applications include:

- Cleaning and rinsing tanks
- Process fluid heating
- Fuel oil heating
- Air and gas heating
- Curing ovens
- Thermoforming
- Embossing
- Spot heating

PROCESS RADIANT HEATERS



- Watt densities: Up to 5.76 kW/ft²
- Element source temperatures: Up to 4,000°F
- Element materials available: Quartz, ceramic, and INCOLOY*

Process radiant heaters include a large selection of elements, fixtures, and panels for the best solution where heated process air or direct contact is impossible, impractical, or undesirable. Drying, curing, preheating, shrinking, and thermoforming are frequent applications. Chromalox sensors and controls are available to provide single-source heating systems suited to your application.

*INCOLOY is a registered trademark of Huntington Alloys Corporation.
Teflon is a registered trademark of E.I. du Pont de Nemours and Company.

HEAT TRACE AND CONTROLS

Heat trace is used to counteract the heat loss from process equipment and piping through its insulation. Chromalox offers a variety of heat trace systems for temperature maintenance and freeze protection in cooling water lines, steam or condensate return lines, compressed-air lines, fire protection lines, storage tanks, and valves. Chromalox heat trace systems can also be used to prevent solution precipitation and the increase of viscosity or solidification of product. In addition, Chromalox offers heat trace and controls for roof and gutter de-icing.

SELF-REGULATING, LOW-TEMPERATURE CABLE




- Circuit lengths: To 780 ft
- Process maintenance temperature: Up to 302°F
- Exposure temperature: Up to 420°F
- Power ratings: 3, 5, 8, 10, 15, and 20 W/ft
- Voltages: 120 and 208 - 277 V

Self-regulating cable for ordinary and hazardous environments prevents pipe freezing and maintains process temperatures. Constructed of a semiconductive heater matrix extruded between parallel buss wires, the self-regulating cable adjusts its output to independently respond to temperatures along its length. This heat trace cable can be single-layer overlapped. It is flexible and can be cut to length in the field. Cable can be used in Division 1 and Division 2 hazardous areas.


CONSTANT-WATTAGE CABLE

- Circuit lengths: To 780 ft
- Process maintenance temperature: Up to 350°F
- Power ratings: 4, 8, and 12 W/ft
- Voltages: 120, 208 - 277, and 480 V

Constant-wattage cable provides process temperature maintenance and freeze protection. Its rugged construction can tolerate exposure temperatures to 392°F. Fluoropolymer jackets are available for corrosive environments. Cable is flexible, can be cut to length in the field, and can be used in Division 1 and Division 2 hazardous areas.

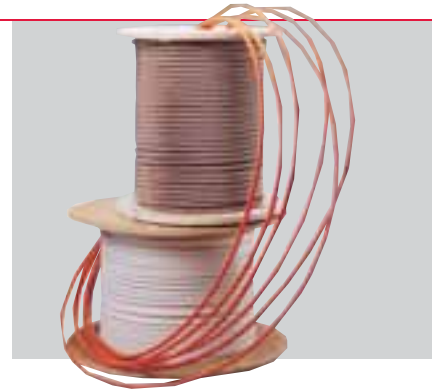

MINERAL-INSULATED CABLE

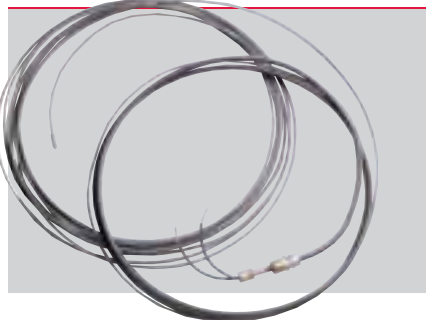

- Circuit lengths: To 1,000 ft
- Process maintenance temperature: Up to 900°F
- Power ratings: 5 - 50 W/ft
- Voltages: 120 - 600 V

Mineral-insulated cable is suitable for the most demanding heat trace applications. Its INCOLOY* sheath resists damage, is fire-resistant, and provides a reliable electrical ground. Chromalox mineral-insulated cable can be used in Division 1 and 2 hazardous areas.

SELF-REGULATING FREEZE PROTECTION CABLE

- Maximum circuit length: 660 ft
- Power ratings: 3, 5, and 8 W/ft
- Voltages: 120 and 208 - 277 V

Chromalox self-regulating freeze protection cable is ideal for warming metal and plastic pipes in commercial construction, institutional buildings, and some industrial freeze protection applications. Its self-regulating polymer core varies output along its entire length, saving energy and eliminating hotspots along pipes. It can be cut to length in the field and single-overlapped without overheating the cable. Cable can be used in non-hazardous areas only.



INSTALLATION KITS AND ACCESSORIES



Installation kits and accessories include all of the necessary components for straight or tee splices, power connection boxes, and water-resistant end-seal terminations for heat trace installation. Installation tape, pipe straps, and caution labels are available from our Econo or Duro line accessories.

CLASS 1, DIVISION 1 CABLE AND ACCESSORIES

Chromalox offers heat trace that is Factory Mutual approved for Class I, Division I, Group B, C, and D environments (hazardous gas and vapor) as well as Class II, Division I, Group E, F, and G (combustible dusts) and Class III, Division I environments. It can be cut-to-length and spliced in the field, and single-overlapped without burnout. Higher current capacity means longer circuit lengths – up to 780 feet. Chromalox hazardous environment cable is fully compatible with our intelliTRACE™ modular process controls.




MODULAR HEAT TRACE CONTROL SYSTEMS



The Chromalox intelliTRACE™ and weatherTRACE™ control systems are complete control solutions for heat trace applications, providing temperature control, monitoring, and power management in one package. The modular design of the control panel and components allows selection of only those features needed for a specific heat trace installation, minimizing cost and simplifying system configuration. The systems employ microprocessor-based controls and come pre-wired and assembled. Options include a choice of AC line voltages (120, 208, 240, 277, and 480), RS-485 communications interface, and Ground Fault Indicator alarms. Single-loop and multi-loop units are available. Multi-loop intelliTRACE panels feature a simple color touchscreen operator panel. Both retrofit easily into existing systems.

HEAT TRACE DESIGN SOFTWARE

ChromaTrace software is an indispensable tool for designing and managing heat trace projects. It does all of the IEEE-compliant calculations and allows you to run “what-ifs” to quickly find the most cost-effective solution. The software determines the exact equipment and quantities needed, and provides their part numbers. Product data sheets and manufacturer’s cross-reference guidelines are provided on-screen for easy reference. ChromaTrace helps manage hundreds of drawings for several heat trace projects and even ties pipe and tank data to specific drawings, identifying which pipes are freeze-protected or process-maintenance, with specific electrical loads in particular areas of the application.

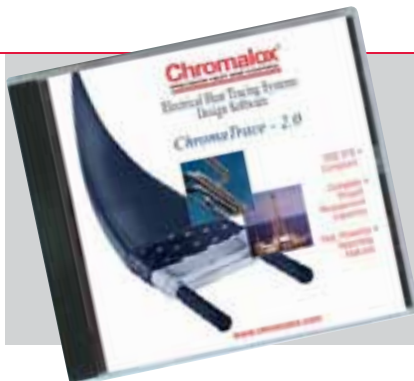

*INCOLOY is a registered trademark of Huntington Alloys Corporation.
NOTE: Consult the National Electric Code for classification of your hazardous area before selecting cable.

Typical applications include:

- Pipe freeze protection
- Process temperature regulation
- Frost heave protection
- Roof and gutter de-icing

TEMPERATURE CONTROLS



From basic electromechanical thermostats to single- and multi-loop, microprocessor-based temperature controllers, Chromalox offers precisely the required level of simplicity or sophistication. Advanced models feature PID operating modes for heating and/or cooling; fuzzy logic control; dual output/dual alarm protection; NEMA 4X front panels; ramp/soak programming; and digital communications and software.

From multi-loop electronic controls to stock and custom control panels, Chromalox can design the right system for your plant's needs. We are the only heating element supplier offering a complete line of electronic heat trace controls and control panels.

Typical applications include:

- Process temperature maintenance
- Freeze protection
- Reactors for chemical and pharmaceutical industries
- Environment chambers and refrigeration
- Food processing/preparation
- Resistive/inductive heating

MONITORS AND OVERTEMPERATURE CONTROLLERS

Chromalox monitors and overtemperature controllers are designed to protect expensive process equipment with models offering alarm relay outputs; DIN rail mounting; digital LED displays; thermocouple and RTD inputs; NEMA 4X front panels; and digital communications. UL-, cUL- and FM-approved models are available.



SCR POWER CONTROL COMPONENTS



SCR power control components are easily integrated into electric resistance heating applications and deliver high-precision power modulation and smooth power output. Zero-crossover and phase-angle-fired configurations are available that drive single- and three-phase loads to 1600 kW. Features include current limiting, over-current trip, LED status indicators, I²T fusing, and shorted SCR detection. Models are UL-, CUL-, CE-, and DEMKO-approved.

STANDARD POWER CONTROL PANELS



Chromalox stocks more standard power control panels than any other supplier in more sizes and configurations. Every pre-engineered, ISO 900-approved panel is ready for installation Chromalox eliminates the hassle and time expenditure needed to select, obtain, and assemble components. Our standard power control panels are available with NEMA 4, 4X, 7, and 12 enclosures and integrated temperature and overtemperature controls. They are pre-configured with SCR power controls or contactors, transformers, firing cards, and fuses, switches, indicators, and special labeling. Units are cUL-certified.

CUSTOM POWER CONTROL PANELS

At our ISO 9001- and UL 508-certified facility, Chromalox custom power control panels are engineered with solid-state controls and sized to virtually any application or specification. Used by the U.S. military for its shipboard systems, Chromalox custom power control panels are available in many NEMA-type enclosures, for single- or three-phase load requirements, and a variety of voltages, contactors, and SCR power controllers. Circuit fusing, current-sensing relays, ground fault breakers, and circuit ammeters can be tailored to your requirements.




intelliPANEL™ 3-PHASE SCR POWER CONTROL PANEL

The industry's first process/power control with a color touchscreen flat panel display provides simplified configuration settings and local monitoring that greatly reduces setup time compared to DIN-style controllers and conventional PLC systems. It features a graphic user interface and simple programming functions. It is loaded with diagnostic features ranging from voltmeters, ammeters, and wattmeters to ground fault monitoring and trending, resistance monitoring, and temperature alarms. The advanced intelliPANEL™ design provides standard panel ratings from <100 to 1200 amps with voltage ranges of 208 to 600 Vac, three-phase power.



SENSORS AND ACCESSORIES

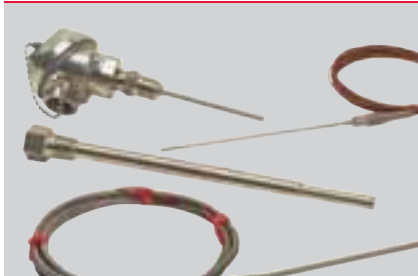

Sensors range from bare thermocouples and RTDs to the most sophisticated infrared non-contact sensors that directly, consistently, and accurately measure product temperature. Stock accessories include thermowells, wiring, indicating meters, timers, and recorders in addition to electromechanical contactors, thermostats, and thermostats.

NOTE: Consult the National Electric Code for classification of your hazardous area before selecting your controls.

INDUSTRIAL COMFORT HEATERS

Chromalox electric comfort heaters provide efficient, economical heat for commercial and industrial applications. Convection, forced air, and radiant heaters provide safe, clean, fast heat. Their heavy-duty construction affords long, dependable service.

Typical applications include:

- Heating industrial work areas
- Machinery freeze protection
- Heating warehouse and storage areas
- Heating and freeze protection in sewage treatment plants
- Pipe thawing
- Shipboard heating

GENERAL-PURPOSE BLOWERS



- Power ratings: 2.6 - 50 kW
- Voltages: 208 - 600 V, single- and 3-phase

Heavy-gauge steel blowers trimmed in a polyester powder coat come in horizontal or vertical configurations that can be ceiling- and wall-mounted. Adjustable louvres direct air flow. Chromalox general-purpose blowers meet UL, CSA, NEC, and OSHA requirements. LUH series heaters include seismic qualifications. Various built-in control options are available.

GENERAL-PURPOSE CONVECTION

- Power ratings: 250 W - 5 kW
- Voltages: 120 - 600 V, single- and 3-phase

General-purpose convection heaters are designed to be wall-mounted in isolated areas, crane cabs, shop offices, and plants. These heavy-gauge steel units are coated with corrosion-resistant powder coat. Various models include thermostats, tamper-proof construction, and UL listings.



HEAVY-DUTY BLOWER



- Power ratings: 2 - 50 kW
- Voltages: 120 - 575 V

Heavy-duty forced-air heaters feature heavy-duty construction for use in dirty, corrosive environments. Some models are available with NEMA 4X control enclosures and stainless steel construction to resist dirt contamination and chemical attack, and can be hosed down. Chromalox heavy-duty heaters are UL-listed and meet NEC and OSHA requirements. Some models are CSA-certified.

HAZARDOUS DUTY



- Power ratings: 1.6 - 35 kW
- Voltages: 120 - 600 V, single- or 3-phase

Hazardous-duty convection and forced-air blower-type heaters are designed for rugged industrial use in the presence of potentially flammable or explosive gases, vapors, powdered metals, or dusts in locations such as sewage treatment plants, petroleum refineries, and chemical processing plants. Numerous control options are available. Units are UL-listed, and CSA-, CE-, and ATEX-certified models are available for wall or ceiling mounting. Consult the National Electric Code for classification of your hazardous area before selecting your heater.

RADIANT HEATERS

- Power ratings: 500 W - 13.5 kW
- Voltages: 120 - 600 V, single- and 3-phase

Radiant heaters provide virtually instantaneous, dependable heat for tough-to-heat areas. They are designed for fixed mounting and will maintain an isolated comfort level within a larger, cooler area. Heavy-duty, metal-sheathed elements resist impact and vibration and are ideal for high-abuse applications. Quartz tube or quartz lamp elements can be used indoors or outdoors. Units are UL-listed and CSA-certified.



PORTABLE HEATERS



- Power ratings, forced air: 2 - 60 kW
- Voltages: 208, 240, 480, and 600 V, single- and 3-phase

Clean, odor-free portable heaters are available in two forced-air designs. Both are constructed for heavy-duty service and can be easily moved to virtually any location where instant heat is required. Forced-air designs are ideal for worker comfort, drying and curing, thawing pipes and machinery, and where temporary, localized heat is necessary.

COMPONENT HEATERS


Component heaters by themselves meet many heating needs. They can also be integrated into more complex heating systems providing a complete thermal solution for your heating requirements.

Shape and size most often are the determining factor in most heater applications. Chromalox carries the widest selection of standard component heaters in many shapes, sizes, and wattages.

Typical applications include:

- Free/forced air heating
- Oil, heat transfer fluid heating
- Die and platen heating
- Condensation prevention
- Commercial cooking equipment
- Degreasing/rinse tanks

TUBULAR ELEMENTS

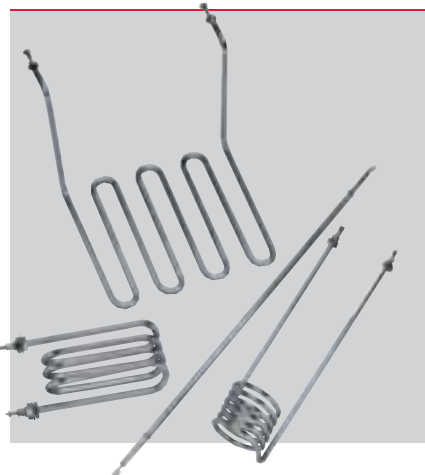

- Maximum temperature: 1,600°F
- Voltages: Up to 600V

Tubular heating elements are versatile and transfer heat exceptionally well by conduction, convection, or radiant heating to heat liquids, air, gases, and surfaces. Round, triangular, flat press, and formed bends are made to customer requirements. A multitude of sheath materials are available. More than 20 optimal terminations and many stocked accessories are available. Can be furnished as UL-listed and CSA-certified. VDE and CE certification also available.


STRIP/RING/DISC ELEMENTS

- Maximum sheath temperature: 1,500°F
- Watt density: Up to 38 W/in.²

Rugged and easy to install, these units transfer heat by either conduction or convection to heat liquids, air, gases, and surfaces. Applications include drying, melting, baking, or curing. Strip heaters range from 0.5 inch to 2.5 inches wide and lengths to 72 inches. Units bolt or clamp to many surfaces. Ring heaters can be nested to provide concentrated heat in small areas. Many sheath materials, termination styles, operating temperatures, sizes, voltages, wattage ratings, and mounting devices are available. Disc units are solid design and are available from 2 1/4 inches to 3 1/4 inches in diameter.



CARTRIDGE ELEMENTS

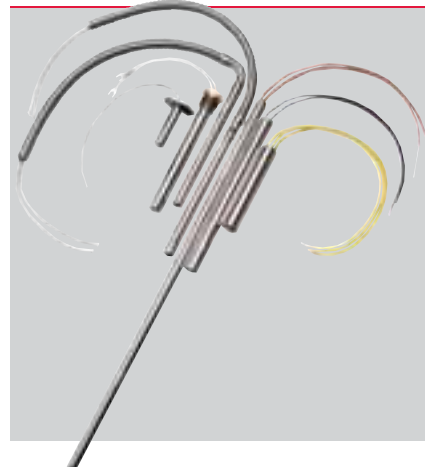

- Diameters: 0.125" to 1.25"
- Maximum sheath temperature: 1,600°F
- Watt density: 25 to 262 W/in.²

Cartridge heaters are inserted into drilled holes to heat metal parts or small spaces. Chromalox provides an array of sizes, wattage ratings, voltages, lead, and mounting options. Optional end seals resist contaminants and moisture from entering the heater as operating temperatures increase.

BAND ELEMENTS




- Maximum temperature: 1,500°F
- Watt density: Up to 50 W/in.²

Band heaters grip tightly to cylindrical surfaces to supply uniform heat transfer. Chromalox band heaters are flexible and come in one- or two-piece construction for easy installation and removal. Stainless steel braids and conduit protect terminations and resist contamination.

THIN BLADE HEATER ELEMENTS

- Length: Up to 120"
- Profile: 0.235" x 1"
- Maximum temperature: 1,200°F
- Watt density: Up to 75 W/in.²

Thin Blade elements provide more surface area than standard tubular elements for greater wattage or lower watt densities. Chromalox Thin Blade heating elements can be configured for immersion heating, conduction, or convection. A variety of sheath materials is available. Three-wire construction within the element provides uniform heating. Single- or three-phase current terminations are available with a 120- to 480-volt range.

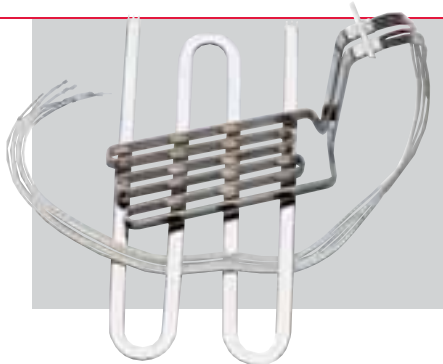

SILICONE LAMINATE/FLEXIBLE ELEMENTS



- Maximum temperature: 390°F
- Voltage: Up to 600V

Versatile Chromalox Silicone Laminate/Flexible elements find use in applications requiring low to medium temperatures. Rugged construction of lightweight material provides chemical and moisture resistance. Wire elements are durable and wound precisely within the structure for optimal performance. A variety of electrical, shape, and contour fittings meets a broad range of specifications.

Chromalox Value-Added Products and Services Are Available Worldwide



Chromalox® PRECISION HEAT AND CONTROL

103 Gamma Drive
Pittsburgh, PA 15238
USA

Phone: (412) 967-3800
Fax: (412) 967-5148
Toll-Free: 1-800-443-2640

email: sales@chromalox.com
www.chromalox.com

Chromalox-UK
Unit 122, Lombard House
2 Purley Way
Croydon, Surrey, CR0 3JP, UK

Tel: +44 (0)20 8665 8900
Fax: +44 (0)20 8689 0571

email: uksales@chromalox.com
www.chromalox.co.uk

Chromalox-France
Route de Château-Thierry
Noyant et Aconin
F-02203 SOISSONS Cedex, France

Tel: +33 (0)3 23 74 39 39
Fax: +33 (0)3 23 74 39 00

email: etirexchromalox@wanadoo.fr
www.chromalox.fr

Chromalox-China
Chromalox (Shanghai) Precision Heat
and Control Co., Ltd.
Suite A2, 4th Floor, Fenggu Building
88 Taigu Road
Waigaoqiao Free Trade Zone
Shanghai 200131
People's Republic of China

Tel: +86 (0)21 5866-8802
Fax: +86 (0)21 5866-8803

email: shanghai.office@chromalox.com
www.chromalox.cn