





# ELECTRONIC VALVES


<u>MOUSE VALVE SERIES (EV, ET, EC, EW SERIES)</u>	<u>165 - 177</u>
<u>OXYGEN CLEAN, SCIENTIFIC &amp; CORROSION- RESISTANT SERIES VALVES</u>	<u>171 - 172</u>
<u>INTRINSICALLY SAFE EI &amp; EIO VALVES</u>	<u>173 &amp; 178</u>
<u>EM SERIES STUD MOUNTED VALVES</u>	<u>179</u>
<u>ELECTRONIC VALVE ACCESSORIES</u>	<u>180 - 183</u>
<u>EVP SERIES PROPORTIONAL CONTROL VALVES</u>	<u>184 - 187</u>
<u>MAXIMATIC® SOLENOID VALVES</u>	<u>188 - 198</u>
<u>ES, ESO SERIES COMPACT VALVES</u>	<u>199 - 204</u>
<u>10 MM &amp; 15 MM SUB-MINIATURE VALVES</u>	<u>205 - 216</u>
<u>ELECTRONIC MANIFOLD CARDS</u>	<u>217 - 219</u>

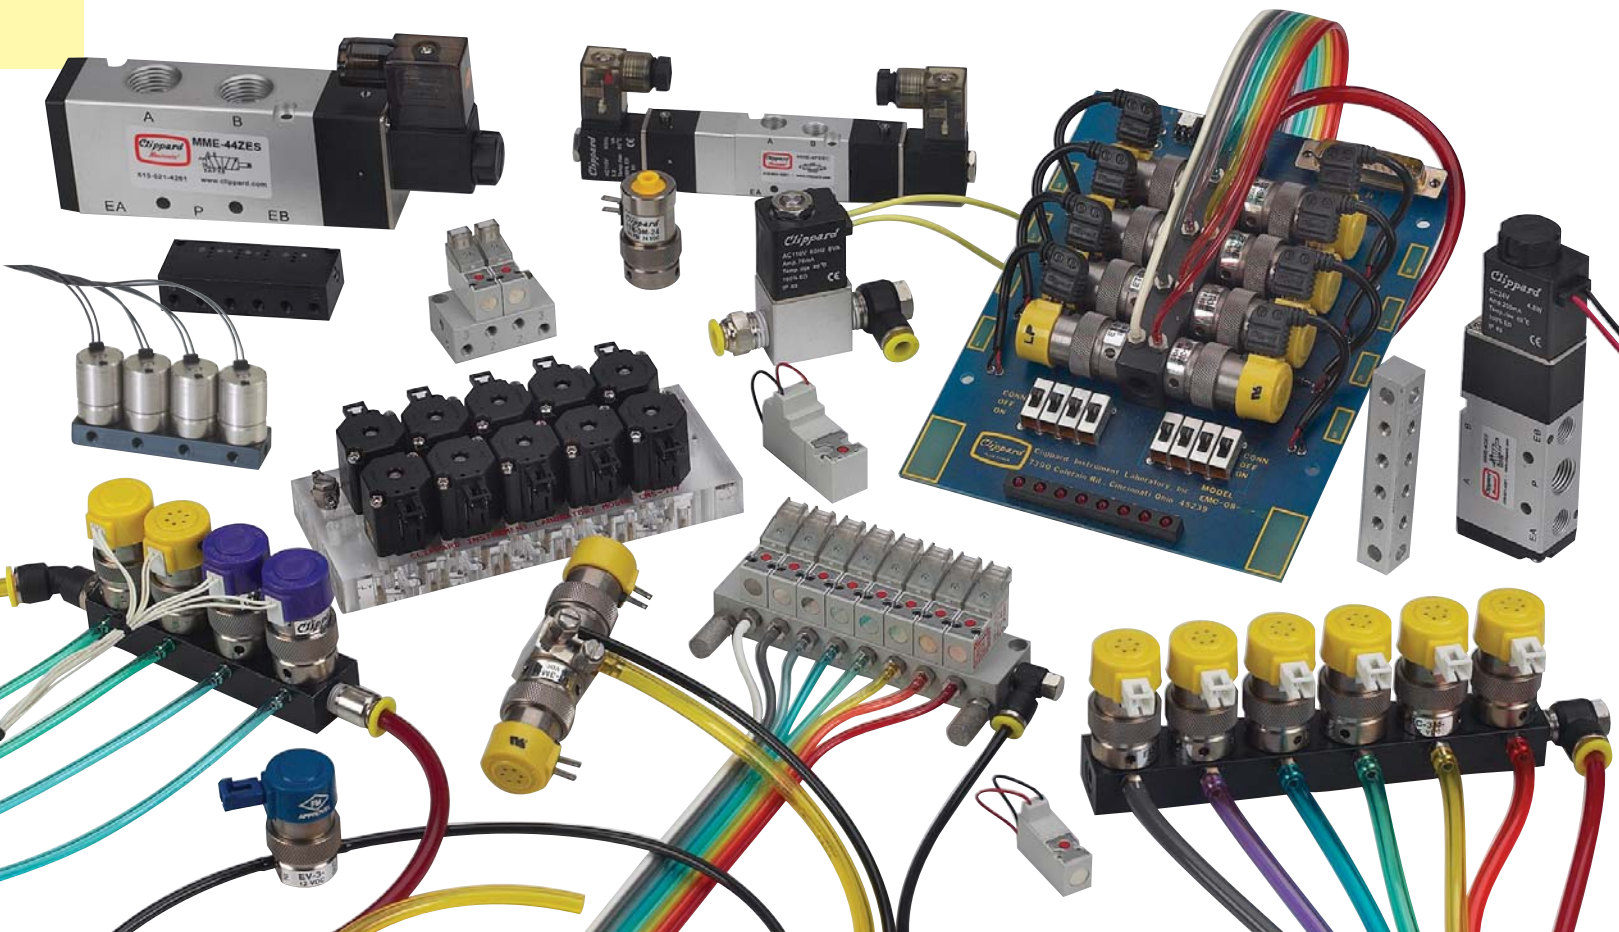

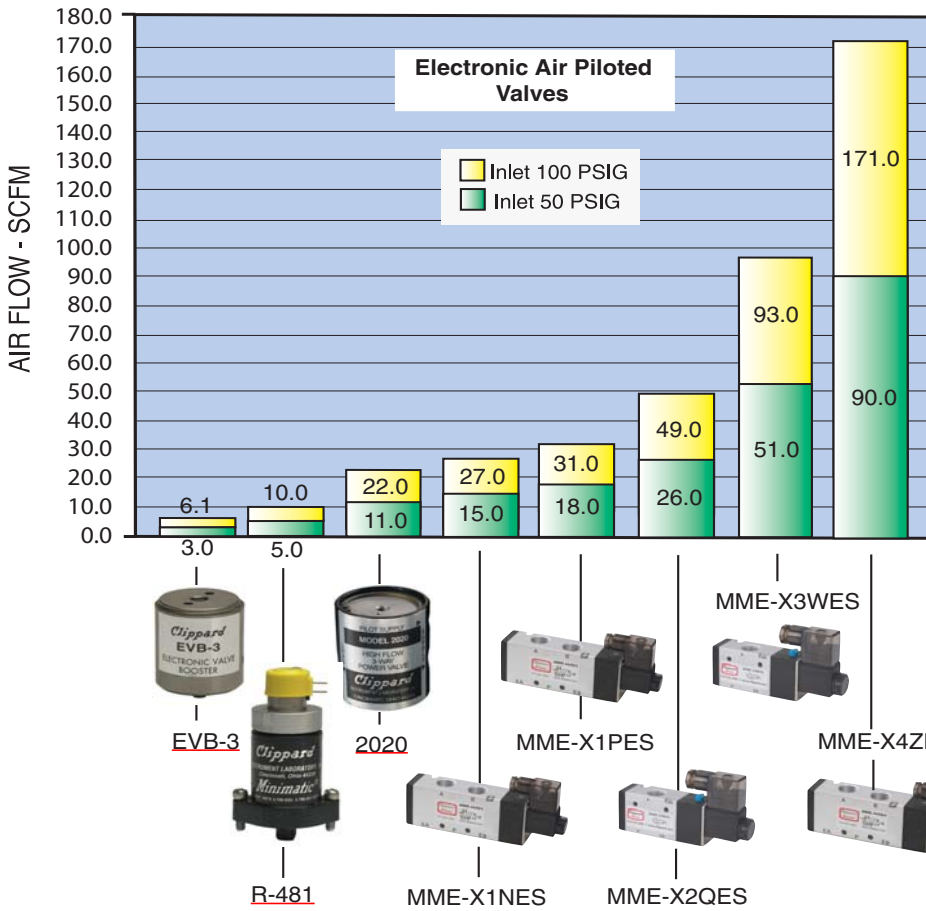

## Typical Air Flow

The EV, ET, EC, EW, ES, EI, E3, MME, etc. are electronic valves offered by Clippard. Combined with a series of Clippard manifolds, they provide a complete system for efficient interface with electric and electronic circuits. The charts show typical air flow values to help select the right valve for the application.

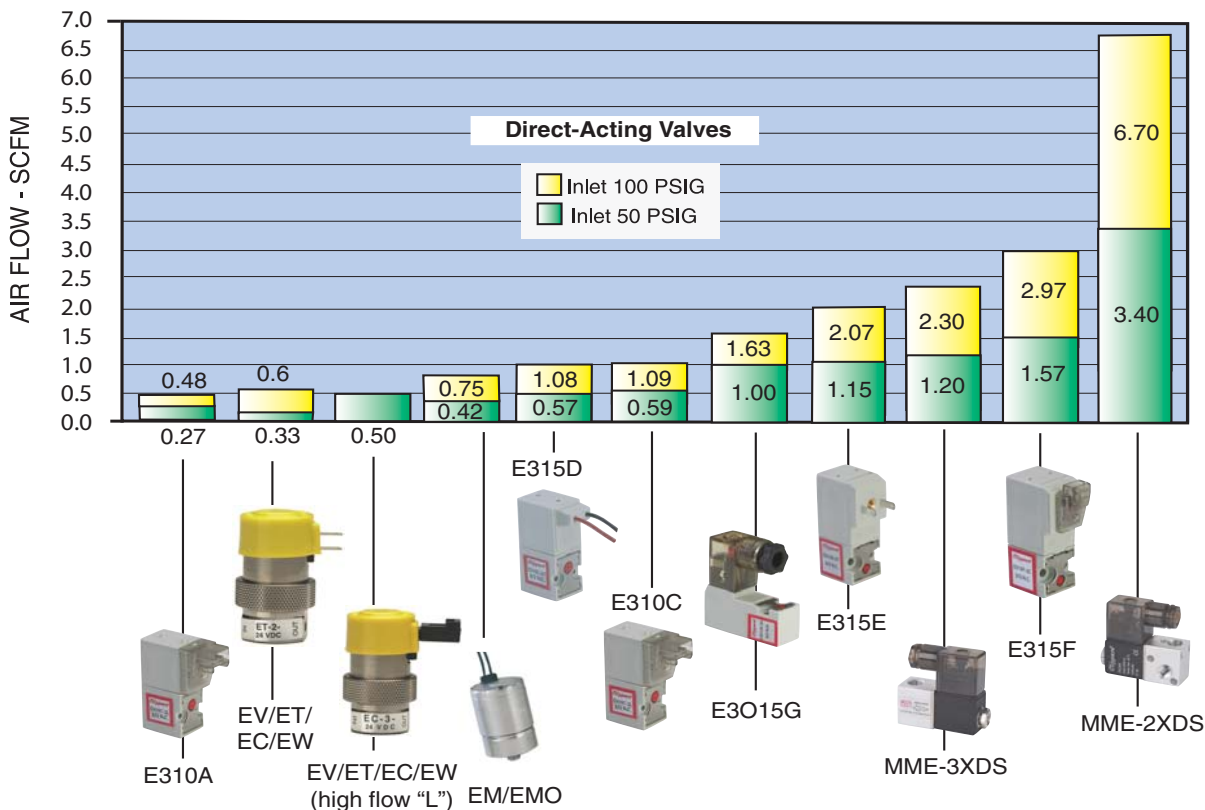



# ELECTRONIC MOUSE VALVE SERIES

## Clippard Mouse Series Electronic Valves

- Functional Simplicity—One Moving Part!
- 1,000,000,000+ Cycle Life
- Fast Response
- Low Heat Rise
- Quiet Operation
- Industry Standard for Leak-Free Operation
- Low Power



### EV Series Mouse Valves

2- and 3-way manifold and in-line mounting. Normally-Closed and fully-ported versions.

See Pages 172 - 176



### Proportional Mouse Valves

Proportional control provides variable output flow. 2-way only.

See Pages 184 - 187



### “Oxygen Clean” EV Series Mouse Valves

Specially-cleaned valves for analytical or Oxygen use.

See Pages 177 - 172, 174 - 176



### ECN, EVN, ETN Mouse Valves

Normally-Open, manifold mount to allow Normally-Closed and Normally-Open valves on the same manifold.

See Page 177



### Corrosion-Resistant Series Mouse Valves

Enhanced plating and some stainless steel components add to the life of this valve used with mildly corrosive media, such as moisture in air or gases.

See Pages 171 - 172, 174 - 176



### Intrinsically Safe Mouse Valves

Low power and suited for Intrinsically Safe barriers.

See Pages 173, 178



### EM Series Mouse Valves

The smallest valve in this series, for applications requiring high-density valve population.

See Page 179



### ES Series Mouse Valves

Alternate mounting with same compact design and reliability.

See Pages 199 - 204

## Poppet & Spool Valves



### 10 mm Valves

High quality and interchangeable 2- and 3-way solenoid valves. Clippard's smallest electronic valve series.

See Pages 205 - 210



### 15 mm Valves

Higher flow and manifold mount. Variety of electrical connections and AC/DC power.

See Pages 211 - 216



### Maximatic® Direct-Acting Valves

Single-solenoid, spring-return poppet valves. 2- and 3-way models up to 1/4" NPT.

See Page 192




### Maximatic® 3-Way & 4-Way Valves

Available in a variety of sizes and voltages in stock for immediate delivery.

See Pages 193 - 198



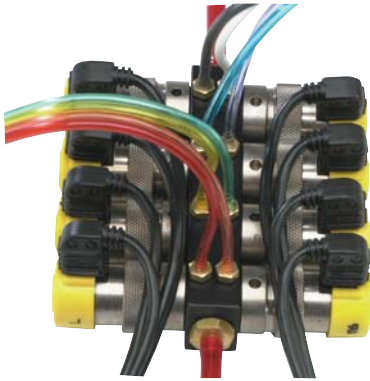

## Multi-Valve Manifolds

Multi-valve manifolds are available in two lengths with either single or double (top or top and bottom) rows of outputs for versatility in application. Input to all valves mounted on this manifold is through the manifold end. Outputs are

individual #10-32 ports for hose barb fittings and vinyl or urethane hose.

[See Page 183](#)



## 2013 Series Electronic Fluidamp

Low-power DC solenoid solid state output signals can be directly converted to high pressure pneumatic power without amplification.

[See Page 180](#)



## EVB Booster Series

Electronic Valve Boosters amplify the flow capacity of EC, EV and ET type valves by over eight times. Manifold style electronic valves mount onto booster body, which, in turn, mounts on Clippard manifolds.

[See Page 180](#)



## 2020/2021 High Flow EC, EV & ET Piloted 3-Way Valves

Designed to be piloted by a Clippard EC, EV, ET and EW manifold mount electronic valve. Output from the EC, EV, ET and EW actuates the valve to produce outputs up to 22 scfm at 100

psig. Combines low wattage, long life and cool running of the EC, EV, ET and EW valves with quick response and high flow of Clippard Fluidamp type valves.

[See Page 180](#)



## Dual-Supply Manifold

Shown is the [15490-3](#) Clippard Dual-Supply Manifold with two ET-3M electronic/pneumatic interface valves. 1/8" NPT inlet is seen at the left of the manifold with the dual #10-32 port outlets at the right.

[See Page 182](#)



## Pilot Manifold

Clippard's ET valve is mounted to the [15491-1](#) Clippard Pilot manifold, making it possible for the ET-3M valve controlled by an electronic signal to actuate a larger air-piloted valve or an air cylinder.

[See Page 182](#)



Send me a **FREE** full-line catalog!

Miniature Pneumatic & Electronic Control Devices









# ELECTRONIC MOUSE LINE VALVES

## Clippard's Unique Electronic Mouse Valves

Clippard's Electronic Valves are quiet and quick! Valves accept low voltage, low current signals, convert them into high pressure (100 psig) pneumatic outputs. Optional low pressure/medium flow and low pressure/high flow are available. (The air supply should be reasonably clean and dry for optimum performance. Recommended filtration is 40 micron.)

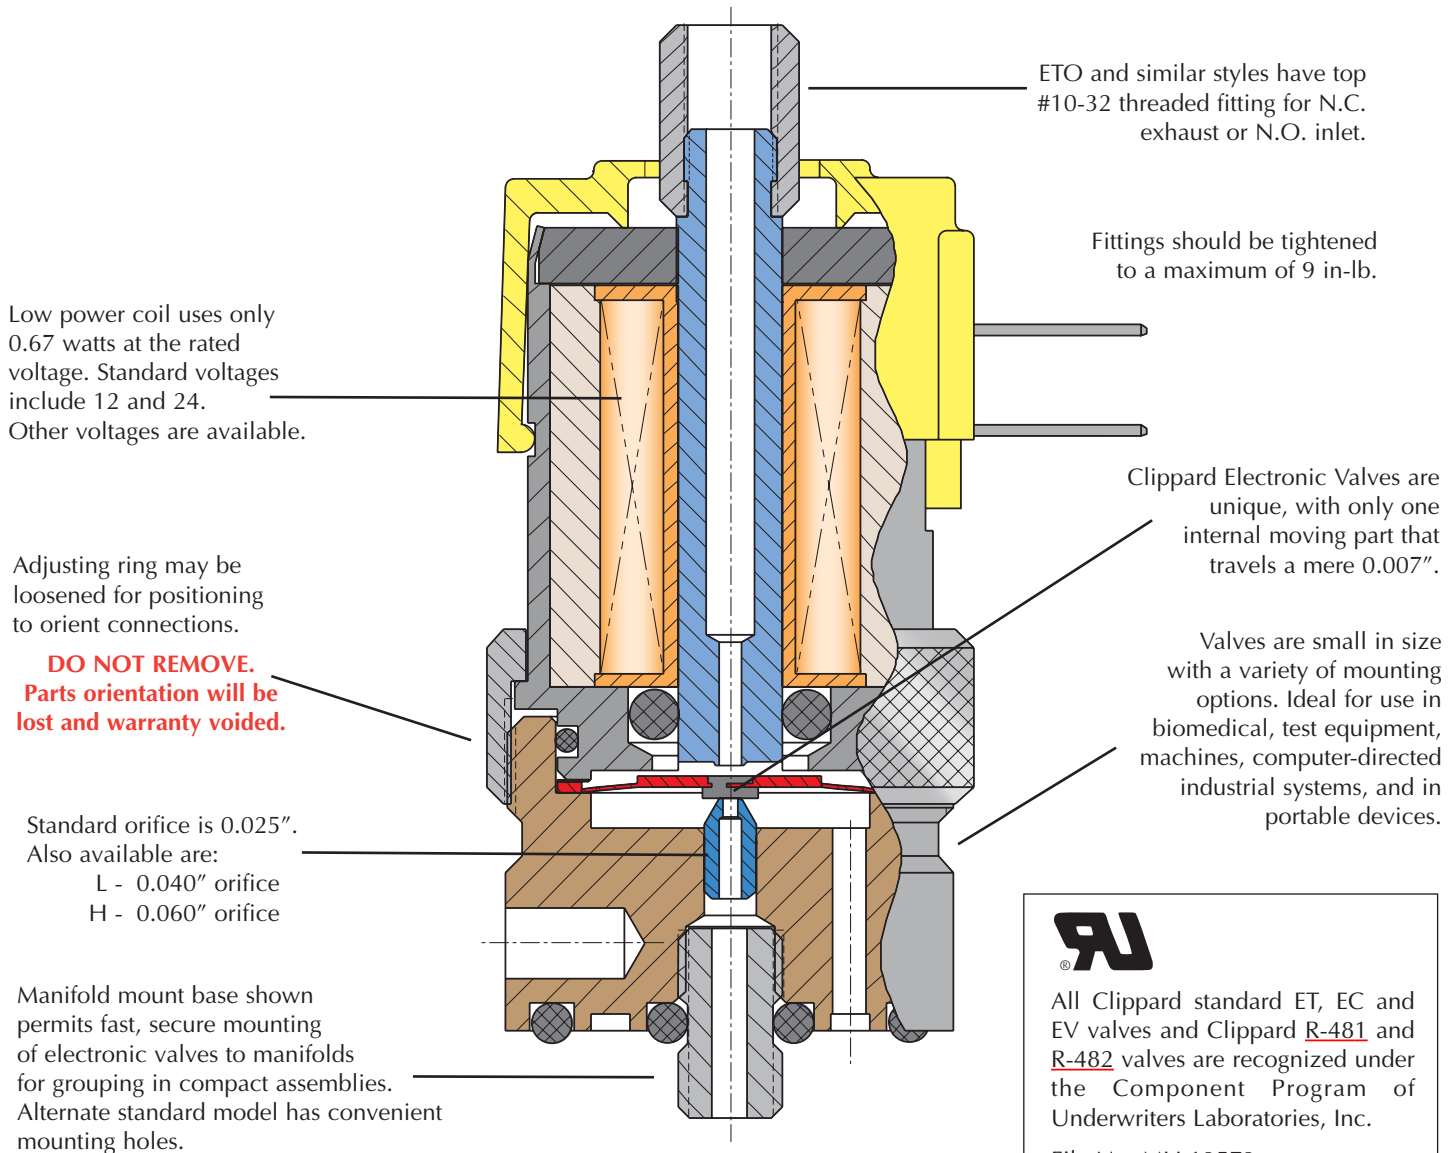All Clippard standard ET, EC and EV valves and Clippard R-481 and R-482 valves are recognized under the Component Program of Underwriters Laboratories, Inc.  
File No. MH 13573

Clippard Minimatic electronic valves are precision-built 2-way or 3-way control valves, utilizing a unique, patented, valving principle. There are no sliding parts. Complete poppet travel is a mere 0.007". As a result, low power consumption and exceptionally long life are major benefits of this design.

The valves are very quiet in operation and also very cool. The valves' small size makes them well suited to a wide range of applications in biomedical, EDP, environmental test equipment, textile machines, packaging machinery, computerized industrial automation, and portable systems.

## Clippard Functional Simplicity

- The design of Clippard electronic valves is a deceptively simple arrangement with a minimum of operating parts, and remarkably straight forward low power operation.
- The Clippard “spider” is the only moving part and its motion to operate the valve is a mere 0.007” travel.
- Low voltage D.C. inputs, signals from simple manual switching up to computer directed systems, move the spider in extremely fast response time . . . 5 to 10 milliseconds.
- The unit uses extremely low power (0.67 watts at the rated voltage) and is cool running. The valves are light in weight, compact in physical size and mount easily in space-saving packages.




## Quick Connect

Clippard ET valves feature spade lugs for simple, quick secure low voltage connections. Wire crimp-on spade lug connectors are available separately to adapt electronic wiring where necessary. Clippard original EV type valves are available in popular voltages with 18” wire leads. The EC model utilizes a 0.025” square pin connector.



## Easy Mounting

The complete line of EC, EV, ET and EW electronic valves are available with two mounting options. Standard base models have two 6-32 threaded, 7/32” deep mounting holes. Manifold models are equipped with a bottom stud, 5/32” long with #10-32 thread, which fits Clippard standard and special manifolds, accessory valves and subplates. Spanner holes in the valve body permit tightening.

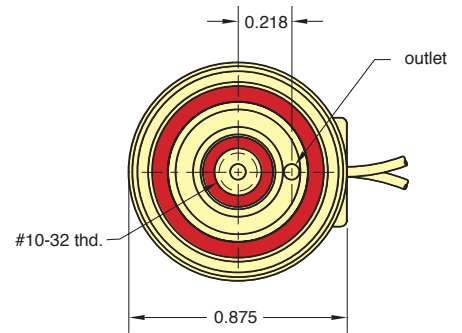


Series	NOMINAL			Power (watts)	Working Range (cont. duty)
	Voltage	Current (amps)	Resistance (ohms)		
Standard	6	0.11	54	0.67	90 to 150% of rated voltage
Oxygen Clean	12	0.055	218	0.67	
Scientific	24	0.028	864	0.67	
Corrosion-Resistant	12	0.098	122	1.2	90 to 110% of rated voltage
	24	0.049	486	1.2	




# ELECTRICAL & MOUNTING OPTIONS

## ELECTRICAL CONNECTION OPTIONS

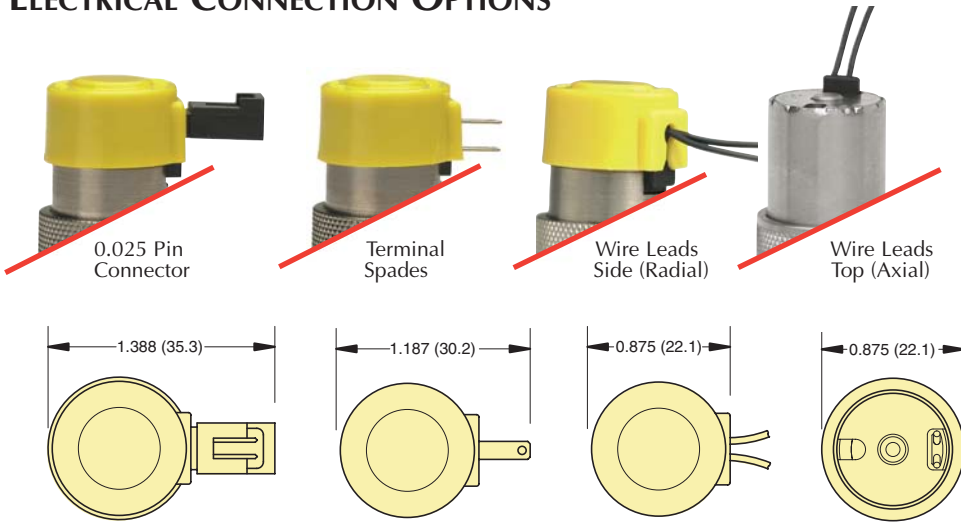


## MOUNTING OPTIONS


### Inline Mount

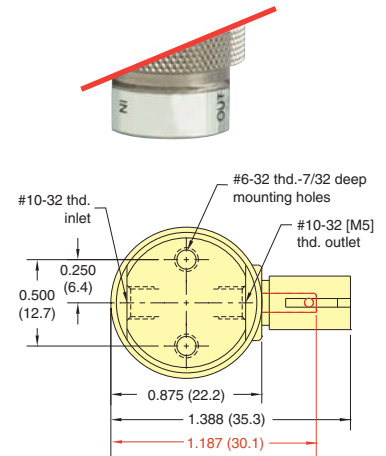

## VALVE TYPES

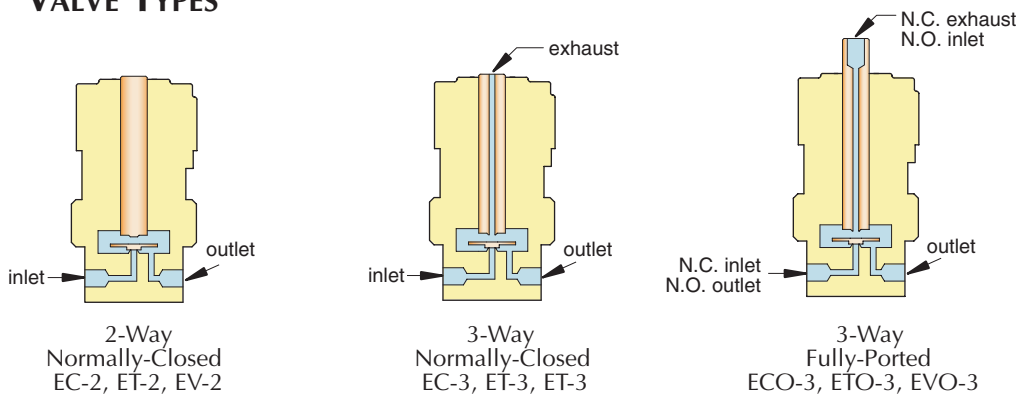

### Manifold Mount

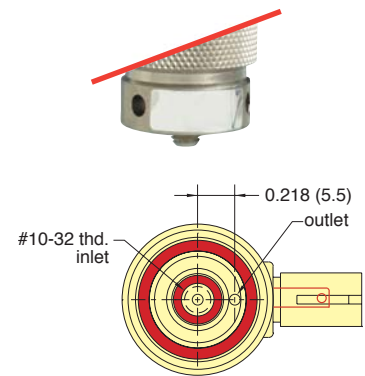

## CUSTOM SOLUTIONS

If you need a product that fits your application perfectly, Clippard has the capability to design or modify one of its products to suit your exact needs. We understand that a standard catalog product may be close but not be exactly what you need. Let us know YOUR Need, and we will help to find YOUR Solution!

**CUSTOM**er solutions



- Custom Voltage
- Custom Flow Rate
- Custom Max Pressure/ Vacuum

### Tight Assemblies

Cartridge design is desirable for integrating valves into compact assemblies. This EVP proportional valve is calibrated to meet the customer's flow range and maintain "zero" leak rate, and is incorporated into the OEM's manifold.



### Clippard Integrated Solutions

offer optimized pneumatic system design to increase performance, reduce cost, and make your job easier.








## Oxygen Clean Series

All EV, ET, EC and EW series electronic valves with the "O-" part number option are available manufactured and assembled for use in Oxygen-enriched environments for applications that are extremely sensitive to contamination.

- Valves are ultrasonically cleaned, assembled, inspected and tested in an enclosed controlled area with a state-of-the-art positive pressure HEPA filtration system
- Both organic and inorganic contaminants such as particulate matter and Hydrocarbon oils are removed
- No organic sealants, adhesives or lubricants are used in the manufacturing process
- Feature FKM (fluorocarbon) seals
- Component parts are lubricated with Oxygen-compatible PFPE (perfluoropolyether) grease, only as needed for assembly
- Individual testing and inspection is accomplished utilizing compressed Nitrogen and ultra-violet light

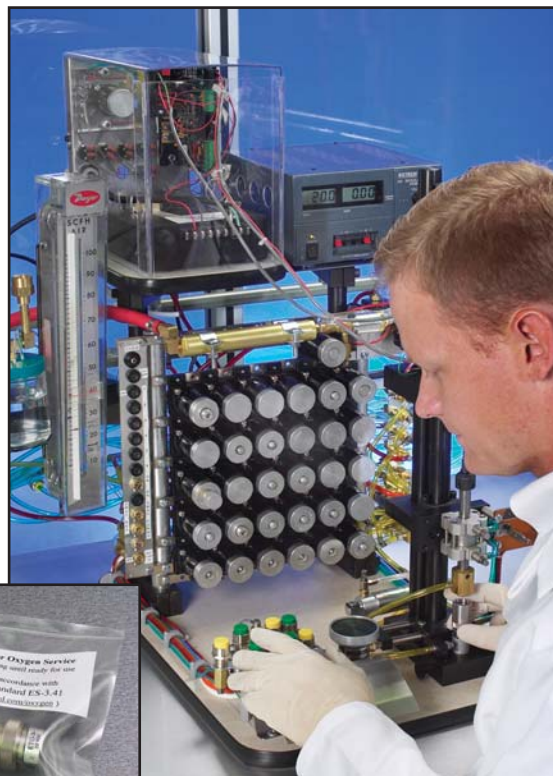

For more information on the process, visit [www.clippard.com/oxygen](http://www.clippard.com/oxygen)



## Scientific Series

The Clippard Scientific Series (S-) combines the functions of our Mouse Valve with specific seals and lubricant to accommodate applications in Scientific markets. Analytical equipment and other apparatus used for diagnostic purposes often require FKM seals and PFPE lubricants in order to reduce outgassing and other "analytical noise" from the samples being moved through the system. This series accommodates that need. Additional special seal materials and lubricants may be specified by contacting your local Clippard distributor, or the factory.




## Corrosion-Resistant Series

Clippard's Corrosion-Resistant Series (CR-) incorporates materials and construction that provides enhanced protection for valves used with mildly corrosive media. Moisture in air or gases, or other corrosive elements cause less damage to the stainless steel elements of the valve. Where stainless steel is not possible, plating is incorporated to add life to wear components. A nickel-plated brass valve body is standard, but stainless steel may be substituted.




# ELECTRONIC VALVE FEATURES


### STANDARD SERIES

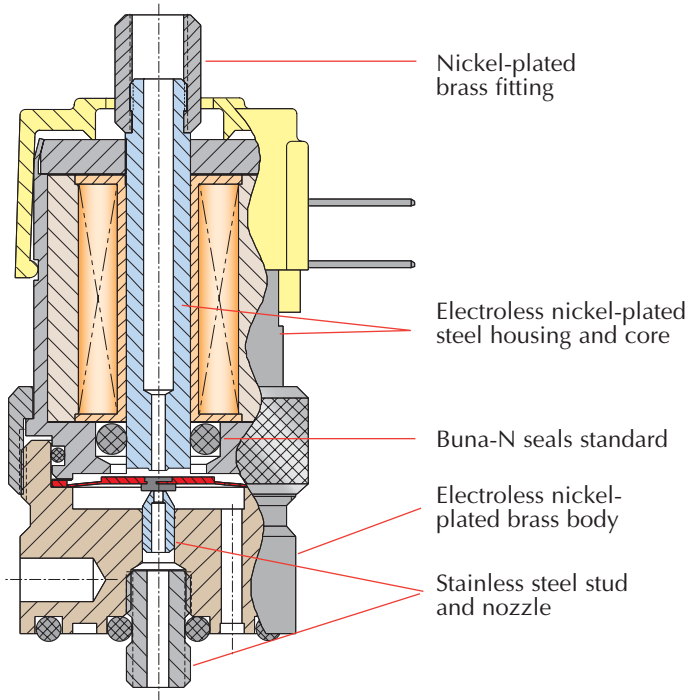


### SCIENTIFIC SERIES (S-)

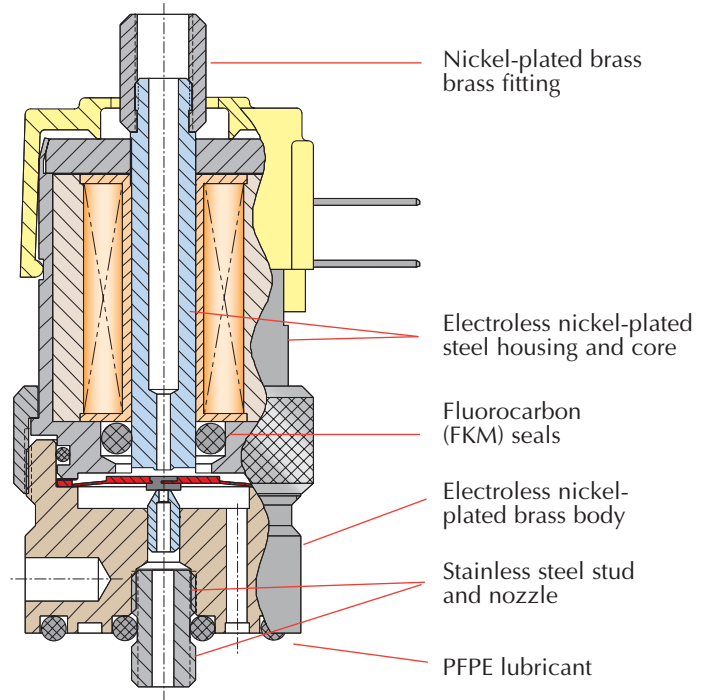

### CORROSION-RESISTANT SERIES (CR-)

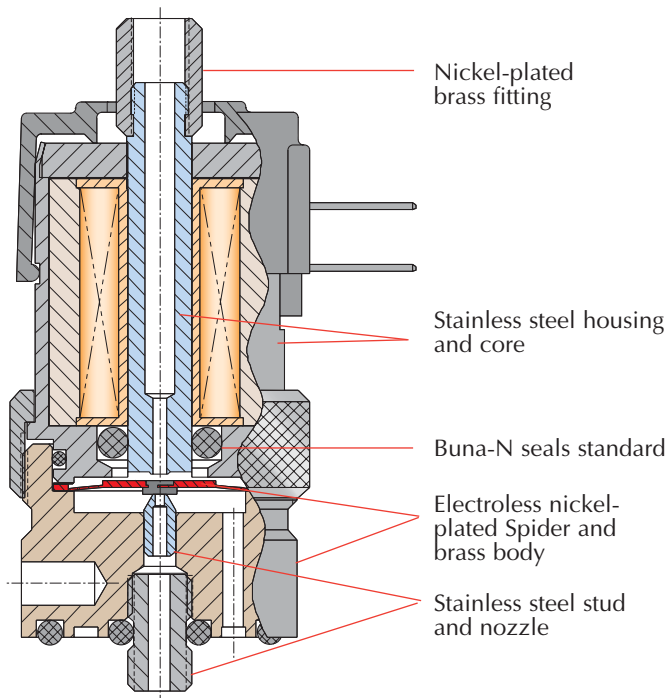

### CLEANED FOR OXYGEN SERVICE SERIES (O-)

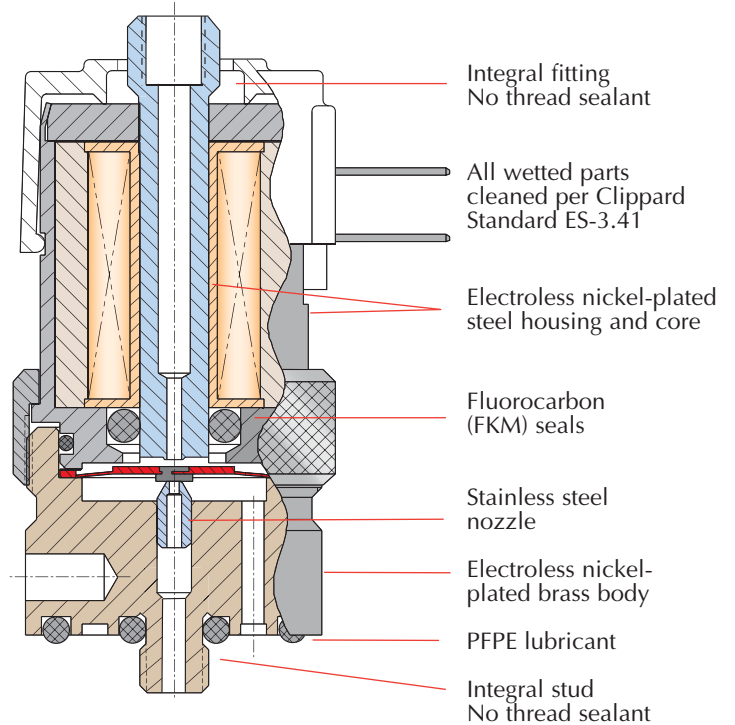



## What is Intrinsic Safety?

An intrinsically safe system is one in which all electrical devices and their associated circuits are designed such that they can neither arc nor spark with sufficient energy to ignite the hazardous substances around which they are being used. Put another way, the energy stored from the inductance of the circuit components must be unable to generate a spark or arc at the circuits open point during current circulation that is capable of igniting the hazardous materials present when they are in a fuel/air mixture that is most favorable for ignition.

## What is Entity approval?

According to INTRINSIC SAFETY standards, there is no requirement for authorized laboratory certification of system-wide intrinsic safety if the designer can determine, with certainty, that the physical and electrical parameters of every system component has been met sufficient to ensure that system-wide intrinsic safety has been maintained.

An "Entity Approval" is documentation stating that a device is intrinsically safe in specified hazardous atmospheres if the stated physical and electrical conditions contained in the approval are met. By meeting the requirements of "Entity Approvals" on all components of a system, the designer can more easily document that system-wide intrinsic safety has been maintained.

The Clippard EI-EIO series valves hold the Entity Approvals listed and supporting documentation is available to our customers.

## Increase Flow

**High Flow Valves** Models 2020 and 2021 high flow valves are piloted 3-way valves that work with EI/EIO intrinsically safe valves as well as EV/ET 3-way valves. They are designed to be mounted on EI/EIO manifold valves. Outputs from the EI/EIO will actuate the valve and produce outputs up to 22 scfm at 100 psig. Piloted 3-way valves are also available as R-481 and R-482.

**EVB Booster Valve** Clippard EVB-3 booster valve mates with manifold mounted EI/EIO valves and manifolds to provide increased flow. Direct piloting from Clippard EI/EIO valves provides a flow of up to 6.1 scfm at 100 psig.

## Definitions

$C_a$  : Maximum Allowed Capacitance

$C_i$  : Maximum Internal Capacitance

$I_{max}$  : Maximum Input Current

$I_{sc}$  : Maximum Output Current


$L_a$  : Maximum Allowed Inductance

$L_i$  : Maximum Internal Inductance

$V_{oc}$  : Maximum Output Voltage

$V_{max}$  : Maximum Input Voltage


$V_t$  : Voltage Total

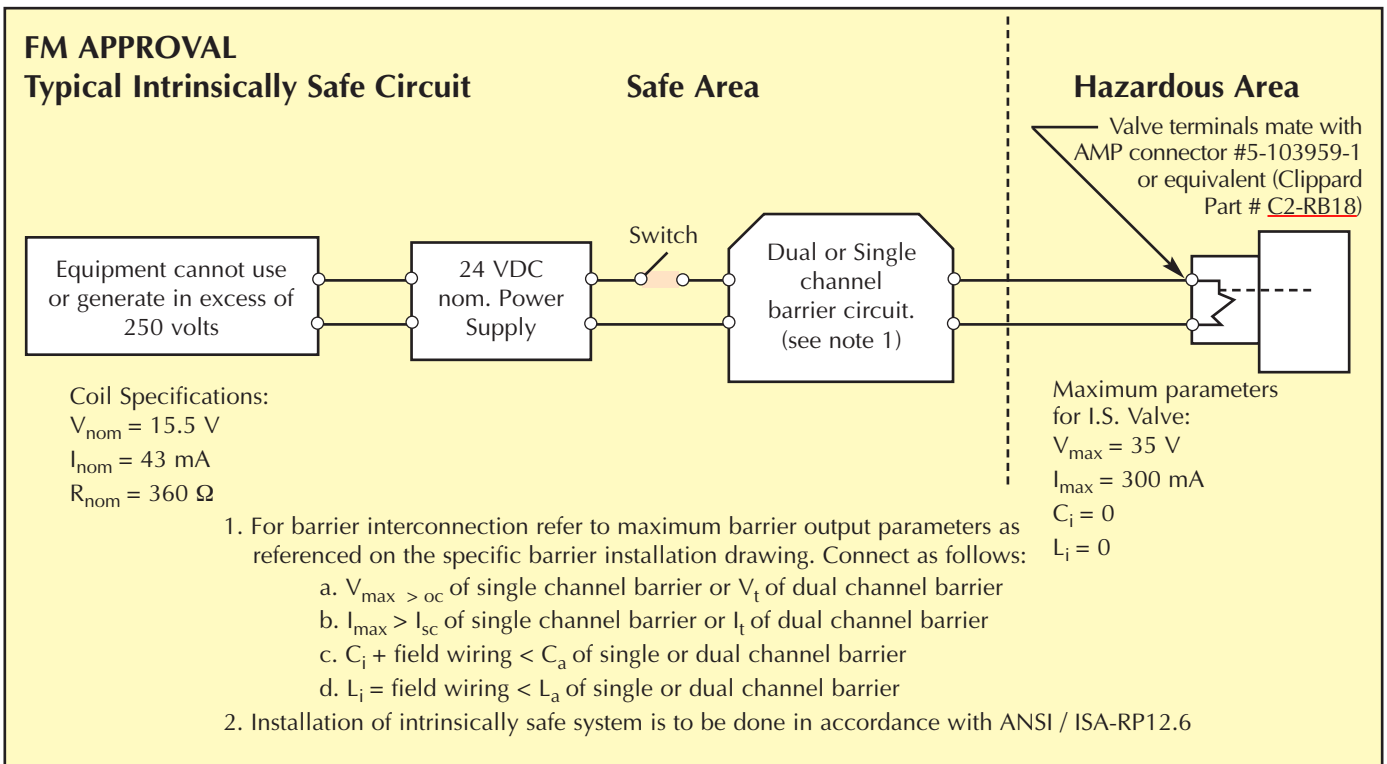





# 2-WAY NORMALLY-CLOSED VALVES, IN-LINE & MANIFOLD

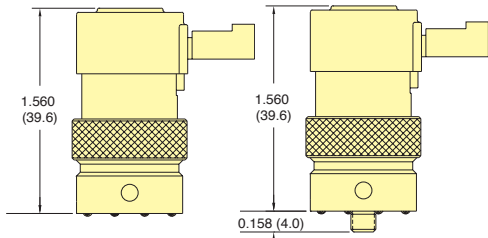

		Pressure Range		Voltage		Part No.	
		Vac. to 105 psig +		Vac. to 50 psig		Vac. to 25 psig	
		12 VDC		24 VDC		In-Line Mount	Manifold Mount
 In-Line Mount	 Manifold Mount	•	•	•	•	* <a href="#">EC-2-12</a>	* <a href="#">EC-2M-12</a>
		•	•	•	•	* <a href="#">EC-2-24</a>	* <a href="#">EC-2M-24</a>
		•	•	•	•	* <a href="#">EC-2-12-L</a>	* <a href="#">EC-2M-12-L</a>
		•	•	•	•	* <a href="#">EC-2-24-L</a>	* <a href="#">EC-2M-24-L</a>
		•	•	•	•	* <a href="#">EC-2-12-H</a>	* <a href="#">EC-2M-12-H</a>
 Terminal Spades		•	•	•	•	* <a href="#">ET-2-12</a>	* <a href="#">ET-2M-12</a>
		•	•	•	•	* <a href="#">ET-2-24</a>	* <a href="#">ET-2M-24</a>
		•	•	•	•	* <a href="#">ET-2-12-L</a>	* <a href="#">ET-2M-12-L</a>
		•	•	•	•	* <a href="#">ET-2-24-L</a>	* <a href="#">ET-2M-24-L</a>
		•	•	•	•	* <a href="#">ET-2-12-H</a>	* <a href="#">ET-2M-12-H</a>
 Wire Leads Side (Radial)		•	•	•	•	* <a href="#">EV-2-12</a>	* <a href="#">EV-2M-12</a>
		•	•	•	•	* <a href="#">EV-2-24</a>	* <a href="#">EV-2M-24</a>
		•	•	•	•	* <a href="#">EV-2-12-L</a>	* <a href="#">EV-2M-12-L</a>
		•	•	•	•	* <a href="#">EV-2-24-L</a>	* <a href="#">EV-2M-24-L</a>
		•	•	•	•	* <a href="#">EV-2-12-H</a>	* <a href="#">EV-2M-12-H</a>
 Wire Leads Top (Axial)		•	•	•	•	* <a href="#">EW-2-12</a>	* <a href="#">EW-2M-12</a>
		•	•	•	•	* <a href="#">EW-2-12</a>	* <a href="#">EW-2M-12</a>
		•	•	•	•	* <a href="#">EW-2-12-L</a>	* <a href="#">EW-2M-12-L</a>
		•	•	•	•	* <a href="#">EW-2-12-L</a>	* <a href="#">EW-2M-12-L</a>
		•	•	•	•	* <a href="#">EW-2-12-H</a>	* <a href="#">EW-2M-12-H</a>

**Medium:** Clean, dry air (40 micron filter)


**Power Consumption:** 0.67 watt (CR Series: 1.2 watt)

**Temperature Range:** 0 to 180°F (-17 to 82°C).  
CR Series: 0 to 150°F (-17 to 64°C)

**Response:** 5 to 10 milliseconds (nominal)

**Operating Range:** 90 to 150% of rated voltage (CR Series: ±10%)

**Ports:** #10-32 (M5 optional), in-line only

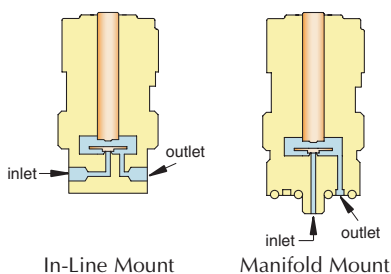


Valve Series (*)	Standard	Non-Standard
Standard	(blank)	
Oxygen Clean	O-	See <a href="#">Pages 171 &amp; 172</a> for further information
Scientific	S-	
Corrosion-Resistant	CR-	
Options (add to end of Part No.)		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D
Metric Ports (in-line)	-M5	

Example Part No's:  
ET-3M-12-V  
CR-ET-2-12

See [Pages 182 & 183](#) for mounting options

Pressure Range	Orifice	Air Flow
28" Hg Vac. to 105 psig <i>+ call for special configurations</i>	0.025"	0.6 scfm @ 100 psig (17 l/min @ 7 bar)
28" Hg Vac. to 50 psig	0.040" (-L)	0.5 scfm @ 50 psig (14 l/min @ 3.5 bar)
28" Hg Vac. to 25 psig	0.060" (-H)	0.45 scfm @ 25 psig (13 l/min @ 1.8 bar)

# 3-WAY NORMALLY-CLOSED VALVES, IN-LINE & MANIFOLD

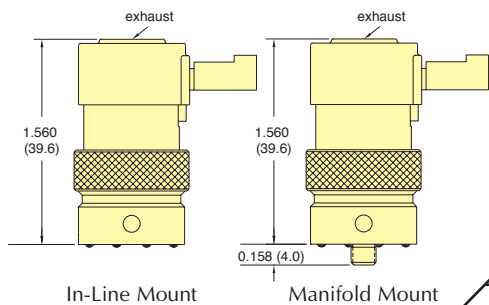

		Pressure Range		Voltage		Part No.		
		Vac. to 105 psig *	Vac. to 50 psig	Vac. to 25 psig	12 VDC	24 VDC	In-Line Mount	Manifold Mount
 0.025 Pin Connector		•			•		* <a href="#">EC-3-12</a>	* <a href="#">EC-3M-12</a>
		•			•		* <a href="#">EC-3-24</a>	* <a href="#">EC-3M-24</a>
			•		•		* <a href="#">EC-3-12-L</a>	* <a href="#">EC-3M-12-L</a>
			•		•		* <a href="#">EC-3-24-L</a>	* <a href="#">EC-3M-24-L</a>
				•	•		* <a href="#">EC-3-12-H</a>	* <a href="#">EC-3M-12-H</a>
			•	•		* <a href="#">EC-3-24-H</a>	* <a href="#">EC-3M-24-H</a>	
 Terminal Spades		•			•		* <a href="#">ET-3-12</a>	* <a href="#">ET-3M-12</a>
		•			•		* <a href="#">ET-3-24</a>	* <a href="#">ET-3M-24</a>
			•		•		* <a href="#">ET-3-12-L</a>	* <a href="#">ET-3M-12-L</a>
			•		•		* <a href="#">ET-3-24-L</a>	* <a href="#">ET-3M-24-L</a>
				•	•		* <a href="#">ET-3-12-H</a>	* <a href="#">ET-3M-12-H</a>
			•	•		* <a href="#">ET-3-24-H</a>	* <a href="#">ET-3M-24-H</a>	
 Wire Leads Side (Radial)		•			•		* <a href="#">EV-3-12</a>	* <a href="#">EV-3M-12</a>
		•			•		* <a href="#">EV-3-24</a>	* <a href="#">EV-3M-24</a>
			•		•		* <a href="#">EV-3-12-L</a>	* <a href="#">EV-3M-12-L</a>
			•		•		* <a href="#">EV-3-24-L</a>	* <a href="#">EV-3M-24-L</a>
				•	•		* <a href="#">EV-3-12-H</a>	* <a href="#">EV-3M-12-H</a>
			•	•		* <a href="#">EV-3-24-H</a>	* <a href="#">EV-3M-24-H</a>	
 Wire Leads Top (Axial)		•			•		* <a href="#">EW-3-12</a>	* <a href="#">EW-3M-12</a>
		•			•		* <a href="#">EW-3-12</a>	* <a href="#">EW-3M-12</a>
			•		•		* <a href="#">EW-3-12-L</a>	* <a href="#">EW-3M-12-L</a>
			•		•		* <a href="#">EW-3-12-L</a>	* <a href="#">EW-3M-12-L</a>
				•	•		* <a href="#">EW-3-12-H</a>	* <a href="#">EW-3M-12-H</a>
			•	•		* <a href="#">EW-3-12-H</a>	* <a href="#">EW-3M-12-H</a>	

**Medium:** Clean, dry air (40 micron filter)


**Power Consumption:** 0.67 watt (CR Series: 1.2 watt)

**Temperature Range:** 0 to 180°F (-17 to 82°C),  
CR Series: 0 to 150°F (-17 to 64°C)

**Response:** 5 to 10 milliseconds (nominal)

**Operating Range:** 90 to 150% of rated voltage (CR Series: ±10%)

**Ports:** #10-32 (M5 optional), in-line only

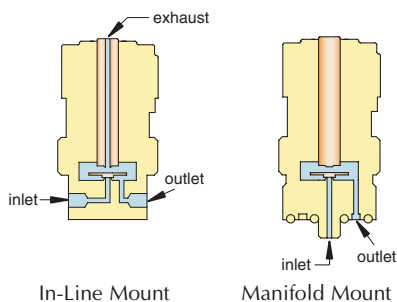

Valve Series (*)	Standard	Non-Standard
Standard	(blank)	
Oxygen Clean	O-	See Pages 171 & 172 for further information
Scientific	S-	
Corrosion-Resistant	CR-	
Options (add to end of Part No.)		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D
Metric Ports (in-line)	-M5	


Example Part No's:  
ET-3-12-S  
O-EW-3-24





See Pages 182 & 183 for mounting options

Pressure Range	Orifice	Air Flow
28" Hg Vac. to 105 psig <i>*call for special configurations</i>	0.025"	0.6 scfm @ 100 psig (17 l/min @ 7 bar)
28" Hg Vac. to 50 psig	0.040" (-L)	0.5 scfm @ 50 psig (14 l/min @ 3.5 bar)
28" Hg Vac. to 25 psig	0.060" (-H)	0.45 scfm @ 25 psig (13 l/min @ 1.8 bar)



# 3-WAY FULLY-PORTED VALVES, IN-LINE & MANIFOLD

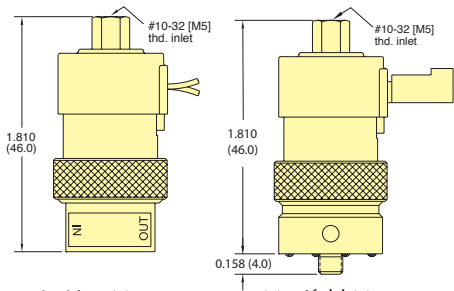

		Vac. to 105 psig +		Vac. to 50 psig		Vac. to 25 psig		12 VDC		24 VDC		Part No.	
		Pressure Range		Voltage		In-Line Mount		Manifold Mount					
	0.025 Pin Connector	•			•		*ECO-3-12	*ECO-3M-12	•			*ECO-3-24	*ECO-3M-24
		•	•		•	•	*ECO-3-12-L	*ECO-3M-12-L	•	•		*ECO-3-24-L	*ECO-3M-24-L
	Terminal Spades	•			•		*ETO-3-12	*ETO-3M-12	•			*ETO-3-24	*ETO-3M-24
		•	•		•	•	*ETO-3-12-L	*ETO-3M-12-L	•	•		*ETO-3-24-L	*ETO-3M-24-L
	Wire Leads Side (Radial)	•			•		*EVO-3-12	*EVO-3M-12	•			*EVO-3-24	*EVO-3M-24
		•	•		•	•	*EVO-3-12-L	*EVO-3M-12-L	•	•		*EVO-3-24-L	*EVO-3M-24-L
	Wire Leads Top (Axial)	•			•		*EWO-3-12	*EWO-3M-12	•			*EWO-3-12	*EWO-3M-12
		•	•		•	•	*EWO-3-12-L	*EWO-3M-12-L	•	•		*EWO-3-12-L	*EWO-3M-12-L
					•		*EWO-3-12-H	*EWO-3M-12-H				*EWO-3-12-H	*EWO-3M-12-H
					•		*EWO-3-12-H	*EWO-3M-12-H				*EWO-3-12-H	*EWO-3M-12-H

**Medium:** Clean, dry air (40 micron filter)


**Power Consumption:** 0.67 watt (CR Series: 1.2 watt)

**Temperature Range:** 0 to 180°F (-17 to 82°C)  
CR Series: 0 to 150°F (-17 to 64°C)

**Response:** 5 to 10 milliseconds (nominal)

**Operating Range:** 90 to 150% of rated voltage (CR Series: ±10%)

**Ports:** #10-32 (M5 optional), in-line only

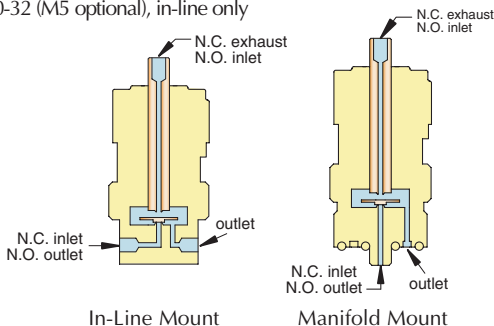

Valve Series (*)	Standard	Non-Standard
Standard	(blank)	
Oxygen Clean	O-	See Pages 171 & 172 for further information
Scientific	S-	
Corrosion-Resistant	CR-	
Options (add to end of Part No.)		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D
Metric Ports (in-line)	-M5	

Example Part No's:  
ETO-3M-24-D  
CR-EVO-3-12

See Pages 182 & 183 for mounting options

Pressure Range	Orifice	Air Flow
28" Hg Vac. to 105 psig <i>+ call for special configurations</i>	0.025"	0.6 scfm @ 100 psig (17 l/min @ 7 bar)
28" Hg Vac. to 50 psig	0.040" (-L)	0.5 scfm @ 50 psig (14 l/min @ 3.5 bar)
28" Hg Vac. to 25 psig	0.060" (-H)	0.45 scfm @ 25 psig (13 l/min @ 1.8 bar)



# 2-WAY & 3-WAY NORMALLY-OPEN VALVES, MANIFOLD



		12 VDC / 24 VDC		Part No.	
		Voltage	2-Way	3-Way	
 0.025 Pin Connector		•	* <a href="#">ECN-2M-12</a>	* <a href="#">ECN-3M-12</a>	
		•	* <a href="#">ECN-2M-24</a>	* <a href="#">ECN-3M-24</a>	
 Terminal Spades		•	* <a href="#">ETN-2M-12</a>	* <a href="#">ETN-3M-12</a>	
		•	* <a href="#">ETN-2M-24</a>	* <a href="#">ETN-3M-24</a>	
 Wire Leads Side (Radial)		•	* <a href="#">EVN-2M-12-L</a>	* <a href="#">EVN-3M-12-L</a>	
		•	* <a href="#">EVN-2M-24-L</a>	* <a href="#">EVN-3M-24-L</a>	


- Medium:** Clean, dry air (40 micron filter)
- Power Consumption:** 0.67 watt
- Temperature Range:** 0 to 180°F (-17 to 82°C)
- Response:** 5 to 10 milliseconds (nominal)
- Operating Range:** 90 to 150% of rated voltage
- Voltage:** 12 VDC or 24 VDC. Other voltages available upon request.
- Ports:** #10-32 (M5 optional)

Valve Series (*)	Standard	Non-Standard
Standard Scientific	(blank) S-	See <a href="#">Pages 171 &amp; 172</a> for further information
<b>Options (add to end of Part No.)</b>		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D
Metric Ports	-M5	

Example Part No's:  
EVN-2M-12-L-V  
S-ETN-3M-24-M5

See [Pages 182 & 183](#) for mounting options



Pressure Range	Air Flow
28" Hg Vac. to 105 psig *call for special configurations	0.9 scfm @ 100 psig (25 l/min @ 7 bar)

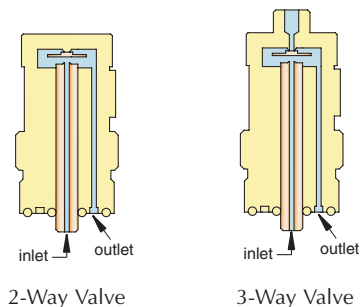




# 2- & 3-WAY INTRINSICALLY SAFE NORMALLY-CLOSED VALVES


## 2-WAY INTRINSICALLY SAFE NORMALLY-CLOSED VALVES, IN-LINE & MANIFOLD MOUNT

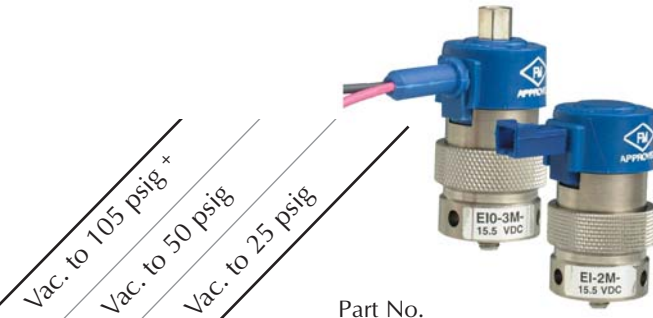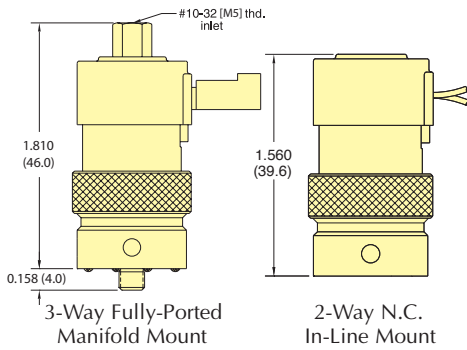

Pressure Range	Part No.	
	In-Line Mount	Manifold Mount
Vac. to 105 psig +	<a href="#">EI-2-15.5</a>	<a href="#">EI-2M-15.5</a>
	<a href="#">EI-2-15.5-L</a>	<a href="#">EI-2M-15.5-L</a>
	<a href="#">EI-2-15.5-H</a>	<a href="#">EI-2M-15.5-H</a>
Vac. to 50 psig	<a href="#">EI-2-15.5-C</a>	<a href="#">EI-2M-15.5-C</a>
	<a href="#">EI-2-15.5-L-C</a>	<a href="#">EI-2M-15.5-L-C</a>
	<a href="#">EI-2-15.5-H-C</a>	<a href="#">EI-2M-15.5-H-C</a>
Vac. to 25 psig	<a href="#">EI-2-15.5-C</a>	<a href="#">EI-2M-15.5-C</a>
	<a href="#">EI-2-15.5-L-C</a>	<a href="#">EI-2M-15.5-L-C</a>
	<a href="#">EI-2-15.5-H-C</a>	<a href="#">EI-2M-15.5-H-C</a>




2-Way In-Line Mount




2-Way Manifold Mount

## 3-WAY INTRINSICALLY SAFE FULLY-PORTED VALVES, IN-LINE & MANIFOLD MOUNT

Pressure Range	Part No.	
	In-Line Mount	Manifold Mount
Vac. to 105 psig +	<a href="#">EIO-3-15.5</a>	<a href="#">EIO-3M-15.5</a>
	<a href="#">EIO-3-15.5-L</a>	<a href="#">EIO-3M-15.5-L</a>
	<a href="#">EIO-3-15.5-H</a>	<a href="#">EIO-3M-15.5-H</a>
Vac. to 50 psig	<a href="#">EIO-3-15.5-C</a>	<a href="#">EIO-3M-15.5-C</a>
	<a href="#">EIO-3-15.5-L-C</a>	<a href="#">EIO-3M-15.5-L-C</a>
	<a href="#">EIO-3-15.5-H-C</a>	<a href="#">EIO-3M-15.5-H-C</a>
Vac. to 25 psig	<a href="#">EIO-3-15.5-C</a>	<a href="#">EIO-3M-15.5-C</a>
	<a href="#">EIO-3-15.5-L-C</a>	<a href="#">EIO-3M-15.5-L-C</a>
	<a href="#">EIO-3-15.5-H-C</a>	<a href="#">EIO-3M-15.5-H-C</a>



3-Way In-Line Mount



3-Way Manifold Mount

**Medium:** Clean, dry air (40 micron filter)

**Power Consumption:** 0.67 watt (CR Series: 1.2 watt)

**Temperature Range:** 0 to 180°F (-17 to 82°C)

**Response:** 5 to 10 milliseconds (nominal)

**Operating Range:** 90 to 150% of rated voltage

**Voltage:** 15.5 VDC. Other voltages available upon request.

**Ports:** #10-32 (M5 optional), in-line only

Options (add to end of Part No.)	
Metric Ports (in-line only)	-M5


Pressure Range	Orifice	Air Flow
28" Hg Vac. to 105 psig <i>+ call for special configurations</i>	0.025"	0.6 scfm @ 100 psig (17 l/min @ 7 bar)
28" Hg Vac. to 50 psig	0.040"	0.5 scfm @ 50 psig
	(-L)	(14 l/min @ 3.5 bar)
28" Hg Vac. to 25 psig	0.060"	0.45 scfm @ 25 psig
	(-H)	(13 l/min @ 1.8 bar)

See [Pages 182 & 183](#) for mounting options

# EM STUD MOUNT 2-WAY & 3-WAY VALVES



## 2- & 3-WAY NORMALLY-CLOSED & 3-WAY N.O./N.C. VALVES, MANIFOLD MOUNT

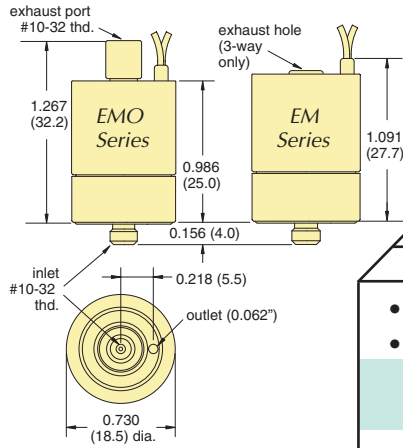


Pressure Range		Voltage		Part No.		
				2-Way N.C.	3-Way N.C.	3-Way N.O./N.C.
•		•		<a href="#">EM-2-12</a>	<a href="#">EM-3-12</a>	<a href="#">EMO-3-12</a>
•		•		<a href="#">EM-2-24</a>	<a href="#">EM-3-24</a>	<a href="#">EMO-3-24</a>
•		•		<a href="#">EM-2-12-L</a>	<a href="#">EM-3-12-L</a>	<a href="#">EMO-3-12-L</a>
•		•		<a href="#">EM-2-24-L</a>	<a href="#">EM-3-24-L</a>	<a href="#">EMO-3-24-L</a>
•		•		<a href="#">EM-2-12-H</a>	<a href="#">EM-3-12-H</a>	<a href="#">EMO-3-12-H</a>
•		•		<a href="#">EM-2-24-H</a>	<a href="#">EM-3-24-H</a>	<a href="#">EMO-3-24-H</a>



An even smaller Mouse valve! When space is critical, the EM Series Valve provides the best solution.

At just over an inch tall, and less than 3/4" in diameter, the EM Valve uses Clippard's special "spider" design. This reliable and proven design for long life is housed in a miniature body, and incorporates wire leads out the top, allowing body rotation for close-center mounting. In addition, the valve features higher flow; combining fast shifting speed, extremely high cycle life with the design flexibility to make this valve a "small wonder" for demanding applications.

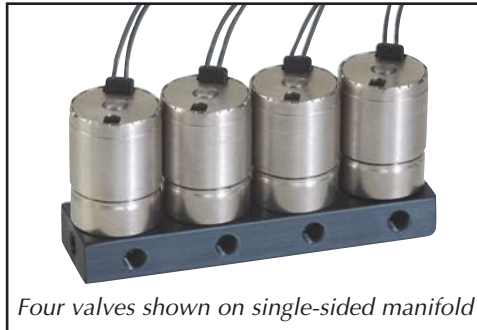

This valve is perfect for air and/or gas control, pilot control, and any application where space is limited, but desired performance is not.

**Medium:** Clean, dry air (40 micron filter)

**Power Consumption:** 1 watt

**Temperature Range:** 0 to 180°F (-17 to 82°C)

**Response:** 10 milliseconds at nominal voltage (15 milliseconds N.O.)

**Operating Range:** 90 to 150% of rated voltage

**Voltage:** 12 VDC or 24 VDC. Other voltages available upon request.


**Ports:** #10-32 Exhaust (M5 optional)

See [Page 183](#) for mounting options

Options (add to end of Part No.)	Standard	Non-Standard
FKM Seals	-V	
EPDM Seals		-E
Silicone Seals		-S
Diode		-D
Metric Ports	-M5	

Pressure Range	Orifice	Air Flow
28" Hg Vac. to 105 psig <i>+call for special configurations</i>	0.025"	0.6 scfm @ 100 psig (17 l/min @ 7 bar)
28" Hg Vac. to 50 psig	0.040" (-L)	0.5 scfm @ 50 psig (14 l/min @ 3.5 bar)
28" Hg Vac. to 25 psig	0.060" (-H)	0.45 scfm @ 25 psig (13 l/min @ 1.8 bar)

Simply tighten valves onto the manifold using a standard 1/8" Allen hex wrench. (4-10 in-lbs. Do not over-tighten)

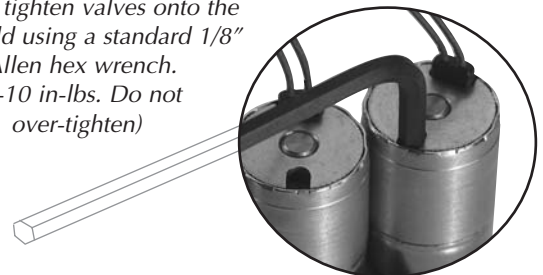






# EV, ET, EC, EW SERIES ACCESSORIES

## EC, EV, ET & EW PILOTED 2-WAY & 3-WAY NORMALLY-CLOSED, PRESSURE PILOTED VALVES, MANIFOLD MOUNT

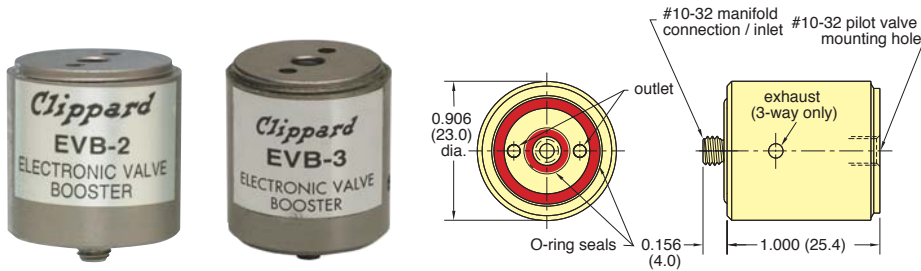

**Medium:** Air

**Materials:** Nickel-plated brass, acetyl, stainless steel and Buna-N

**Response:** 20 milliseconds @ 20 psig;  
13 milliseconds @ 100 psig

**Ports:** Inlet and outlet through manifold

**Material:** Nickel-plated brass, acetyl, stainless steel and Buna-N


**Note:** Use only Normally-Closed 3-Way Pilot valves in conjunction with EVB-2/EVB-3

**Part No.**

- EVB-2 2-Way Valve Booster
- EVB-3 3-Way Valve Booster

Input Pressure	Air Flow
20 to 150 psig	6.1 scfm @ 100 psig (176 l/min @ 7 bar)

## ELECTRONIC INTERFACE 3-WAY NORMALLY-CLOSED VALVE

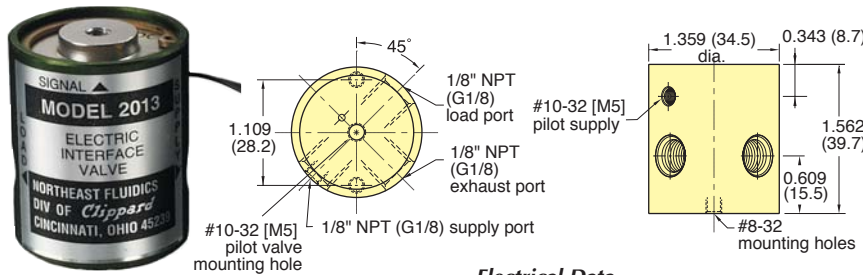

**Medium:** Air

**Filtration:** 10 micron

**Ports:** 1/8" NPT female

**Switching Speed:** 10 milliseconds

**Bleed Flow:** 0.10 scfm @ 100 psig

**Frequency Response:** 50 Hz @ 100 psig;  
70 Hz @ 30 psig

**Note:** Use only Normally-Closed 3-Way Pilot valves in conjunction with EVB-2/EVB-3

**Part No.**

- 2013-6 Interface Valve, 6 VDC
- 2013-12 Interface Valve, 12 VDC
- 2013-24 Interface Valve, 24 VDC

**Electrical Data**


**Continuous Overload:** 350% @ 25°C ambient; 250% @ 50°C ambient

**Power Consumption:** Less than 0.50 watts @ rated voltage (80 ma. @ 6 VDC, 40 ma. @ 12 VDC 20 ma. @ 24VDC)

**Leads:** 28 gauge stranded PVC insulated

Input Pressure	Air Flow
30 to 100 psig <i>call for special configurations</i>	22 scfm @ 100 psig (634 l/min @ 7 bar)

## 3-WAY NORMALLY-CLOSED, PRESSURE PILOTED VALVES

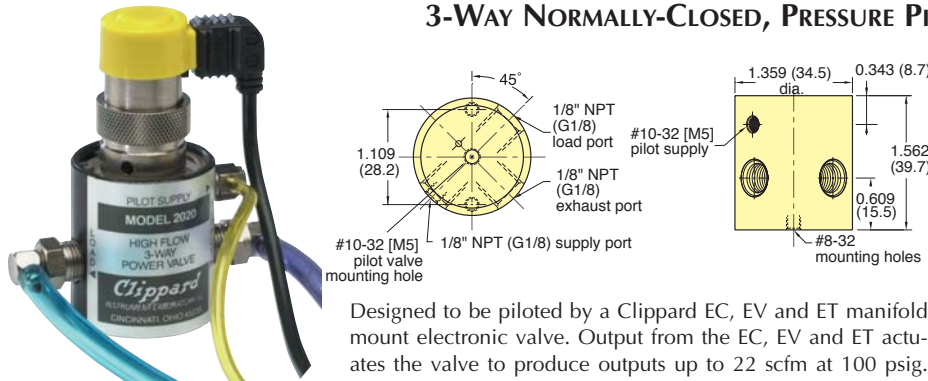

**Medium:** Air

**Pilot Pressure:** (2020) 60% of supply pressure, minimum

**Response:** Approximately 20 milliseconds

**Mounting:** Mounting holes provided

**Ports:** Inlet and outlet, exhaust 1/8" NPT  
Pilot supply on 2020 is #10-32 female

**Materials:** Anodized Aluminum, Stainless Steel and Buna-N

**Additional Note:** Use only Normally-Closed 3-way pilot valves in conjunction with 2020/2021

**Option:** Add -MG to the end of the Part No. for metric version

Designed to be piloted by a Clippard EC, EV and ET manifold mount electronic valve. Output from the EC, EV and ET actuates the valve to produce outputs up to 22 scfm at 100 psig. Combines low wattage, long life and cool running of the EC, EV and ET valves with quick response and high flow of Clippard "Fluidamp" type valves. The 2020 and 2021 are identical in all respects except one. The 2020 has an external #10-32 port for the pressure supply to the EC, EV, and ET electronic pilot valve.

**Part No.**





- 2020 External Piloted Valve
- 2021 Internal Piloted Valve with #10-32 Port

Input Pressure	Air Flow
30 to 100 psig <i>call for special configurations</i>	30 scfm @ 100 psig (2.1 l/min @ 7 bar)

# ET PILOTED 4-WAY VALVES



## ET 4-WAY PILOTED VALVES



**Type:** 4-way combination electronic and modular spool type interface valve. Fully-ported ET-3 & R-401 (R-481)/R-402 (R-482) hybrid

**Medium:** Air, water, or oil; pilot - air only

**Mounting:** Uses Octoport base and two captivated screws

**Ports:** Valve has patented Octoport system

**Note:** Supply pressure must be applied to both ports 1 and 4. Minimum pressure on port 4 should be 40 psig.

### Part No.

<u>R-481-12</u>	ET-3/R-401, 12 VDC
<u>R-481-24</u>	ET-3/R-401, 24 VDC
<u>R-482-12</u>	ET-3/R-402, 12 VDC
<u>R-482-24</u>	ET-3/R-402, 24 VDC

Input Pressure	Air Flow
Pilot: 40 psig min.	9 scfm @ 100 psig
Working: 0 to 150 psig	(255 l/min @ 7 bar)

For more information please see Page 265 in the Modular Valve section of this catalog.

## ET VALVE CONNECTORS

Black molded lug connectors are available for easy push-on connection ET-C48 is 48" in length, ET-C120 is 120" in length.



Insulated crimp-on spade lug connectors are available for wiring up leads to connect an electronic circuit to ET style valves. Accepts #22, #24, or #26 wire.



### Part No.


<u>ET-C48</u>	48" Connector
<u>ET-C120</u>	120" Connector

### Part No.

<u>3831</u>	Spade Lug Connector
-------------	---------------------

## EC & EI VALVE CONNECTORS

AMP connector #5-103959-1 with 18" or 120" wire leads for EC/ECO and EI/EIO valves.

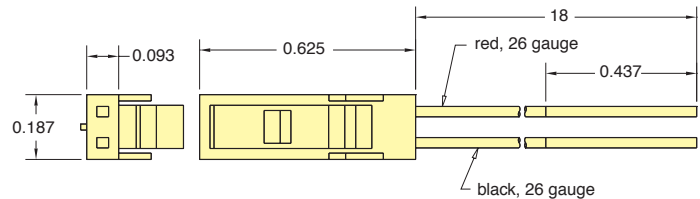

### Part No.

<u>C2-RB18</u>	18" Connector
<u>C2-RB120</u>	120" Connector



## CUSTOM PORTS & CONNECTORS

If you need a product that fits your application perfectly, Clippard has the capability to design or modify one of its products to suit your exact needs.

This application requires a special connection to a MAPP gas canister. The valve is tested for response time and flow rate, which delivers a consistent amount of gas each cycle.

**CUSTOM**er  
solutions



# EV, ET, EC SERIES ACCESSORIES

## Specialized Manifolds




**Material:** ENP brass


**Use:** Mount EC, EV and ET valves to any 1/8" NPT supply port

**Option:** Add -MR for metric version


**15490-1 and O-15490-1 (Oxygen Clean).**  
#10-32 [M5] Inlet  
1/8" NPT (R1/8) Outlet




**15490-2 and O-15490-2 (Oxygen Clean).**  
1/8" NPT (R1/8) Inlet  
#10-32 [M5] Outlet




**15490-3 and O-15490-3 (Oxygen Clean) Dual Outlet.**  
1/8" NPT (R1/8) Inlet  
#10-32 [M5] Outlet



**15491-1 and O-15491-1 (Oxygen Clean).**  
#10-32 [M5] Inlet  
1/8" NPT (R1/8) Outlet



**15491-2 and O-15491-2 (Oxygen Clean).**  
1/8" NPT (R1/8) Inlet  
#10-32 [M5] Outlet



## Oxygen Clean Manifolds



Multi-station manifolds are available for use with Clippard's Oxygen Clean series electronic valves. These manifolds offer either single-sided or double-sided mounting in Oxygen-compatible ENP brass material.

The Oxygen series products are manufactured and assembled for applications in Oxygen-enriched environments which are extremely sensitive to contamination. Each manifold is cleaned according to Clippard Specification #ES-3.41, and double bagged in heat-sealed polyethylene bags.

**Medium:** Air or Liquid

**Input Ports:** In-line 1/8" NPT (G1/8 optional)

**Outlet Ports:** #10-32 (M5 optional)


**Mounting:** #10-32 tapped holes (M5 optional)

**Materials:** ENP Brass

**Option:** Add -M5 for Metric version

Single-Sided		Double-Sided		Length "L"	Mtg. "M"
Part No.	Stations	Part No.	Stations		
O-15581-2*	2	O-15582-8*	8	1.826	0.937
O-15581-4*	4	O-15582-12*	12	3.702	1.875
O-15581-6*	6			5.577	3.750

\* Add -M5 for metric version (G1/8 inlet)

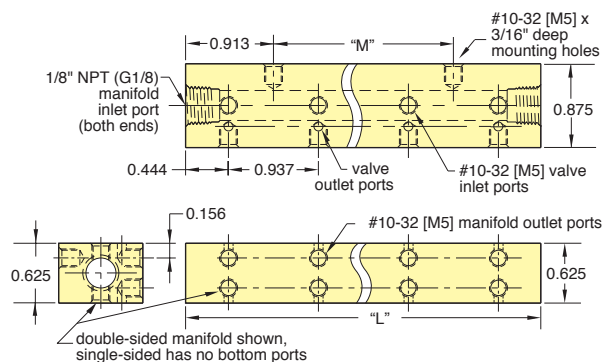

# EV, ET, EC, EM SERIES MANIFOLDS




## Multi-Valve Manifolds

**Construction:** Black anodized aluminum

**Option:** Add -M5 for Metric version




Single-Sided		Double-Sided		Length "L"	Mtg. "M"
Part No.	Stations	Part No.	Stations		
<a href="#">15481-2</a>	2			1.826	0.937
<a href="#">15481-4</a>	4	<a href="#">15482-8</a>	8	3.702	1.875
<a href="#">15481-6</a>	6	<a href="#">15482-12</a>	12	5.577	3.750

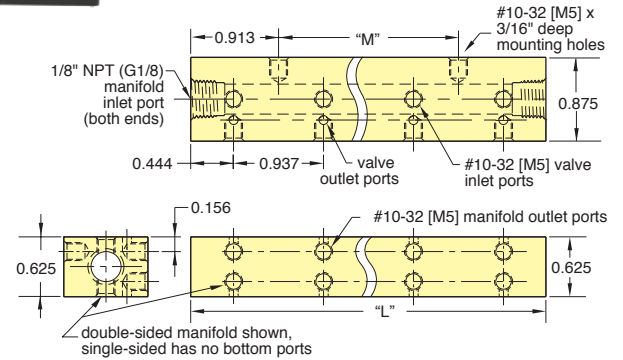


## EM Series Manifolds

**Construction:** Black anodized aluminum

**Option:** Add -M5 for Metric version

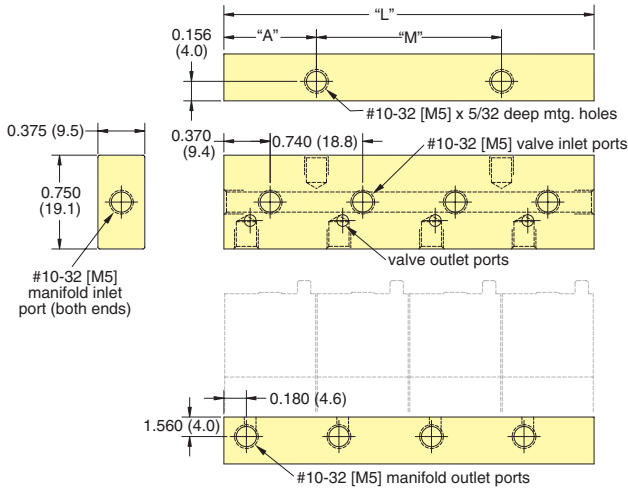

**Single-Sided**

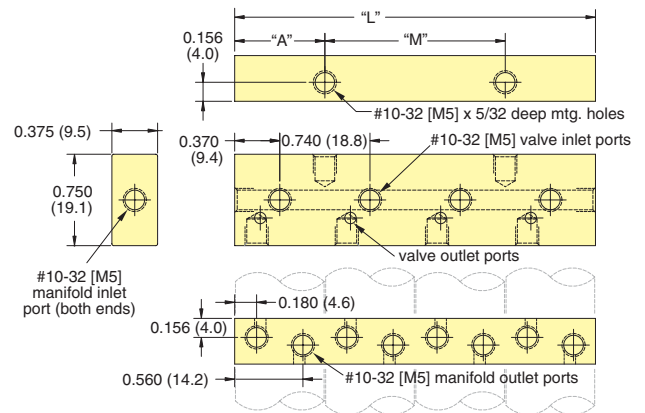

**Double-Sided**

Part No.	Stations	Part No.	Stations	Length "L"	Mtg. "M"	"A"
<b>Single-Sided</b>		<b>Double-Sided</b>				
<a href="#">15681-2</a>	2	<a href="#">15682-4</a>	4	1.480"	0.740"	0.370"
<a href="#">15681-4</a>	4	<a href="#">15682-8</a>	8	2.960"	1.480"	0.740"
<a href="#">15681-6</a>	6	<a href="#">15682-12</a>	12	4.440"	2.960"	0.740"
<a href="#">15681-8</a>	8	<a href="#">15682-16</a>	16	5.920"	4.440"	0.740"





# EVP SERIES PROPORTIONAL CONTROL VALVES


The EVP series Proportional Control Valves combine the features of the existing EV series valve - long life, low power, and Clippard's reputation for high quality components - with the additional capability for proportional control.

The EVP series valve provides air or gas flow control, and varies the output flow based on the current input to the solenoid. The consistent gain (see chart) of this valve provides a high degree of control for many applications.

Controllability and overall value are the main features of the EVP Proportional Valve series. The valve may be controlled using DC current, open or closed-loop control, and even PWM (pulse width modulation) to cover a broad range of applications.

## Features

- Flow proportional to input current
- Fast response
- Long life
- Small package
- Single moving part
  - low friction and wear
- Five orifice sizes
- Three connection styles
- Two mounting types

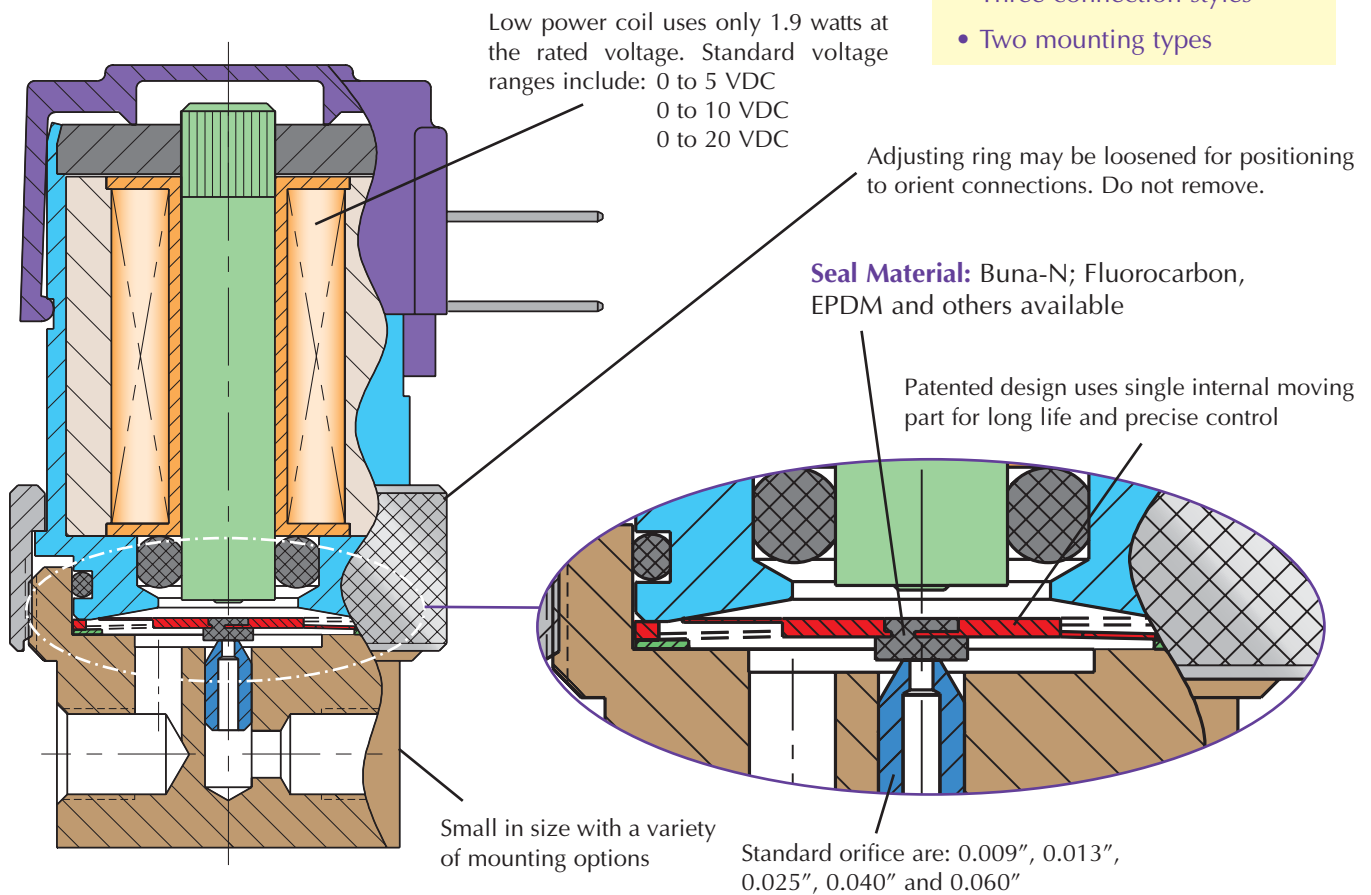

## Designed For:


- Analytical Instruments
- Blood pressure monitoring
- Precise pressure control
- Patient Simulators
- Automotive
- Gas Controllers
- Mass Flow Control
- Gas Chromatography
- Respirators / Ventilators and many more...

# EVP SERIES PROPORTIONAL CONTROL VALVES



Based on Clippard's original spider design from 1973, the EVP's armature is the heart of the valve which provides precise flow control.

Typical Performance

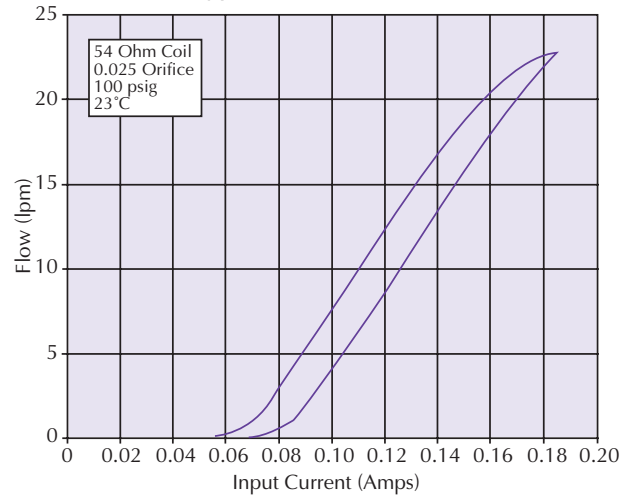

**Type:** 2-Way, Proportional

**Medium:** Air, Inert Gases

**Temperature Range:** 32 to 120°F (0 to 50°C)

**Power Consumption:** 1.9 watts at 23°C, 2.3 watts max

**Mounting:** In-line or Manifold

**Ports:** #10-32 Female (In-line)


#10-32 Male Stud (Manifold)

**Seal Material:** Buna-N; Fluorocarbon and EPDM  
Others available.

**Maximum Hysteresis:** 10% of full current

For control accessories, consult factory.

Maximum Flow vs. Operating Pressure

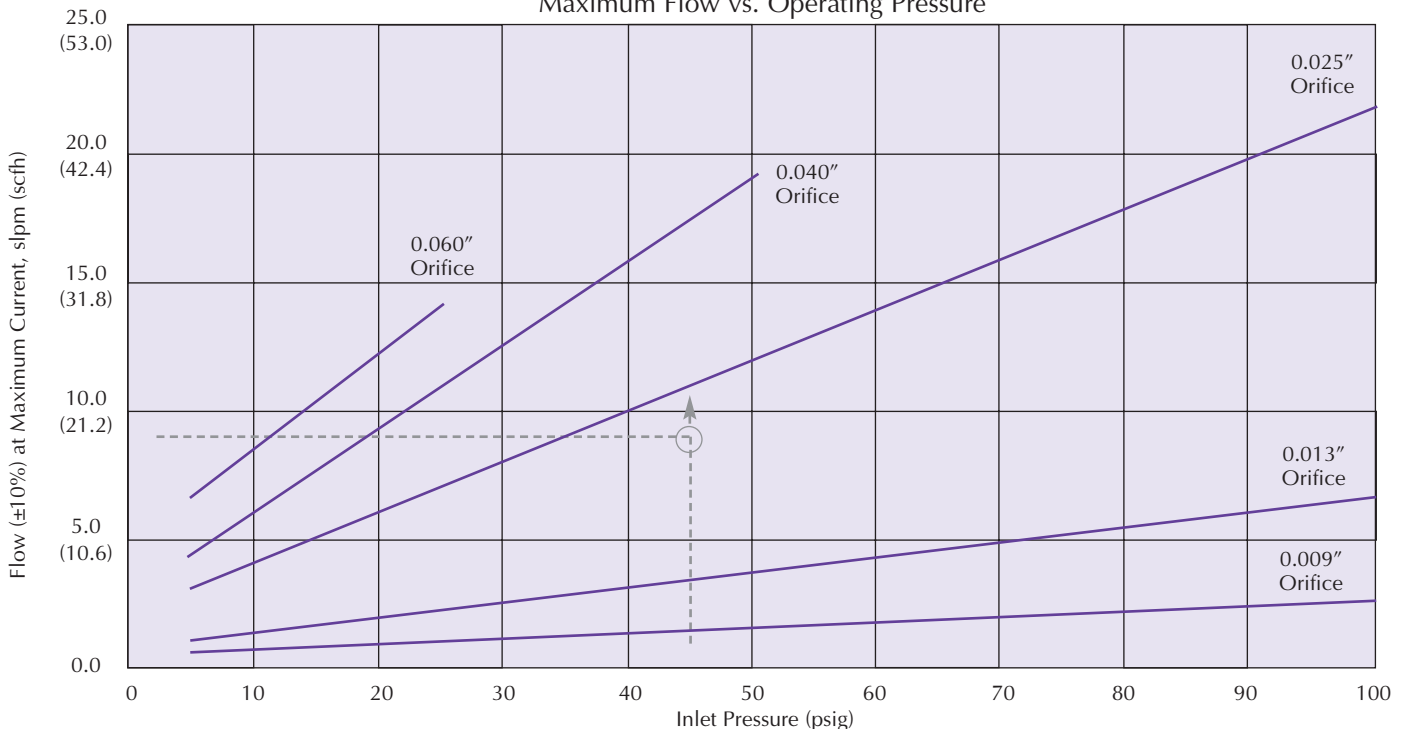


To determine the correct orifice required, locate the colored line immediately above the flow/pressure intersection  
Example: 9 slpm required at 45 psig inlet. This example leads to a "-2545" valve (0.025" nozzle, 45 psig).



# EVP SERIES PROPORTIONAL CONTROL VALVES


## IN-LINE MOUNT

### EC - P - □ - □ - □ - □

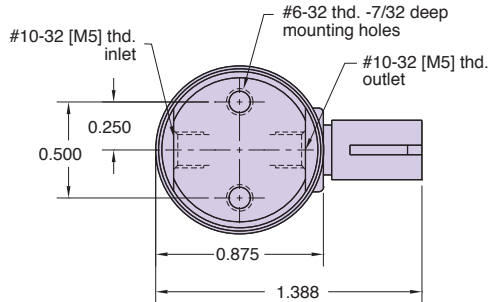


**Type:** 2-Way, Proportional  
**Medium:** Air or Inert Gases  
**Temperature Range:** 32 to 120°F  
**Power Consumption:** 1.9 watts at 23°C, 2.3 watts max.  
**Mounting:** In-line  
**Ports:** #10-32 [M5] Female

### ET - P - □ - □ - □ - □

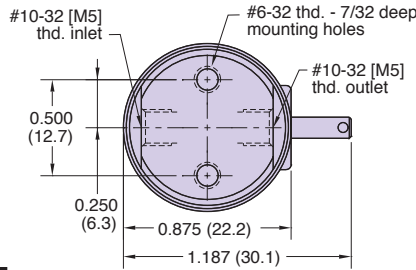

### EV - P - □ - □ - □ - □



Nominal Voltage Range at 23°C (vdc)	Input Current Range (amps)	Coil Resistance at 23°C (ohms)	Max. Voltage Required (vdc)
0 - 5	0 - 0.370	13.5	6.2
0 - 10	0 - 0.185	54	12.4
0 - 20	0 - 0.092	218	24.8

*Do not exceed input current range.*

The EVP Proportional Valve can be calibrated for pressures less than the maximum shown here. Lower pressures may be substituted, and will be used for calibration. The pressures shown above are standard options. For pressures less than 5 psig, please consult factory.

#### NUMBERING SYSTEM

**E** □ - **P** - □ - □ - □ - □

**C** - Connector  
**T** - Terminal Spades  
**V** - Wire Leads

**Voltages: \***  
**05** - 0-5 VDC  
**10** - 0-10 VDC  
**20** - 0-20 VDC

**Orifice Options:**

<b>09</b> - 0.009" dia.	} → □ - 0-100 psig
<b>13</b> - 0.013" dia.	
<b>25</b> - 0.025" dia.	
<b>40</b> - 0.040" dia.	→ □ - 0-50 psig
<b>60</b> - 0.060" dia.	→ □ - 0-25 psig

**Maximum Pressure (specify Operating Pressure):**

**Options:**  
**Blank** - none  
**E** - EPDM  
**V** - FKM seals

**Ports:**  
**Blank** - #10-32  
**M5** - Metric

\* Consult factory for availability of non-standard voltages and other options


Sample part number: EC-P-10-2585

For Cable and Connectors, see [Page 181](#).


# EVP SERIES PROPORTIONAL CONTROL VALVES MANIFOLD MOUNT




## EC - PM - □ - □ □ - □



## ET - PM - □ - □ □ - □



## EV - PM - □ - □ □ - □



**Type:** 2-Way, Proportional  
**Medium:** Air or Inert Gases  
**Temperature Range:** 32 to 120°F  
**Power Consumption:** 1.9 watts at 23°C, 2.3 watts max.  
**Mounting:** Manifold  
**Ports:** #10-32 male stud

Nominal Voltage Range at 23°C (vdc)	Input Current Range (amps)	Coil Resistance at 23°C (ohms)	Max. Voltage Required (vdc)
0 - 5	0 - 0.370	13.5	6.2
0 - 10	0 - 0.185	54	12.4
0 - 20	0 - 0.092	218	24.8

*Do not exceed input current range.*

The EVP Proportional Valve can be calibrated for pressures less than the maximum shown here. Lower pressures may be substituted, and will be used for calibration. The pressures shown above are standard options. For pressures less than 5 psig, please consult factory.

### NUMBERING SYSTEM

**E** □ - **PM** - □ - □ □ - □

**C** - Connector  
**T** - Terminal Spades  
**V** - Wire Leads

**Voltages: \***  
**05** - 0-5 VDC  
**10** - 0-10 VDC  
**20** - 0-20 VDC

**Orifice Options:**

**09** - 0.009" dia. }  
**13** - 0.013" dia. } → □ - 0-100 psig  
**25** - 0.025" dia. }  
**40** - 0.040" dia. → □ - 0-50 psig  
**60** - 0.060" dia. → □ - 0-25 psig

**Maximum Pressure (specify Operating Pressure):**

**Ports:**  
**Blank** - #10-32  
**M5** - Metric

**Options:**  
**Blank** - none  
**E** - EPDM  
**V** - FKM seals

\* Consult factory for availability of non-standard voltages and other options

Sample part number: EC-PM-10-4025

For Cable and Connectors, see [Page 181](#).





# Maximatic®



## MAXIMATIC SOLENOID VALVES

Clippard's Maximatic Solenoid valves are available in 2-way, 3-way and 4-way configurations in port sizes from #10-32 to 1/2" NPT. Select either a direct-acting poppet or solenoid-controlled pilot operated balanced spool design. Spool valves are body ported but can be bolted to a parallel circuit manifold.

These electronic valves offer high flow in a small package, and are constructed of aluminum, stainless steel and thermoplastic materials. The 4-way valves are also available in 3 position versions with either pressure center, closed center or exhaust center spool options.

- Materials:** Aluminum, Stainless Steel, Thermoplastic
- Maximum Pressure:** 0 to 115 psig (direct-acting only) (see [Page 192](#)); 30 to 125 on MME-41 Series, 20 to 125 psig on all others (spool valves)
- Response Time:** Less than 20 milliseconds
- Mounting:** Manifold standard. Actuator (1/4" only) or NAMUR (3/8" NPT only) available on [Page 195](#).
- Manual Override:** Locking or non-locking
- Electrical Connection:** DIN terminal with LED indicator, or 18" Wire Leads
- DIN Connector:** Plug-in electrical connector with LED. MME-31/41 models are DIN Industrial Form "C" (9.4 mm centers) 3 mm screw. All others are DIN 43650 Form "B" 3 mm screw. LED will not "light" if polarity is reversed.
- Wire Leads:** Not polarity sensitive
- Temperature Range:** 32 to 150°F (0 to 65°C)
- Seals:** Buna-N

Conforms to ISO 19973-2 test standards.

**3- & 4-Way Valves**

Port	Cv	Flow Rate	
		@ 50 psig	@ 100 psig
#10-32	0.58	16 scfm	27 scfm
1/8" NPT	0.67	18 scfm	31 scfm
1/4" NPT	0.89	26 scfm	49 scfm
3/8" NPT	1.68	51 scfm	93 scfm
1/2" NPT	2.79	91 scfm	171 scfm



**Send me a FREE full-line catalog!**

Miniature Pneumatic & Electronic Control Devices



# Maximum Value. Maximum Performance.

Choose either DIN connector with LED indicator or 18" Wire Lead connection. Both are rotatable and interchangeable.

2-, 3- & 4-Way Designs

For side ported manifold mount, the Maximatic line of valves offers both 1/4" actuator mount and 3/8" NAMUR mount

Easily accessible locking or non-locking manual override switch

Port sizes from #10-32 to 1/2" NPT

Buna-N Seals

Sturdy aluminum body withstands rough environments

Closed Center, Pressure Center and Exhaust Center Models Available

Operating ranges to 125 psig

Small size makes valves ideal for use in compact applications

Maximatic® Valves are available as body ported, manifold mount, NAMUR (3/8" NPT only), and Actuator (1/4" NPT only) mounting. Standard models include a base that permits fast, secure mounting of electronic valves to a manifold for grouping in compact assemblies.

A wide variety of voltage options are available including 12 VDC, 24 VDC, 24 VAC, 110 VAC and 220 VAC. Consult factory for other voltages.

All Maximatic® Solenoid Valves are IP 65 CE Rating




# MAXIMATIC® SOLENOID VALVES




Single Solenoid Electronic Valves Mounted on 8-Station Manifold

**Note:** This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.

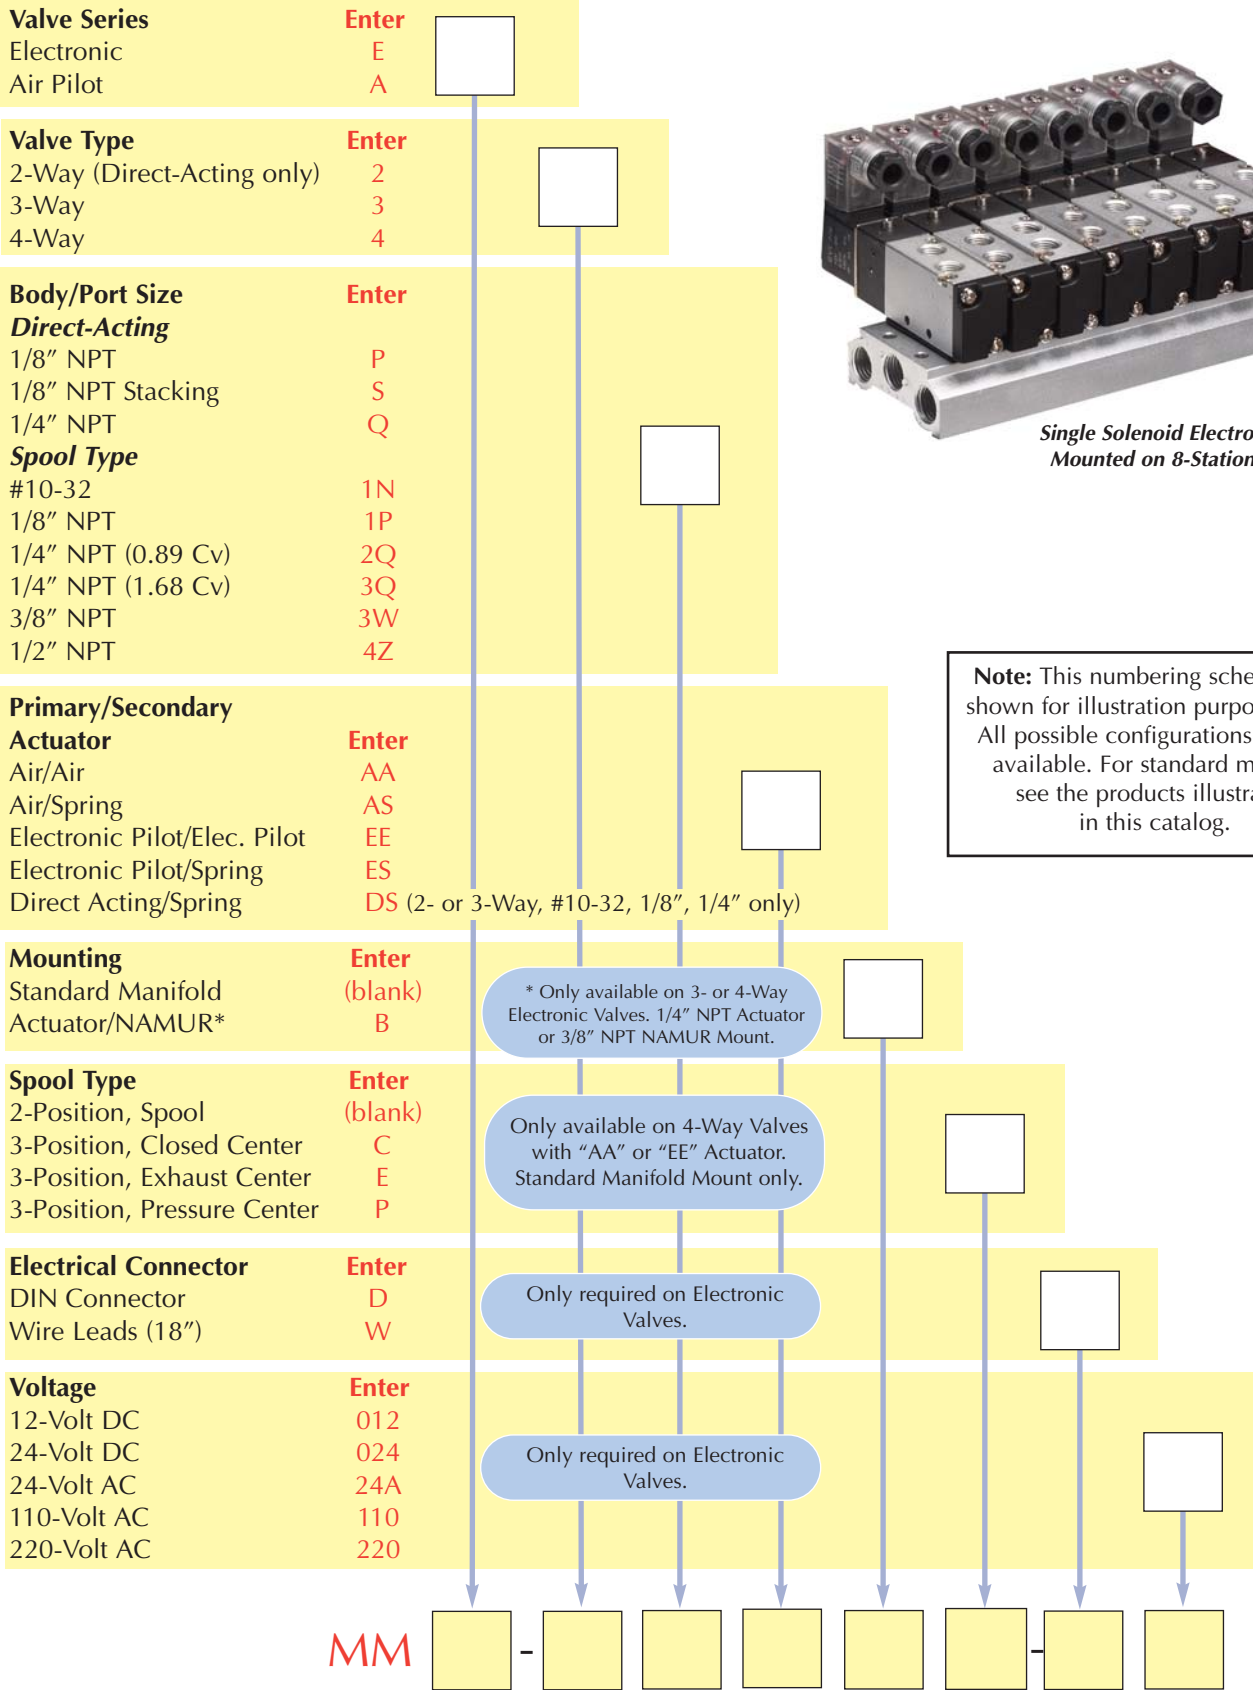

MM



Example: MM  E -  4  2Q  ES -  D  110



2-Way Valves							
Series No.	Style	Inlet	Ports Outlet	Exhaust	Function	Cv	Flow @ 100 psig
<a href="#">MME-2PDS</a>	Poppet	1/8" NPT	1/8" NPT	1/8" NPT	2/2	0.12	6.7 scfm
<a href="#">MME-2QDS</a>	Poppet	1/4" NPT	1/4" NPT	1/4" NPT	2/2	0.12	6.7 scfm
<a href="#">MME-2SDS</a>	Poppet	1/8" NPT	1/8" NPT	1/8" NPT	2/2	0.05	2.3 scfm

3-Way Valves							
Series No.	Style	Inlet	Ports Outlet	Exhaust	Function	Cv	Flow @ 100 psig
<a href="#">MME-3PDS</a>	Poppet	1/8" NPT	1/8" NPT	1/8" NPT	3/2	0.12	6.7 scfm
<a href="#">MME-3QDS</a>	Poppet	1/4" NPT	1/4" NPT	1/4" NPT	3/2	0.12	6.7 scfm
<a href="#">MME-3SDS</a>	Poppet	1/8" NPT	1/8" NPT	1/8" NPT	3/2	0.05	2.3 scfm
<a href="#">MME-31NES</a>	Spool	#10-32	#10-32	#10-32	3/2 NC	0.58	27 scfm
<a href="#">MME-31PES</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	3/2 NC	0.67	31 scfm
<a href="#">MME-32QES</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	3/2 NC	0.89	49 scfm
<a href="#">MME-33WES</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	3/2 NC	1.68	93 scfm
<a href="#">MME-34ZES</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	3/2 NC	2.79	171 scfm
<a href="#">MME-31NEE</a>	Spool	#10-32	#10-32	#10-32	3/2	0.58	27 scfm
<a href="#">MME-31PEE</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	3/2	0.67	31 scfm
<a href="#">MME-32QEE</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	3/2	0.89	49 scfm
<a href="#">MME-33WEE</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	3/2	1.68	93 scfm
<a href="#">MME-34ZEE</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	3/2	2.79	171 scfm

4-Way Valves								Spool Configuration		
Series No.	Style	Inlet	Ports Outlet	Exhaust	Function	Cv	Flow @ 100 psig	Closed Center	Exhaust Center	Pressure Center
<a href="#">MME-41NES</a>	Spool	#10-32	#10-32	#10-32	5/2	0.58	27 scfm			
<a href="#">MME-41PES</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	5/2	0.67	31 scfm			
<a href="#">MME-42QES</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	5/2	0.89	49 scfm			
<a href="#">MME-43WES</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	5/2	1.68	93 scfm			
<a href="#">MME-44ZES</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	5/2	2.79	171 scfm			
<a href="#">MME-41NEE</a>	Spool	#10-32	#10-32	#10-32	5/2	0.58	27 scfm			
<a href="#">MME-41PEE</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	5/2	0.67	31 scfm			
<a href="#">MME-42QEE</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	5/2	0.89	49 scfm			
<a href="#">MME-43WEE</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	5/2	1.68	93 scfm			
<a href="#">MME-44ZEE</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	5/2	2.79	171 scfm			
<a href="#">MME-41NEEC</a>	Spool	#10-32	#10-32	#10-32	5/3	0.50	23 scfm		•	
<a href="#">MME-41PEEC</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	5/3	0.50	23 scfm		•	
<a href="#">MME-42QEEC</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	5/3	0.67	49 scfm		•	
<a href="#">MME-43WEEC</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	5/3	1.00	72 scfm		•	
<a href="#">MME-44ZEEC</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	5/3	1.68	93 scfm		•	
<a href="#">MME-41NEEP</a>	Spool	#10-32	#10-32	#10-32	5/3	0.50	23 scfm			•
<a href="#">MME-41PEEP</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	5/3	0.50	23 scfm			•
<a href="#">MME-42QEEP</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	5/3	0.89	49 scfm			•
<a href="#">MME-43WEEP</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	5/3	1.00	72 scfm			•
<a href="#">MME-44ZEEP</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	5/3	1.68	93 scfm			•
<a href="#">MME-41NEEE</a>	Spool	#10-32	#10-32	#10-32	5/3	0.50	23 scfm		•	
<a href="#">MME-41PEEE</a>	Spool	1/8" NPT	1/8" NPT	1/8" NPT	5/3	0.50	23 scfm		•	
<a href="#">MME-42QEEE</a>	Spool	1/4" NPT	1/4" NPT	1/8" NPT	5/3	0.89	49 scfm		•	
<a href="#">MME-43WEEE</a>	Spool	3/8" NPT	3/8" NPT	1/4" NPT	5/3	1.00	72 scfm		•	
<a href="#">MME-44ZEEE</a>	Spool	1/2" NPT	1/2" NPT	1/2" NPT	5/3	1.68	93 scfm		•	





# MAXIMATIC® 2- & 3-WAY VALVES

## Direct-Acting 2-Position Solenoid Valves



**MME-2SDS-D024**



**MME-3PDS-D110**

Maximatic® Direct-Acting Valves are single solenoid spring return poppet type valves available as either 2-way or 3-way configurations in ports sizes 1/8" NPT and 1/4" NPT. Hardware to stack multiple valves included with each stacking valve (MME-3SDS and MME-2SDS). Includes one long screw, one short screw, one gasket, and one nut.

**Flow:** 2.3 scfm @ 100 psig  
**Electrical Connection:** DIN connector with LED indicator ("D"), or 18" Wire Lead ("W")  
**Voltage:** 12-volt DC ("-012"), 24-volt DC ("-024"), 24-volt AC ("-24A"), 110-volt AC ("-110"), or 220-volt AC ("-220")  
**Power Consumption:** 6.5 Watt  
**Number of Ports:** 2 or 3  
**Mounting:** Body Ported or Stacking


**Medium:** Air (40 micron filtration), Inert Gas or Liquid  
**Operating Range:** 0 to 115 psig

### Replacement Stacking Kit

Replacement Stacking Kits are available which include two long screws, two short screws, one gasket and two nuts.


**Part No.**  
27048

Replacement Stacking Kit

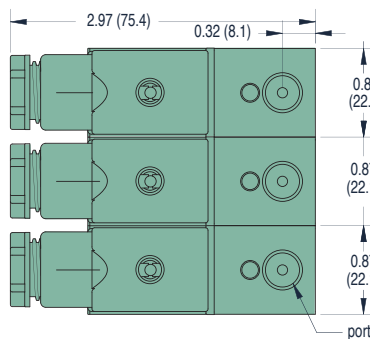


**3-Station Configuration**

### 2-Way & 3-Way Valves (Stacking)

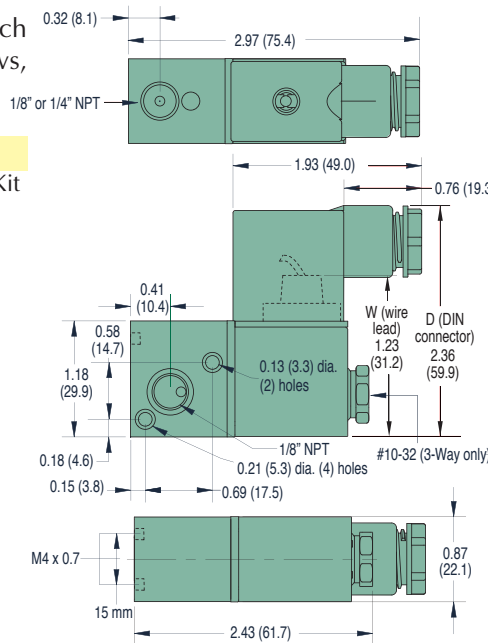

### 2-Way & 3-Way Valves (non-Stacking)

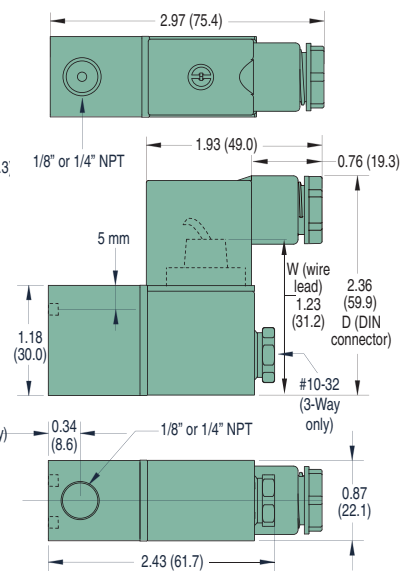

2-Way Valves	Cv/scfm*	3-Way Valves	Inlet	Outlet	Exhaust	Cv/scfm*
MME-2PDS-A	0.12/6.7	MME-3PDS-A	1/8" NPT	1/8" NPT	#10-32	0.10/2.3
MME-2SDS-P	0.05/2.3	MME-3SDS-P	1/8" NPT	1/8" NPT	#10-32	0.10/2.3
MME-2QDS-P	0.12/6.7	MME-3QDS-P	1/4" NPT	1/4" NPT	#10-32	0.10/2.3

\*\* Stacking Valve

\* scfm based on flow @ 100 psig

Add Electrical Connection and Voltage Choices to the end of each Base Part Number - Example: **MME-2QDS-W220**





# MAXIMATIC® 4-WAY VALVES

## 2-Position Single & Double Solenoid Valves



**MME-44ZEE-D110**



**MME-44ZES-D012**

Maximatic® 4-way solenoid controlled pilot operated valves are either single solenoid spring return or double solenoid spool valves in #10-32 thread to 1/2" NPT port sizes.

**Medium:** Air (40 micron filtration) or Inert Gas

**Operating Range:** 20 to 125 psig

**Electrical Connection:** DIN connector with LED indicator ("-D"), or 18" Wire Lead ("-W")

**Voltage:** 12-volt DC ("-012"), 24-volt DC ("-024"), 24-volt AC ("-24A"), 110-volt AC ("-110"), or 220-volt AC ("-220")


**Number of Ports:** 5

**Mounting:** Body Ported, Manifold Mount

**Manual Override:** Non-locking on MME-41 models. Locking on all other models.

**Power Consumption:** 2.5 Watts on MME-41 models; 3 Watts for all others.

Dim.	MME-41	MME-42	MME-43	MME-44
D	2.14 (54.4)	2.65 (67.3)	2.71 (68.8)	2.94 (74.7)
DS	0.13 (3.3)	0.17 (4.3)	0.17 (4.3)	0.21 (5.3)
DT	0.13 (3.3)	0.13 (3.3)	0.17 (4.3)	0.17 (4.3)
H	1.07 (27.2)	1.38 (35.1)	1.58 (40.1)	1.97 (50.0)
HS	0.16 (4.1)	0.28 (7.1)	0.26 (6.6)	0.29 (7.4)
L1	3.81 (96.8)	4.49 (114.0)	5.19 (131.8)	6.39 (162.3)
L2	5.54 (140.7)	6.49 (164.8)	7.24 (183.9)	8.48 (215.4)
LE	1.09 (27.7)	1.42 (36.1)	1.77 (45.0)	2.48 (63.0)
LO	0.63 (16.0)	0.74 (13.9)	0.96 (24.4)	1.42 (36.1)
LS	0.56 (14.2)	0.98 (24.9)	0.95 (24.1)	1.11 (28.2)
LT	1.18 (30.0)	1.40 (35.6)	1.97 (50.0)	2.82 (71.6)
T	0.71 (18.0)	0.86 (21.8)	1.06 (26.1)	1.34 (34.0)
TO	0.11 (2.8)	0.13 (3.3)	0.16 (4.1)	0.19 (4.8)
TU	0.50 (12.7)	0.65 (16.5)	0.80 (20.3)	1.07 (27.2)
W	1.32 (33.5)	1.51 (38.4)	1.54 (39.1)	1.73 (43.9)

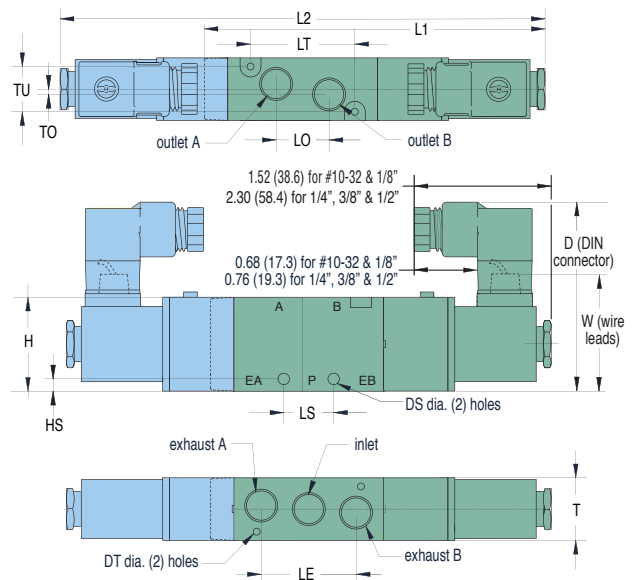


Single Solenoid Valves		Double Solenoid Valves		Inlet	Outlet	Exhaust	Cv/scfm*
<u>MME-41NES-</u>		<u>MME-41NEE-</u>		#10-32	#10-32	#10-32	0.58/27
<u>MME-41PES-</u>		<u>MME-41PEE-</u>		1/8" NPT	1/8" NPT	1/8" NPT	0.67/31
<u>MME-42QES-</u>		<u>MME-42QEE-</u>		1/4" NPT	1/4" NPT	1/8" NPT	0.89/49
<u>MME-43WES-</u>		<u>MME-43WEE-</u>		3/8" NPT	3/8" NPT	1/4" NPT	1.68/93
<u>MME-44ZES-</u>		<u>MME-44ZEE-</u>		1/2" NPT	1/2" NPT	1/2" NPT	2.79/171

\* scfm based on flow @ 100 psig


Add Electrical Connection and Voltage Choices to the end of each Base Part Number - Example: **MME-43WEE-D110**

## 2-Position Single Solenoid Valves

1/4" & 3/8" NAMUR Style

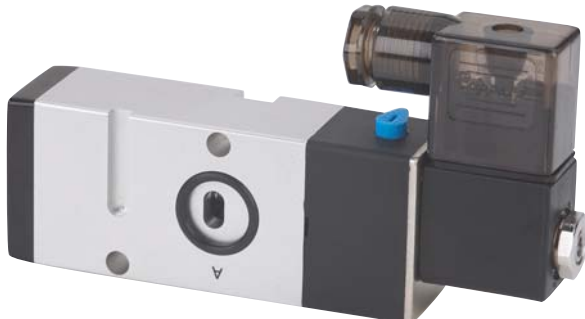

**MME-33WESB-D012**

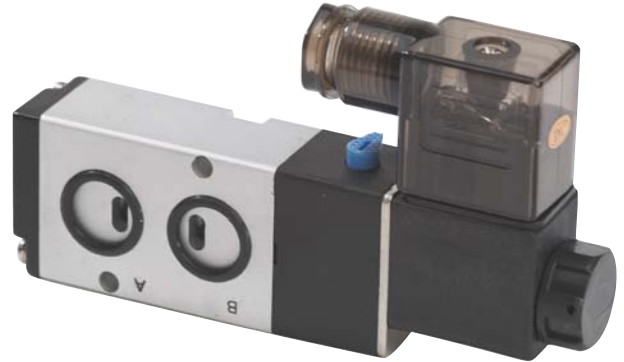

**MME-32QESB-D220**

Maximatic® 3-way and 4-way single solenoid spring return spool valves are also available in 1/4" NPT actuator mount or 3/8" NAMUR mount.

**Medium:** Air (40 micron filtration) or Inert Gas

**Operating Range:** 20 to 125 psig

**Electrical Connection:** DIN terminal with LED indicator ("-D"), or Grommet with 18" Wire Lead ("-W")

**Voltage:** 12-volt DC ("-012"), 24-volt DC ("-024"), 24-volt AC ("-24A"), 110-volt AC ("-110"), or 220-volt AC ("-220")

**Number of Ports:** 3 or 5


**Mounting:** Actuator (1/4" NPT only) or NAMUR (3/8" NPT only).

**Manual Override:** Locking

**Power Consumption:** 3 Watts


NAMUR/Actuator mount available on other 3- and 4-way Electronic and Air Pilot valves—  
Call for specifications.

### 3-Way Solenoid Valves

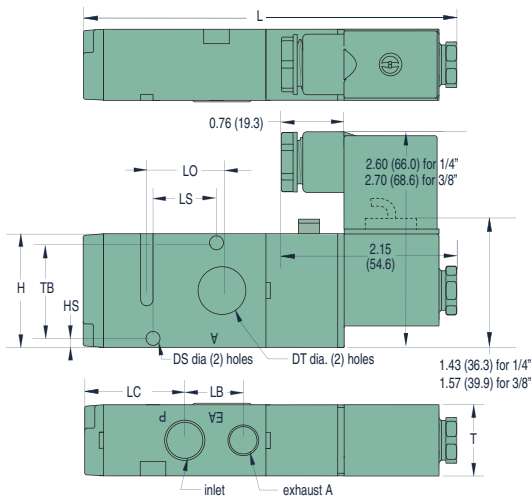

Dim.	1/4" NPT	3/8" NPT
DS	0.17 (4.3)	0.22 (5.6)
DT	0.72 (18.3)	0.78 (19.8)
H	1.38 (35.1)	1.58 (40.1)
HS	0.09 (2.3)	0.15 (3.8)
L	4.49 (114.0)	5.19 (131.8)
LC	1.21 (30.7)	1.57 (39.9)
LB	0.71 (18.0)	0.94 (23.9)
LO	0.91 (23.1)	0.94 (23.9)
LS	0.79 (20.1)	0.94 (23.9)
T	0.86 (21.8)	1.06 (26.9)
TB	1.14 (29.0)	1.26 (32.0)

### 4-Way Solenoid Valves

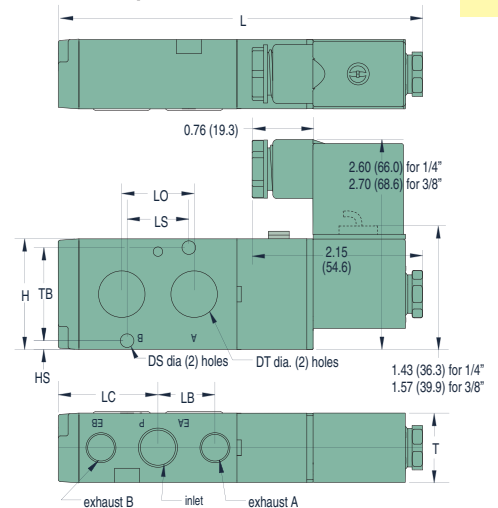

#### 3-Way Single Solenoid Valves

**MME-32QESB-**  
**MME-33WESB-**



**Supply Port**

**Outlet**

**Exhaust**

**Cv/scfm\***

1/4" NPT

0.72"

1/4" NPT

0.89/49

3/8" NPT


0.78"

1/4" NPT

1.68/93

#### 4-Way Single Solenoid Valves

**MME-42QESB-**  
**MME-43WESB-**



**Supply Port**

**Outlet**

**Exhaust**

**Cv/scfm\***

1/4" NPT

0.72"

1/4" NPT

0.89/49

3/8" NPT

0.78"

1/4" NPT

1.68/93

\* scfm based on flow @ 100 psig


Add Electrical Connection and Voltage Choices to the end of each Base Part Number - Example: **MME-42QESB-D110**





# MAXIMATIC® 4-WAY VALVES

## 3-Position Spring Centered Double Solenoid Valves

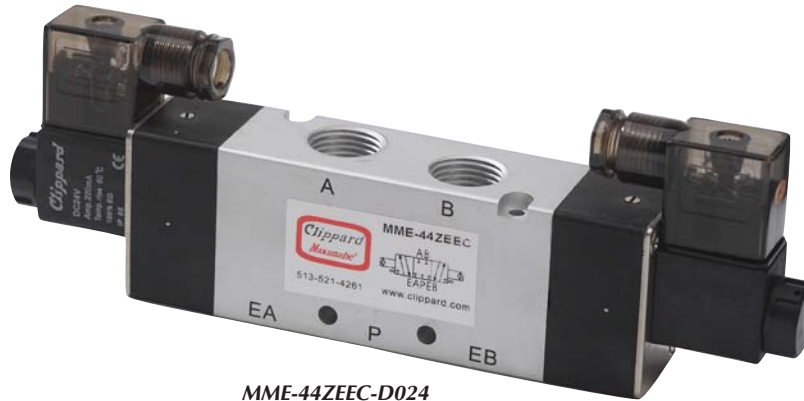

**MME-44ZEED-024**

Maximatic® 4-way double solenoid spring centered valves with closed center, pressure center or exhaust center spools are available from #10-32 thread to 1/2" NPT port sizes.

**Medium:** Air (40 micron filtration) or Inert Gas

**Operating Range:** 30 to 125 psig on MME-41 series, 20 to 125 psig on all others

**Electrical Connection:** DIN terminal with LED indicator ("-D"), or 18" Wire Lead ("-W")


**Voltage:** 12-volt DC ("-012"), 24-volt DC ("-024"), 24-volt AC ("-24A"), 110-volt AC ("-110"), or 220-volt AC ("-220")

**Number of Ports:** 5

**Mounting:** Body Ported, Manifold Mount

**Manual Override:** Non-locking on MME-41 Series. Locking on all other models.

**Power Consumption:** 2.5 Watts on MME-41 models; 3 Watts for all others.

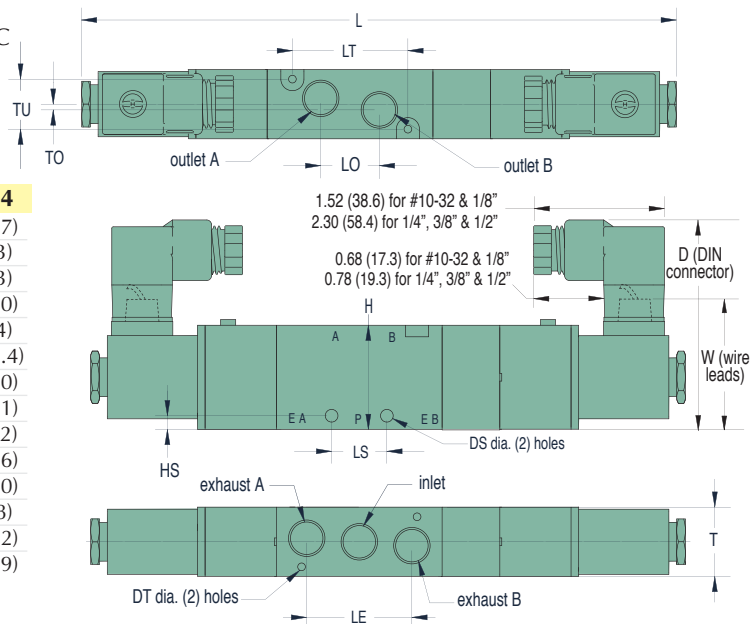

Dim.	MME-41	MME-42	MME-43	MME-44
D	2.14 (54.4)	2.65 (67.3)	2.71 (68.8)	2.94 (74.7)
DS	0.13 (3.3)	0.17 (4.3)	0.17 (4.3)	0.21 (5.3)
DT	0.13 (3.3)	0.13 (3.3)	0.17 (4.3)	0.17 (4.3)
H	1.07 (27.2)	1.38 (35.1)	1.58 (40.1)	1.97 (50.0)
HS	0.16 (4.1)	0.28 (7.1)	0.26 (6.6)	0.29 (7.4)
L	6.13 (155.7)	7.24 (183.9)	7.98 (202.7)	8.48 (215.4)
LE	1.09 (27.7)	1.42 (36.1)	1.77 (45.0)	2.48 (63.0)
LO	0.63 (16.0)	0.74 (18.8)	0.96 (24.4)	1.42 (36.1)
LS	0.56 (14.2)	0.98 (24.9)	0.95 (24.1)	1.11 (28.2)
LT	1.18 (30.0)	1.40 (35.6)	1.97 (50.0)	2.82 (71.6)
T	0.71 (18.0)	0.86 (21.8)	1.06 (26.9)	1.34 (34.0)
TO	0.11 (2.8)	0.13 (3.3)	0.16 (4.1)	0.19 (4.8)
TU	0.50 (12.7)	0.65 (16.5)	0.80 (20.3)	1.07 (27.2)
W	1.32 (33.5)	1.51 (38.4)	1.54 (39.1)	1.73 (43.9)



Closed Center	Pressure Center	Exhaust Center	Inlet	Outlet	Exhaust	Cv/scfm*
<u>MME-41NEEC-</u>	<u>MME-41NEEP-</u>	<u>MME-41NEEE-</u>	#10-32	#10-32	#10-32	0.50/23
<u>MME-41PEEC-</u>	<u>MME-41PEEP-</u>	<u>MME-41PEEE-</u>	1/8" NPT	1/8" NPT	1/8" NPT	0.50/23
<u>MME-42QEEC-</u>	<u>MME-42QEEP-</u>	<u>MME-42QEEE-</u>	1/4" NPT	1/4" NPT	1/8" NPT	0.89/49
<u>MME-43WEEC-</u>	<u>MME-43WEEP-</u>	<u>MME-43WEEE-</u>	3/8" NPT	3/8" NPT	1/4" NPT	1.00/72
<u>MME-44ZEED-</u>	<u>MME-44ZEEP-</u>	<u>MME-44ZEEE-</u>	1/2" NPT	1/2" NPT	1/2" NPT	1.68/93


\* scfm based on flow @ 100 psig

Add Electrical Connection and Voltage Choices to the end of each Base Part Number - Example: **MME-41PEEP-W024**

**Rebuild Kits.** Convenient rebuild kits are available which contain common maintenance items that may be needed during the life of the valve. Each contains a spool, diamond seal, two pilot seals, two pistons with seals, and spring. Consult factory for 3-position kits.

Part No.	Description
<a href="#">27040-31</a>	3-Way Kit, MME-31
<a href="#">27040-32</a>	3-Way Kit, MME-32
<a href="#">27040-33</a>	3-Way Kit, MME-33
<a href="#">27040-34</a>	3-Way Kit, MME-34
<a href="#">27040-41</a>	4-Way 2 Pos. Kit, MME-41
<a href="#">27040-42</a>	4-Way 2 Pos. Kit, MME-42
<a href="#">27040-43</a>	4-Way 2 Pos. Kit, MME-43
<a href="#">27040-44</a>	4-Way 2 Pos. Kit, MME-44

## Parallel Bar Manifolds

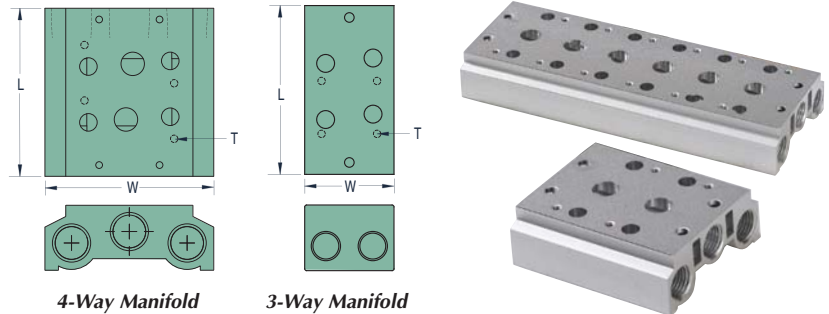

Valve Series	"L" Dimension					"T" Mtg. Thd.
	2-Station	4-Station	6-Station	8-Station	16-Station	
MME-31/41	2.24 (56.9)	3.73 (94.7)	5.25 (133.4)	6.75 (171.5)	12.69 (322.3)	M4
MME-32/42	2.71 (68.8)	4.50 (114.3)	6.33 (160.8)	8.13 (206.5)	15.38 (390.7)	M4
MME-33/43	3.22 (81.8)	5.42 (137.7)	7.62 (193.5)	9.82 (249.4)	18.63 (473.2)	M5
MME-34/44	3.85 (97.8)	6.56 (166.6)	9.38 (238.3)	12.10 (307.3)	23.11 (587.0)	M5

Parallel circuit manifold bars are available for all sizes of MME 3- and 4-way valves. Manifolds are made in increments of two stations from 2 to 16, and are supplied with mounting screws and gaskets. Spare kits are also available which include two screws and a gasket. Blank plate supplied with one gasket, two screws and metal plate.

Valve Series	Manifold Inlet/						
	Exhaust	Blank Plate	2-Station	4-Station	6-Station	8-Station	16-Station
<b>3-Way Valve Manifolds</b>							
MME-31	1/8"	<a href="#">MMM-31-B</a>	<a href="#">MMM-31-02</a>	<a href="#">MMM-31-04</a>	<a href="#">MMM-31-06</a>	<a href="#">MMM-31-08</a>	<a href="#">MMM-31-16</a>
MME-32	1/4"	<a href="#">MMM-32-B</a>	<a href="#">MMM-32-02</a>	<a href="#">MMM-32-04</a>	<a href="#">MMM-32-06</a>	<a href="#">MMM-32-08</a>	<a href="#">MMM-32-16</a>
MME-33	3/8"	<a href="#">MMM-33-B</a>	<a href="#">MMM-33-02</a>	<a href="#">MMM-33-04</a>	<a href="#">MMM-33-06</a>	<a href="#">MMM-33-08</a>	<a href="#">MMM-33-16</a>
MME-34	1/2"	<a href="#">MMM-34-B</a>	<a href="#">MMM-34-02</a>	<a href="#">MMM-34-04</a>	<a href="#">MMM-34-06</a>	<a href="#">MMM-34-08</a>	<a href="#">MMM-34-16</a>

### 3-Way Spare Mounting Kit Hardware

<a href="#">27041-31</a> . . . . . Hardware Kit for MME-31 Series Valves	<a href="#">27041-33</a> . . . . . Hardware Kit for MME-33 Series Valves
<a href="#">27041-32</a> . . . . . Hardware Kit for MME-32 Series Valves	<a href="#">27041-34</a> . . . . . Hardware Kit for MME-34 Series Valves

Valve Series	Manifold Inlet/						
	Exhaust	Blank Plate	2-Station	4-Station	6-Station	8-Station	16-Station
<b>4-Way Valve Manifolds</b>							
MME-41	1/4"	<a href="#">MMM-41-B</a>	<a href="#">MMM-41-02</a>	<a href="#">MMM-41-04</a>	<a href="#">MMM-41-06</a>	<a href="#">MMM-41-08</a>	<a href="#">MMM-41-16</a>
MME-42	1/4"	<a href="#">MMM-42-B</a>	<a href="#">MMM-42-02</a>	<a href="#">MMM-42-04</a>	<a href="#">MMM-42-06</a>	<a href="#">MMM-42-08</a>	<a href="#">MMM-42-16</a>
MME-43	3/8"	<a href="#">MMM-43-B</a>	<a href="#">MMM-43-02</a>	<a href="#">MMM-43-04</a>	<a href="#">MMM-43-06</a>	<a href="#">MMM-43-08</a>	<a href="#">MMM-43-16</a>
MME-44	1/2"	<a href="#">MMM-44-B</a>	<a href="#">MMM-44-02</a>	<a href="#">MMM-44-04</a>	<a href="#">MMM-44-06</a>	<a href="#">MMM-44-08</a>	<a href="#">MMM-44-16</a>

### 4-Way Spare Mounting Kit Hardware

<a href="#">27041-41</a> Hardware Kit for MME-41 Series Valves	<a href="#">27041-43</a> Hardware Kit for MME-43 Series Valves
<a href="#">27041-42</a> Hardware Kit for MME-42 Series Valves	<a href="#">27041-44</a> Hardware Kit for MME-44 Series Valves



# MAXIMATIC® VALVE ACCESSORIES

## Replacement Coils



**Industrial Form**  
2.5 Watt  
#10-32 & 1/8"

**Form B**  
3.0 Watt  
1/4", 3/8" & 1/2"

**Form B**  
6.5 Watt  
Direct-Acting

Replacement coils for solenoid valves are available in volt-ages from 12 VDC to 220 VAC with either DIN connector or 18" wire leads. Refer to DIN Connectors below.


Description	2.5 Watt #10-32 & 1/8"	3.0 Watt 1/4", 3/8" & 1/2"	6.5 Watt Direct-Acting
<b>DIN Connectors</b>			
12-Volt DC	<a href="#">27001-D012</a>	<a href="#">27065-D012</a>	<a href="#">27002-D012</a>
24-Volt DC	<a href="#">27001-D024</a>	<a href="#">27065-D024</a>	<a href="#">27002-D024</a>
110-Volt AC	<a href="#">27001-D110</a>	<a href="#">27065-D110</a>	<a href="#">27002-D110</a>
220-Volt AC	<a href="#">27001-D220</a>	<a href="#">27065-D220</a>	<a href="#">27002-D220</a>
24-Volt AC	<a href="#">27001-D24A</a>	<a href="#">27065-D24A</a>	<a href="#">27002-D24A</a>
<b>Wire Leads</b>			
12-Volt DC	<a href="#">27001-W012</a>	<a href="#">27065-W012</a>	<a href="#">27002-W012</a>
24-Volt DC	<a href="#">27001-W024</a>	<a href="#">27065-W024</a>	<a href="#">27002-W024</a>
110-Volt AC	<a href="#">27001-W110</a>	<a href="#">27065-W110</a>	<a href="#">27002-W110</a>
220-Volt AC	<a href="#">27001-W220</a>	<a href="#">27065-W220</a>	<a href="#">27002-W220</a>
24-Volt AC	<a href="#">27001-W24A</a>	<a href="#">27065-W24A</a>	<a href="#">27002-W24A</a>

## DIN Connectors

DIN 43650 Form B Connectors with 11 mm spade center spacing. DIN type size 2, 3 and 4 Maximatic valves. Industrial Form Connectors with 9.4 mm spade center spacing are designed to connect to 15 mm terminal coils. Both are available with or without surge suppression, and 152 or 381 mm PVC molded three-wire cord set.



Form B Part No.	Industrial Form Part No.	Volts	LED	Cord
<a href="#">CC-B</a>	<a href="#">CC-I</a>			-
<a href="#">CC-B-P6</a>	<a href="#">CC-I-P6</a>	6-240	no	6'
<a href="#">CC-B-P15</a>	<a href="#">CC-I-P15</a>			15'
<a href="#">CC-BLL</a>	<a href="#">CC-ILL</a>			-
<a href="#">CC-BLL-P6</a>	<a href="#">CC-ILL-P6</a>	6-24	yes	6'
<a href="#">CC-BLL-P15</a>	<a href="#">CC-ILL-P15</a>			15'
<a href="#">CC-BLM</a>	<a href="#">CC-ILM</a>			-
<a href="#">CC-BLM-P6</a>	<a href="#">CC-ILM-P6</a>	48-110	yes	6'
<a href="#">CC-BLM-P15</a>	<a href="#">CC-ILM-P15</a>			15'
<a href="#">CC-BLH</a>				-
<a href="#">CC-BLH-P6</a>		208-240	yes	6'
<a href="#">CC-BLH-P15</a>				15'

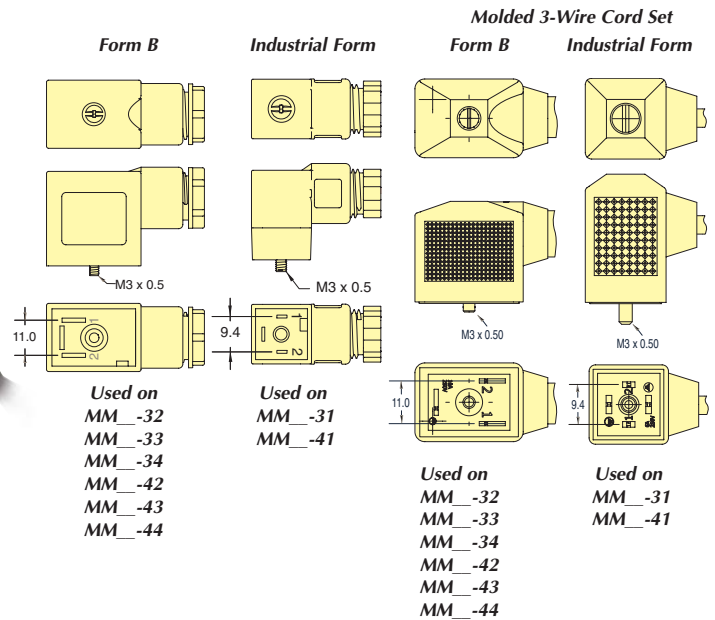


Send me a **FREE** full-line catalog!

## ES, ESO SERIES COMPACT VALVES

Valves are small in size with a variety of coil voltages and flow options. Mounting is as close as 7/8" on center.

ESO and similar styles have top hose barb or #10-32 threaded fitting for N.C. exhaust or N.O. inlet.

Housing is molded Zytel® ST 801 for toughness and rigidity.

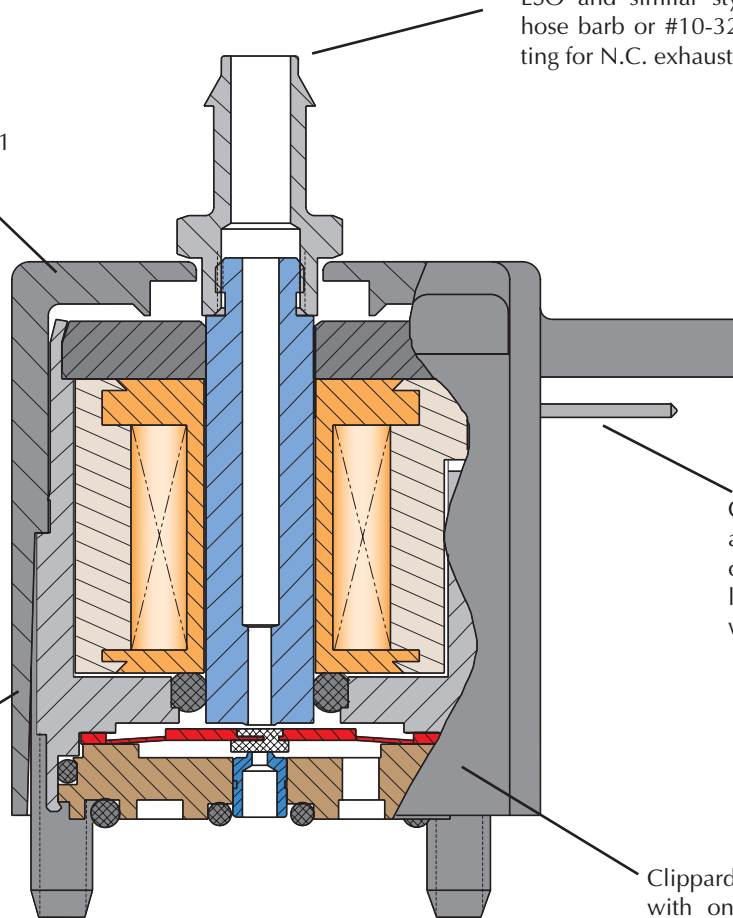

Coils are available with an AMP# 103959-2 pin connection or 18" wire leads which utilize #26 wire.


Valves feature low power, cool running, quiet operation and fast response time. They convert low voltage, low current signals into high pressure pneumatic outputs.

Clippard ES valves are unique, with only one internal moving part that travels a mere 0.007 inches.

Zytel® is a registered trademark of E.I. DuPont



# ES, ESO SERIES VALVES

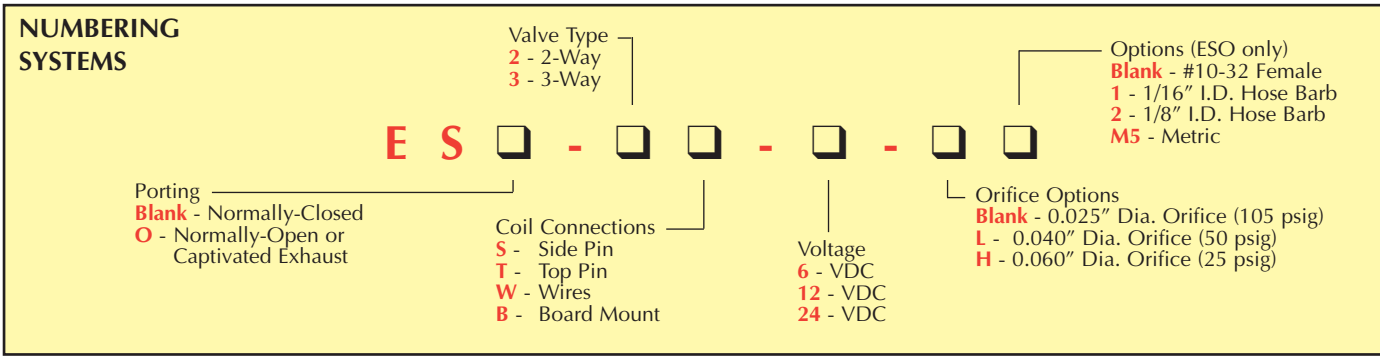

## Quality Design

The compact ES valve, like Clippard EV and ET valves, converts low voltage, low current signals into high pressure (0 to 105 psig) pneumatic outputs, utilizing a unique, patented, valving principle. Since there are no sliding parts, and complete poppet travel is only 0.007", low power consumption and exceptionally long life are assured with this design. No flow is required for cooling because the compact ES is cool, as well as quiet, in operation.



The compact nature of design makes this valve well suited to a wide range of applications in biomedical, environmental test equipment, textile machines, packaging machinery, computerized industrial automation, and portable systems.

## Features

- Temperature Range: 30 to 180°F
- Medium: Air (40 micron filtration)
- Low power consumption - 1 watt at rated voltage
- Close mounting - 7/8" on center
- Voltage Options: 6, 12 or 24 VDC
- Overall height less than 1"
- Easy to mount on manifold with two #4-40 screws
- Response: 5 to 10 milliseconds at max rated pressure
- Geometric design
- Polymer housing - Zytel ST 801® super tough
- Pin connectors - AMP # 103959-2 or 18" wire leads: #26 wire
- Flow up to 0.6 scfm/17 l/min

Zytel ST 801® super tough is a registered trademark of DuPont




NOMINAL			Power (watts)	Working Range (cont. duty)
Voltage	Current (amps)	Resistance (ohms)		
6	0.17	36	1.0	90% to 150% of rated voltage
12	0.083	144	1.0	
24	0.042	576	1.0	



# ES SERIES 2- & 3-WAY VALVES



## Normally-Closed 2 & 3-Way Electronic Poppet Valves with Side Pin Connector

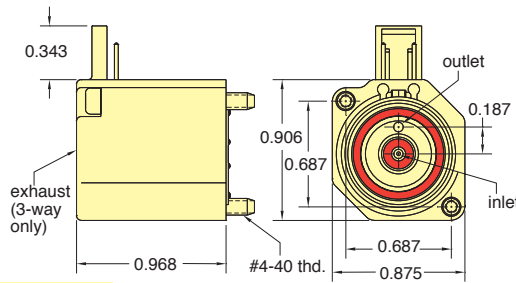


Part No.	Description
ES-2S-□	2-Way Electronic Poppet Valve
ES-3S-□	3-Way Electronic Poppet Valve

**Input Pressure:** 28" Hg Vac. to 105 psig  
 28" Hg Vac. to 50 psig (L)  
 28" Hg Vac. to 25 psig (H)

**Air Flow:** 0.6 scfm @ 100 psig  
 0.5 scfm @ 50 psig (L)  
 0.45 scfm @ 25 psig (H)

**Ports:** Inlet and outlet through manifold;  
 3-way exhaust through top of valve (3-way only)

## Normally-Closed 2- & 3-Way Electronic Poppet Valves with Top Pin Connector

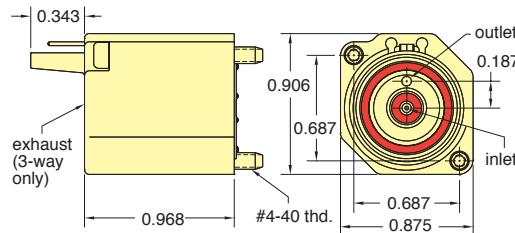


Part No.	Description
ES-2T-□	2-Way Electronic Poppet Valve
ES-3T-□	3-Way Electronic Poppet Valve

**Input Pressure:** 28" Hg Vac. to 105 psig  
 28" Hg Vac. to 50 psig (L)  
 28" Hg Vac. to 25 psig (H)

**Air Flow:** 0.6 scfm @ 100 psig  
 0.5 scfm @ 50 psig (L)  
 0.45 scfm @ 25 psig (H)

**Ports:** Inlet and outlet through manifold;  
 3-way exhaust through top of valve (3-way only)

## Normally-Closed 2- & 3-Way Electronic Poppet Valves with Wire Leads

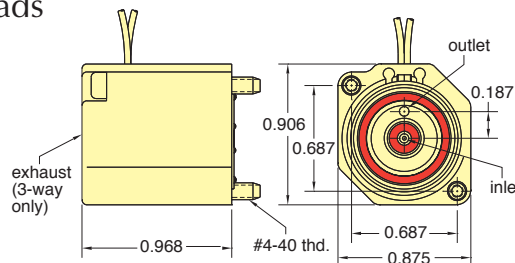


Part No.	Description
ES-2W-□	2-Way Electronic Poppet Valve
ES-3W-□	3-Way Electronic Poppet Valve

**Input Pressure:** 28" Hg Vac. to 105 psig  
 28" Hg Vac. to 50 psig (L)  
 28" Hg Vac. to 25 psig (H)

**Air Flow:** 0.6 scfm @ 100 psig  
 0.5 scfm @ 50 psig (L)  
 0.45 scfm @ 25 psig (H)

**Ports:** Inlet and outlet through manifold;  
 3-way exhaust through top of valve (3-way only)

## Normally-Closed 2- & 3-Way Electronic Poppet Valves with Board Mount

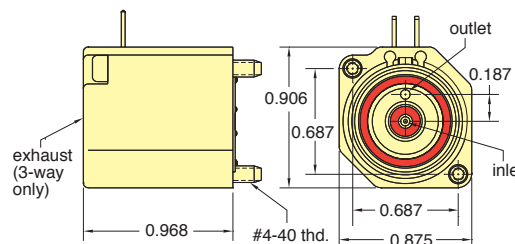

Part No.	Description
ES-2B-□	2-Way Electronic Poppet Valve
ES-3B-□	3-Way Electronic Poppet Valve

**Input Pressure:** 28" Hg Vac. to 105 psig  
 28" Hg Vac. to 50 psig (L)  
 28" Hg Vac. to 25 psig (H)

**Air Flow:** 0.6 scfm @ 100 psig  
 0.5 scfm @ 50 psig (L)  
 0.45 scfm @ 25 psig (H)


**Ports:** Inlet and outlet through manifold;  
 3-way exhaust through top of valve (3-way only)

For Cable and Connectors, see [Page 204](#).



# ESO SERIES 3-WAY VALVES

## Fully-Ported 3-Way Electronic Poppet Valve with Side Pin Connector

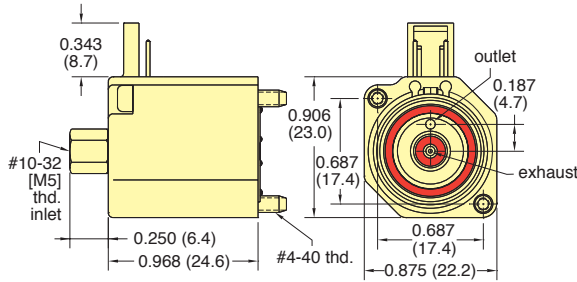

**Input Pressure:** 28" Hg Vac. to 105 psig  
28" Hg Vac. to 50 psig (L)  
28" Hg Vac. to 25 psig (H)


**Air Flow:** 0.6 scfm @ 100 psig;  
15 l/min @ 7 bar  
0.5 scfm @ 50 psig (L);  
15 l/min @ 3.5 bar  
0.45 scfm @ 25 psig (H);  
14 l/min @ 1.8 bar

**Ports:** Exhaust and outlet through manifold;  
3-way supply (#10-32/M5) through top of valve

**Metric:** Add -M5 to Part Number

Part No.	Description
ESO-3S-□	3-Way Electronic Poppet Valve

## Fully-Ported 3-Way Electronic Poppet Valve with Top Pin Connector

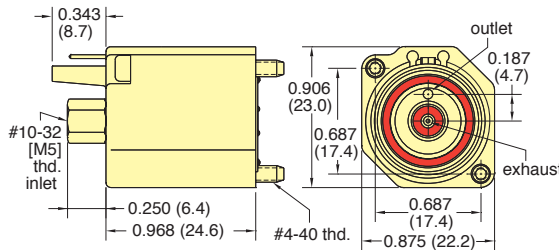

**Input Pressure:** 28" Hg Vac. to 105 psig  
28" Hg Vac. to 50 psig (L)  
28" Hg Vac. to 25 psig (H)


**Air Flow:** 0.6 scfm @ 100 psig;  
15 l/min @ 7 bar  
0.5 scfm @ 50 psig (L);  
15 l/min @ 3.5 bar  
0.45 scfm @ 25 psig (H);  
14 l/min @ 1.8 bar

**Ports:** Exhaust and outlet through manifold;  
3-way supply (#10-32/M5) through top of valve

**Metric:** Add -M5 to Part Number

Part No.	Description
ESO-3T-□	3-Way Electronic Poppet Valve

## Fully-Ported 3-Way Electronic Poppet Valve with Wire Leads

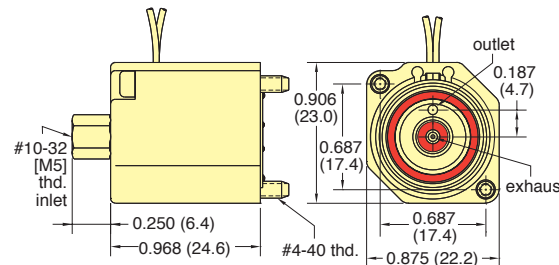

**Input Pressure:** 28" Hg Vac. to 105 psig  
28" Hg Vac. to 50 psig (L)  
28" Hg Vac. to 25 psig (H)


**Air Flow:** 0.6 scfm @ 100 psig;  
15 l/min @ 7 bar  
0.5 scfm @ 50 psig (L);  
15 l/min @ 3.5 bar  
0.45 scfm @ 25 psig (H);  
14 l/min @ 1.8 bar

**Ports:** Exhaust and outlet through manifold;  
3-way supply (#10-32/M5) through top of valve

**Metric:** Add -M5 to Part Number

Part No.	Description
ESO-3W-□	3-Way Electronic Poppet Valve

## Fully-Ported 3-Way Electronic Poppet Valve with Board Mount

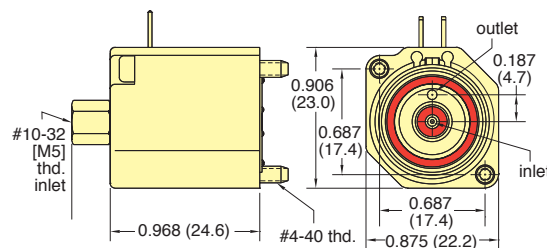

**Input Pressure:** 28" Hg Vac. to 105 psig;  
28" Hg Vac. to 50 psig (L)  
28" Hg Vac. to 25 psig (H)

**Air Flow:** 0.6 scfm @ 100 psig;  
15 l/min @ 7 bar  
0.5 scfm @ 50 psig (L);  
15 l/min @ 3.5 bar  
0.45 scfm @ 25 psig (H);  
14 l/min @ 1.8 bar

**Ports:** Exhaust and outlet through manifold;  
3-way supply (#10-32/M5) through top of valve

**Metric:** Add -M5 to Part Number


Part No.	Description
ESO-3B-□	3-Way Electronic Poppet Valve

For Cable and Connectors, see [Page 204](#).

## Single-Sided Dual Mount Manifold

Part No.	Description
26081-□	Single-Sided Manifold

Suffix	Valves	L	M1	M2
-4	4	4.375"	2.875"	4.000"
-4-M5	4	111.1 mm	73.0 mm	101.6 mm
-6	6	6.125"	4.625"	5.750"
-6-M5	6	155.6 mm	117.5 mm	146.1 mm
-8	8	7.875"	6.375"	7.500"
-8-M5	8	200.0 mm	161.9 mm	190.5 mm

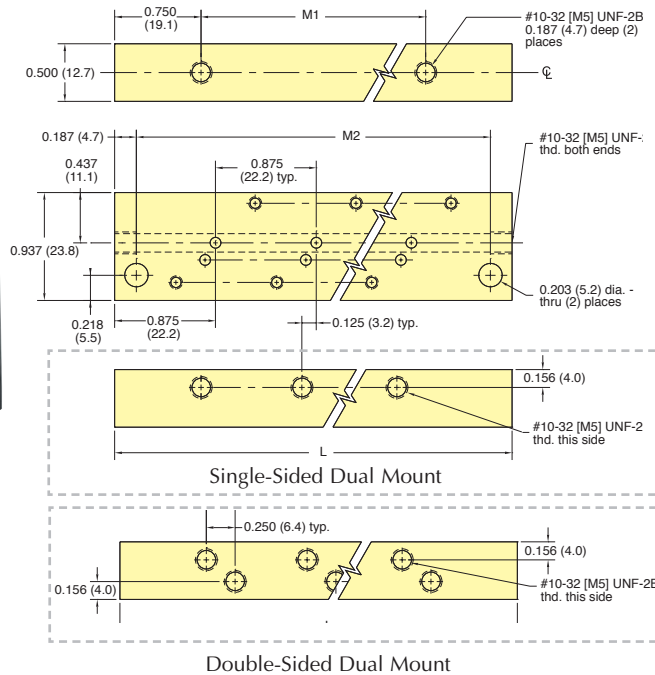

## Double-Sided Dual Mount Manifold

Part No.	Description
26082-□	Double-Sided Manifold


Suffix	Valves	L	M1	M2
-8	8	4.375"	2.875"	4.000"
-8-M5	8	111.1 mm	73.0 mm	101.6 mm
-12	12	6.125"	4.625"	5.750"
-12-M5	12	155.6 mm	117.5 mm	146.1 mm
-16	16	7.875"	6.375"	7.500"
-16-M5	16	200.0 mm	161.9 mm	190.5 mm

\* ESM-CP plate is to cover individual unused manifold station.

## Single-Sided Rear Mount Manifold

Part No.	Description
26083-□	Single-Sided Manifold

Suffix	Valves	L	M
-4	4	3.500"	2.875"
		88.9 mm	73.0 mm
-6	6	5.250"	4.625"
		133.4 mm	117.5 mm
-8	8	7.000"	6.375"
		177.8 mm	161.9 mm

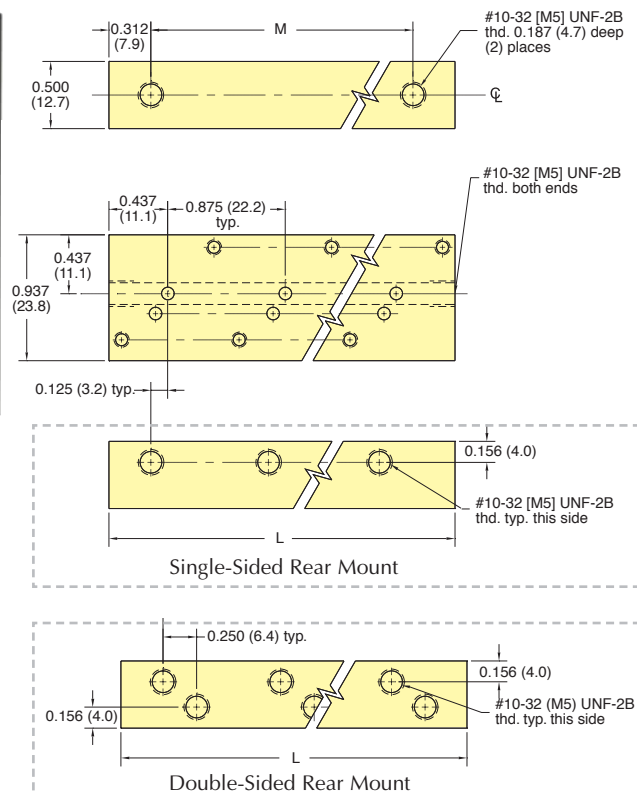

## Double-Sided Rear Mount Manifold

Part No.	Description
26084-□	Double-Sided Manifold

Suffix	Valves	L	M
-8	8	3.500"	2.875"
-8-M5	8	88.9 mm	73.0 mm
-12	12	5.250"	4.625"
-12-M5	12	133.4 mm	117.5 mm
-16	16	7.000"	6.375"
-16-M5	16	177.8 mm	161.9 mm

\* ESM-CP cover plate is available for one manifold station.





# ES, ESO SERIES VALVES SINGLE MANIFOLDS

## Single-Station Side Port Manifold



**Part No.** 26090-1  
**Description** Side Port Manifold

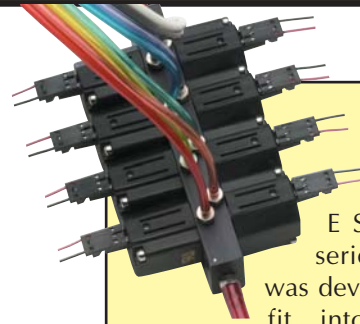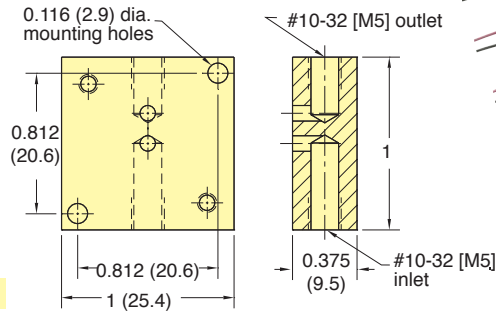


The ES/ESO series valve was developed to fit into tighter physical envelopes. By reducing the size of the base as well as the size of the coil, a considerable volume savings was achieved.

## Single-Station Bottom Port Manifold



**Part No.** 26090-2  
**Description** Bottom Port Manifold

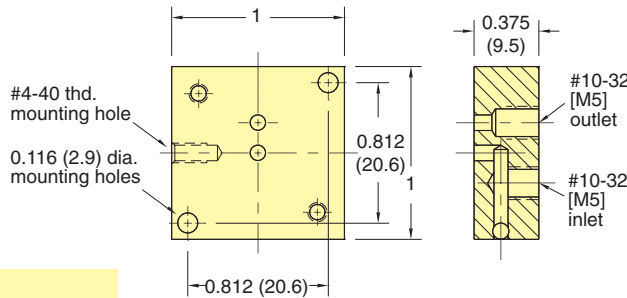


As in the case of the EV/EVO product, the ES/ESO uses the single moving part design proven many times in the EV/ET/EC series valves. Of course, given the reduced size of the coil the power to operate increases to 1 watt.

## Dual-Station Manifold




**Part No.** 26090-3  
**Description** Dual Station Manifold

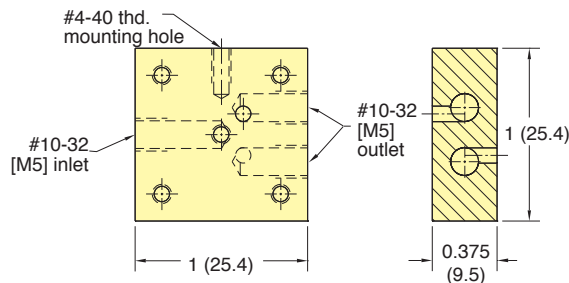

Because of its reliability, the ES/ESO series valve is found in many of the same applications and industries as its predecessor, the EV/ET/EC. However, the smaller size finds it used more commonly in portable or mobile equipment. This makes the valve particularly applicable in home healthcare applications.

## AMP Connector #5-103960-2 with 18" Wire Leads for ES/ESO Valves

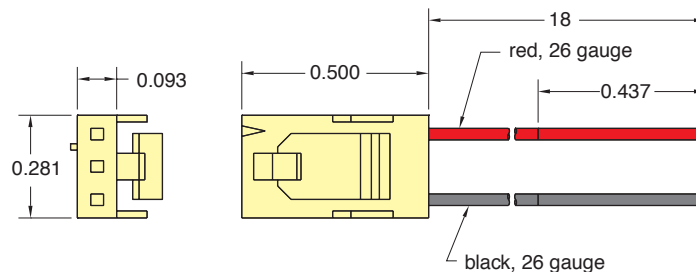


Lead Set Chart For ES Valve						
Part No.	Used On	Wire Colors			Lead Length	Wire Gage
		Pin 1	Pin 2	Pin 3		
C3-RXB18	ES	red	~	black	18"	#26

# 10 MM & 15 MM MINIATURE VALVES




All of the benefits of Clippard quality and reliability are now available in these 10 mm and 15 mm valves. Offered in both Normally-Open or Normally-Closed models, these 2-way and 3-way valves are perfect for small areas where compact electronically-controlled pneumatics are needed.

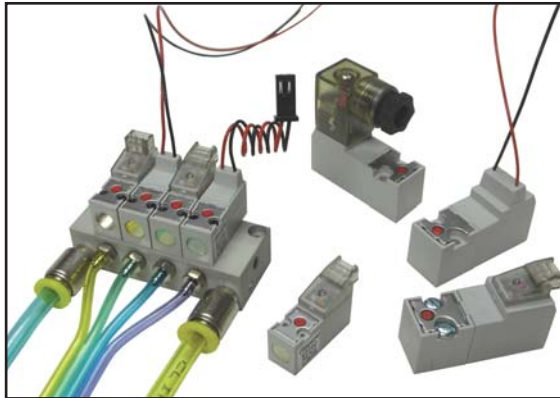

This series has a high strength, engineered lightweight glass filled nylon body, along with stainless steel, copper and Buna-N, making it suitable for a broad range of applications. With exceptional life and reliability this is the perfect sub-miniature valve for tomorrow's needs in a wide variety of industries.

All 10 mm and 15 mm valves are RoHS compliant.

## Typical Air Flow

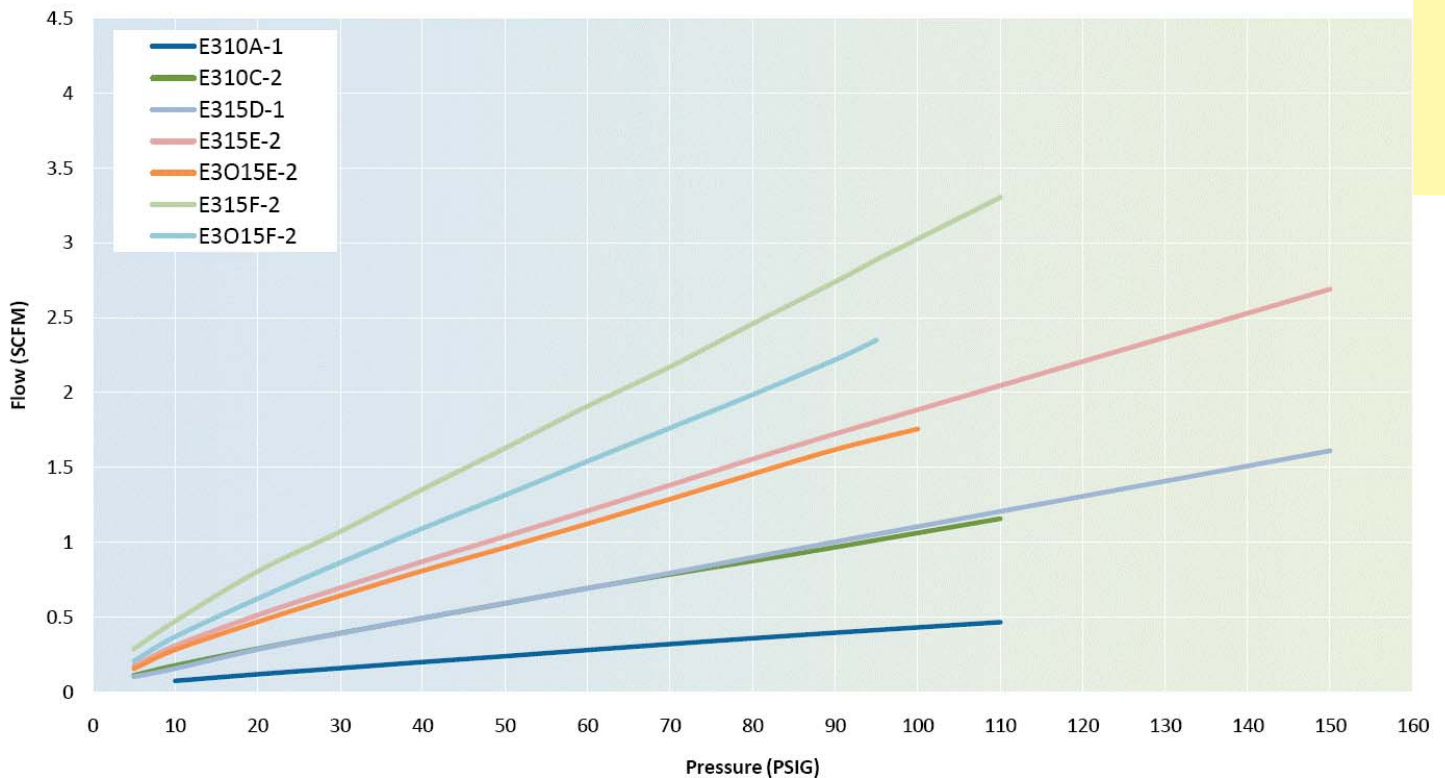

**Valve Material:** Glass filled Nylon, Stainless Steel, Buna-N or Fluorocarbon Elastomer

**Electrical:** The coil is constructed of copper wire and is insulated according to the class "F" standard. All circuitry and connections are protected from corrosion.

**Weight:** Weighing in at a mere 0.4 ounces is the 10 mm valve, and in the other corner the 15 mm checks in at 1.3 ounces!







# 10 MM MINIATURE VALVES

## Part Numbering System

<b>Valve Type</b>	<b>Choose</b>	<input type="text"/>
2-Way Normally-Closed	E210	<input type="text"/>
3-Way Normally-Closed	E310	
3-Way Normally-Open	E3O10	
<b>Orifice Size</b>	<b>Choose</b>	<input type="text"/>
0.020" (0.5 mm)	A	<input type="text"/>
0.030" (0.75 mm)	C	
<b>Power</b>	<b>Choose</b>	<input type="text"/>
0.6 Watts	1	<input type="text"/>
1.3 Watts	2	
<b>Electrical Connector</b>	<b>Choose</b>	<input type="text"/>
In-Line Connector	F	<input type="text"/>
In-Line Connector with LED	C	
90° Connector	E	
90° Connector with LED	L	
Wire Leads, 11.8" (300 mm)	W	
<b>Voltage</b>	<b>Choose</b>	<input type="text"/>
12-Volt DC	012	<input type="text"/>
24-Volt DC	024	

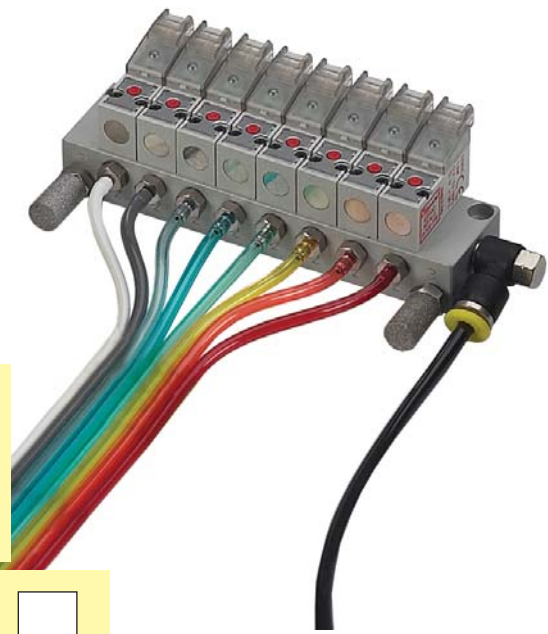

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.

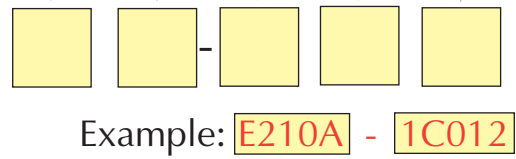


Another feature of the Clippard 10 mm valve is the ability to detach the coil and connector from the valve body. This can be useful for the purpose of orientating the coil by 180°, or exchanging connector types or voltages.



<b>Normally-Closed</b>	<b>Silver</b>
<b>Normally-Open</b>	<b>Black</b>


Clippard also helps you identify the valve you have by color coding the top plate. If it is silver, the valve is a Normally-Closed version—if it is black, the valve is Normally-Open.

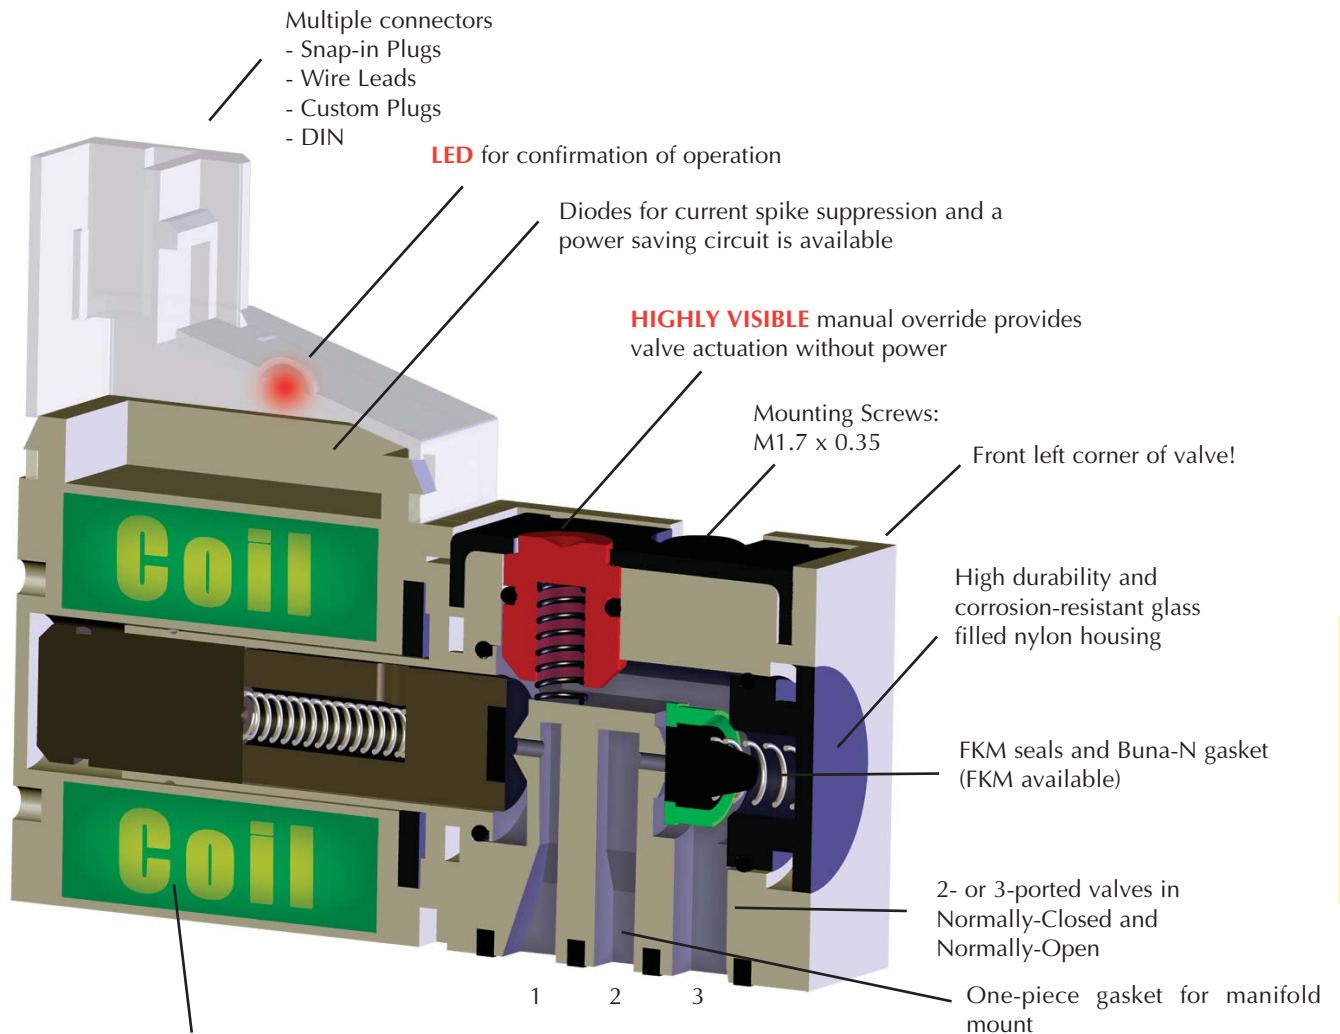

Encapsulated low wattage coils. Available in 12 VDC or 24 VDC. Special voltages available for OEMs.

Config.	1	2	3
N.C.	supply	exhaust	outlet
N.O.	exhaust	supply	outlet

## Functional Schematics

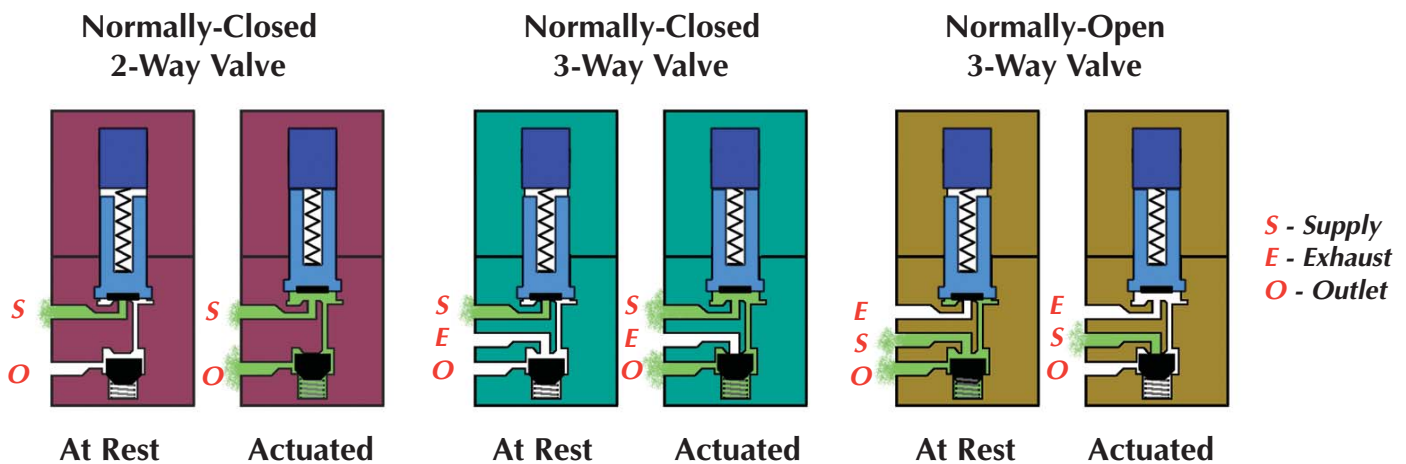



# 10 MM MINIATURE VALVES

## Specifications

**Medium:** Air, Gas or other Compatible Fluids

**Working Pressure:** See Chart below

**Max. Flow Rate:**

0.020" Orifice: 0.5 scfm (14 lpm)  
0.030" Orifice: 1.1 scfm (31.2 l/min)

**Exhaust Flow:**

0.020" Orifice: 0.8 scfm (22.7 l/min)  
0.030" Orifice: 1.2 scfm (34 l/min)

**Response Time:** 8 ms when energized; 10 ms when de-energized




**Electrical:** 12 VDC or 24 VDC

**Power Consumption:** 0.6 or 1.3 watts dependent on orifice size and pressure

**Material:** Stainless steel core and springs, nylon body, FKM dynamic seals, and Buna-N gasket and static seals. FKM gasket and static seals available, consult factory.


**Temperature Range:** 23 to 122°F (-5 to 50°C). When below 32°F (0°C), must use clean, dry air

## Order Information


Type	Base No.	Connector	Orifice	Wattage	Working Pressure
<b>2/2 Normally-Closed</b> 	<u>E210A-1E*</u>	90° Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E210C-2E*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E210A-1L*</u>	90° Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E210C-2L*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E210A-1F*</u>	In-Line Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E210C-2F*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
<u>E210A-1C*</u>	In-Line Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E210C-2C*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	
<u>E210A-1W*</u>	Wire Leads, 11.8" (300 mm)	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E210C-2W*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	
<b>3/2 Normally-Closed</b> 	<u>E310A-1E*</u>	90° Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E310C-2E*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E310A-1L*</u>	90° Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E310C-2L*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E310A-1F*</u>	In-Line Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E310C-2F*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
<u>E310A-1C*</u>	In-Line Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E310C-2C*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	
<u>E310A-1W*</u>	Wire Leads, 11.8" (300 mm)	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E310C-2W*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	
<b>3/2 Normally-Open</b> 	<u>E3O10A-1E*</u>	90° Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E3O10C-2E*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E3O10A-1L*</u>	90° Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E3O10C-2L*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
	<u>E3O10A-1F*</u>	In-Line Connector	0.020"	0.6	14.7 to 110 psig/7.6 bar
	<u>E3O10C-2F*</u>		0.030"	1.3	0 to 110 psig/7.6 bar
<u>E3O10A-1C*</u>	In-Line Connector with LED	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E3O10C-2C*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	
<u>E3O10A-1W*</u>	Wire Leads, 11.8" (300 mm)	0.020"	0.6	14.7 to 110 psig/7.6 bar	
<u>E3O10C-2W*</u>		0.030"	1.3	0 to 110 psig/7.6 bar	

\*Add Voltage Choice to the end of each Base Part Number. Example: E210A-1C012


## Wire Leads

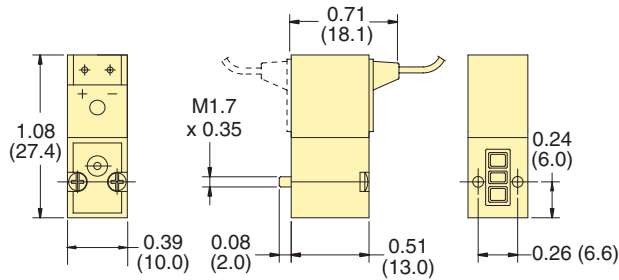

## 90° Connector

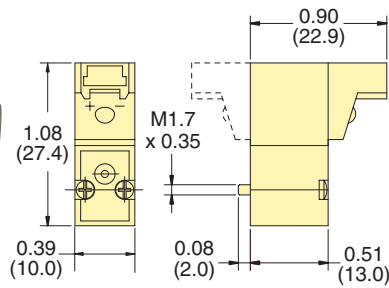

## In-Line Connector

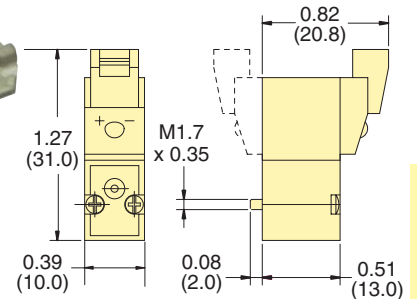

## Electrical Specifications



Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Coil Isolation Class
0.6 & 1.3	12 VDC / 24 VDC	-10% to 10%	8 ms	10 ms	F 311°F (155°C)

## Cover Plate

Manifold Cover Plate includes plate, gasket and two screws.



**Part No.**  
E10M-CP 10 mm Cover Plate

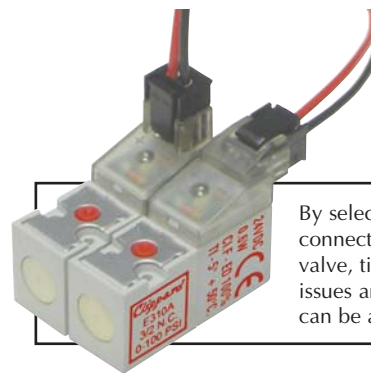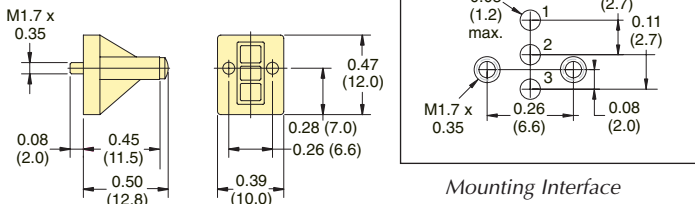

By selecting the appropriate connector type for your 10 mm valve, tight spaces, orientation issues and electrical requirements can be accommodated easily.

## Connectors

Wire Connector must be ordered separately. 24 AWG. Stranding 7/32.



**Part No.**  
C2A-RB300 Connector with Cable, 11.8" (300 mm)  
C2A-RB500 Connector with Cable, 19.69" (500 mm)  
C2A-RB1000 Connector with Cable, 39.37" (1,000 mm)

Molex terminal insert #050013-8000, #28139 plug and 24 AWG wire.




# 10 MM MINIATURE VALVE ACCESSORIES


## NEW! Sub-Miniature Manifolds



Small, compact manifolds offer the efficient grouping of 10 mm valves along with fast installation. Each manifold features a common inlet, individually-ported outlets, and exhaust to atmosphere.

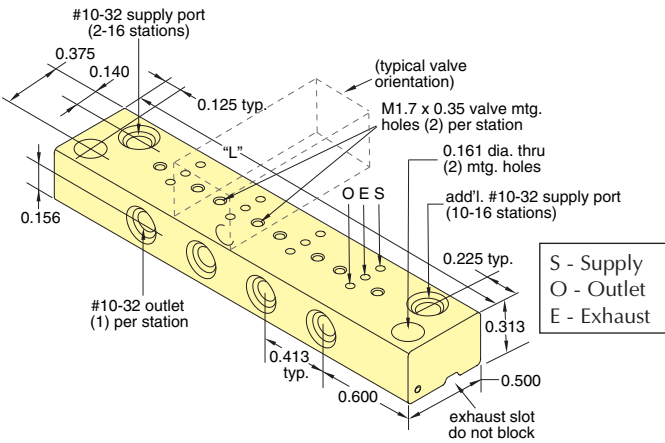


Stations	Supply Ports	Part No.	Length "L"
2	1	<a href="#">E10SM-02</a>	1.61" (40.9)
4	1	<a href="#">E10SM-04</a>	2.44" (62.0)
6	1	<a href="#">E10SM-06</a>	3.27" (82.8)
8	1	<a href="#">E10SM-08</a>	4.09" (103.8)
10	2	<a href="#">E10SM-10</a>	4.92" (125.0)
12	2	<a href="#">E10SM-12</a>	5.74" (145.8)
14	2	<a href="#">E10SM-14</a>	6.57" (166.9)
16	2	<a href="#">E10SM-16</a>	7.40" (187.7)

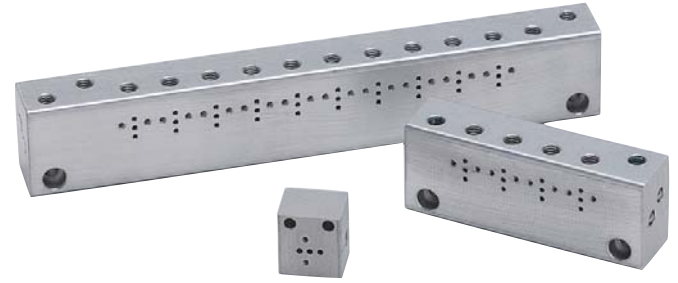



## Manifolds

Manifolds are available for one to 12 valves. Spare hardware and closing plates also available. Add -M5 for Metric ports.

### Part No. E10M-01 Single-Station Manifold

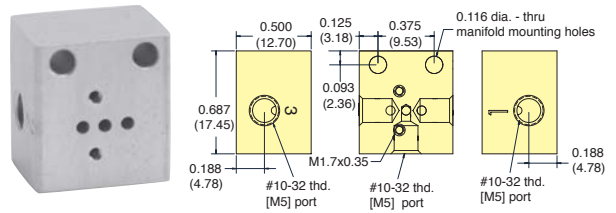

### Multi-Station Manifolds

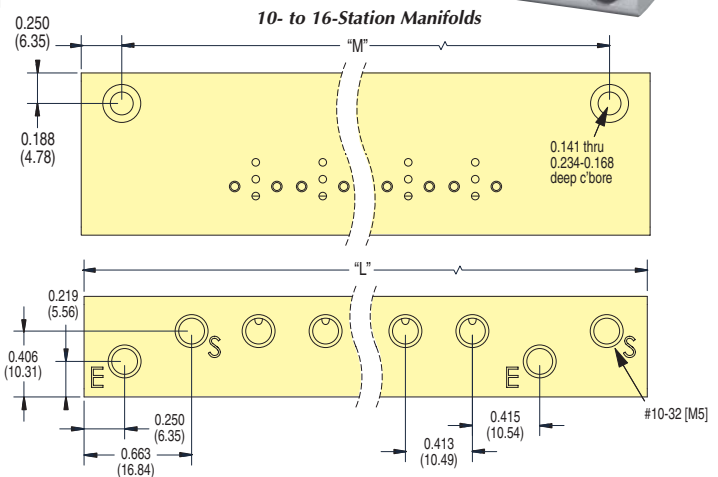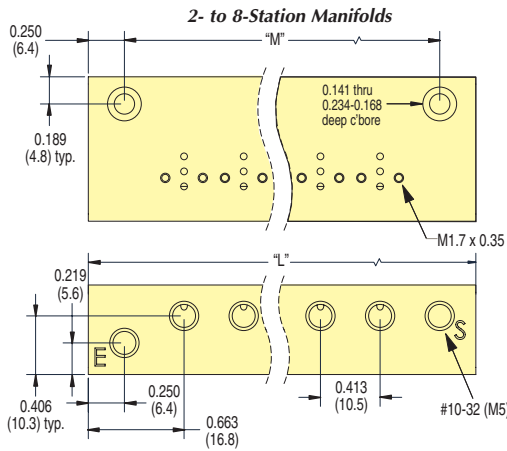



Part No.	Stations	"L"	"M"	Part No.	Stations	"L"	"M"	Part No.	Stations	"L"	"M"
<a href="#">E10M-01</a>	1			<a href="#">E10M-06</a>	6	3.39 (86.1)	2.89 (73.4)	<a href="#">E10M-12</a>	12	6.70 (170.2)	6.20 (157.5)
<a href="#">E10M-02</a>	2	1.74 (44.2)	1.24 (31.5)	<a href="#">E10M-08</a>	8	4.22 (107.2)	3.72 (94.5)	<a href="#">E10M-14</a>	14	7.52 (191.0)	7.02 (178.3)
<a href="#">E10M-04</a>	4	2.57 (65.2)	2.07 (52.5)	<a href="#">E10M-10</a>	10	5.87 (149.1)	5.37 (136.4)	<a href="#">E10M-16</a>	16	8.35 (212.1)	7.85 (199.4)

Add "-M5" for metric threads. Consult factory for custom manifolds.







## Part Numbering System

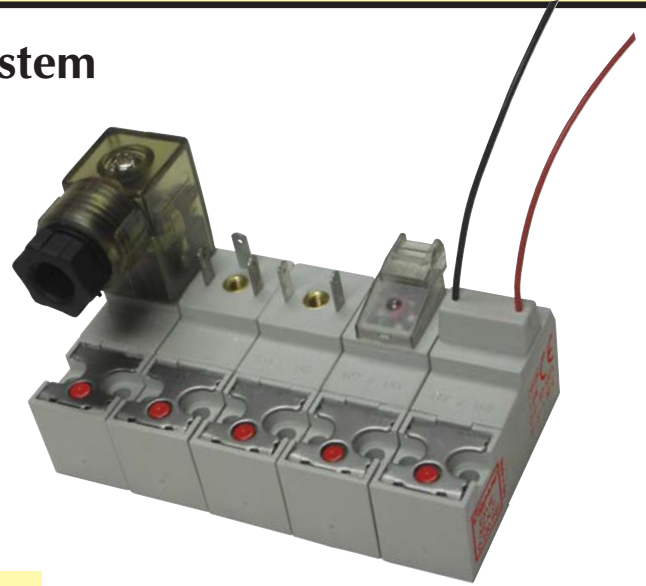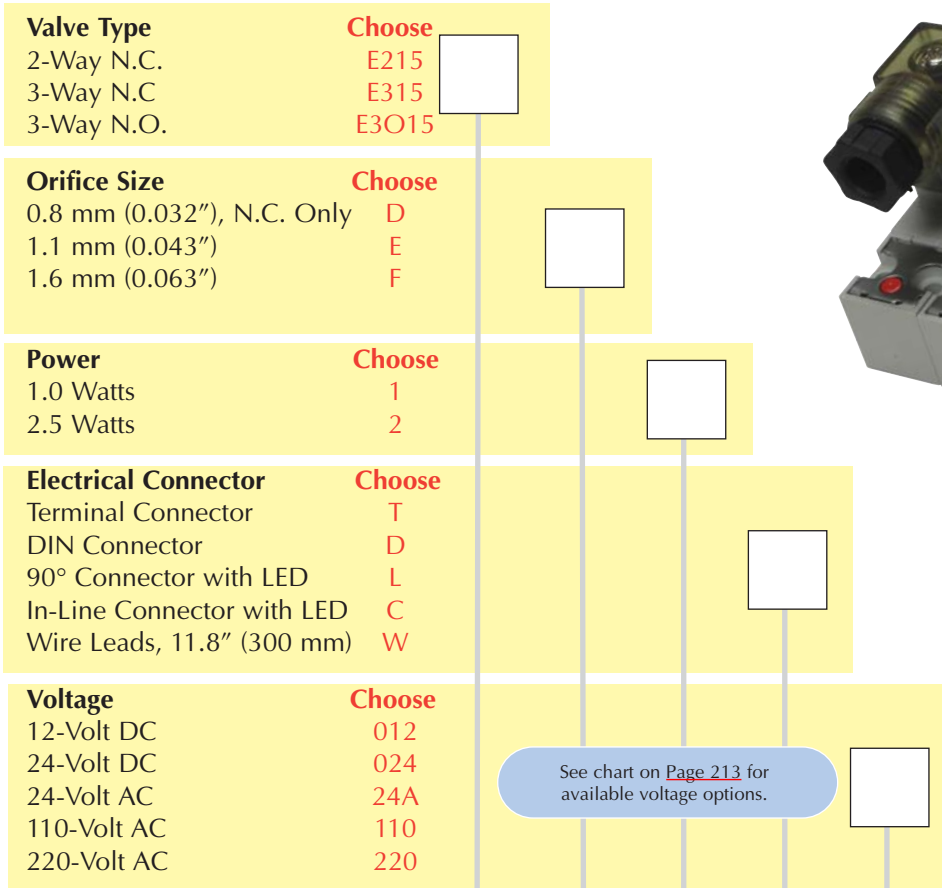

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E315F - 2L024**

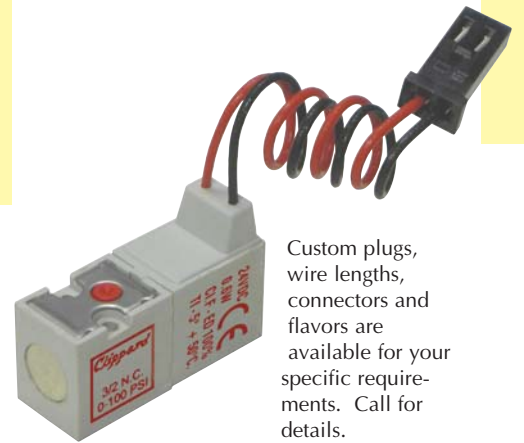

Custom plugs, wire lengths, connectors and flavors are available for your specific requirements. Call for details.

## Electrical Specifications


Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Coil Insulation Class
1.0	24 VDC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)
2.5	12 VDC 24 VDC 24 VAC 110 VAC 220 VAC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)



# 15 MM MINIATURE VALVES

## Multiple Connectors

- Snap-in Plugs
- Wire Leads
- DIN Connector
- Terminal Spades
- Custom Plugs

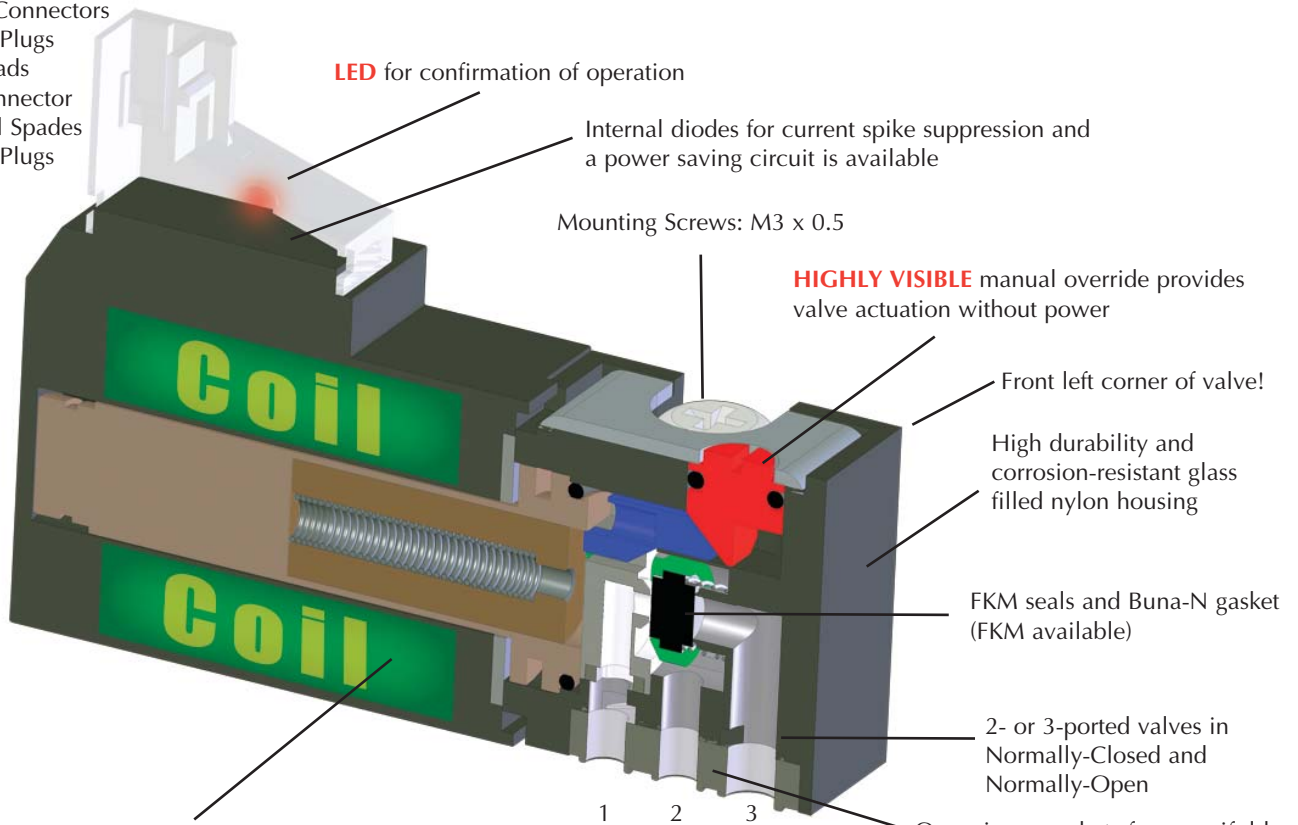

Encapsulated low wattage coils. Available in: 12 VDC, 24 VDC, 24 VAC, 110 VAC or 220 VAC. Special voltages available for OEMs.


Configuration	1	2	3
N.C. & N.O.	exhaust	outlet	supply

One-piece gasket for manifold mount and supply/exhaust port reversed for same manifold mounting of N.O. or N.C. valve


## Functional Schematics

### Normally-Closed 3-Way Valve


S - Supply  
E - Exhaust  
O - Outlet

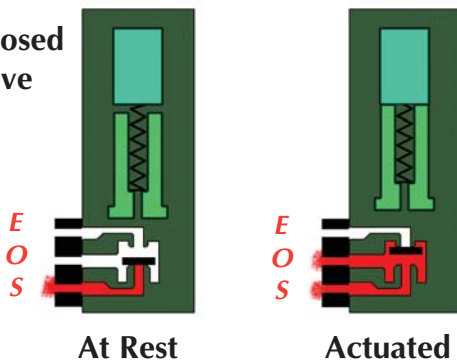

### Normally-Open 3-Way Valve

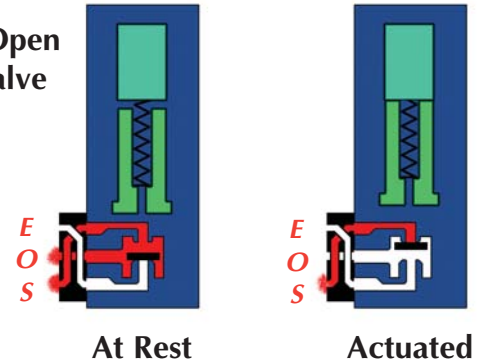

**Porting Gasket**  
The Normally-Open and Normally-Closed configurations allow both models to be mounted on the same manifold.



# 15 MM MINIATURE VALVES



## Specifications

**Medium:** Air, Gas, or other Compatible Fluids

**Working Pressure:** See Chart below.

**Maximum Flow Rate:**

0.032" Orifice 1.6 scfm (45 l/min)  
 0.043" Orifice 2.6 scfm (70 l/min)  
 0.063" Orifice 3.2 scfm (91 l/min)



**Response Time:** 10 ms when energized; 12 ms when de-energized

**Material:** Stainless steel core and springs, springs, nylon body, FKM seals, and Buna-N gasket. FKM gasket available, consult factory

**Voltage:** 12-volt DC, 24-volt DC or 24-volt AC. 110-volt AC and 220-volt AC only available with DIN Connectors.

**Power Consumption:** 1.0 or 2.5 watts dependent on orifice size and pressure

**Temperature Range:** 23 to 122°F (-5 to 50°C)

## Order Information

Type	Base No.	Connector	12 VDC	24 VDC	24 VAC	110 VAC	220 VAC	Orifice	Wattage	Working Pressure
<b>2/2 Normally-Closed</b> 	<a href="#">E215D-1T*</a>	Terminal	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E215E-2T*</a>		•	•	•			0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E215F-2T*</a>		•	•	•			0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E215D-1D*</a>	DIN Connector	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E215E-2D*</a>		•	•	•	•	•	0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E215F-2D*</a>		•	•	•	•	•	0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E215D-1W*</a>	Wire Leads, 11.8" (300 mm)	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E215E-2W*</a>		•	•	•			0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E215F-2W*</a>		•	•	•			0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E215D-1L*</a>	90° Connector with LED	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E215E-2L*</a>		•	•				0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E215F-2L*</a>		•	•				0.063"	2.5	0 to 110 psig/7.6 bar
<a href="#">E215D-1C*</a>	In-Line Connector with LED	•	•				0.032"	1.0	0 to 150 psig/10.3 bar	
<a href="#">E215E-2C*</a>		•	•				0.043"	2.5	0 to 150 psig/10.3 bar	
<a href="#">E215F-2C*</a>		•	•				0.063"	2.5	0 to 110 psig/7.6 bar	
<b>3/2 Normally-Closed</b> 	<a href="#">E315D-1T*</a>	Terminal	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E315E-2T*</a>		•	•	•			0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E315F-2T*</a>		•	•	•			0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E315D-1D*</a>	DIN Connector	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E315E-2D*</a>		•	•	•	•	•	0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E315F-2D*</a>		•	•	•	•	•	0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E315D-1W*</a>	Wire Leads, 11.8" (300 mm)	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E315E-2W*</a>		•	•	•			0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E315F-2W*</a>		•	•	•			0.063"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E315D-1L*</a>	90° Connector with LED	•	•				0.032"	1.0	0 to 150 psig/10.3 bar
	<a href="#">E315E-2L*</a>		•	•				0.043"	2.5	0 to 150 psig/10.3 bar
	<a href="#">E315F-2L*</a>		•	•				0.063"	2.5	0 to 110 psig/7.6 bar
<a href="#">E315D-1C*</a>	In-Line Connector with LED	•	•				0.032"	1.0	0 to 150 psig/10.3 bar	
<a href="#">E315E-2C*</a>		•	•				0.063"	2.5	0 to 150 psig/10.3 bar	
<a href="#">E315F-2C*</a>		•	•				0.063"	2.5	0 to 110 psig/7.6 bar	
<b>3/2 Normally-Open</b> (110 psig max.) 	<a href="#">E3O15E-2T*</a>	Terminal	•	•	•			0.043"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E3O15F-2T*</a>		•	•	•			0.063"	2.5	0 to 75 psig/5.2 bar
	<a href="#">E3O15E-2D*</a>	DIN Connector	•	•	•	•	•	0.043"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E3O15F-2D*</a>		•	•	•	•	•	0.063"	2.5	0 to 75 psig/5.2 bar
	<a href="#">E3O15E-2W*</a>	Wire Leads, 11.8" (300 mm)	•	•	•			0.043"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E3O15F-2W*</a>		•	•	•			0.063"	2.5	0 to 75 psig/5.2 bar
	<a href="#">E3O15E-2L*</a>	90° Connector with LED	•	•				0.043"	2.5	0 to 110 psig/7.6 bar
	<a href="#">E3O15F-2L*</a>		•	•				0.063"	2.5	0 to 75 psig/5.2 bar
<a href="#">E3O15E-2C*</a>	I-Line Connector with LED	•	•				0.063"	2.5	0 to 110 psig/7.6 bar	
<a href="#">E3O15F-2C*</a>		•	•				0.063"	2.5	0 to 75 psig/5.2 bar	


• Indicates standard items

\* Add Voltage Choice to the end of each Base Part Number. Example: [E315D-1C012](#)




# 15 MM MINIATURE VALVES

## Terminal Connector

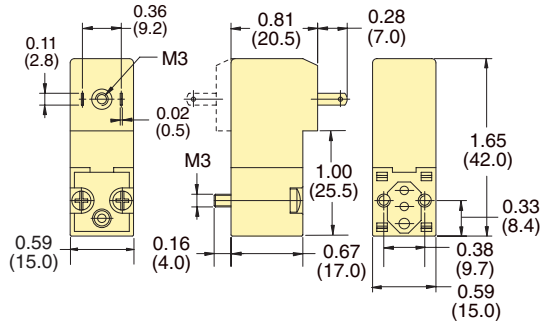


Industrial Form C Connector ordered separately below.

## DIN Connector




DIN Connector ordered separately below.


## Wire Leads

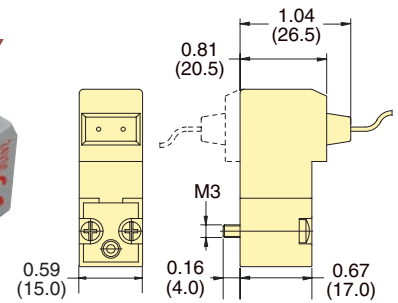

## 90° Connector with LED



## In-Line Connector with LED

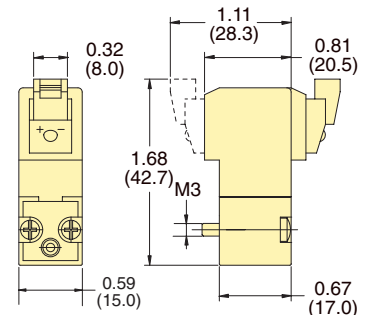


Form C		Industrial Form	



## NEW! Sub-Miniature Manifolds

Small, compact manifolds offer the efficient grouping of 15 mm valves along with fast installation. Each manifold features a common inlet, individually-ported outlets, and exhaust to atmosphere.

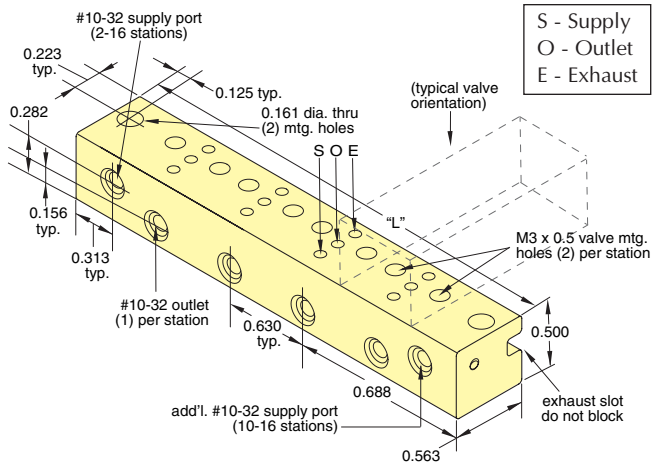

Stations	Supply Ports	Part No.	Length "L"
2	1	<a href="#">E15SM-02</a>	2.01" (51.1)
4	1	<a href="#">E15SM-04</a>	3.27" (83.1)
6	1	<a href="#">E15SM-06</a>	4.53" (115.1)
8	1	<a href="#">E15SM-08</a>	5.79" (147.1)
10	2	<a href="#">E15SM-10</a>	7.05" (179.1)
12	2	<a href="#">E15SM-12</a>	8.31" (211.1)
14	2	<a href="#">E15SM-14</a>	9.57" (243.1)
16	2	<a href="#">E15SM-16</a>	10.82" (274.8)



## Connectors

Wire Connector must be ordered separately. 24 AWG. Stranding 7/32.

### Part No.

- [C2A-RB300](#) Connector with Cable, 11.8" (300 mm)
- [C2A-RB500](#) Connector with Cable, 19.69" (500 mm)
- [C2A-RB1000](#) Connector with Cable, 39.37" (1,000 mm)




Molex terminal insert #050013-8000, #28139 plug and 24 AWG wire.

## Cover Plate

Manifold Cover Plate includes plate, gasket and two screws.

### Part No.


E15M-CP 15 mm Cover Plate



Mounting Interface

## Manifolds

Manifolds are available for one to 16 valves, and are supplied with mounting screws and gaskets. Spare hardware and closing plates also available. Add -M5 for Metric ports.

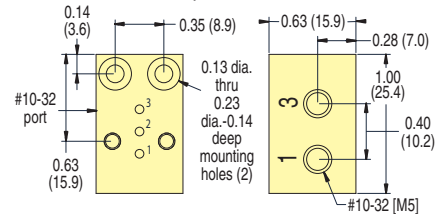

### Part No.


[E15M-01](#) Single-Station Manifold




### Multi-Station Manifolds



### 2- through 8-Station

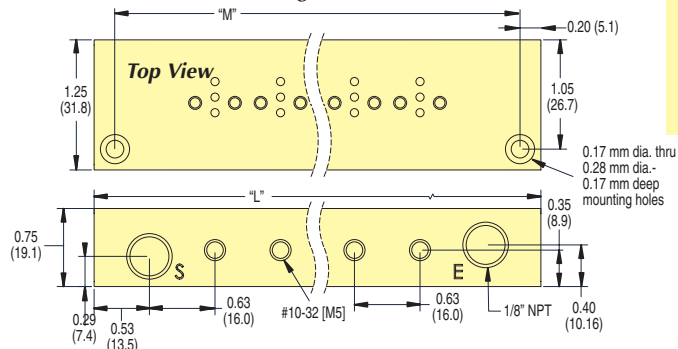

### 10- through 16-Station

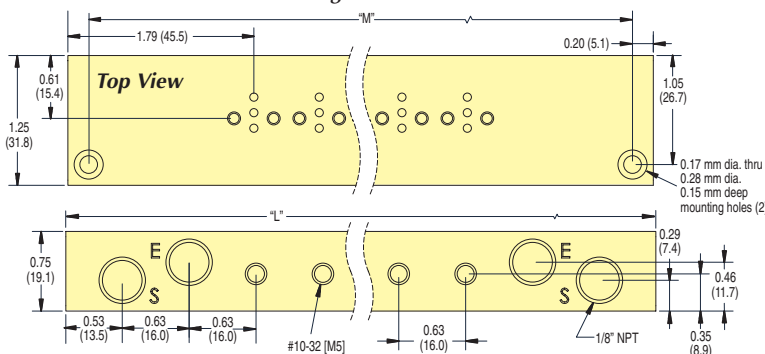


Stations	Part No.	Length "L"	Length "M"
2	<a href="#">E15M-02</a>	2.95" (74.2)	2.55 (64.8)
4	<a href="#">E15M-04</a>	4.21" (106.9)	3.81 (96.8)
6	<a href="#">E15M-06</a>	5.47" (138.9)	5.07 (128.8)
8	<a href="#">E15M-08</a>	6.73" (170.9)	6.33 (160.8)
10	<a href="#">E15M-10</a>	9.25" (235.0)	8.85 (224.8)
12	<a href="#">E15M-12</a>	10.51" (277.0)	10.1 (256.8)
14	<a href="#">E15M-14</a>	11.77" (299.0)	11.4 (288.8)
16	<a href="#">E15M-16</a>	13.03" (331.0)	12.6 (320.0)





# NEW! LATCHING 10 mm & 15 mm MINIATURE VALVES

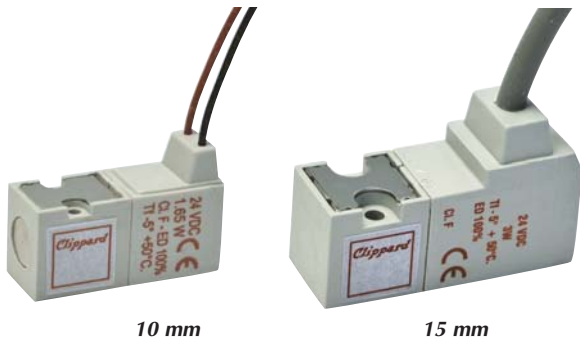


10 mm


15 mm

- 2-Way & 3-Way Normally-Closed configurations
- Pulse-actuated (on or off)
- 3-wire coil (15 mm). No polarity reverse required
- Stable latch

### 10 mm Valves

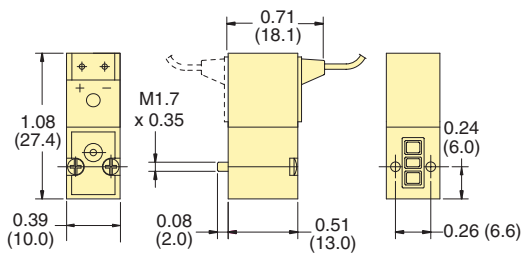

### 15 mm Valves

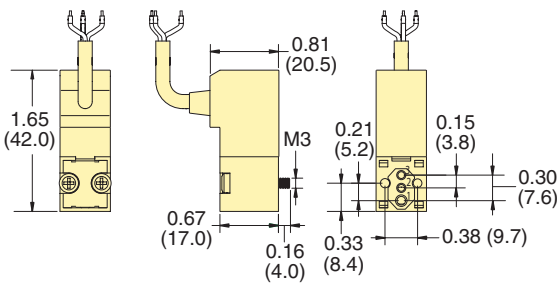

Clippard's Latching Valves have many of the same features as the popular 10 mm and 15 mm valve line including small, compact design, exceptional life and reliability, lightweight design and more. A careful balance of forces—through the precise placement of a permanent magnet in the valve core—produces a bi-stable valve. A short pulse of current opens the valve, which “latches” open indefinitely after the current stops. A subsequent pulse of current in the opposite direction closes the valve. The valve consumes less energy and produces less heat than a standard solenoid valve when used in extended duty cycle applications, since the coil is energized for only a small fraction of the total duty cycle.

**Medium:** Air, Gas or other Compatible Fluids

**Max. Flow Rate:** 0.020" Orifice: 0.8 scfm (23 lpm)  
 0.043" Orifice: 2.1 scfm (59 l/min)  
 0.060" Orifice: 3.0 scfm (84 l/min)

**Exhaust Flow:** 0.020" Orifice: 0.8 scfm (22.7 l/min)  
 0.030" Orifice: 1.2 scfm (34 l/min)

**Electrical Connection:** 10 mm: 2-Wire Reverse Polarity, 300 mm, 24 AWG  
 15 mm: 3-Wire Molded Cord, 300 mm, 24 AWG  
 (4.5 mm external jacket; tinned copper wires; silicone jacket and conductor insulation)

**Electrical:** 12 VDC (“-012”) or 24 VDC (“-024”). 6 VDC also available.  
 Call for further information.

**Electrical Tolerance:** -10 to 10%

**Response Time:** 8 ms when energized; 10 ms when de-energized


**Copper Wire Isolation Class:** F 311°F (115°C)

**Material:** Stainless steel core and springs, nylon body, FKM dynamic seals, and Buna-N gasket and static seals. FKM gasket available, consult factory.

**Temperature Range:** 23 to 122°F (-5 to 50°C). When below 32°F (0°C), must use clean, dry air

Type	Part No.	Connector	Orifice	Voltage	Wattage	Pressure Range
10 mm 2-Way	<a href="#">E2L10C-7W012</a>	Wire Leads	0.020" (0.75 mm)	12 VDC	2.0	0 to 110 psig/7.6 bar
	<a href="#">E2L10C-6W024</a>			24 VDC	1.7	
10 mm 3-Way	<a href="#">E3L10C-7W012</a>	Wire Leads	0.020" (0.75 mm)	12 VDC	2.0	0 to 110 psig/7.6 bar
	<a href="#">E3L10C-6W024</a>			24 VDC	1.7	
15 mm 2-Way	<a href="#">E2L15E-4W012</a>	3-Wire Molded Cord, 300 mm	0.043" (1.1 mm)	12 VDC	4.0	0 to 150 psig/10.3 bar
	<a href="#">E2L15E-4W024</a>		0.043" (1.1 mm)	24 VDC		0 to 150 psig/10.3 bar
	<a href="#">E2L15F-4W012</a>		0.063" (1.6 mm)	12 VDC		0 to 110 psig/7.6 bar
	<a href="#">E2L15F-4W024</a>		0.063" (1.6 mm)	24 VDC		0 to 110 psig/7.6 bar
15 mm 3-Way	<a href="#">E3L15E-4W012</a>	3-Wire Molded Cord, 300 mm	0.043" (1.1 mm)	12 VDC	4.0	0 to 150 psig/10.3 bar
	<a href="#">E3L15E-4W024</a>		0.043" (1.1 mm)	24 VDC		0 to 150 psig/10.3 bar
	<a href="#">E3L15F-4W012</a>		0.063" (1.6 mm)	12 VDC		0 to 110 psig/7.6 bar
	<a href="#">E3L15F-4W024</a>		0.063" (1.6 mm)	24 VDC		0 to 110 psig/7.6 bar

See pages [209 & 210](#), and [214 & 215](#) for connectors and manifolds

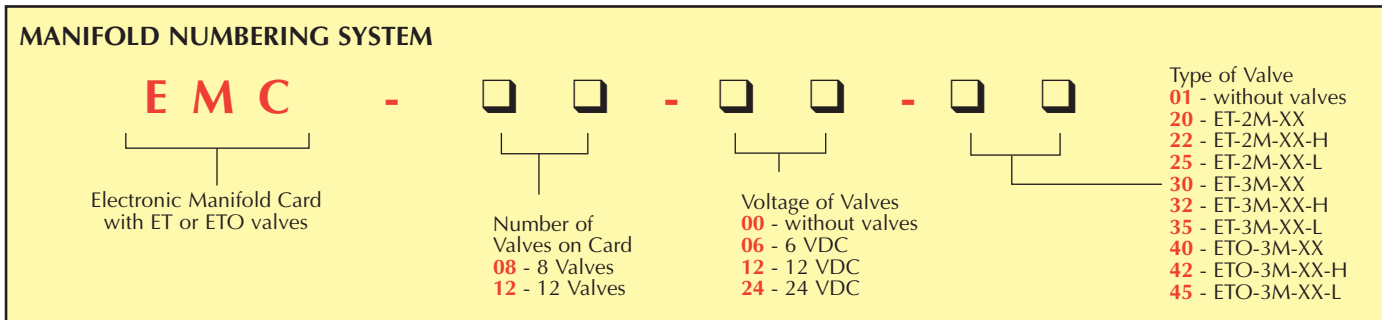

EMC-08-00-01 and EMC-12-00-01 are part numbers for cards without any valves, and without manifold. Manifold mounting hardware is included. Manifolds may be ordered separately, if desired.

Part numbers are: 15482-8 and 15482-12

Convenience in interfacing electronics and pneumatics... fast mounting, completely assembled, manifolded valve cards.

## Clippard Electronic Manifold Cards

Now you can direct low-voltage DC signals from controllers, systems, computers or other sources to operate powerful pneumatic valves with a minimum of piping and hook-up.

Self-contained card includes:

- 8 or 12 Clippard ET interface valves
- Manifold mount for single air supply
- Circuit board fully wired
- Instant plug-in with 25-pin connector
- Resistor, diode, LED and switch for each valve
- Auxiliary power supply connection

Ready to operate quickly. Just mount the card and make external connection.

And each valve may be individually removed and replaced without any need for desoldering!

## Features

- Fast, easy to mount
- Pre-assembled; all valves mounted
- 8 or 12 valve sizes
- 6, 12 or 24 volts DC
- Low power requirements (0.67 watt per valve)
- Choice of valve types
- Each valve switchable
- Shut-off spike protection
- 25-pin connector
- No expensive card rack required



Send me a **FREE** full-line catalog!



# ELECTRONIC MANIFOLD CARDS

### Auxiliary Power Input

Power to operate the valves may be provided through two sources: ONE, through the 25-pin connector if your signal source also has sufficient power to operate the bank of valves, or TWO, through a separate auxiliary power input connection built into the board. To isolate power from the 25-pin connector, use the power source selector switch.

NOTE: In applying power on a temporary basis, use care to observe proper circuit polarity.

### Power Selector Switch

Two-position selector switch enables choice of power input source (25-pin connector or auxiliary).

### 25-Pin Connector

### Clippard Electronic Valves

### Reverse Polarity Protection

Circuit using diodes and capacitor provides input voltage protection against reverse polarity.

### Valve Connection Cords

Cord and plug leads are terminated with solder connections on the board, and connect by molded plug to the valves. All connections are completed at the factory.

### Resistor-Diode-LED Circuit

Individual circuit to each valve provides protection against shut-off spikes. LED is illuminated when valve is actuated.

### Clippard Valve Manifold

Compact, efficient mounting of the valves is by Clippard multi-valve manifolds.

### Valve Identification

Valve numbers are silk-screened on each panel.

### Mounting Holes

Four (EMC-08) and six (EMC-12) mounting holes 0.191" dia. are built into each board.

### Printed Circuit Board


Durable laminated fiberglass

### LED Bank


Illuminated LED signals that the valve is actuated.

### 3-Position Detented Switches



Three position slide switch provides for:  
ON - Power "ON"; valve is activated  
OFF - Power "OFF"; valve not connected  
CONN - Valve connected to 25-pin connector, and will be controlled through it.

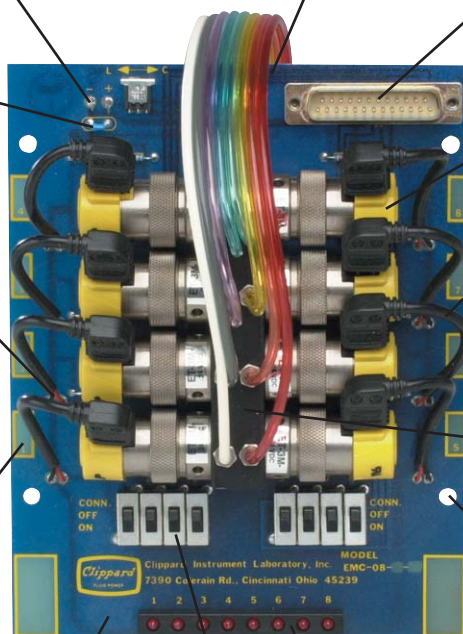

## EMC-08

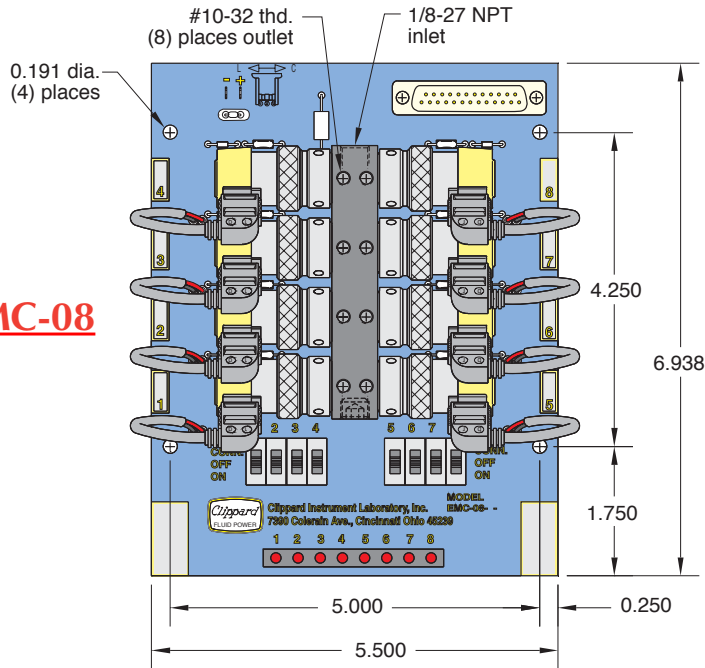

## EMC-12

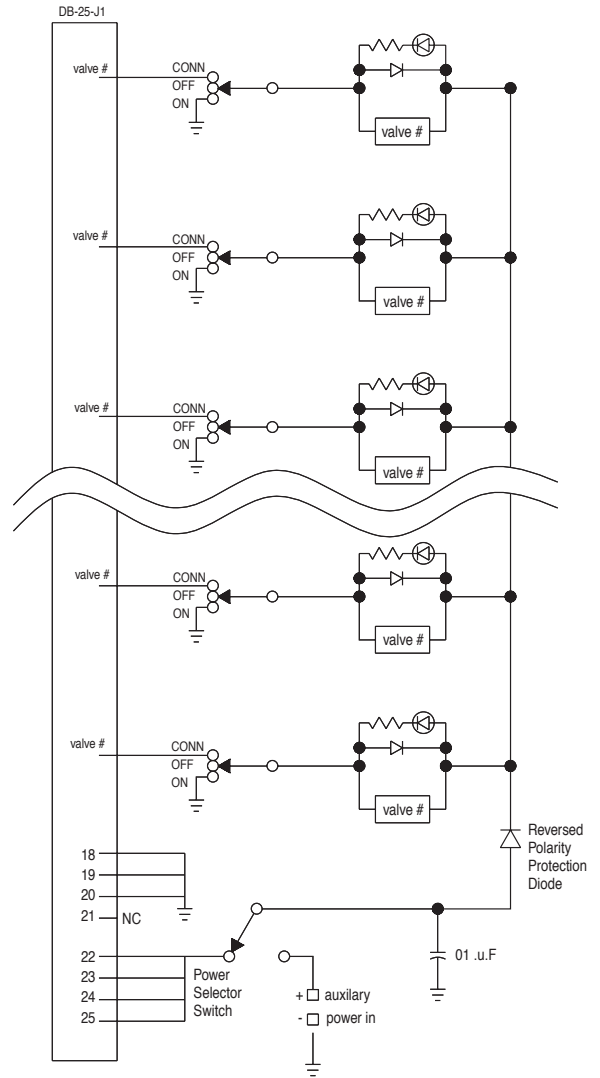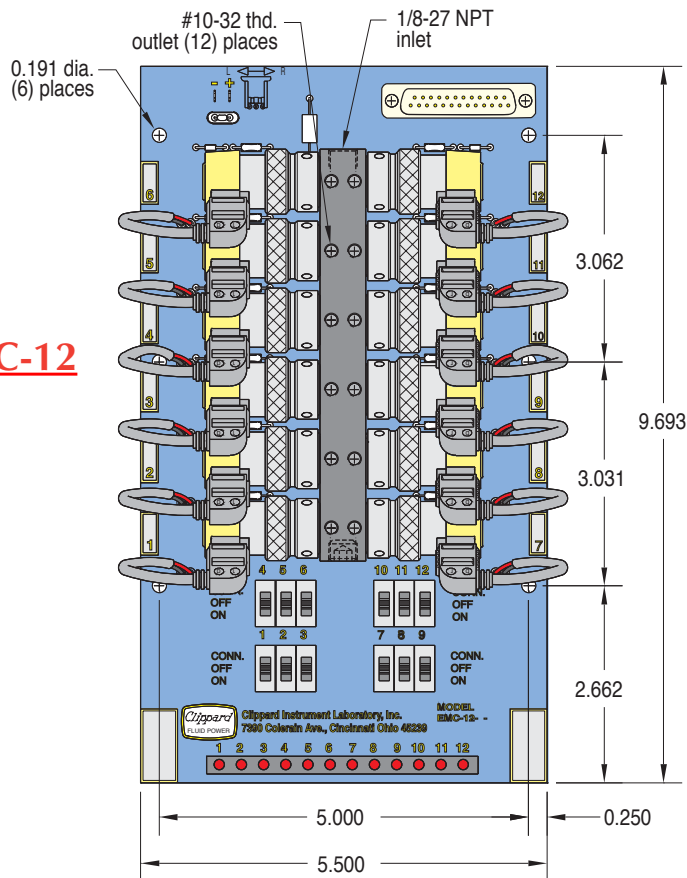

## Wiring Diagram

Note: Manifold mounted valves are Normally-Closed. Use ETO models if exhaust must be ported. ETO models cannot be used "Normally-Open" without special piping.