



- KEYPADS**
- Keypads and Modular Types
  - Audible/Tactile Snap
  - Standard, Prototype Style, or Custom Legending
  - Choice of Button Distances
  - Buttons or Color Graphics

	Page
<b>SELECTION CHART .....</b>	<b>2</b>
 <b>STANDARD KEYPADS</b>	
Conductive Rubber .....	Series 96 ..... 3
Backlit with Self Adhesive Legends .....	Series 84B ..... 7
Standard Backlit .....	Series 84BL ..... 9
Sealed .....	Series 84S ..... 11
Sealed, Low Profile .....	Series 84LS ..... 14
Rugged Construction .....	Series 84R ..... 17
Unsealed, .750" Centers .....	Series 84 ..... 20
Unsealed, .500" Centers .....	Series 83 ..... 24
Unsealed, .500" Centers, Flange Mounted .....	Series 86 ..... 28
Sealed, Flange Mounted .....	Series 88 ..... 33
Piezo Keypad .....	Series 37F ..... 37
 <b>MODULAR KEYBOARDS</b>	
Lightable .....	Series 82 ..... 40
Low Profile .....	Series 87 ..... 46
Piezo Pushbuttons .....	..... 51
 <b>CUSTOM KEYPADS .....</b>	 <b>54</b>

SELECT CRITERIA	KEYPAD SERIES						MODULAR SERIES	
	96	84S/84LS	84	83	86	88	82	87
Pages	3 to 6	11 to 16	17 to 20	21 to 24	25 to 28	29 to 33	37 to 42	43 to 47

**FEATURES**

Sealed/Splashproof	—	Yes	—	—	—	Yes	—	—
Audible/Tactile Snap	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes
Long/Wiping Stroke	—	—	—	—	—	—	Yes	—
Modular	—	—	—	—	—	—	Yes	Yes
Lightable	Yes	—	—	—	—	—	Yes	—

**CIRCUITRY**

SPST	—	—	—	—	—	—	Yes	(1-Btn)
2PST-4PST/Coded	—	—	—	—	—	—	Yes	—
Variable, Per Button Matrix; XY; Row&Clmn.	—	—	—	—	—	—	Custom	—
SP/Cmmn.	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes
Bus	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes

**SIZE** In Inches (and millimeters)

Button Cntr Distances	.500 (12,7)	.750 (19,05)	.750 (19,05)	.500 (12,7)	.500 (12,7)	.500 (12,7)	.687 (17,45)	.500 (12,7)
3x4, Outer Dimensions	2.7x2.0 (68,58x50,8)	2.35x3.1 (60,96x78,74)	2.25x3.0 (58,42x76,2)	1.58x2.2 (40,64x50,8)	3.0x2.2 (55,88x76,2)	3.0x2.2 (55,88x76,2)	3.0x2.1 (53,34x76,2)	1.5x2.0 (38,1x50,8)
4x4, Outer Dimensions	2.5x2.7 (68,58x63,5)	3.1x3.1 (78,74x78,74)	3.0x3.0 (76,2x76,2)	2.0x2.0 (50,8x50,8)	2.7x3.0 (68,58x76,2)	3.0x2.7 (68,58x76,2)	3.0x3.0 (76,2x76,2)	2.0x2.0 (50,8x50,8)
5x4, Outer Dimensions	—	—	—	—	3.2x3.0 (81,28x76,2)	3.2x3.0 (93,98x76,2)	3.7x3.0 (63,5x50,8)	2.5x2.0

**LEGENDING**

Telephone	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—
Other Std.	Yes	Yes	Yes	Yes	Yes	Yes	—	—
User Apply, Pre-Printed	—	—	Yes	Yes	Yes	Yes	Yes	Yes
Custom	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—

**LEGEND METHOD**

Deadfront, Thru-Lit	—	—	—	—	—	Custom	Yes	—
Graphics, Color	—	—	—	—	—	Yes	—	—
Plastic, Molded-In	—	Custom	Yes	Yes	Custom	—	Yes	Custom
Printed, Epoxy Ink	Yes	Yes	Custom	Custom	Yes	—	Custom	Custom

**RELATIVE PRICE**

Least (1) to Most (9)	1	8	4	2	3	6	7	5
-----------------------	---	---	---	---	---	---	---	---

## SERIES 96 Conductive Rubber


### FEATURES

- Quality, Economical Keyboards
- Easily Customized Legends
- Matrix Circuitry
- Backlit and Shielded Options Available
- Termination Mates With Standard Connectors
- Tactile Feedback to Operator
- 1,000,000 Operations per Button
- Compatible With High Resistance Logic Inputs

The Series 96 is Grayhill's most economical 3x4 and 4x4 keypad family. The contact system utilizes conductive rubber to mate the appropriate PC board traces. Offered in matrix circuitry, with shielded and backlit options. Built with quality component parts, the Series 96 is subjected to our rigid statistical process control to insure that it meets our reliability standards.




### DIMENSIONS In inches (and millimeters)

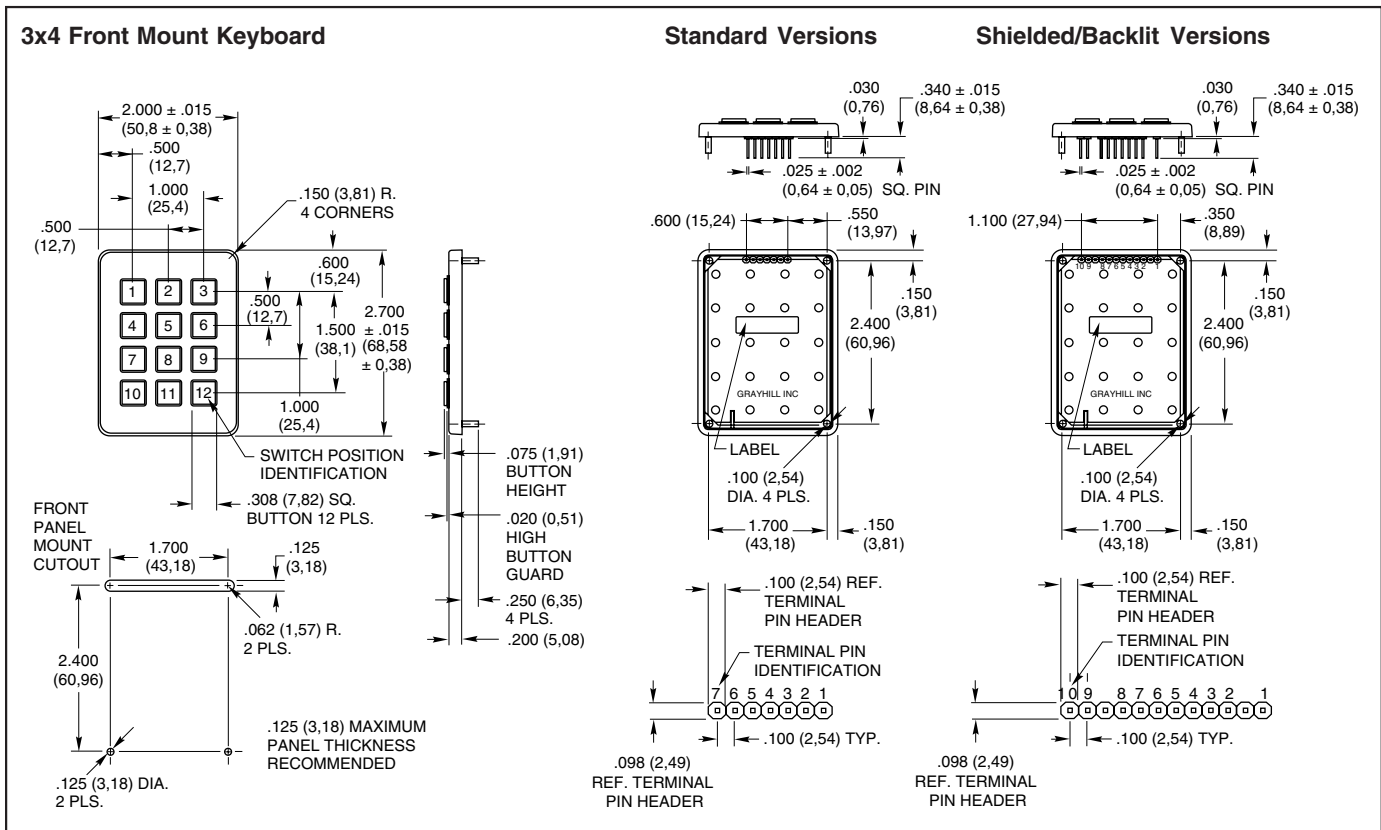


Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)


**3x4 Rear Mount Keyboard**

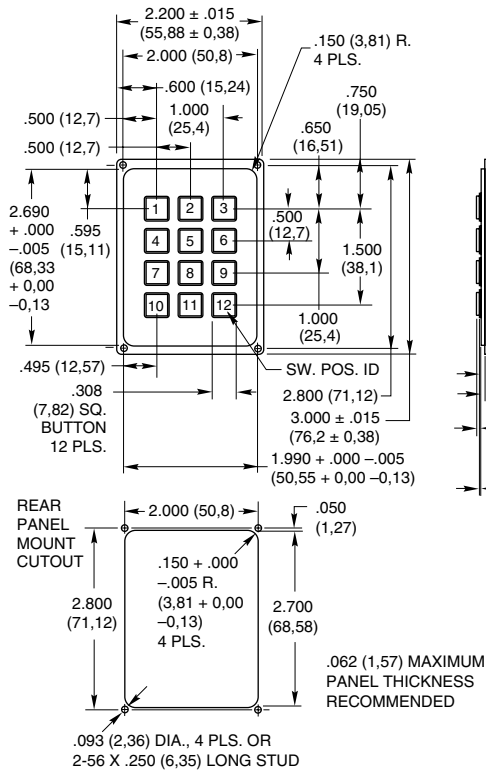


**Standard Versions**

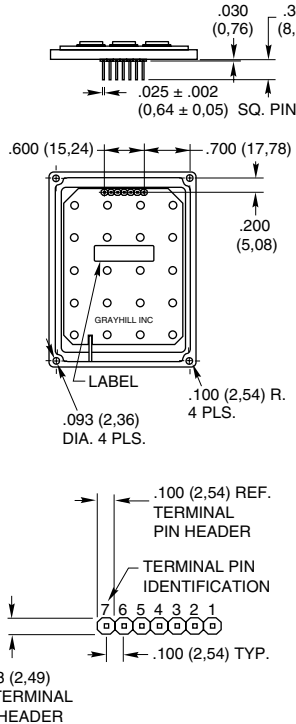


**Shielded/Backlit Versions**

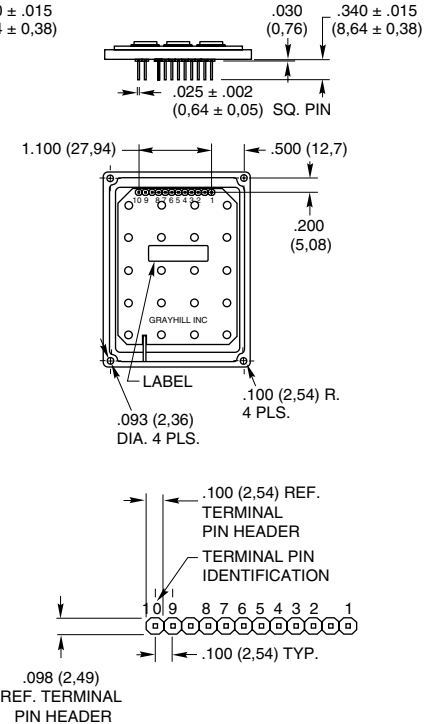


**4x4 Front Mount Keyboard**

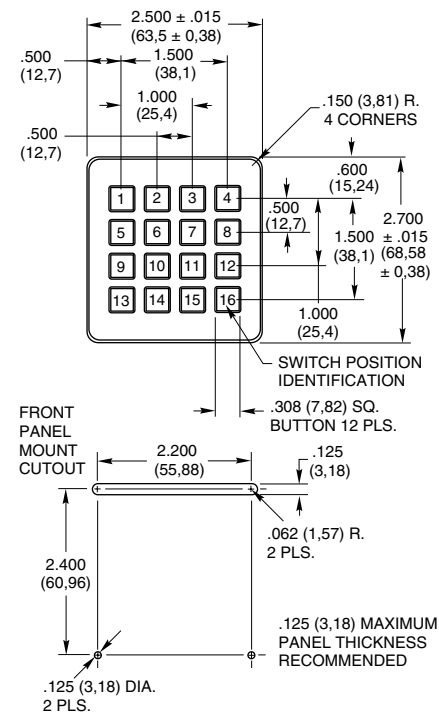


**Standard Versions**

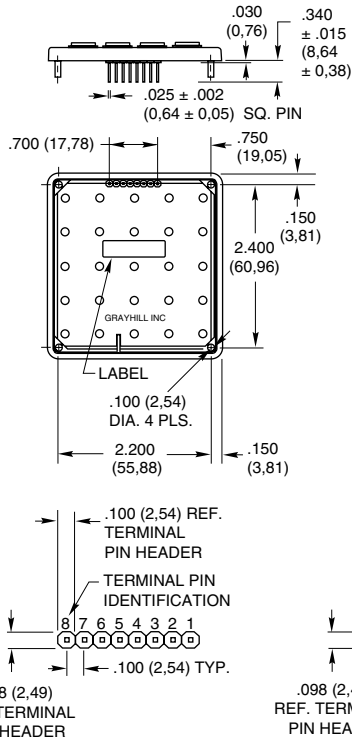

**Shielded/Backlit Versions**

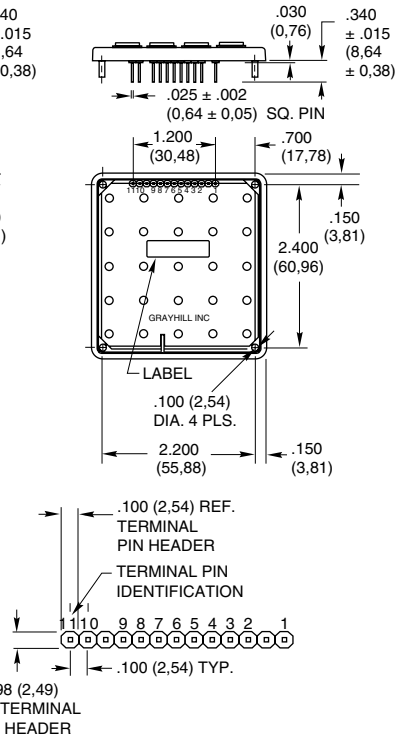

**DIMENSIONS** In inches (and millimeters)

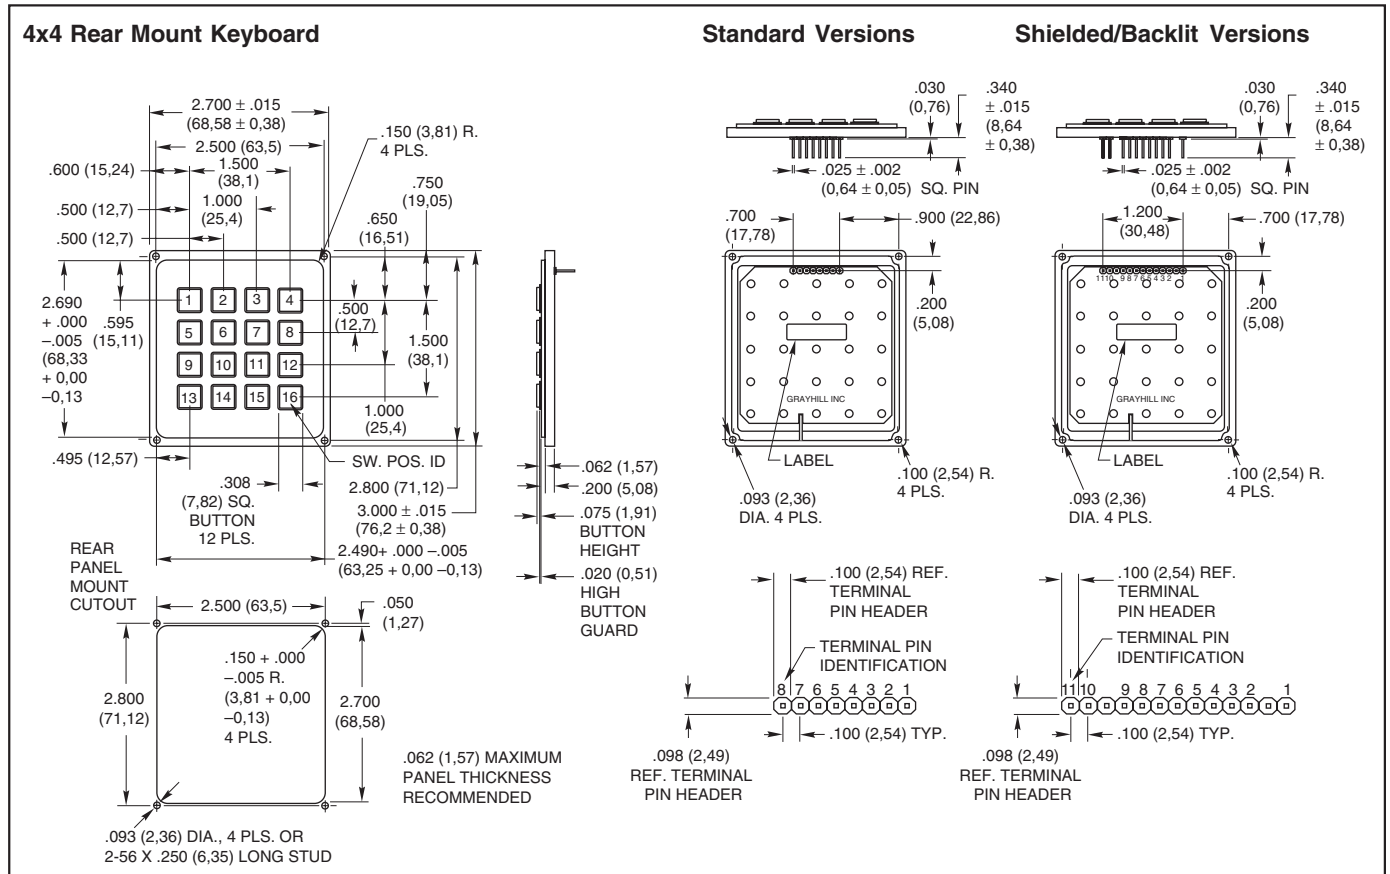

Keyboards and Keycaps

**CODE AND TRUTH TABLES**

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

**12 Button Keycaps**

3x4	MATRIX CODES		
	Standard	Shielded/Backlit	
1	•	•	Shielded keypad = Shielded Backlit keypad = NC Shielded and backlit keypad = Shielded  Shielded keypad = NC Backlit keypad = EL Panel 1 Shielded and backlit keypad = EL Panel 1  Shielded keypad = NC Backlit keypad = EL Panel 2 Shielded and backlit keypad = EL Panel 2
2	•	•	
3	•	•	
4	•	•	
5	•	•	
6	•	•	
7	•	•	
8	•	•	
9	•	•	
10	•	•	
11	•	•	
12	•	•	
	5 6 7 1 2 3 4	6 7 8 2 3 4 5 1 9 10	
	TERMINAL LOCATION		

**16 Button Keycaps**

4x4	MATRIX CODES		
	Standard	Shielded/Backlit	
1	•	•	Shielded keypad = Shielded Backlit keypad = NC Shielded and backlit keypad = Shielded  Shielded keypad = NC Backlit keypad = EL Panel 1 Shielded and backlit keypad = EL Panel 1  Shielded keypad = NC Backlit keypad = EL Panel 2 Shielded and backlit keypad = EL Panel 2
2	•	•	
3	•	•	
4	•	•	
5	•	•	
6	•	•	
7	•	•	
8	•	•	
9	•	•	
10	•	•	
11	•	•	
12	•	•	
13	•	•	
14	•	•	
15	•	•	
16	•	•	
	5 6 7 8 1 2 3 4	6 7 8 9 2 3 4 5 1 10 11	
	TERMINAL LOCATION		

**SPECIFICATIONS**

**Rating Criteria**

- Rating at 12 Vdc:** 5 milliamps for .5 seconds
- Contact Bounce:** < 12 milliseconds
- Contact Resistance:** < 300 milliohms max.
- Voltage Breakdown:** 250 Vac between components
- Mechanical Operation Life:** 1,000,000 operations per key
- Insulation Resistance:** > 10<sup>12</sup> ohms @ 500 Vdc
- Push Out Force Per Pin:** 5 lbs.

**Operating Features**

- Travel:** .040 minimum
- Operating Force:** 175 ± 40 grams
- Operating Temperature:** -30°C to +80°C

**Material and Finishes**

- Terminal Pin:** Phosphor bronze
- PC Board:** FR-4 glass cloth epoxy
- Keypad:** Silicone rubber, durometer 50 ± 5
- Housing:** ABS, cycolac FR15
- Housing Color:** Black

**Shielding Effectiveness**


Results shown are typical for a standard Grayhill Series 84S keyboard. A conductive gasket will generally increase the shielding, depending on the size and shape of the gasket and its material. Data derived for E-Field Radiation.

**Test Method:**

Measurements were made with the keyboard mounted to a brass plate, which in turn was mounted to a shielded enclosure containing the receiving equipment. A signal generator provided the frequency source that was radiated from the transmitting antenna to the enclosed receiving antenna. The spacing between antennas was maintained constant throughout the frequency range. The effectiveness rating is determined by establishing a reference reading without obstruction between the two antennas and determining the difference between that reading and the test setup reading.

**Note:**

When measured in actual equipment, shielding effectiveness is determined by many factors. This method accurately represents the shielding effectiveness of the Grayhill Series 84S under Ideal test conditions.

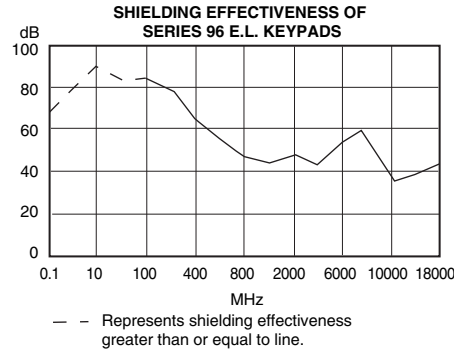


Frequency M Hz	Rating in dB
0.1	≥ 66.2
10	≥ 94.8
100	90.5
400	64.2
800	42.3
2,000	40.5
6,000	33.1
10,000	34.4
18,000	37.0


**STANDARD LEGENDS**

Available through Grayhill Distributors


To order one of the configurations below, use the dash number shown here; select the keypad size and code, and order the part number with the appropriate legend dash number.

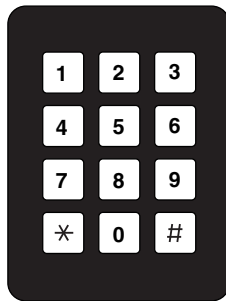


-102

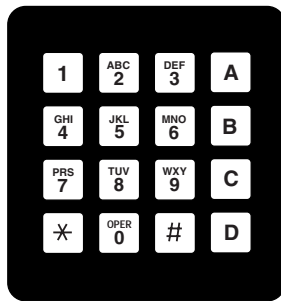

-006

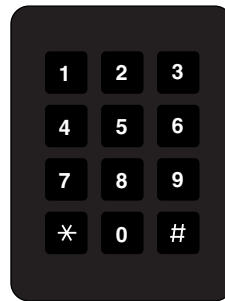


-152

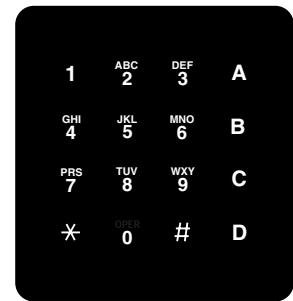

-056

**ORDERING INFORMATION**

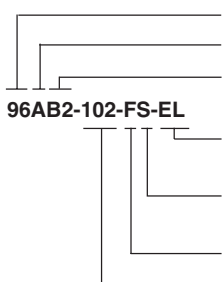

- Grayhill Series Number**
- Keyboard Size:** A = 3x4, B = 4x4
- Circuitry:** B2 = Matrix (terminal pin header)
- E.L. Panel Backlighting Option**  
EL = Backlit, Blank = Non-backlit
- EMI/RFI Shielding Option**  
S = Shielded, Blank = Non-shielded
- Mounting Option:** F = Front panel mount, R = Rear panel mount
- Standard Legend Choices**
- 12 Position legends*
- 102 = Black legends on a white button
- 152 = White legends on a black button
- 16 Position legends*
- 006 = Black legends on a white button
- 056 = White legends on a black button

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

**SERIES 84B**  
**Backlit with Self**  
**Adhesive Legends**


**FEATURES**

- Backlit for Low Light Applications
- Waterproof Silicone Rubber
- Audible, Tactile Contacts
- Low Contact Resistance
- Optional RFI/EMI Shielding
- 3,000,000 Operations per Button




Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)

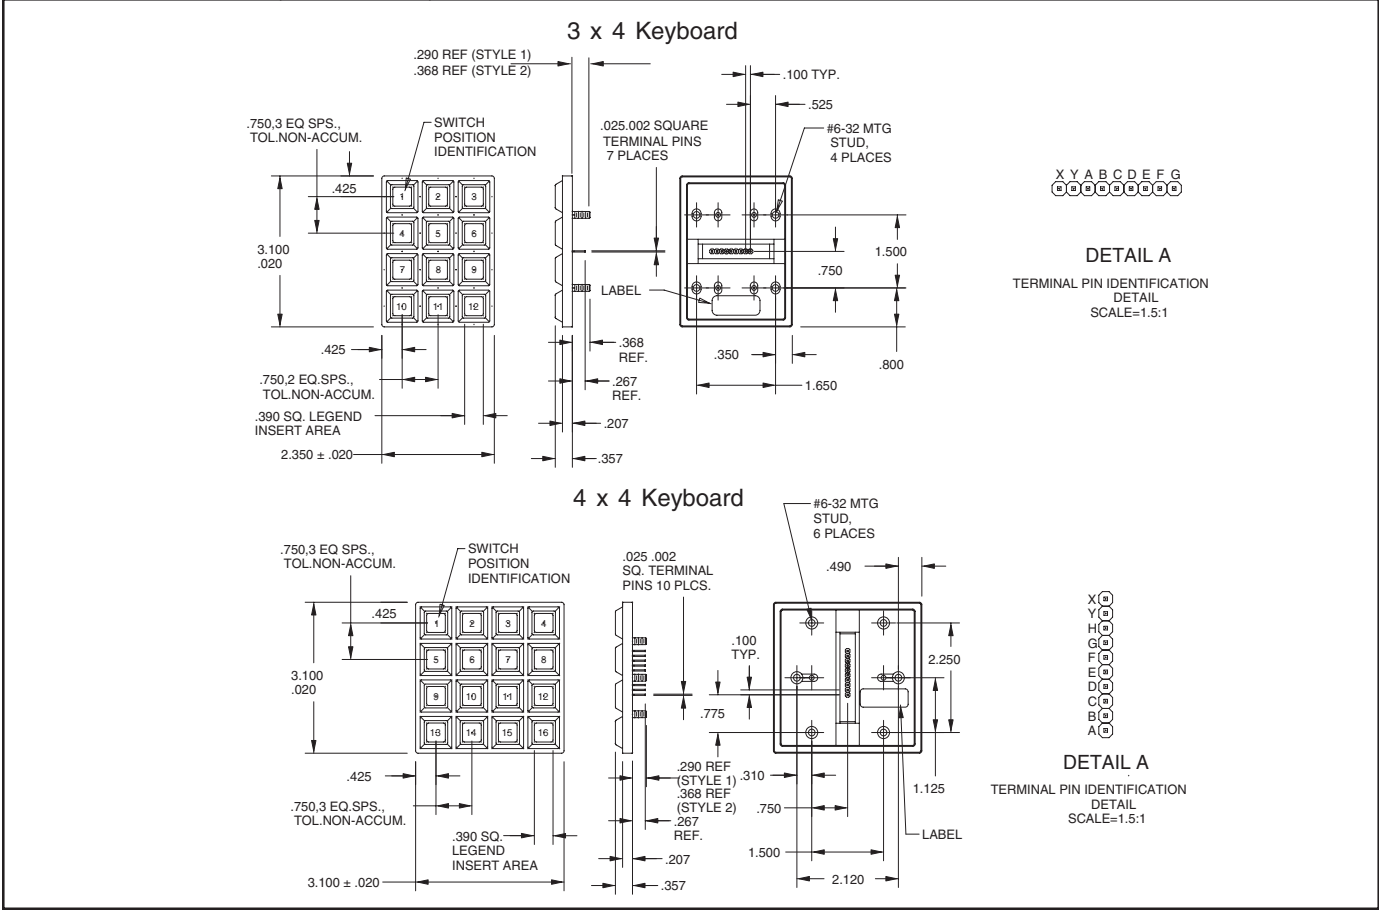


**Stud Detail**

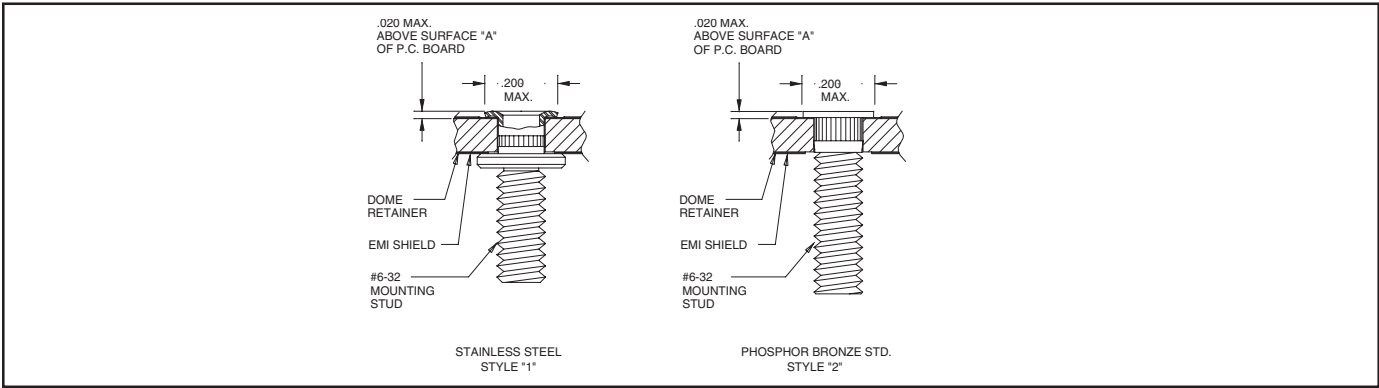





**SCHEMATIC AND TRUTH TABLE**

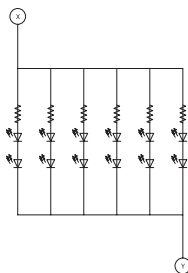


**3 x 4**

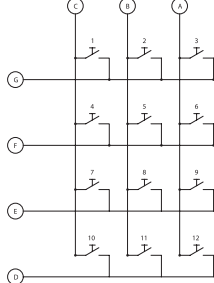

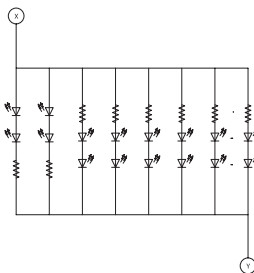

**4 x 4**

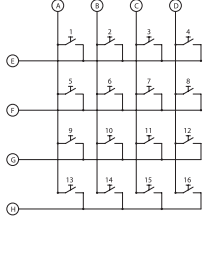

LED Color	Forward Voltage			Resistor (OHMS)	Typ. Current Consumption (With 5V Pwr. Supply)	
	Min.	Typ.	Max.		3 x 4	4 x 4
Red	-	1.95	2.40	43	155mA	205mA
Yellow/Green	-	1.95	2.40	43	155mA	205mA
Green	1.50	-	2.40	43	155mA	205mA
Orange	-	1.95	2.40	43	155mA	205mA

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** - 10 milliamps resistive (max.)

**Contact Bounce:** 4 milliseconds maximum at make; 10 milliseconds, at break

**Contact Resistance:** 10 ohms maximum

**Life Expectancy:** 3 million operations/button

**Insulation Resistance:** >1,000 megohms

**Operating Features**

**Pre-Travel:** .030 inches minimum

**Operating Force:** 20 ± 4 ounces

**Humidity:** 0 to 98% (no condensation)

**Materials and Finishes**

**Terminal Pins:** Copper alloy CDA 725

**PC Board:** FR-4 glass cloth epoxy

**Dome Retainer/Rear Seal Sheet:** Polyester

**Mounting Studs:** Style 1: Stainless steel,

Style 2: Phosphor bronze

**Optional Hex Nut:** Stainless steel, passivated

**Optional EMI Shield:** Aluminum foil


**Keypad:** Silicone rubber

**SELF-ADHESIVE LEGEND SHEETS**

Each 8.5" x 11" legend sheet contains commonly used symbols, terms, alpha characters and 0-9 in helvetica bold type. Self-adhesive legends are clear urethane on a chrome mylar base. Adhesive is silicone/acrylic. Legends can be purchased in the following ways:

1. Entire legend sheets: Part numbers 84AC5012-1, -2, -3 OR -4.
2. Individual legends: Part numbers 84AC5012-0001, -0002 etc. (Individual legend pins are for groups of 10 legends each)
3. See Grayhill drawing 84AC5012-X for detailed information on available legends, sizes and fonts.

**ORDERING INFORMATION**



**84B** = Insertable Legend, Sealed and Shielded  
**84BN** = Insertable Legend, Sealed and Non-Shielded  
**Keyboard Size:** A = 3 x 4, B = 4 x 4  
**B** = Matrix Code  
**1** = Style "1" Terminal Pin Header (see stud detail), **2** = Style "2" Terminal Pin Header (see stud detail)

**84BN-AB1-022AN**

**N** = Mounting Nuts Supplied and Shipped Loose, Blank = No Nuts Supplied  
**Led Color:** A = Red, B = Yellow, C = Green, D = Orange


**SERIES 84BL**  
Standard Backlit

**FEATURES**

- Backlit for Low Light Applications
- Waterproof Silicone Rubber
- Audible, Tactile Contacts
- Low Contact Resistance
- Optional RFI/EMI Shielding
- 3,000,000 Operations per Button




**DIMENSIONS** In inches (and millimeters)

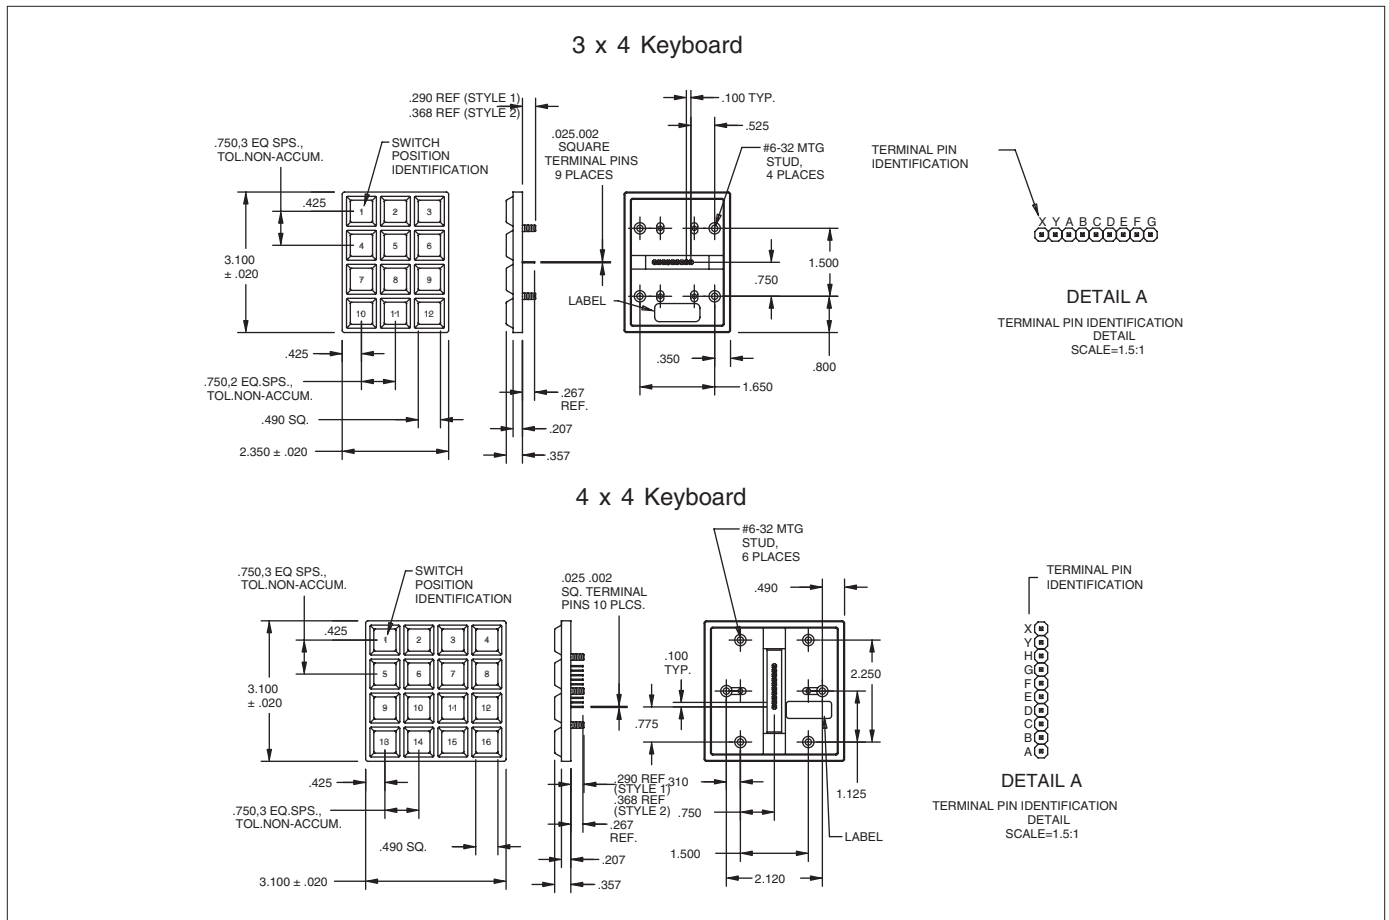

Keyboards and Keypads

**Stud Detail**

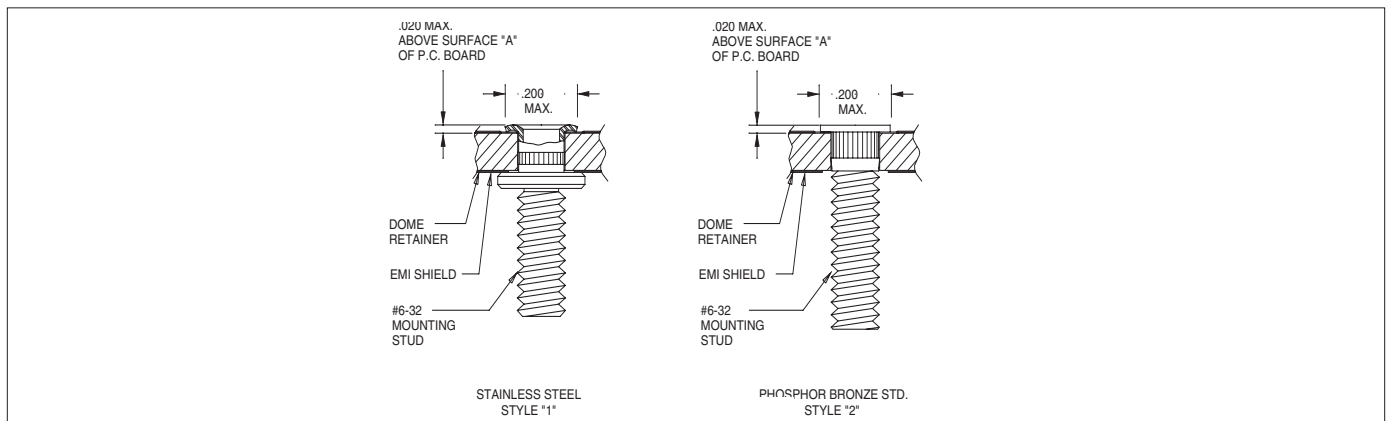


**SCHEMATIC AND TRUTH TABLE**


LED Color	Forward Voltage			Resistor (OHMS)	Typ. Current Consumption (With 5V Pwr. Supply)	
	Min.	Typ.	Max.		3 x 4	4 x 4
Red	-	1.95	2.40	43	155mA	205mA
Yellow	-	1.95	2.40	43	155mA	205mA
Green	1.50	-	2.40	43	155mA	205mA
Orange	-	1.95	2.40	43	155mA	205mA

**STANDARD LEGENDS**

Available through Grayhill Distributors To order one of the configurations below, use the dash number shown here; select the keypad size and order the part number with the appropriate legend dash number. Contact Grayhill for Customs.




-112



-014



-113



-016

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** - 10 milliamps resistive  
**Contact Bounce:** 4 milliseconds maximum at make; 10 milliseconds, at break  
**Contact Resistance:** 10 ohms maximum

**Life Expectancy:** 3 million operations/button  
**Insulation Resistance:** •1,000 megohms

**Operating Features**  
**Pre-Travel:** .030 inches minimum  
**Operating Force:** 20 ± 4 ounces  
**Humidity:** 0 to 98% (no condensation)

**Materials and Finishes**

**Terminal Pins:** Copper alloy CDA 725  
**PC Board:** FR-4 glass cloth epoxy  
**Dome Retainer/Rear Seal Sheet:** Polyester  
**Mounting Studs:** Style 1: Stainless steel, Style 2: Phosphor bronze  
**Optional Hex Nut:** Stainless steel, passivated  
**Optional EMI Shield:** Aluminum foil  
**Keypad:** Silicone rubber

**ORDERING INFORMATION**

**84BLN-AB1-XXXAN**

- 84BL = Printed Legend, Sealed and Shielded
- 84BLN = Printed Legend, Sealed and Non-Shielded
- Keyboard Size: A = 3 x 4, B = 4 x 4
- B = Matrix Code
- 1 = Style "1" Terminal Pin Header (see stud detail), 2 = Style "2" Terminal Pin Header (see stud detail)
- N = Mounting Nuts Supplied and Shipped Loose, Blank = No Nuts Supplied
- Led Color: A = Red, B = Yellow, C = Green, D = Orange
- Standard Legends: -112 or -113 for 3x4, -014 or -016 for 4x4

# SERIES 84S

Sealed


## FEATURES

- Waterproof Silicone Rubber
- Easily Customized Legends
- Audible, Tactile Contacts
- Low Contact Resistance
- Optional RFI/EMI Shielding
- 3,000,000 Operations per Button





Keyboards and Keycaps


## DIMENSIONS In inches (and millimeters)

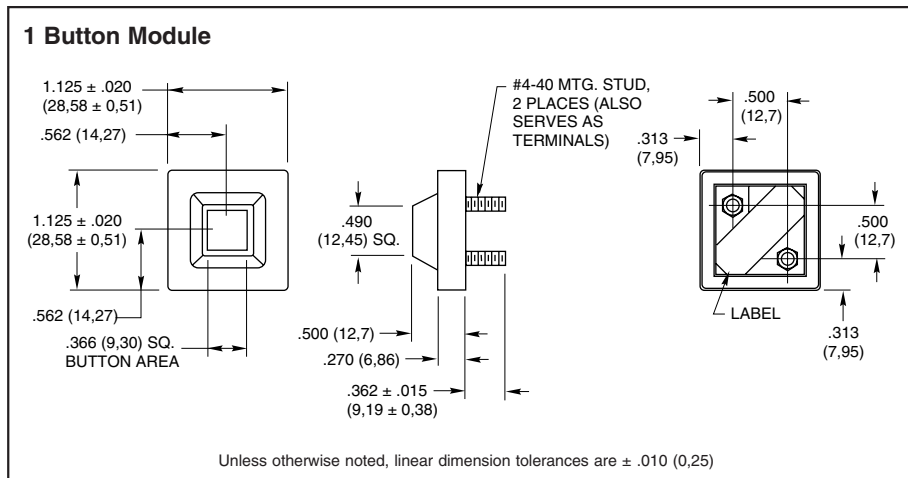

## CIRCUITRY

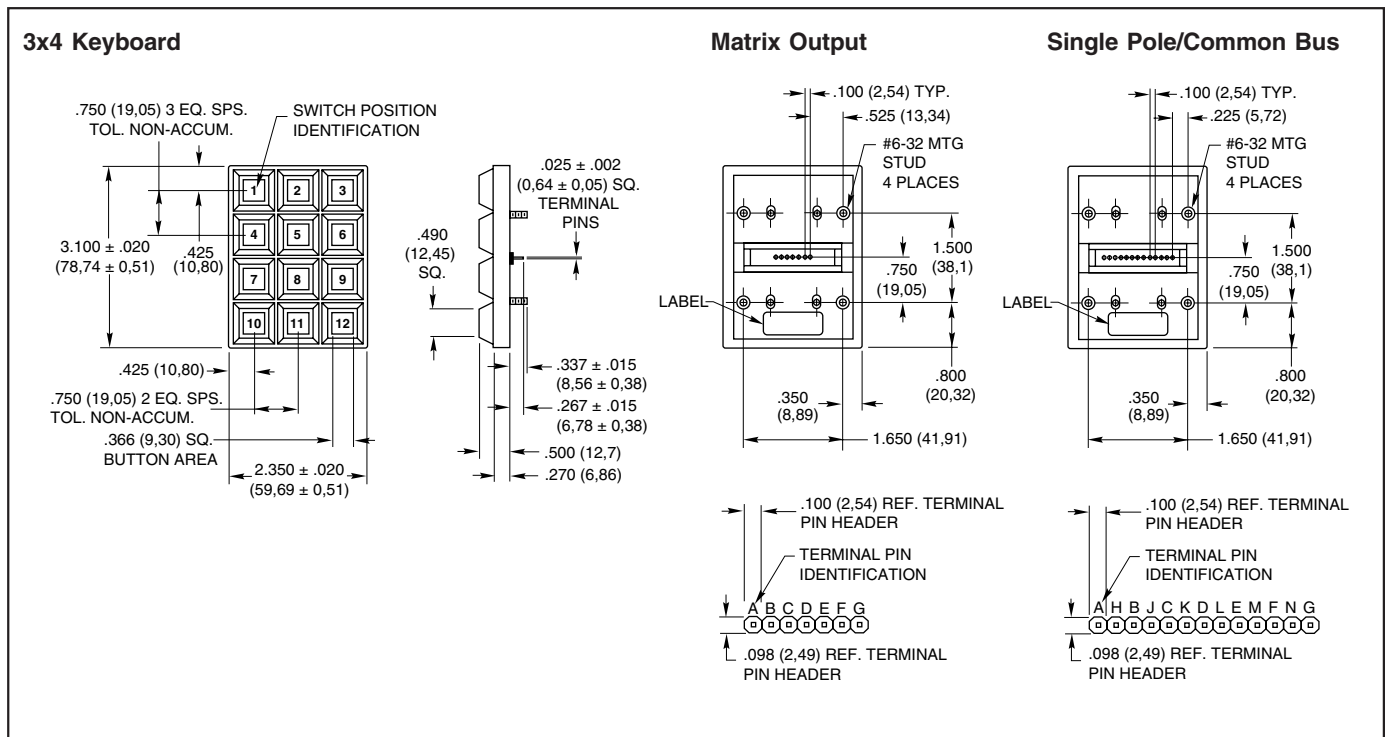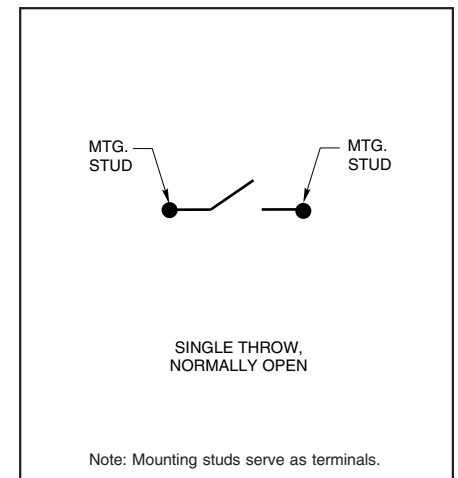



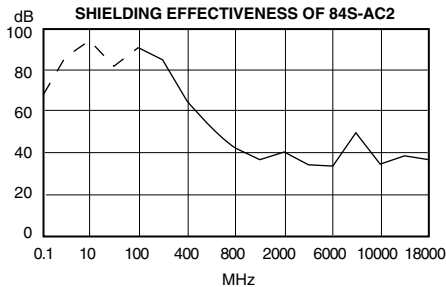

Frequency MHz	Rating in dB
0.1	66.2
10	94.8
100	90.5
400	64.2
800	42.3
2,000	40.5
6,000	33.1
10,000	34.4
18,000	37.0

receiving equipment. A signal generator provided the frequency source that was radiated from the transmitting antenna to the enclosed receiving antenna. The spacing between antennas was maintained constant throughout the frequency range. The effectiveness rating is determined by establishing a reference reading without obstruction between the two antennas and determining the difference between that reading and the test setup reading.

**Note:**

When measured in actual equipment, shielding effectiveness is determined by many factors. This method accurately represents the shielding effectiveness of the Grayhill Series 84S under ideal test conditions.


**Test Method:**

Measurements were made with the keyboard mounted to a brass plate, which in turn was mounted to a shielded enclosure containing the


**STANDARD LEGENDS**

**Available through Grayhill Distributors**


To order one of the configurations below, use the dash number shown here; select the keypad size and code, and order the part number with the appropriate legend dash number. The buttons in these keypads can be removed, and reinserted in any configuration.

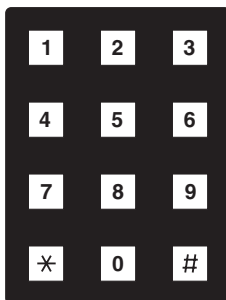


-112

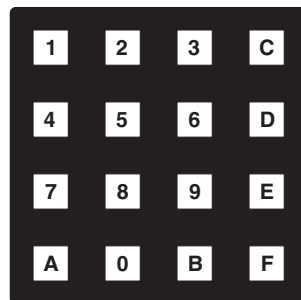

-014

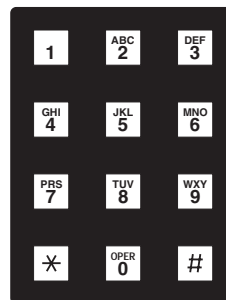


-113

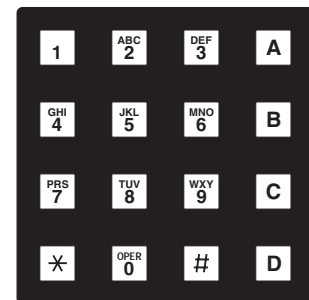

-016

**CUSTOM LEGENDS**

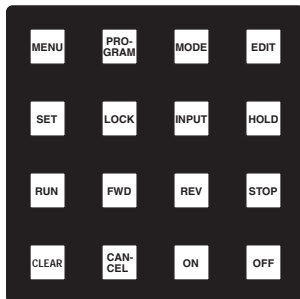

**Library of Legends**

Grayhill maintains a legend library which contains the most often requested special legends and many unusual ones. If the legend is in the library, the cost to utilize this legend in your keypad configuration is minimal. If the legend is not available, Grayhill can list the charges required to add your legend to the library. In this manner, new legends are added on a periodic basis. Custom legends to fit your unique requirements may not be as expensive as you think, contact Grayhill.

**Adding Color**

Use colored buttons to segregate button groupings or to provide originality. Available in black legends on white or yellow buttons, or in white legends on black, green, red or blue buttons. Two popular combinations, black on white and white on black, are available from Grayhill stock. Delivery time will increase for other color combinations.



**HEADER CONNECTORS**

Compatible with: Samtec, Inc. Header Series BCS, BSW, CES, ESW, ESQ, SLW, SSW, SSQ, IDSS and IDSD or equivalent.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

**ORDERING INFORMATION**

**84S-AC2-113-N**

- Grayhill Series Number**
- Shielded or Non-Shielded Option**  
S = Shielded; SN = Non-Shielded
- Size Option:** A = 3x4; B = 4x4; C = 1 Button
- Circuitry Option (B2 and C2 not applicable to 1 button)**  
B2 = Matrix in-line pins  
C2 = Single pole/common bus, in-line pins  
C3 = 1 Button, SPST-N.O., non-shielded only
- Mounting Nut Option**  
N = Provided with hex nuts for mounting; Blank = Nuts not provided
- Standard Legend Choices**  
3x4 Size: -112 or -113; -000, No buttons; -101, Blank Buttons  
4x4 Size: -014 or -016; -000, No buttons; -001, Blank Buttons  
1 Button Size: -001, No legend, white button

Keyboards and Keypads

**SERIES 84LS**  
Sealed, Low Profile

**FEATURES**

- Waterproof Silicone Rubber
- Easily Customized Legends
- Audible, Tactile Contacts
- Low Contact Resistance
- Optional RFI/EMI Shielding
- 3,000,000 Operations per Button


**DESCRIPTION**

The Series 84LS is the low profile version of Grayhill's popular Series 84S sealed keypads. These keypads are legended by epoxy ink printing the rubber key tops. Custom legends and colors are available at a nominal cost. The Series 84LS is offered with a choice of matrix or single pole/common bus circuitries and EMI shielding.




Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)

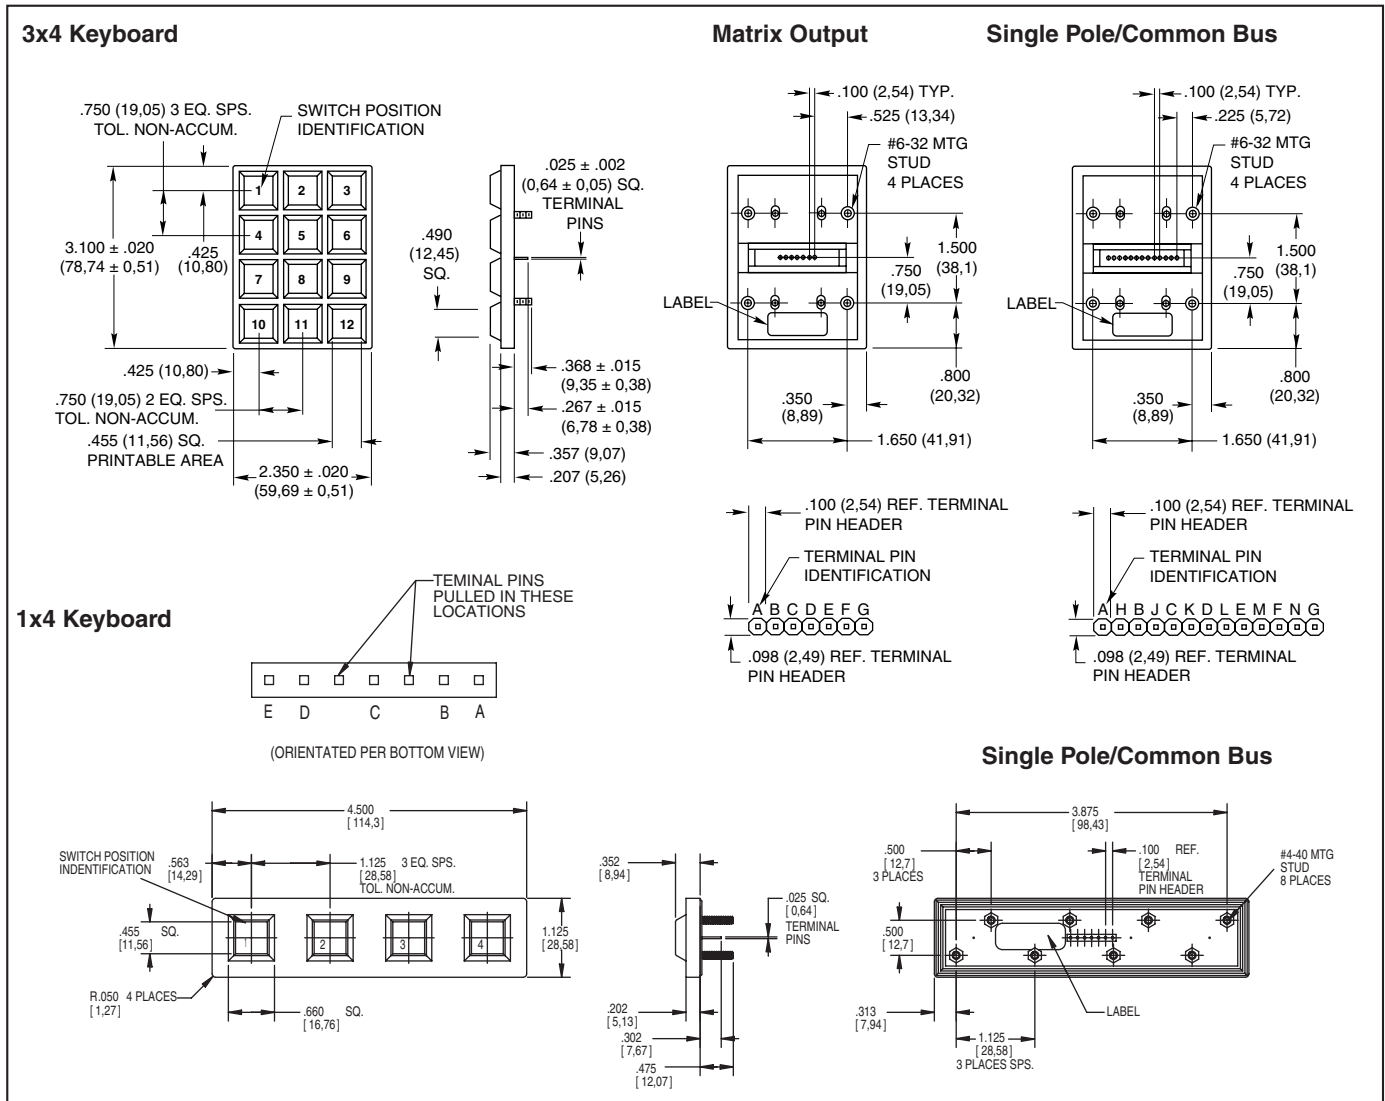

**DIMENSIONS** In inches (and millimeters)

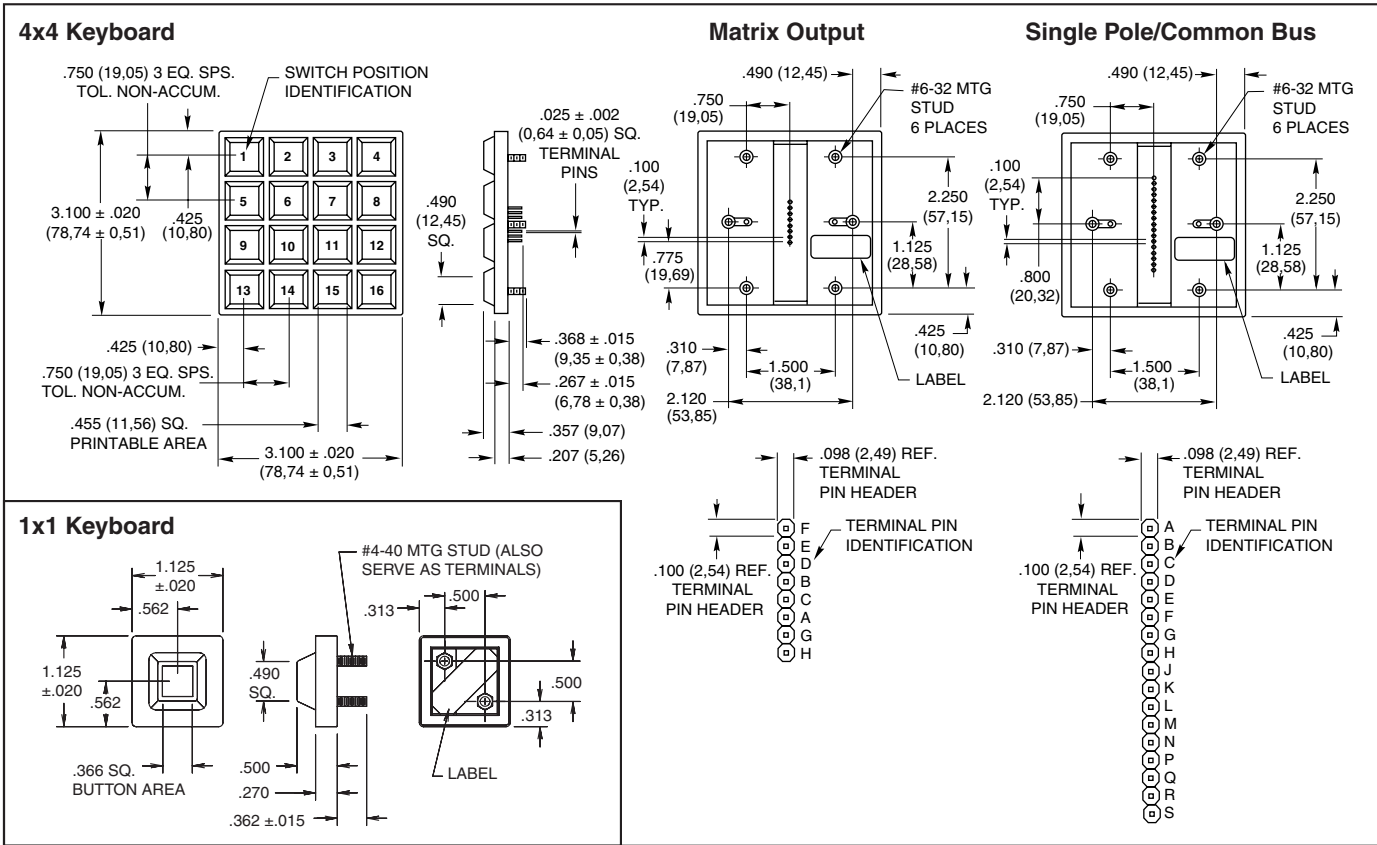

Keyboards and Keycaps

**CODE AND TRUTH TABLES**

The chart indicates the relationship of the terminal pins to each key switch. The dot indicates a closed switch. Terminals are identified on the keyboard.

**4 Button Keycaps**

BUTTON LOCATION	CODES				
	PINS				
1	•				•
2		•			
3			•		
4				•	
	A	B	C	D	E
	TERMINAL LOCATION				

**12 Button Keycaps**

BUTTON LOCATION	CODES																			
	Matrix						Single Pole/Common Bus													
1	•											•								
2		•																		
3			•																	
4				•																
5					•															
6						•														
7							•													
8								•												
9									•											
10										•										
11											•									
12												•								
	C	B	A	G	F	E	D	E	C	B	F	D	A	N	K	H	M	L	J	G
	TERMINAL LOCATION																			

**16 Button Keycaps**

BUTTON LOCATION	CODES																								
	Matrix								Single Pole/Common Bus																
1	•															•									
2		•																							
3			•																						
4				•																					
5					•																				
6						•																			
7							•																		
8								•																	
9									•																
10										•															
11											•														
12												•													
13													•												
14														•											
15															•										
16																•									
	A	B	C	D	E	F	G	H	D	B	A	C	H	F	E	G	K	M	L	J	P	R	Q	N	S
	TERMINAL LOCATION																								

**SPECIFICATIONS**

- Rating Criteria**
- Rating at 24 Vdc: ≤ 10 milliamps resistive
- Contact Bounce: 4 milliseconds maximum at make; 10 milliseconds, at break
- Contact Resistance: MOS, TTL, and DTL compatible. (10 ohms maximum)
- Operating Temperature: -55°C to 85°C


- Life Expectancy: 3 million operations/button
- Insulation Resistance: 1,000 megohms
- Operating Features
- Pre-Travel: .030 inches minimum
- Operating Force: 20 ± 4 ounces
- Humidity: 0 to 98% (no condensation)
- Minimum Push Out Force Per Pin: 5 pounds

- Materials and Finishes**
- Terminal Pins: Copper alloy CDA 725
- PC Board: FR-4 glass cloth epoxy
- Dome Retainer/Rear Seal Sheet: Polyester
- Mounting Studs: Phosphor bronze
- Optional Hex Nut: Stainless steel, passivated
- Optional EMI Shield: Aluminum foil
- Keycap: Silicone rubber



### Shielding Effectiveness

Results shown are typical for a standard Grayhill Series 84LS Keyboard. A conductive gasket will generally increase the shielding, depending on the size and shape of the gasket and its material. Data derived for E-Field Radiation.

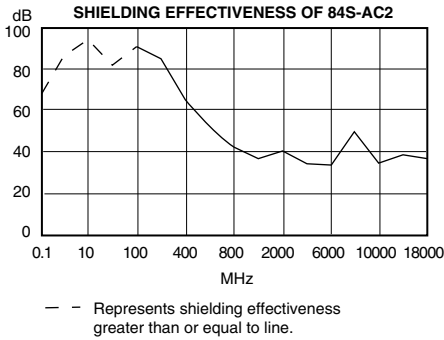

Frequency MHz	Rating in dB
0.1	66.2
10	94.8
100	89.0
400	70.6
800	42.5
2,000	39.5
6,000	32.6
10,000	45.2
18,000	42.2

the frequency source that was radiated from the transmitting antenna to the enclosed receiving antenna. The spacing between antennas was maintained constant throughout the frequency range. The effectiveness rating is determined by establishing a reference reading without obstruction between the two antennas and determining the difference between that reading and the test setup reading.

**Note:**

When measured in actual equipment, shielding effectiveness is determined by many factors. This method accurately represents the shielding effectiveness of the Grayhill Series 84LS under ideal test conditions.

**Test Method:**


Measurements were made with the keyboard mounted to a brass plate, which in turn was mounted to a shielded enclosure containing the receiving equipment. A signal generator provided

Keyboards and Keypads


### STANDARD LEGENDS

Available through Grayhill Distributors


To order one of the configurations below, use the dash number shown here; select the keypad size and code, and order the part number with the appropriate legend dash number.

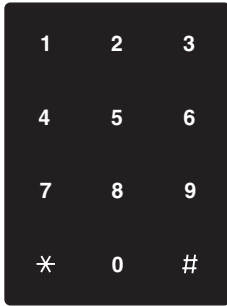


-112

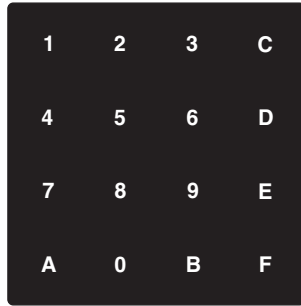

-014

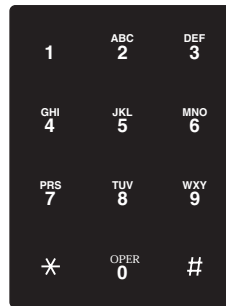


-113

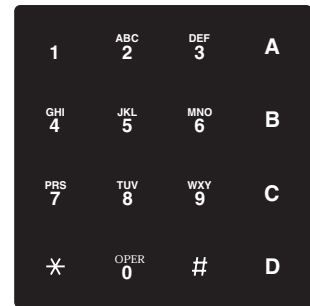

-016



-301



-302



-201

### CUSTOM LEGENDS

Any reasonable legend can be printed in the key area. Fax a sketch of your requirements to Grayhill. Printing and symbols will be coordinated in keeping with concepts of good design. Or, if required, the details of your submitted artwork

will be matched as closely as possible. Allow 3 to 4 weeks for custom legend delivery. A nominal charge, depending on the total quantity of keypads ordered and the complexity of the legend, will be assessed.

### HEADER CONNECTORS

Compatible with:

Samtec, Inc. Header Series BCS, BSW, CES, ESW, ESQ, SLW, SSW, SSS, IDSS and IDSD or equivalent.

### ORDERING INFORMATION

**Grayhill Series Number**  
**Shielded or Non-Shielded Option**  
 S = Shielded  
 SN = Non-Shielded  
**Size Option**  
 A = 3x4 B = 4x4 C = 1x1 F = 1x4  
**Circuitry Option**  
 B2 = Matrix in-line pins C2 = Single pole/common bus, in-line pins

**84LS-AC2-113-N**

**Mounting Nut Option**  
 N = Provided with hex nuts for mounting  
 Blank = Nuts not provided  
**Standard Legend Choices**  
 3x4 Size, choose -112 or -113  
 4x4 Size, choose -014 or -016  
 1x4 Size, choose -301 or -302  
 1x1 Size, choose -201

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local distributor or Grayhill.

### SERIES 84R Sealed, Low Profile

#### FEATURES

- Metal Keys
- Easily Customized Legends
- Sealed Construction
- Choice of Dome Contacts or Carbon Pill
- 3,000,000 Operations per Button


#### DESCRIPTION

Custom legends and colors are available at a nominal cost. The Series 84R is offered with a choice of matrix or single pole/common bus circuitries.




Keypads and Keypads

#### DIMENSIONS In inches (and millimeters)

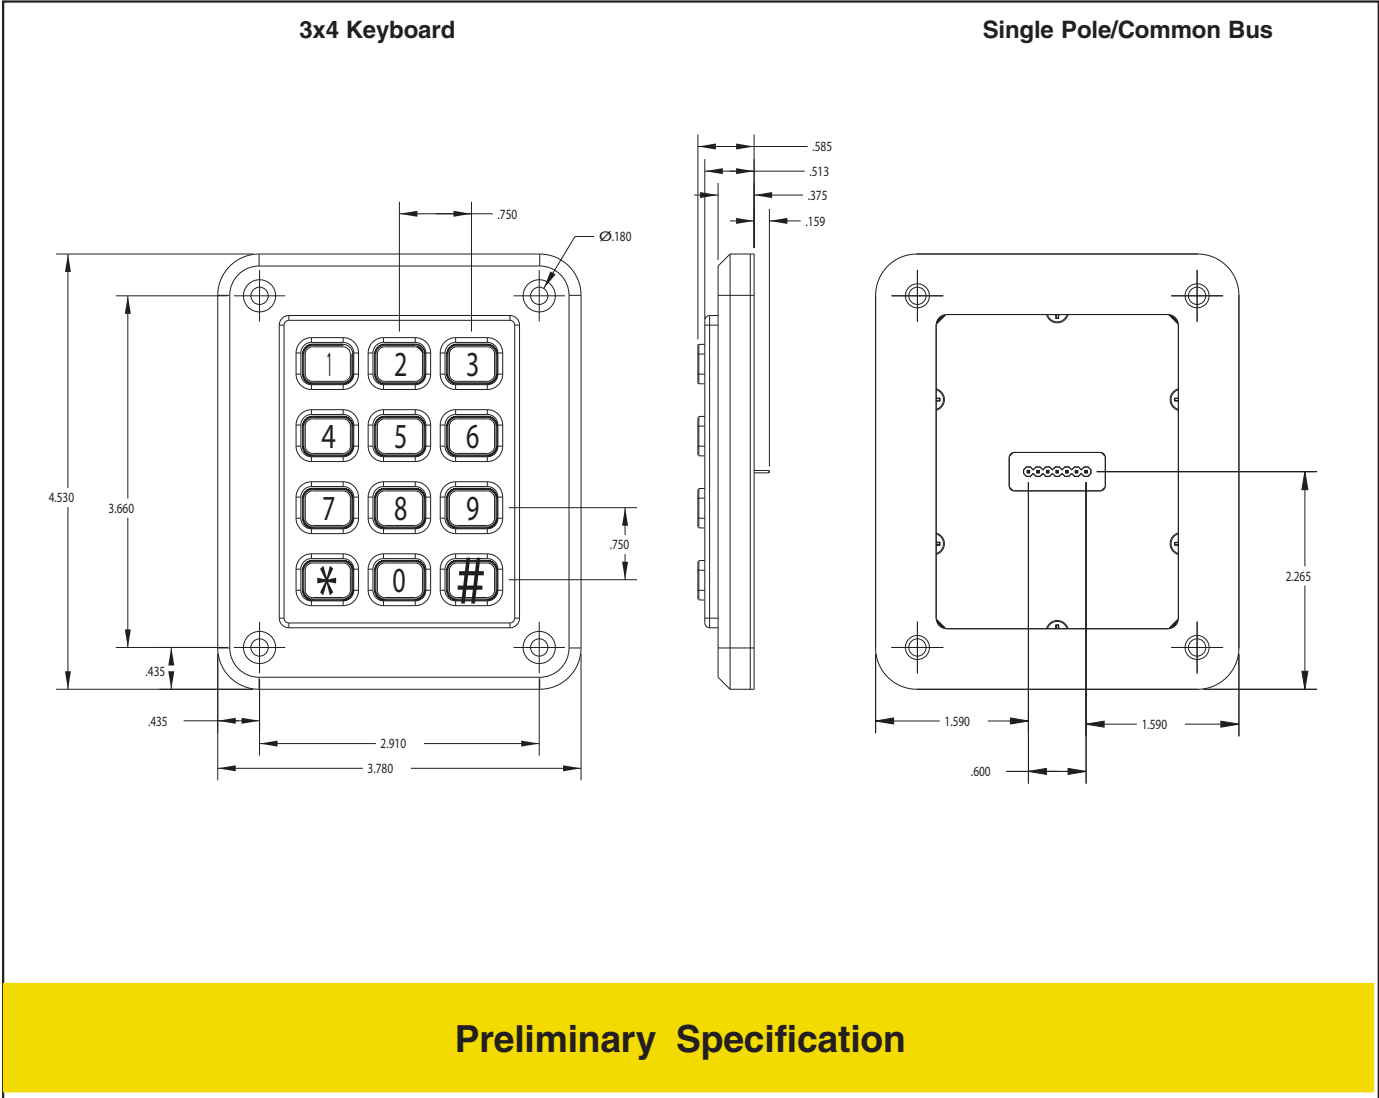

**CODE AND TRUTH TABLES**

The chart indicates the relationship of the terminal pins to each key switch. The dot indicates a closed switch. Terminals are identified on the keyboard.

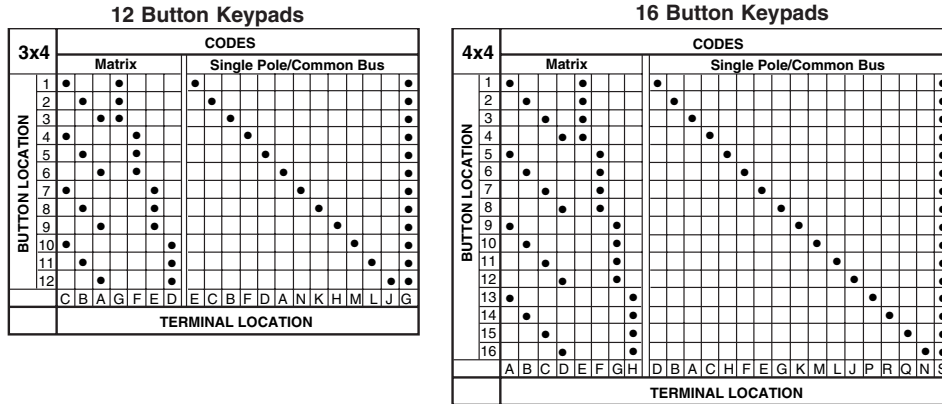

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** ≤ 10 milliamps resistive  
**Contact Bounce:** 4 milliseconds maximum at make; 10 milliseconds, at break  
**Contact Resistance:** MOS, TTL, and DTL compatible. (10 ohms maximum for dome contacts; 300 ohms maximum for carbon pill version)

**Operating Temperature:** -55°C to 85°C  
**Life Expectancy:** 3 million operations/button  
**Insulation Resistance:** 1,000 megohms

**Operating Features**

**Pre-Travel:** .030 inches minimum  
**Operating Force:** 20 ± 4 ounces  
**Humidity:** 0 to 98% (no condensation)  
**Minimum Push Out Force Per Pin:** 5 pounds


**Materials and Finishes**

**Terminal Pins:** Copper alloy CDA 725  
**PC Board:** FR-4 glass cloth epoxy  
**Dome Retainer/Rear Seal Sheet:** Polyester  
**Housing:** Die cast aluminum, anodized  
**Keys:** Die cast aluminum, anodized with engraved epoxy filled legends


**STANDARD LEGENDS**

Available through Grayhill Distributors

To order one of the configurations below, use the dash number shown here; select the keypad size and code, and order the part number with the appropriate legend dash number.

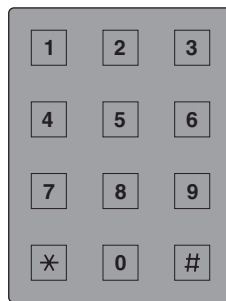

-112

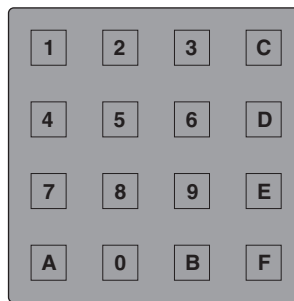

-014

**CUSTOM LEGENDS**


Any reasonable legend can be printed in the key area. Fax a sketch of your requirements to Grayhill. Legends will be coordinated in keeping with concepts of good design. Or, if required, the details of your submitted artwork

will be matched as closely as possible. Allow 3 to 4 weeks for custom legend delivery. A nominal charge, depending on the total quantity of keypads ordered and the complexity of the legend, will be assessed.

**HEADER CONNECTORS**

**Compatible with:**  
**Samtec, Inc.** Header Series BCS, BSW, CES, ESW, ESQ, SLW, SSW, SSQ, IDSS and IDSD or equivalent.

**ORDERING INFORMATION**

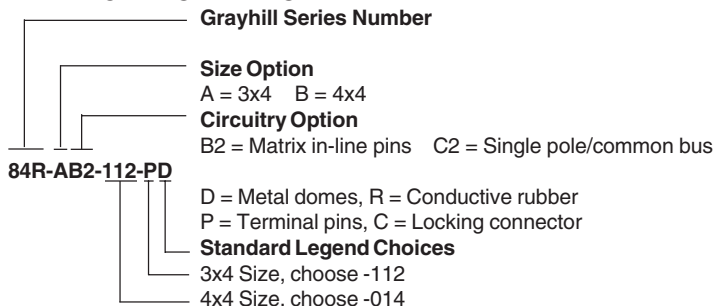

**Available from your local Grayhill Distributor.**  
 For prices and discounts, contact a local Sales Office, an authorized local distributor or Grayhill.

**CUSTOM LEGENDS**

Any reasonable legend can be printed in the key area. Fax a sketch of your requirements to Grayhill. Printing and symbols will be coordinated in keeping with concepts of good design. Or, if required, the details of your

submitted artwork will be matched as closely as possible. Allow 3 to 4 weeks for custom legend delivery. A nominal charge, depending on the total quantity of keypads ordered and the complexity of the legend, will be assessed.

**HEADER CONNECTORS**

**Compatible with:**  
**Samtec, Inc.** Header Series BCS, BSW, CES, ESW, ESQ, SLW, SSW, SSQ, IDSS and IDSD or equivalent.

**ORDERING INFORMATION**

**Grayhill Series Number**  
**Shielded or Non-Shielded Option**  
 R = Shielded  
 RN = Non-Shielded  
**Size Option**  
 A = 3x4 B = 4x4  
**Circuitry Option**  
 B2 = Matrix in-line pins C2 = Single pole/common bus

**84R-AB2-112-PD**

D = Metal domes, R = Conductive rubber  
 P = Terminal pins, C = Locking connector  
**Standard Legend Choices**  
 3x4 Size, choose -112  
 4x4 Size, choose -014  
 1x4 Size, choose -301 or -302

**Available from your local Grayhill Distributor.**  
For prices and discounts, contact a local Sales Office, an authorized local distributor or Grayhill.

Keypads and Keypads

**SERIES 84**  
Unsealed, .750" Centers


**FEATURES**

- 3/4" Button Centers
- Post Mounted
- Mounts by Grooveless Retaining Rings or Heat Upset Post
- Snap-Dome Contact Provides Positive Feedback




**DIMENSIONS** In inches (and millimeters)

**3x4 Keyboard**

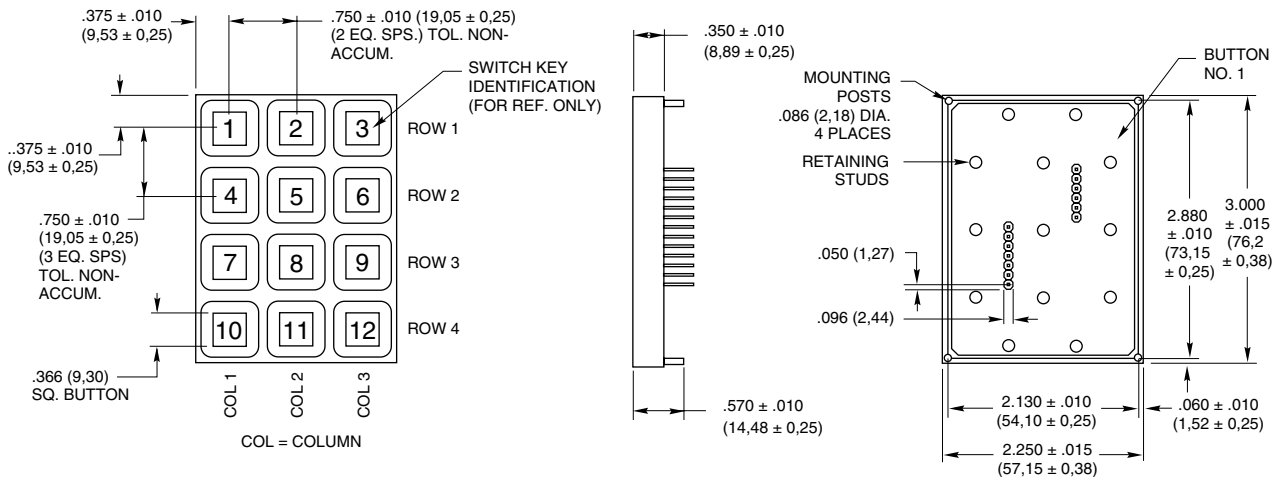


**Termination** In inches (and millimeters)

**3x4 Matrix Output**

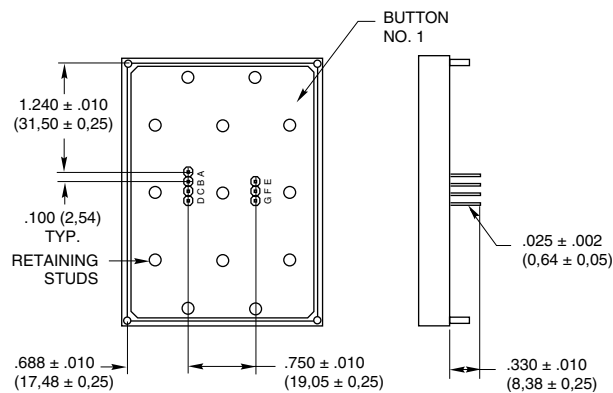

**Single Pole/Common Bus**

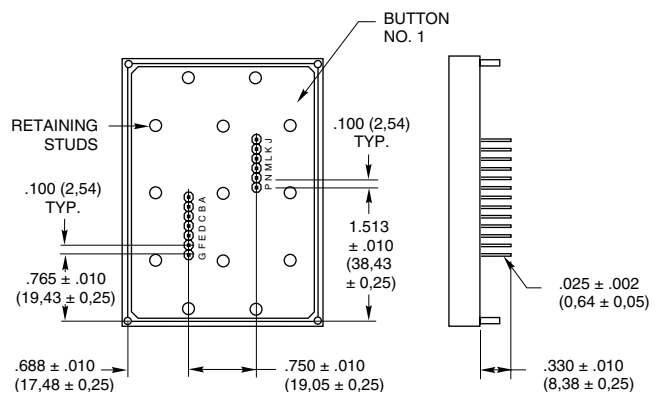

**SERIES 84**  
Unsealed, .750" Centers




**FEATURES**

- 3/4" Button Centers
- Post Mounted
- Mounts by Grooveless Retaining Ring or Heat Upset Post
- Snap-Dome Contact Provides Positive Feedback




**DIMENSIONS** In inches (and millimeters)

**4x4 Keyboard**

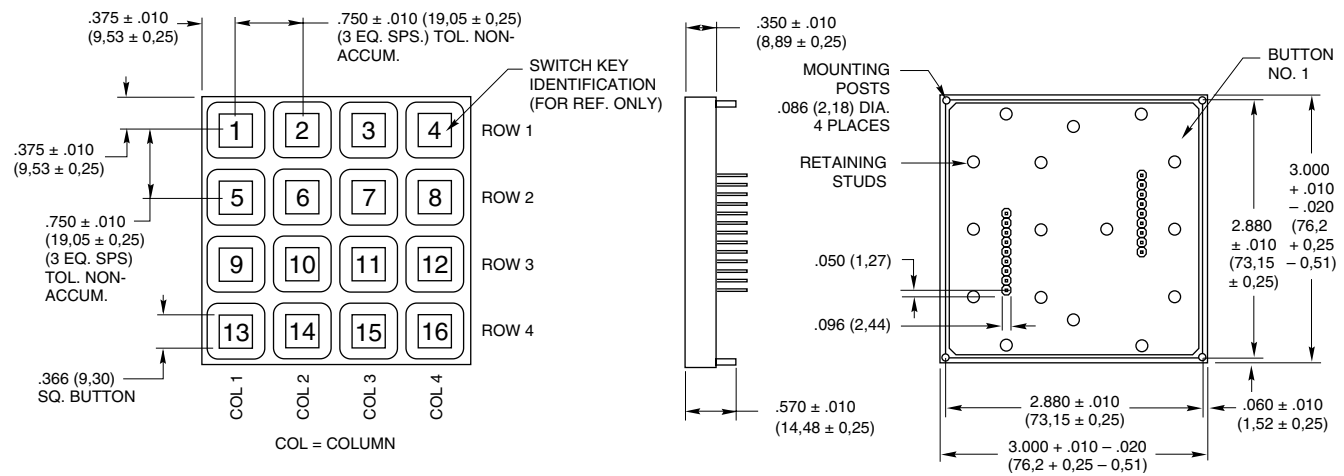


**Termination** In inches (and millimeters)

**4x4 Matrix Output**

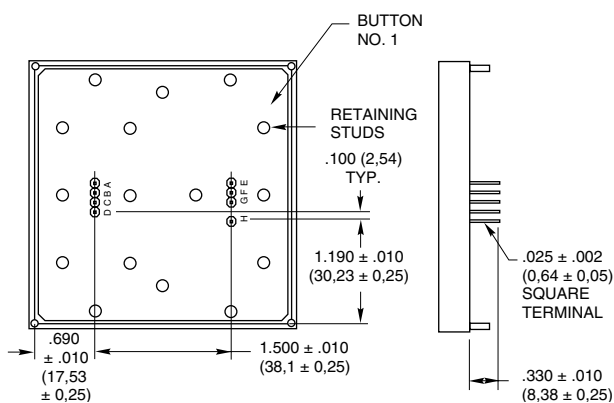

**Single Pole/Common Bus**

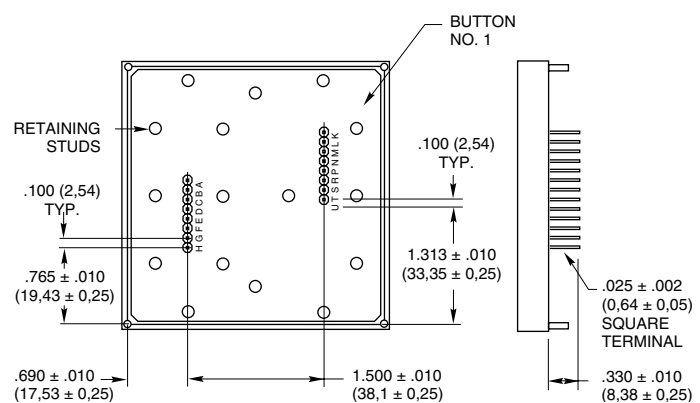

Keyboards and Keypads

**CODE AND TRUTH TABLES**

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

**12 Button Keypads**

3x4		CODES																					
		Matrix						Single Pole/Common Bus															
BUTTON LOCATION	1	•					•						•										
	2		•		•									•									
	3			•											•								
	4	•														•							
	5		•														•						
	6			•														•					
	7	•																	•				
	8		•																	•			
	9			•																	•		
	10	•																				•	
	11		•																				•
	12			•																			
		E	C	D	A	B	F	G	K	J	B	M	L	C	N	E	D	P	G	F	A		
		TERMINAL LOCATION																					

**16 Button Keypads**

4x4		CODES																													
		Matrix								Single Pole/Common Bus																					
BUTTON LOCATION	1	•							•															•							
	2		•																							•					
	3			•																							•				
	4	•																										•			
	5		•																										•		
	6			•																										•	
	7	•																												•	
	8		•																												•
	9			•																											•
	10	•																													•
	11		•																												•
	12			•																											•
	13	•																													•
	14		•																												•
	15			•																											•
	16				•																										•
		E	F	D	C	A	B	G	H	K	L	A	B	N	M	C	D	P	R	F	E	T	U	H	G	S					
		TERMINAL LOCATION																													

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** 10 milliamps, resistive  
**Contact Resistance:** Compatible with MOS, TTL and DTL (10 ohms maximum)  
**Voltage Breakdown:** 250 Vac between mutually insulated parts  
**Life Expectancy:** 3,000,000 operations per button

**Contact Bounce:** Less than 4 milliseconds at make, 10 milliseconds at break  
**Operating Temperature:** -40°C to +80°C

**Materials and Finishes**

**Housing:** Polycarbonate/ABS blend, black; meets UL94V-0  
**Buttons:** ABS plastic, white. Legends are black.

**Snap-On-Cap:** Clear polycarbonate  
**Contact Dome:** Stainless steel, selectively gold-plated  
**Terminals:** Phosphor bronze

**Operating Features**

**Button Travel:** 0.015" (0,38 mm) nominal total travel  
**Typical Operating Force:** 350 grams

**STANDARD LEGENDS**


Insertable legend version (legend numbers -101 and -001) has a removable cap. The revealed button surface can be legended by an insert or a dry transfer of a blank legend

insert. This surface can also be ink stamped by Grayhill in higher volume quantities. When the cap is replaced, the assembly extends approximately .015" (0,38 mm) above the


surface. The legend sheet information follows the legend presentation. All other legends incorporate molded-in (two shot) legends.



-101 (Insertable)

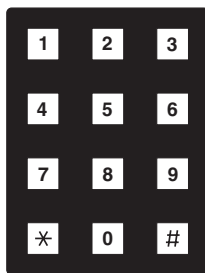


-102 (Molded-in)

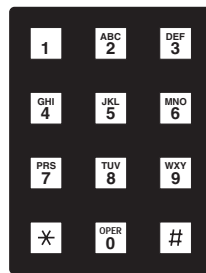


-103 (Molded-in)




-001 (Insertable)

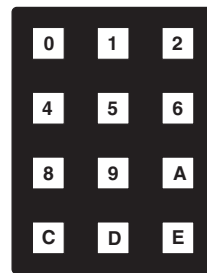


-002 (Molded-in)

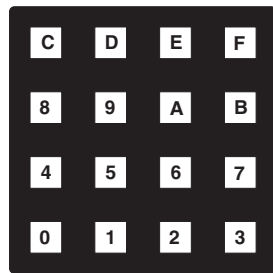


-003 (Molded-in)

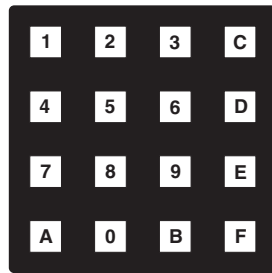

-004 (Molded-in)

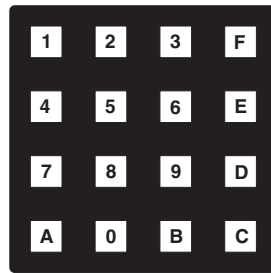

-005 (Molded-in)

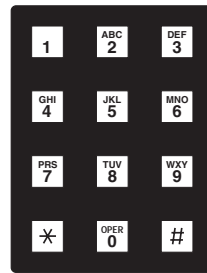

-006 (Molded-in)

### INSERTABLE LEGEND SHEETS

For use with -101 or -001 legend option. Legends are die cut to fit button surface when cap is removed. Dry transfer legends offer some flexibility to customize the blank inserts included on the sheet of popular legend letters, words and symbols provided or on the insertable legends sheet.

Description	Part Number
Sheet of Legend Inserts	<b>87AC2046</b>
Dry Transfer Lettering, Small	<b>87-DT-2096-088</b>
Dry Transfer Lettering, Medium	<b>87-DT-2096-125</b>
Dry Transfer Lettering, Large	<b>87-DT-2096-187</b>

For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.

### PRINTED LEGENDS

#### For Maximum Versatility

Printing allows you the flexibility to create your own legend using whole words and symbols with various type styles. Durable epoxy ink printing bonds to the button cap surface. There are two types of button cap printing:

**Top Surface Printing:** Legend is applied directly to the top of the button. Button is recessed slightly below the keyboard housing.

**Sub-Surface Printing:** For insertable legend models. Provides maximum wear for printed surfaces. Printed internal button cap is protected by clear snap-on cap.

**Printed Typestyles:** The typestyle chart illustrates type style, size and approximate character limits for button caps. Grayhill's library of typefaces includes most popular legends.

Type No. and Typical Height	Sample Style and Typical Sizes	Sub Surface Character and Line Limitations	Top Surface Character and Line Limitations
<b>4GH088</b> .083"	ABCDEFGH	4 Characters 2 Lines 	4 Characters 2 Lines 
<b>1GH125</b> .138"	ABCDE	3 Characters 1 Line 	3 Characters 1 Line 
<b>3GH187</b> .207"	ABCD	2 Characters 1 Line 	2 Characters 1 Line 
<b>2GH250</b> .276"	ABC	N/A N/A	2 Characters 1 Line 

Keyboards and Keypads

### ORDERING INFORMATION:

#### Special Legends

Follow this procedure:

- 1. Basic Keyboard.** Formulate the part number with the exception of the legend suffix.
- 2. Mounting.** Standard mounting is shown in our dimensional drawings. These drawings relate the terminal location to the button legend orientation. It is possible to rotate the button legends by 90°, changing the orientation. When mounting the keypad, it would be rotated 90° to have the legends appear upright. A 3x4 keypad thus becomes a 4x3.
- 3. Color.** Many colors, other than our standard black housing, are available. Buttons can be made from equivalent plastic in black, red, green, blue and yellow. White legends are used with dark color buttons, black with light ones. Other colors available on special order.
- 4. Buttons.** Legends can be printed on button surface and protected by a snap-on cap in a similar fashion to our insertable legend types. A second option is printing a 'blank' button. (One that has the same dimensions as a molded-in legend button with a flat top surface.) Disadvantage is legend wear over time. A third option is molded-in legends, usually requiring tooling. Molded buttons are available with a flat or concave top surface.
- 5. Legends.** Specify the legend requirements for each button. Identify buttons per our dimensional drawings. Caution if keypad has been rotated.

### ORDERING INFORMATION

**84AB1-103**

**Grayhill Series Number**

**Size Option**  
A= 3x4  
B= 4x4

**Circuitry Option**  
B1= Matrix code  
C1= Single pole/common bus

**Standard Legend Choices**  
3x4 Size: -101, -102 or -103  
4x4 Size: -001, -002, -003, -004, -005 or -006

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.



### SERIES 83

Unsealed, .500" Centers

#### FEATURES


- 1/2" Button Centers
- Post Mounted
- Mount by Grooveless Retaining Ring or Heat Upset Post
- Snap-Dome Contact Provides Positive Feedback



Keyboards and Keypads

#### DIMENSIONS In inches (and millimeters)


##### 3x4 Keyboard

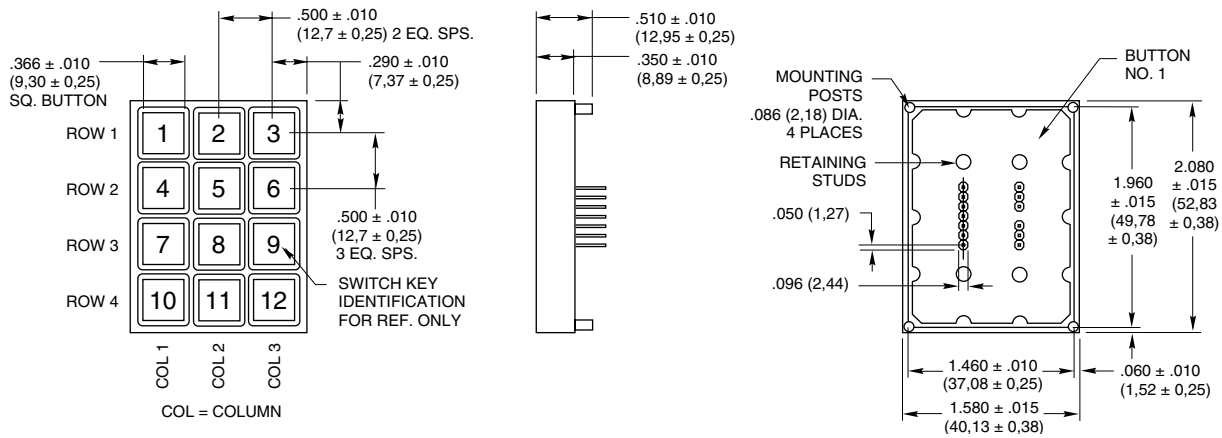


#### Termination In inches (and millimeters)

##### 3x4

##### Matrix Output

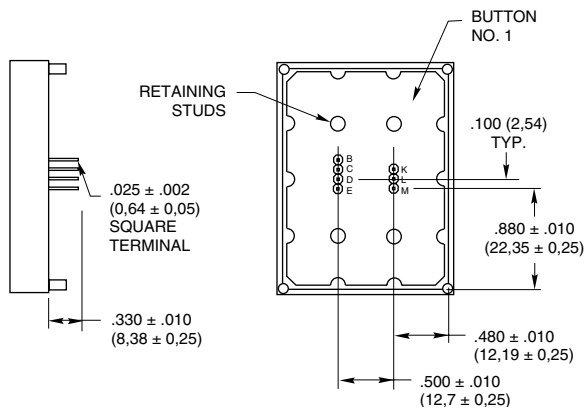

##### Single Pole/Common Bus

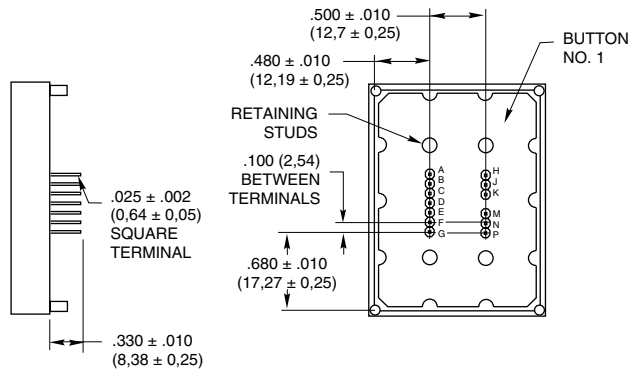

**SERIES 83**  
Unsealed, .500" Centers


**FEATURES**

- 1/2" Button Centers
- Post Mounted
- Mount by Grooveless Retaining Ring or Heat Upset Post
- Snap-Dome Contact Provides Positive Feedback




**DIMENSIONS** In inches (and millimeters)

**4x4 Keyboard**

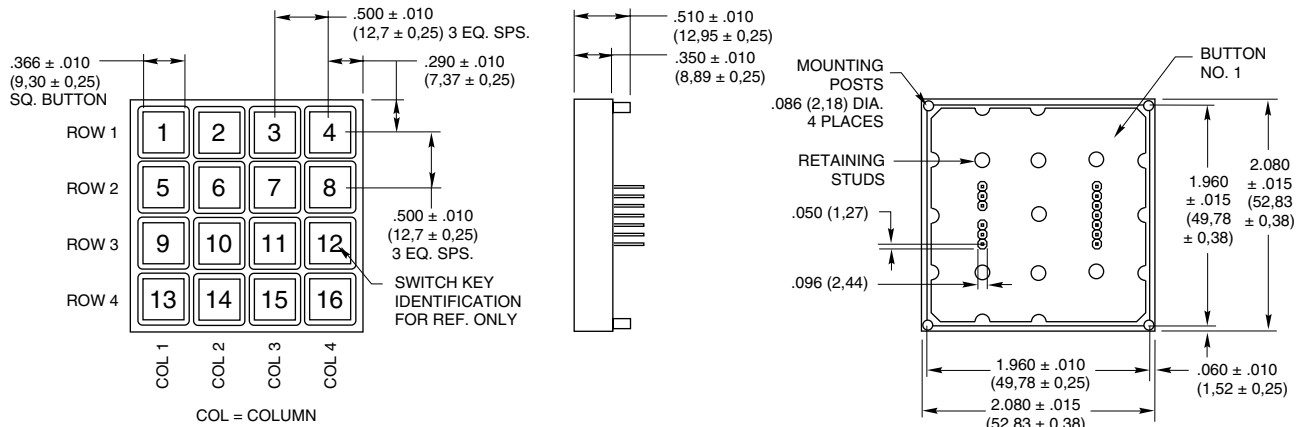


**Termination** In inches (and millimeters)

**4x4 Matrix Output**

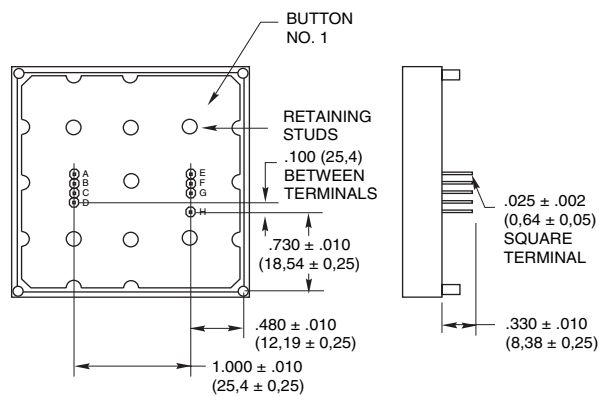

**Single Pole/Common Bus**

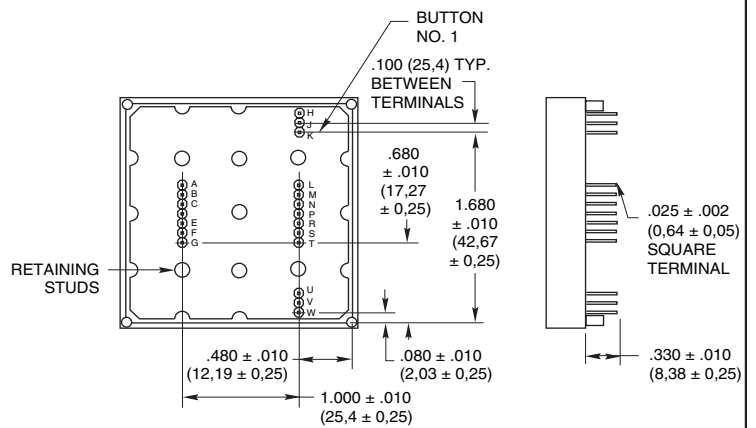

CODE AND TRUTH TABLES

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

**12 Button Keypads**

3x4		CODES																			
		Matrix				Single Pole/Common Bus															
BUTTON LOCATION	1	•		•			•						•								
	2		•		•								•								
	3			•									•								
	4	•			•								•								
	5												•								
	6			•									•								
	7	•											•								
	8												•								
	9			•									•								
	10												•								
	11												•								
	12												•								
		K	D	E	B	C	L	M	K	H	A	J	C	B	N	E	F	M	P	G	D
		TERMINAL LOCATION																			

**16 Button Keypads**

4x4		CODES																									
		Matrix				Single Pole/Common Bus																					
BUTTON LOCATION	1	•		•																				•			
	2		•		•																			•			
	3			•																				•			
	4				•																			•			
	5	•																						•			
	6																							•			
	7																							•			
	8																							•			
	9																							•			
	10																							•			
	11																							•			
	12																							•			
	13																							•			
	14																							•			
	15																							•			
	16																							•			
		E	F	D	C	A	B	G	H	H	J	K	A	L	M	C	B	T	S	E	F	W	V	U	G	P	
		TERMINAL LOCATION																									

Keyboards and Keypads

SPECIFICATIONS

Rating Criteria

- Rating at 24 Vdc:** 10 milliamps, resistive
- Contact Resistance:** Compatible with MOS, TTL and DTL (10 ohms maximum)
- Voltage Breakdown:** 250 Vac between mutually insulated parts
- Life Expectancy:** 3,000,000 operations per button

- Contact Bounce:** Less than 4 milliseconds at make, 10 milliseconds at break
- Operating Temperature:** -40°C to +80°C

- Contact Dome:** Stainless steel, selectively gold-plated
- Terminals:** Phosphor bronze

Materials and Finishes

- Housing:** ABS polycarbonate, black
- Buttons:** ABS plastic, white. Legends are black.
- Snap-On-Cap:** Clear polycarbonate

Operating Features


- Button Travel:** 0.015" (0,38 mm) nominal total travel
- Typical Operating Force:** 350 grams

STANDARD LEGENDS


Insertable legend version (legend numbers -101 and -001) has a removable cap. The revealed button surface can be legended by an insert or a dry transfer of a blank legend

insert. This surface can also be ink stamped by Grayhill in higher volume quantities. When the cap is replaced, the assembly extends approximately .015" (0,38 mm) above the


surface. The legend sheet information follows the legend presentation. All other legends incorporate molded-in (two shot) legends.

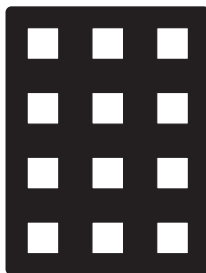


-101 (Insertable)

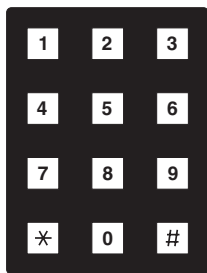


-102 (Molded-in)

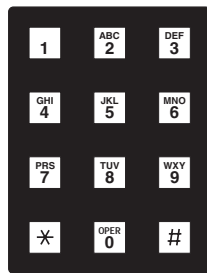


-103 (Molded-in)

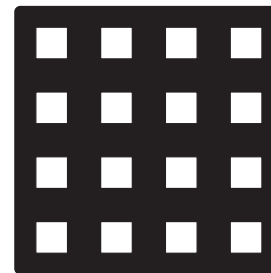


-001 (Insertable)

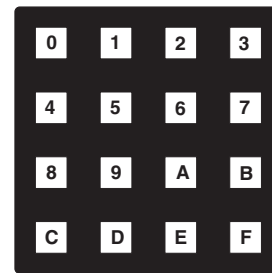


-002 (Molded-in)

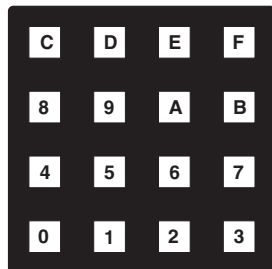


-003 (Molded-in)

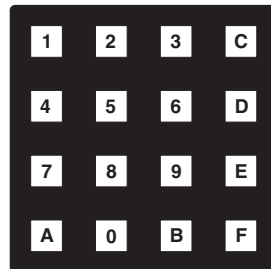

-004 (Molded-in)

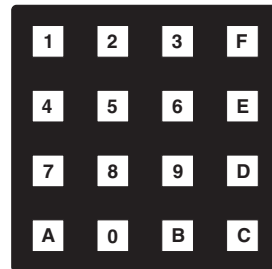

-005 (Molded-in)

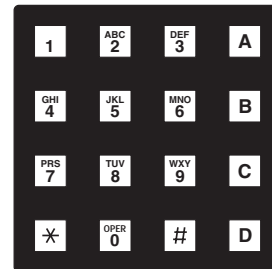

-006 (Molded-in)

### INSERTABLE LEGEND SHEETS

For use with -101 or -001 legend option. Legends are die cut to fit button surface when cap is removed. Dry transfer legends offer some flexibility to customize the blank inserts included on the sheet of popular legend letters, words and symbols provided or on the insertable legends sheet.

Description	Part No.
Sheet of Legend Inserts	<b>87AC2046</b>
Dry Transfer Lettering, Small	<b>87-DT-2096-088</b>
Dry Transfer Lettering, Medium	<b>87-DT-2096-125</b>
Dry Transfer Lettering, Large	<b>87-DT-2096-187</b>

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

### PRINTED LEGENDS

#### For Maximum Versatility

Printing allows you the flexibility to create your own legend using whole words and symbols with various type styles. Durable epoxy ink printing bonds to the button cap surface. There are two types of button cap printing:

**Top Surface Printing:** Legend is applied directly to the top of the button. Button is recessed slightly below the keyboard housing.

**Sub-Surface Printing:** For insertable legend models. Provides maximum wear for printed surfaces. Printed internal button cap is protected by clear snap-on cap.

**Printed Typestyles:** The typestyle chart illustrates type style, size and approximate character limits for button caps. Grayhill's library of typefaces includes most popular legends.

Type No. and Typical Height	Sample Style and Typical Sizes	Sub Surface Character and Line Limitations	Top Surface Character and Line Limitations
<b>4GH088</b> .083"	ABCDEFGH	4 Characters 2 Lines 	4 Characters 2 Lines 
<b>1GH125</b> .138"	ABCDE	3 Characters 1 Line 	3 Characters 1 Line 
<b>3GH187</b> .207"	ABCD	2 Characters 1 Line 	2 Characters 1 Line 
<b>2GH250</b> .276"	ABC	N/A N/A	2 Characters 1 Line 

### ORDERING INFORMATION:

#### Special Legends

Follow this procedure:

- 1. Basic Keyboard.** Formulate the part number with the exception of the legend suffix.
- 2. Mounting.** Standard mounting is shown in our dimensional drawings. These drawings relate the terminal location to the button legend orientation. It is possible to rotate the button legends by 90°, changing the orientation. When mounting the keypad, it would be rotated 90° to have the legends appear upright. A 3x4 keypad thus becomes a 4x3.
- 3. Color.** Many colors, other than our standard black housing, are available. Buttons can be made from equivalent plastic in black, red, green, blue and yellow. White legends are used with dark color buttons, black with light ones. Other colors available on special order.
- 4. Buttons.** Legends can be printed on button surface and protected by a snap-on cap in a similar fashion to our insertable legend types. A second option is printing a 'blank' button. (One that has the same dimensions as a molded-in legend button with a flat top surface.) Disadvantage is legend wear over time. A third option is molded-in legends, usually requiring tooling. Molded buttons are available with a flat or concave top surface.
- 5. Legends.** Specify the legend requirements for each button. Identify buttons per our dimensional drawings. Caution if keypad has been rotated.

### ORDERING INFORMATION

**83AB1-103**

- Grayhill Series Number**
- Size Option**  
A = 3x4  
B = 4x4
- Circuitry Option**  
B1 = Matrix code  
C1 = Single pole/common bus
- Standard Legend Choices**  
3x4 Size: -101, -102 or -103  
4x4 Size: -001, -002, -003, -004, -005 or -006

**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

**SERIES 86**  
**Unsealed, .500" Centers,**  
**Flange Mounted**

**FEATURES**


- 1/2" Button Centers
- Flange Mounted
- Top Surface or Sub Surface Mounting
- Snap-Dome Contact Provides Positive Feedback




Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)

**3x4 Keyboard**

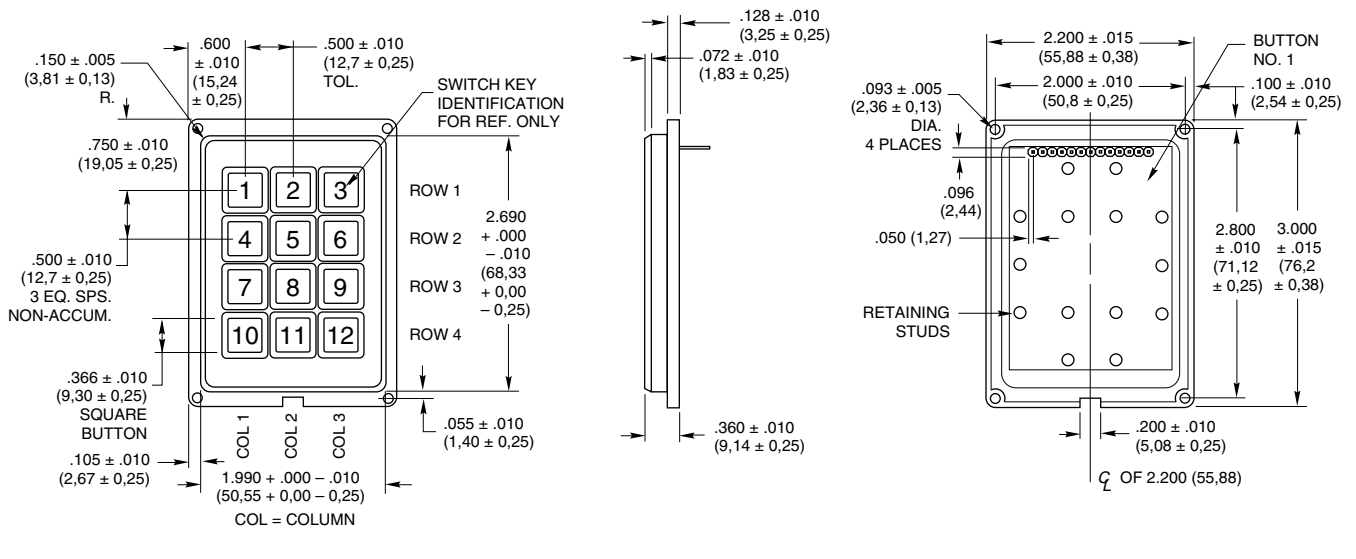

**Termination** In inches (and millimeters)

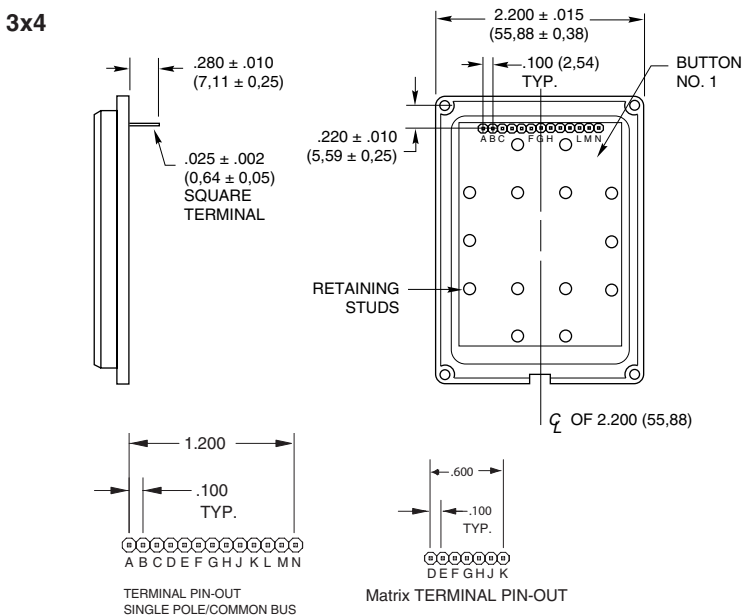

**Code and Truth Table**

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

BUTTON LOCATION	CODES	
	Matrix	Single Pole/Common Bus
1	•	•
2	•	•
3	•	•
4	•	•
5	•	•
6	•	•
7	•	•
8	•	•
9	•	•
10	•	•
11	•	•
12	•	•
	F E D K J H G	J E A K F B L G C M H D N
	TERMINAL LOCATION	

### SERIES 86

Unsealed, .500" Centers,  
Flange Mounted


#### FEATURES

- 1/2" Button Centers
- Flange Mounted
- Top Surface or Sub Surface Mounting
- Snap-Dome Contact Provides Positive Feedback




#### DIMENSIONS In inches (and millimeters)

##### 4x4 Keyboard

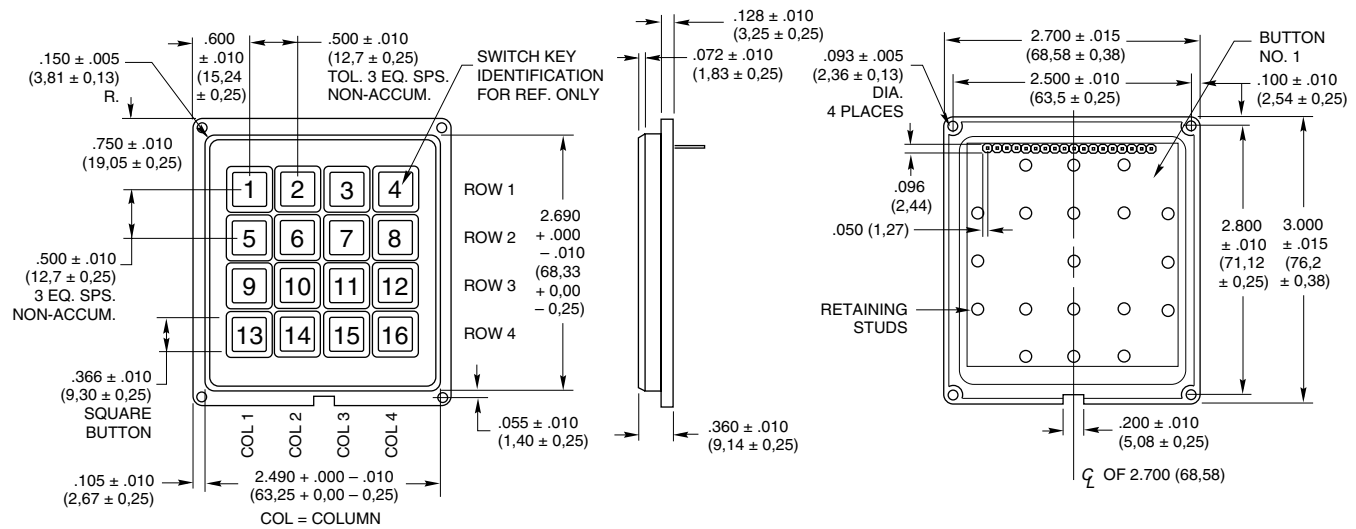

#### Termination In inches (and millimeters)

##### 4x4

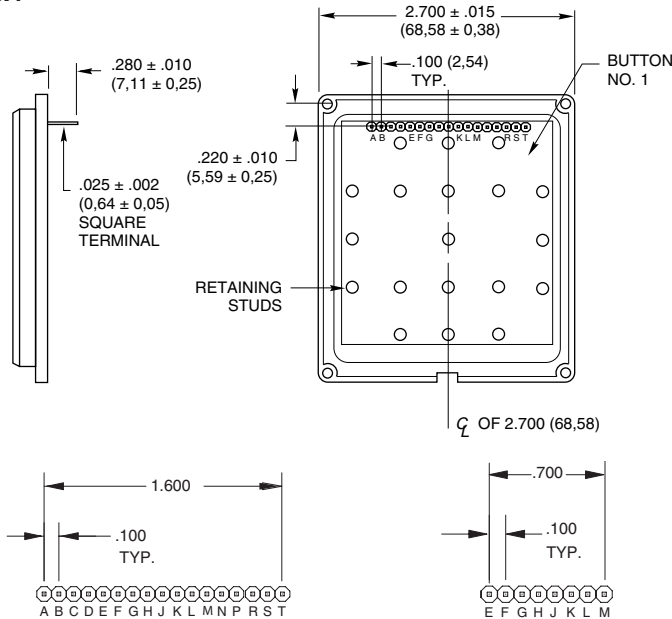

#### Code and Truth Table

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

4x4		CODES																									
		Matrix								Single Pole/Common Bus																	
BUTTON LOCATION	1	•																									
	2		•																								
	3			•																							
	4				•																						
	5					•																					
	6						•																				
	7							•																			
	8								•																		
	9									•																	
	10										•																
	11											•															
	12												•														
	13													•													
	14														•												
	15															•											
	16																•										
		H	G	F	E	I	M	L	K	J	P	J	E	A	R	L	F	B	S	M	H	C	T	N	G	D	K
		TERMINAL LOCATION																									

### SERIES 86

Unsealed, .500" Centers,  
Flange Mounted


#### FEATURES

- 1/2" Button Centers
- Flange Mounted
- Top Surface or Sub Surface Mounting
- Snap-Dome Contact Provides Positive Feedback




#### DIMENSIONS In inches (and millimeters)

##### 5x4 Keyboard

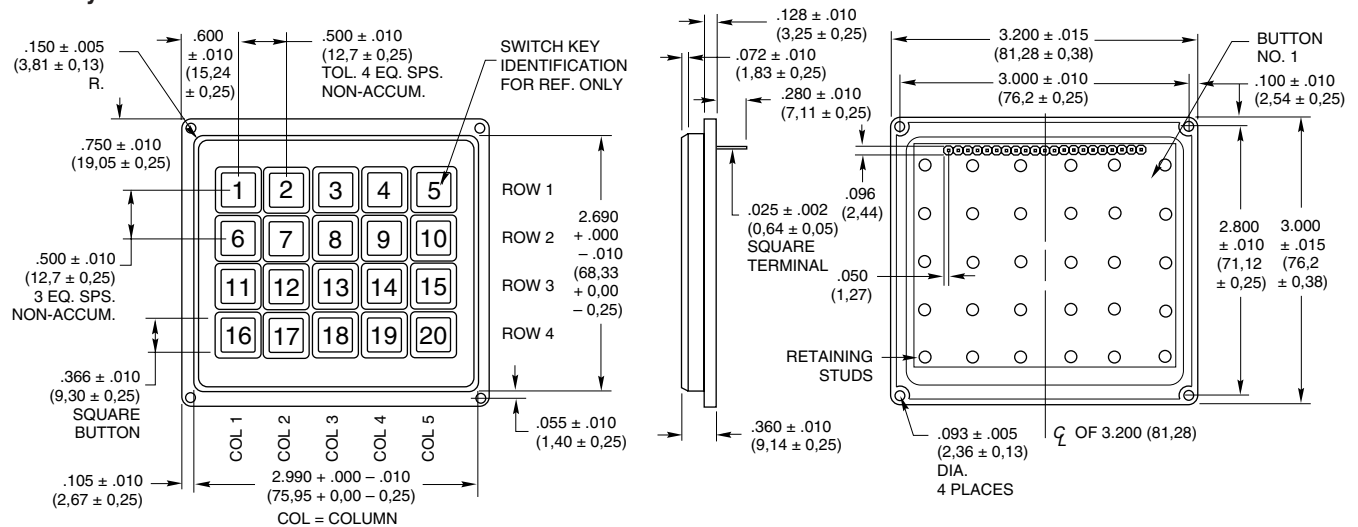

#### Termination In inches (and millimeters)

##### 5x4

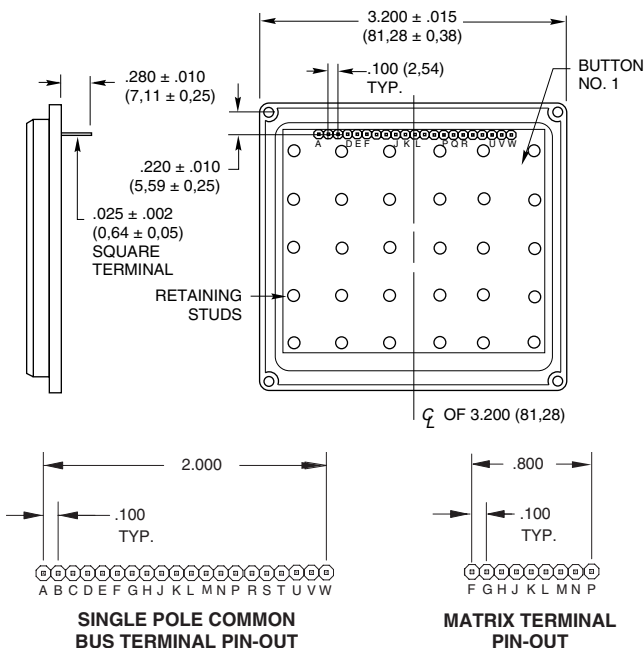

#### Code and Truth Table

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

5x4		CODES	
		Matrix	Single Pole/Common Bus
1	•	•	•
2	•	•	•
3	•	•	•
4	•	•	•
5	•	•	•
6	•	•	•
7	•	•	•
8	•	•	•
9	•	•	•
10	•	•	•
11	•	•	•
12	•	•	•
13	•	•	•
14	•	•	•
15	•	•	•
16	•	•	•
17	•	•	•
18	•	•	•
19	•	•	•
20	•	•	•
	P N K G F J L M H	T P M H D U Q L G C V R K F B W S J E A N	
	TERMINAL LOCATION		

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** 10 milliamps, resistive  
**Contact Resistance:** Compatible with MOS, TTL and DTL (10 ohms maximum)  
**Voltage Breakdown:** 250 Vac between mutually insulated parts  
**Life Expectancy:** 3,000,000 operations per button

**Contact Bounce:** Less than 4 milliseconds at make, 10 milliseconds at break  
**Operating Temperature:** -40°C to +80°C

**Contact Dome:** Stainless steel, selectively gold-plated  
**Terminals:** Phosphor bronze

**Materials and Finishes**

**Housing:** ABS polycarbonate, black  
**Buttons:** ABS plastic, white. Legends are black.  
**Snap-On-Cap:** Clear polycarbonate

**Operating Features**

**Button Travel:** 0.015" nominal total travel  
**Typical Operating Force:** 350 grams


**STANDARD LEGENDS**

Insertable legend version (legend numbers -101, -001, -201 and row or column indicated in -202 and -203) has a removable cap. The revealed button surface can be legended by an insert or a dry transfer of a blank legend

insert. This surface can also be ink stamped by Grayhill in higher volume quantities. When the cap is replaced, the assembly extends approximately .015" (0,38 mm) above the surface. The legend sheet information follows

the legend presentation. All other legends incorporate molded-in (two shot) legends with the exception of legend numbers -202 and -203. The blank legends or spaces in legends -202 and -203 are insertable legends, others are molded-in.

**5x4:** Shown below

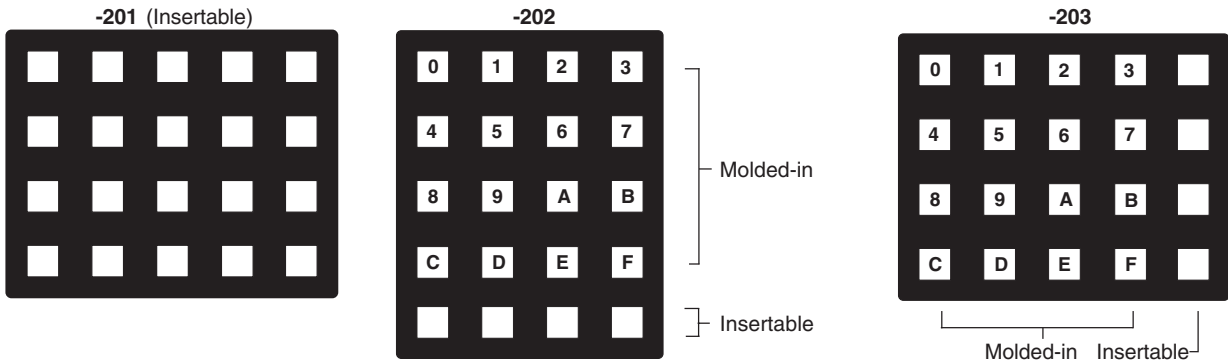

Keyboards and Keypads

**INSERTABLE LEGENDS**

For use with -101, -001, -201, -202 and -203 legend options. Legends are die cut to fit button surface when cap is removed. Dry transfer legends offer some flexibility to customize the blank inserts included on the sheet of popular legend letters, words and symbols provided or on the insertable legends sheet.

Description	Part No.
Sheet of Legend Inserts	<b>87AC2046</b>
Dry Transfer Lettering, Small	<b>87-DT-2096-088</b>
Dry Transfer Lettering, Medium	<b>87-DT-2096-125</b>
Dry Transfer Lettering, Large	<b>87-DT-2096-187</b>

**ORDERING INFORMATION**

**86AB2-103**

- Grayhill Series Number**
- Size Option**  
 A = 3x4  
 B = 4x4  
 J = 5x4
- Circuitry Option**  
 B2 = Matrix code  
 C2 = Single pole/common bus
- Standard Legend Choices**  
 3x4 Size: -101, -102 or -103  
 4x4 Size: -001, -002, -003, -004, -005 or -006  
 5x4 Size: -201, -202, or -203

**Available from your local Grayhill Distributor.**  
 For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.



## SERIES 88

### Sealed, Flange Mounted



#### FEATURES

- Sealed Keyboard
- Colorful Graphic Overlay
- Audible, Snap-Dome Contact
- User Legendable Styles
- 3,000,000 Operations per Button
- Optional Panel Seal Gasket to Protect Your Equipment





#### DIMENSIONS In inches (and millimeters)

##### 3x4 Keyboard

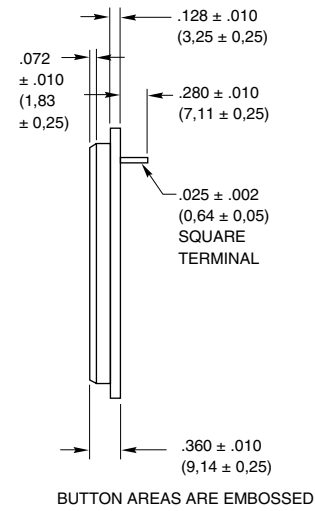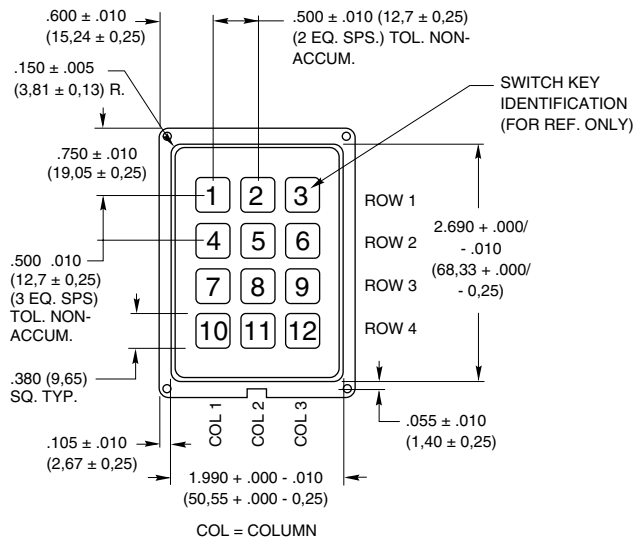


#### Termination In inches (and millimeters)

##### 3x4

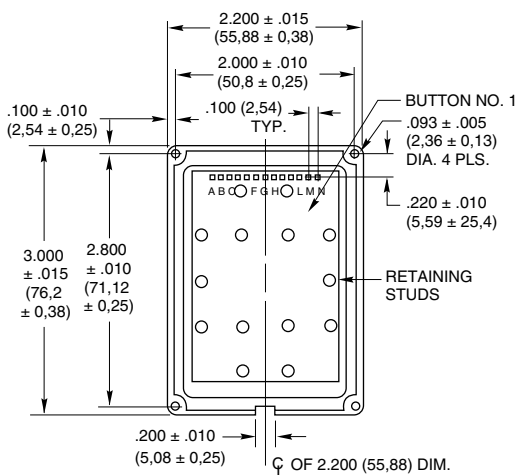

SINGLE POLE COMMON BUS TERMINAL



MATRIX TERMINAL PIN-OUT

#### Code and Truth Table

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

3x4		CODES																					
		Matrix								Single Pole/Common Bus													
BUTTON LOCATION	1	•																					
	2		•																				
	3			•																			
	4				•																		
	5					•																	
	6						•																
	7							•															
	8								•														
	9									•													
	10										•												
	11											•											
	12												•										
		F	E	D	K	J	H	G	J	E	A	K	F	B	L	G	C	M	H	D	N		
		TERMINAL LOCATION																					



### SERIES 88

#### Sealed, Flange Mounted


#### FEATURES

- Sealed Keyboard
- Colorful Graphic Overlay
- Audible, Snap-Dome Contact
- User Legendable Styles
- 3,000,000 Operations per Button
- Optional Panel Seal Gasket to Protect Your Equipment




#### DIMENSIONS In inches (and millimeters)

##### 5x4 Keyboard

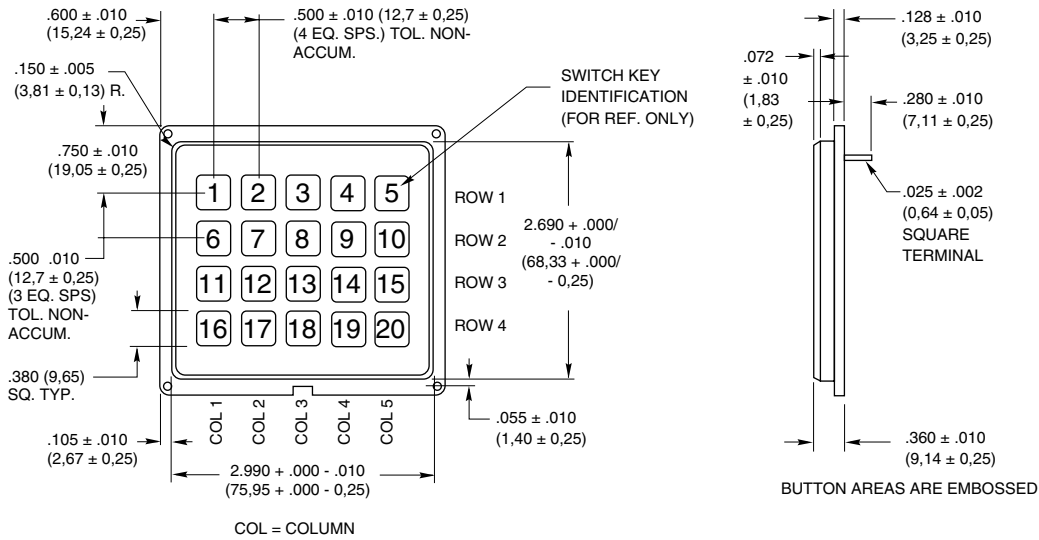

#### Termination In inches (and millimeters)

##### 5x4 Keyboard

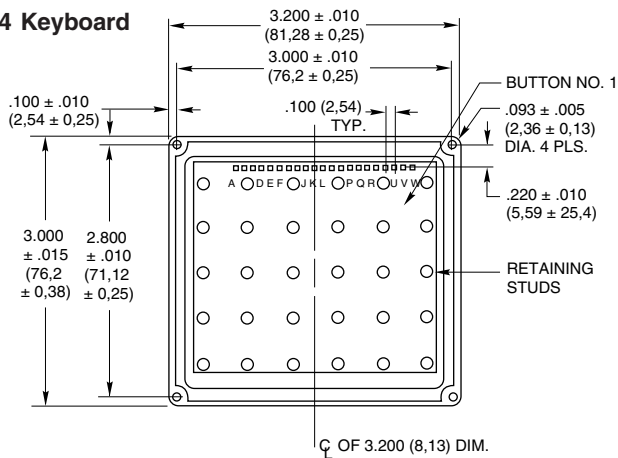

#### Code and Truth Table

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

5x4	CODES	
	Matrix	Single Pole/Common Bus
1	•	•
2	•	•
3	•	•
4	•	•
5	•	•
6	•	•
7	•	•
8	•	•
9	•	•
10	•	•
11	•	•
12	•	•
13	•	•
14	•	•
15	•	•
16	•	•
17	•	•
18	•	•
19	•	•
20	•	•
	P N K G F J L M H	T P M H D U Q L G C V R K F B W S J E A N
	TERMINAL LOCATION	

**SPECIFICATIONS**

**Rating Criteria**

**Rating at 24 Vdc:** 10 milliamps, resistive  
**Contact Resistance:** Compatible with MOS, TTL and DTL (10 ohms maximum)  
**Voltage Breakdown:** 250 Vac between mutually insulated parts  
**Life Expectancy:** 3,000,000 operations per button

**Contact Bounce:** Less than 4 milliseconds at make, 10 milliseconds at break  
**Temperature:** -40°C to +80°C

**Operating Features**

**Button Travel:** 0.015"(0,38 mm) nominal total travel  
**Typical Operating Force:** 350 grams

**Materials and Finishes**

**Housing:** ABS polycarbonate, black  
**Graphic Overlay:** Polyester  
**Contact Dome:** Stainless steel, selectively gold-plated  
**Terminals:** Phosphor bronze

**STANDARD LEGENDS**

Colorful graphic overlays are polyester with a tough acrylic bond to provide maximum protection against dirt and moisture. Second surface printed, the overlay wipes clean and

continues to look bright and bold throughout the keyboard life. Available through distributors. For instant custom legends, order separate blank keyboards as indicated in the Ordering

Information section and choose one of the clear window overlays below; then order a sheet of legend inserts. Or, if you prefer, order the keyboard custom printed by Grayhill; see Ordering Information.




-143



-152



-172

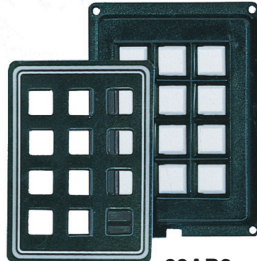

88AB2, 88AC2




-052




-072




-082

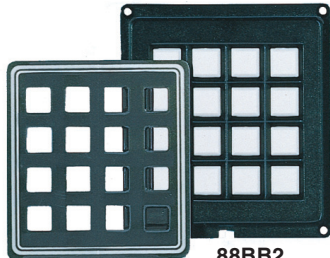


88-101 88BB2, 88BC2

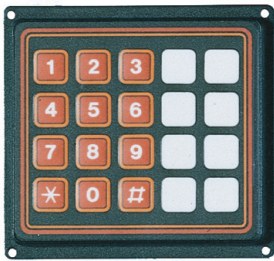

-252

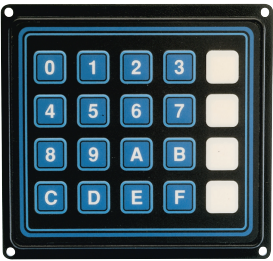

-262

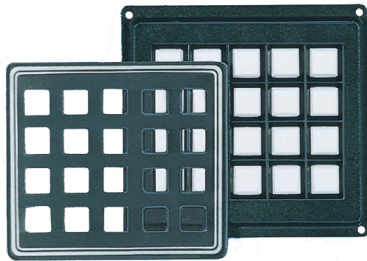

88-001 88JB2, 88JC2

**SEALING OF KEYBOARDS**

The graphic legend is silk-screen printed on the second surface of a clear polyester film, providing maximum legend protection. It withstands high humidity, and it is resistant to scratching, marring, and dulling of the surface caused by fingernails, wiping cloths, and cleaning materials. It has excellent solvent resistance to water, petroleum oil, alcohols and aliphatic hydrocarbons.

detergent solution, soapy water, 30% hydrogen peroxide, wine, beer, whiskey, coffee, cocoa, milk, tomato juice, lemon juice, etc. Hydrocarbons, ketones and freon do not affect the overlay. But, we recommend that you do not subject the keyboard to these chemicals, since they may affect the switch housing, which is ABS plastic. To discuss a particular solvent, contact Grayhill.

keyboard to the equipment panel. Use an optional gasket with the keyboard. There are two types of gaskets: one for mounting the keyboard beneath the panel, and one for mounting it above the equipment panel. See Panel Seal Gaskets.

These common liquids do not attack the overlay: 5% acetic acid, 5% citric acid, 2%

Protect your equipment in outdoor or harsh environmental conditions by sealing the

The contact system is internally sealed by a special adhesive backed sheet that holds the domes in position on the PC board.


Keypads and Keypads

**PANEL SEAL GASKETS**

Weatherproof and waterproof your subpanel and topside mounted keyboards with optional panel seal gaskets.

Subpanel keyboard gasket is .062" (1,57 mm) thick; topside keyboard gasket is .094" (2,39 mm).

Material is cellulose fiber, foam, nitrile rubber. Order gaskets separately from keyboard.

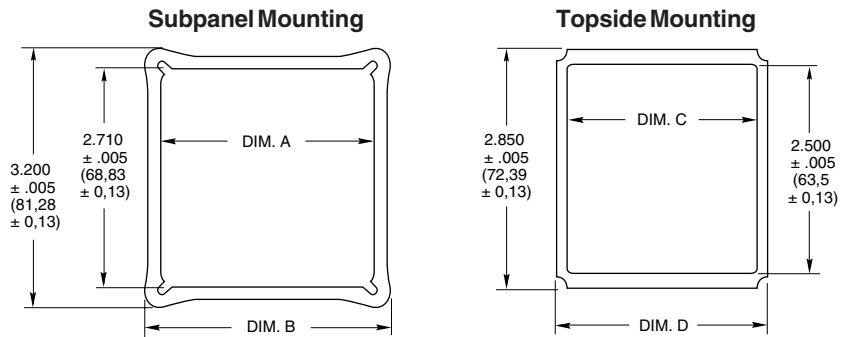

- Subpanel 3x4 **Part No. 88M2001-2**
- Subpanel 4x4 **Part No. 88M2009-2**
- Subpanel 5x4 **Part No. 88M2019-1**
  
- Topside 3x4 **Part No. 88M2012-1**
- Topside 4x4 **Part No. 88M2015-1**
- Topside 5x4 **Part No. 88M2018-1**

Size of Keyboard	Subpanel Mount		Topside Mount	
	Dim. A	Dim. B	Dim. C	Dim. D
3x4	2.010 ± .005 (51,05 ± 0,13)	2.400 ± .005 (60,96 ± 0,13)	1.800 ± .005 (45,72 ± 0,13)	2.040 ± .005 (51,82 ± 0,13)
4x4	2.510 ± .005 (63,75 ± 0,13)	2.900 ± .005 (73,66 ± 0,13)	2.300 ± .005 (58,42 ± 0,13)	2.540 ± .005 (64,52 ± 0,13)
5x4	3.010 ± .005 (76,45 ± 0,13)	3.400 ± .005 (86,36 ± 0,13)	2.800 ± .005 (71,12 ± 0,13)	3.040 ± .005 (77,22 ± 0,13)

**INSTANT CUSTOM LEGENDS**

**Available through Distributors**

Create your own legends using these 3 items: 1) a blank keyboard, 2) the clear window overlays shown on Standard Legend page and 3) a sheet of legend inserts.

**Blank Keyboards**

The numbers below order blank keyboards for the user to legend. For description, refer to the part numbering scheme below. The keyboards and overlays are ordered separately.

- 3x4 Matrix **Part No. 88AB2**
- 3x4 SP/Com Bus **Part No. 88AC2**
- 4x4 Matrix **Part No. 88BB2**
- 4x4 SP/Com Bus **Part No. 88BC2**
- 5x4 Matrix **Part No. 88JB2**
- 5x4 SP/Com Bus **Part No. 88JC2**

**Legend Insert Sheet and Dry Transfers**

Self-adhesive inserts are die-cut to fit the

button. Legends are printed in black on clear film in News Gothic Condensed type style. They include letters A through Z, numbers 0-9, telephone legends, commonly used words, symbols and blanks.

**Part No. 87AC2046**

Use matching dry transfer lettering on blank inserts of legend sheet: upper and lower case letters, 0-9, and common symbols.

- Small Print **Part No. 87-DT-2096-088**
- Medium Print **Part No. 87-DT-2096-125**
- Large Print **Part No. 87-DT-2096-187**

**Clear Window Overlays**

Order separately from keyboards. See also ordering information.


- 3x4 Overlay **Part No. 88-101**
- 4x4 Overlay **Part No. 88-001**
- 5x4 Overlay **Part No. 88-201**

**PRINTED LEGENDS**

**Not available through Distributors.** For medium volume applications, or where legends cannot be produced by the self legend method, you can order epoxy ink printed legends. Virtually anything which can be photographed can be printed. Grayhill will print your legend and then add the clear window overlay.

Type I.D. No.	Simulated Style & Size	Character & Line Limitations *
4GH088	ABCDEFGH	END DATA
1GH125	ABCDE	LAD
3GH187	ABCD	ON
2GH250	ABC	15

**ORDERING INFORMATION**

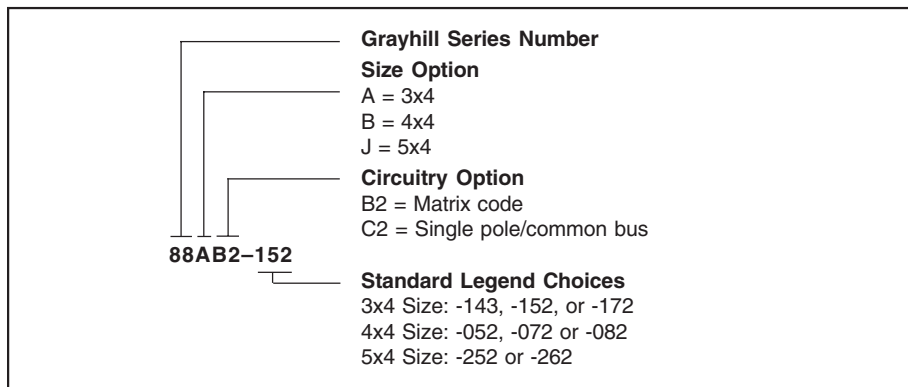


**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

**SERIES 37F**  
Keypads


**FEATURES**

- Fully Sealed
- Virtually Indestructible
- Vandal Resistant
- Indoor and Outdoor Use

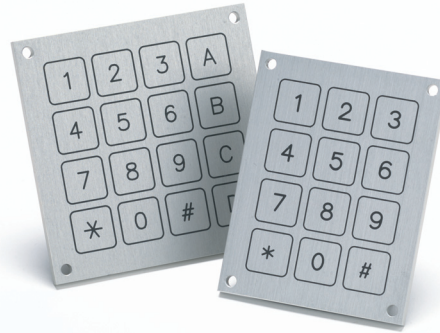


**DIMENSIONS** In inches (and millimeters)


**3x4 Keypad**

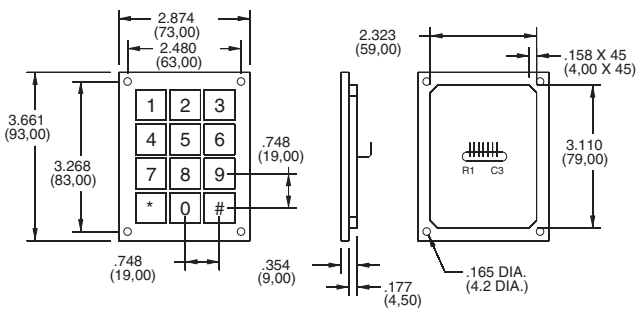


**FRONT MOUNT OPT- #1**

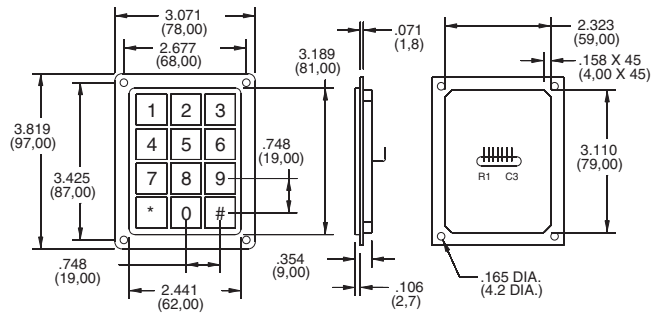

**REAR MOUNT OPT- #3**

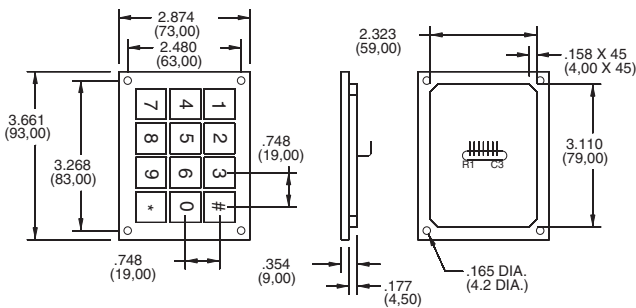

**FRONT MOUNT OPT- #2**

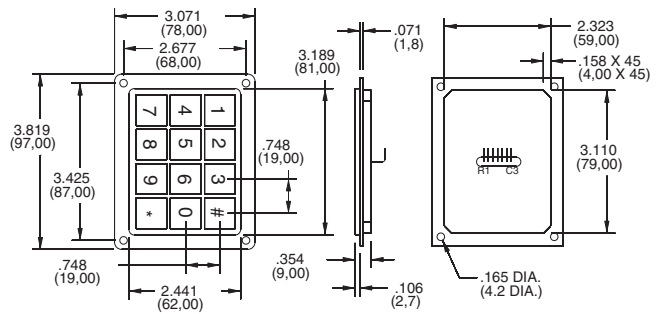

**REAR MOUNT OPT- #4**



## SPECIFICATIONS

### Rating Criteria

**Rated Voltage:** 0 – 24V AC/DC

**Rated Current:** 0 – 2 Amps.

**Resistance “ON”:** <10 Ohms.

**Resistance “OFF”:** >5 megohms

**Switch Capacitance:** 25pF

**Switch Functioning:** One Shot

**Activation Force:** 3-5N Typ.

**Operating Temperature:** -40°C to 85°C  
(40° to 125°C upon requested)


**Lifecycle:** >50 million

**EMI or RFI Effect:** None

**Housing Material:** Aluminium

**Protection System:** IP68  
according to IEC 529.

## ORDERING INFORMATION

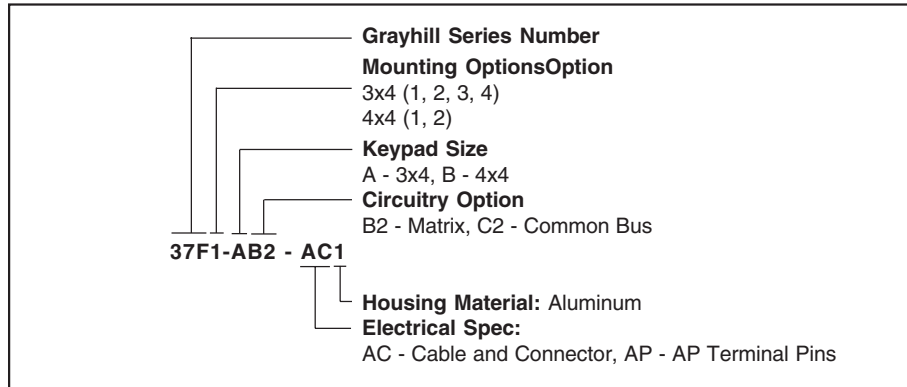



## SERIES 82 Lightable

### FEATURES

- $11/16$ " Between Button Centers
- Long, Stroke, Wiping Contact
- Lightable Modules
- Choice of 5 Circuitries with Unlighted Modules
- User Legenable



Lightable Modules



Unlighted Modules

### MOUNTING

Build a custom keyboard with identical button distances no matter how you stack them. Designed to plug into any printed circuit board from  $1/16$ " to  $1/8$ " thick, modules stack in any configuration, maintaining  $11/16$ " button centers.

For Lightable Modules which will be continuously lit, mixing vertically mounted modules with

horizontally mounted modules is not recommended; the orientation of the rectangular, lighted area will differ. See drawings.

See Figure 1 Panel Cutout Diagram for 6 button module mounting dimensions. Refer to drawings for other module dimensions.

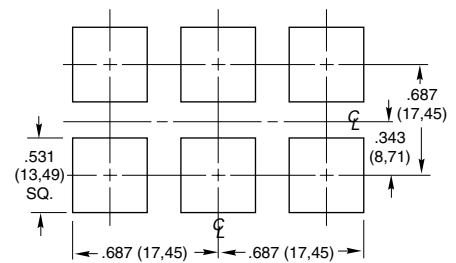


Figure 1 Panel Mount Cutout Diagram

### LIGHTABLE MODULES


#### Light Source and Lamp Mounting

Each lightable button fits over a T-1 size LED or incandescent lamp mounted to PC board (see Figure 2-2a). The height of the lamp should not exceed  $.250$ " ( $6.35$  mm) from the surface of the board. (Note: Grayhill does not manufacture or sell LED's or incandescent lamps).

For easy light replacement, mount the lamp or LED through the back or solder side of the board (see Figure 2). This method of mounting allows you to replace light source without removing the keyboard module. The other method of light mounting (Figure 2a) requires

desoldering the keyboard module then desoldering the lamp when it's necessary to replace the light source.

The chart below lists ratings for a size T-1 incandescent lamp. To extend the life of the lamp, use an alternating current and reduced voltage. The chart also lists maximum temperatures the module can withstand. For higher temperatures, Grayhill offers modules made of special plastics, polyester switch housing and polycarbonate internal button. All measurements were determined under laboratory conditions. (Mounted model continuously lit in temperature controlled oven with continuously circulating air for 24 hours.)

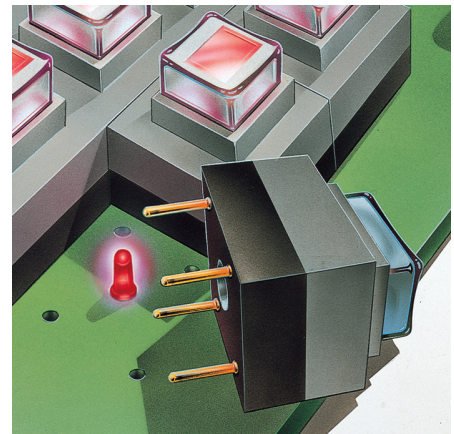

#### Incandescent Lamp—Size T-1

Lamp Number*	Intensity and Mean Spherical Candle Power	Volts	Service Life in Hours	Current Per Lamp	Maximum Allowable Ambient Temperature	Max, Temp. for Modules With Special Plastics
715	Bright .15 MSCP	5 V	40,000	115 mA	130°F	200°F
680	Moderate .03 MSCP	5 V	100,000	60 mA	150°F	220°F

\*Lamps not available from Grayhill.

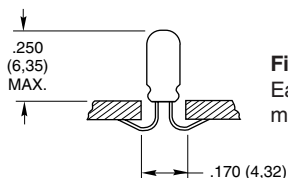


Figure 2  
Easy replacement  
mounting





Figure 2a  
Mounted from  
component side



Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)

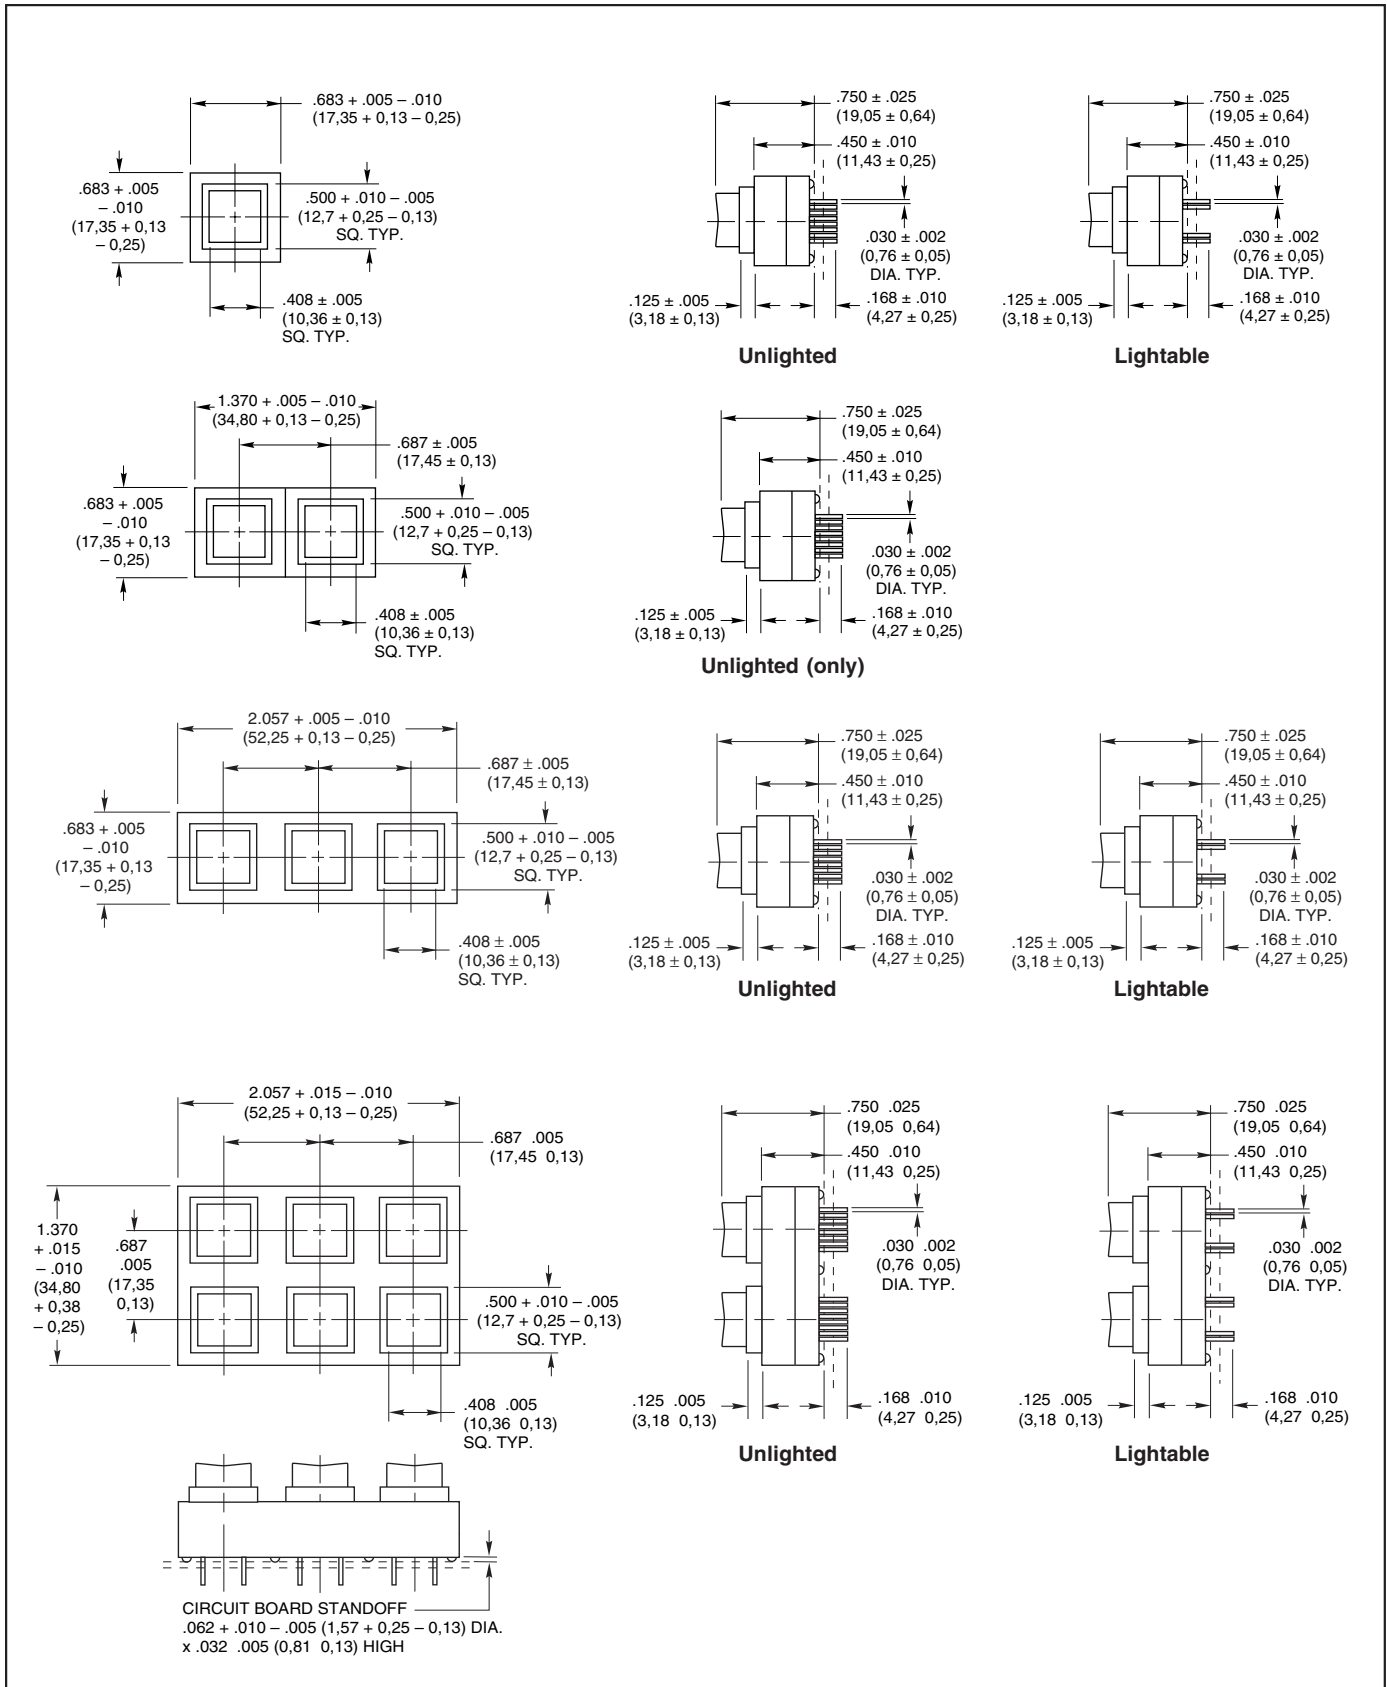

Keyboards and Keypads


**TERMINAL ARRANGEMENTS**

For continuously lit keyboards, mixing horizontally and vertically mounted modules is not recommended. See lamp mounting on page D-33.


Letters shown in front views are for identification only; product is marked on back as shown. Pin locations correspond to circuit diagrams.

**Vertical Mount**



Button Identification





Rear Views and Pin Locations





Unlighted Lightable




Unlighted (only)

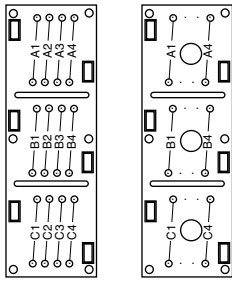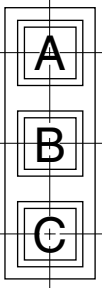

Unlighted Lightable

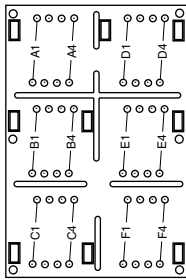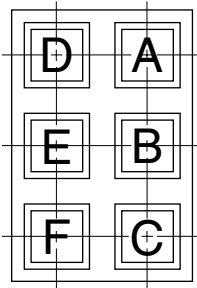


Unlighted

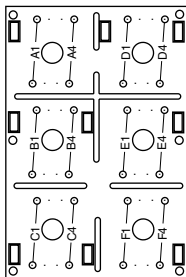


Lightable

**Horizontal Mount**



Button Identification





Rear Views and Pin Locations

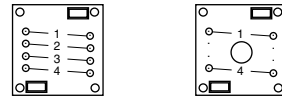


Unlighted Lightable





Unlighted (only)

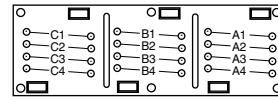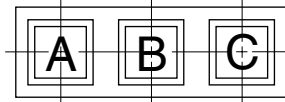


Unlighted

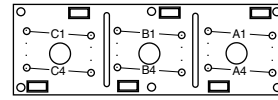




Lightable

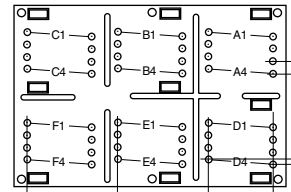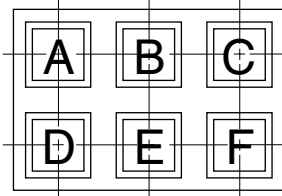

Unlighted

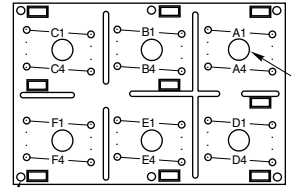

Lightable

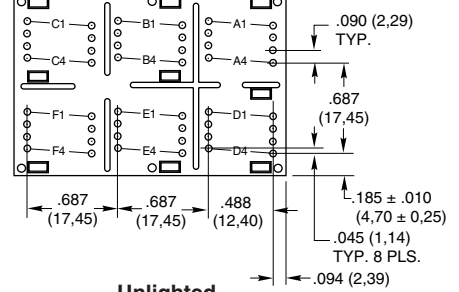

### ORIENTATION OF MODULES

A module, depending on circuitry, may not be symmetrical. Rotating it 180° will result in a different pin location. Please note the button

identification, the pin location for the desired circuitry, and the direction of mounting. It is important to use this information when designing a printed circuit board layout and when


communicating with Grayhill. See Ordering Information—Special Keyboard Modules on the next page.

### CIRCUIT DIAGRAMS

The bottom view of the line drawings shows number (A1, A2, etc.) next to the pin locations of each switch section. These pin numbers are directly related to the circuit diagrams. For example, if the switch under Button A of a standard module were SPST, the pins would be located at the "#2" Position. If the module were a lightable one with SPST circuitry, the pins would be located at the "#1" Position. If other locations are desired, specify them.

The coded circuits shown are suggested possibilities and each button may carry a different circuit. Location of active pins on each button may be varied to conform with layout of the printed circuit board. Up to a 7-bit code is possible under each button.

Combinations of simple circuitries are also possible as shown in the sample diagrams.

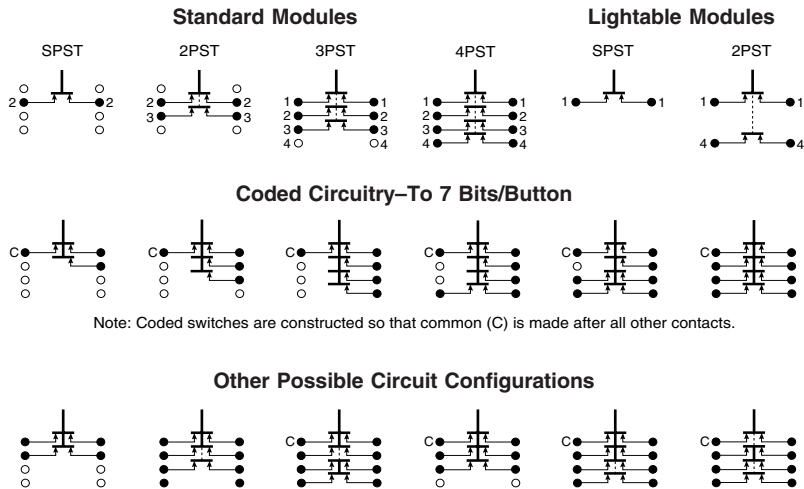


### PRINTED CIRCUIT BOARD LAYOUT

This layout provides the horizontal printed circuit board layout as viewed from the top side of the PC board. Turning end to end will result in a different pin location. However, the dimensional relationship will remain the same.

#### Lightable Modules—per drawing below.

This drawing indicates the layout to be used for a 6 button module with light sources mounted two ways: the lamps for the upper 3 buttons are mounted from the top or component side of the board, and the lamps for the lower 3 buttons are mounted by the easy replacement method. (See also Light Source and Lamp Mounting.) Light sources, when mounted from the top side of the board, must be mounted before the keyboard modules; when mounted, lamp should extend no more than .250" (6,35 mm) above the board.

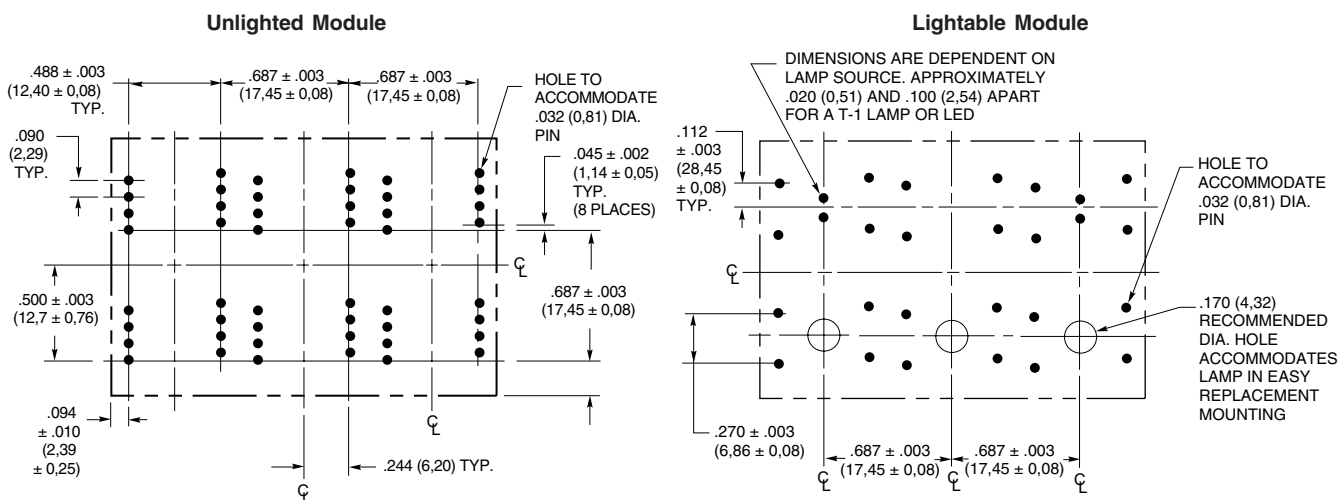

### SPECIFICATIONS

#### Rating

**Rating at 5 Vdc:** 100 milliamps  
**Contact Resistance:** 25 milliohms or less on a new switch  
**Voltage Breakdown:** 250 Vac between mutually insulated parts  
**Insulation Resistance:** 1,000 megaohms minimum  
**Life Expectancy:** 1,000,000 operations  
**Contact Bounce:** 10 milliseconds or less for the life of the switch  
**Operating Temperature:** -40°C to 80°C

#### Materials and Finishes

**Pin Contact:** Brass, gold plate over nickel plate

**Spring Contact:** Copper alloy, gold plate over nickel plate  
**Housing:** ABS plastic (gray)  
**Base:** PPS plastic (black)  
**Return Spring:** Tinned music wire  
**Other Parts:** (By Module and Legend Style): For unlighted module with molded legends or top surface printed legends. Internal Button is acetal and the Button is ABS plastic (gray).

For unlighted module with sub-surface printed legends or insertable legends, Internal Button is acetal; Internal Cap is ABS plastic (gray); and Clear Cap is polycarbonate plastic. For lightable modules, the Internal Button and the Clear Cap are polycarbonate. The Internal Cap for gray modules is acrylic; for the black modules, the Internal Cap with window is polycarbonate.

For special lightable modules for higher temperatures, internal button cap is polycarbonate and housing is polyester.

#### Operating Features

**Action:** Momentary, wiping contact  
**Button Travel:** 0.130" (3.30 mm) total travel  
**Overtravel:** 0.080" nominal  
**Operating Force:** 8 ± 3 ounces (depends on number of poles.)

#### Soldering Instructions

Series 82 Keyboard Modules have been successfully tested for heat resistance to soldering up to 260°C (500°F) for a maximum of 5 seconds. Careful flux cleaning is required since the switch is not sealed. For applications in excess of these limits or that require vapor spray or immersion cleaning, contact Grayhill.

### STANDARD LEGENDS

#### Telephone Keypad




Two 6-button modules form the keypad. White telephone legend is molded into a gray button. SPST, 2PST, 3PST, and 4PST circuitry available from distributors, see ordering information; order special circuitry from Grayhill.

#### Insertable Legend Styles

Prototypes can look professional with insertable legend modules. Just slip imprinted legend insert through the slot of the clear button cap.

#### Legend Sheet

Available for each module style. Each sheet contains commonly used symbols, terms, alpha characters, and 0-19 in News Gothic Condensed type on polyester film, ready to be cut and inserted. Deadfront legends are invisible until lit.

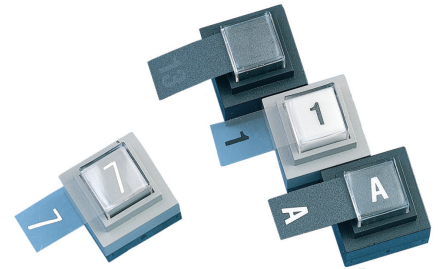

#### Non-Legend, Lighted Modules

Standard lightable module configurations without cap slot for insertable legend.

**White on Clear:** For unlighted gray modules  
**Black on Clear:** For lighted gray modules  
**Translucent White on Black:** For black modules  
**Deadfront on Black:** For black modules

**Part No. 82AC2017-1**  
**Part No. 82AC2050-1**  
**Part No. 82AC2060**

### SPECIAL LEGENDS

#### Molded-In Legends

##### For Unlighted Modules

In addition to standard white legend on gray button, long-wearing, molded-in legends are available in white button with black legend and white legend with red, green or black buttons. Other color combinations are possible.



#### Printed Type styles

The type style chart below illustrates type style and approximate sizes and limits for button cap legends; other sizes are also available. Limitations for legends differ with type size and character. Legends for lightable modules are further limited by the size of the internal button and lighted area. Grayhill's library includes many popular legends. Contact Grayhill for complete information.

#### Special Colors

Besides the standard gray and black housings, you may order white, beige or brown. Button colors may also be specially ordered. For more information, see next page.



#### Printed Legends (2 Styles)

Virtually anything which can be photographed can be printed. Sturdy epoxy ink printing bonds to the surface of the button. Standard printing for the gray unlighted buttons is white; standard printing for the translucent white buttons of the lightable modules is black.

**Top Surface Printing:** Legend is applied directly to top of button. Available on all standard, unlighted modules.

**Sub Surface Printing:** Provides maximum wear for printed surfaces. Available for lighted and unlighted gray modules. Printed internal button cap is protected by a clear outer cap.

Type No. and Typical Height	Sample Style and Typical Sizes	Sub Surface Character and Line Limitations	Top Surface Character and Line Limitations	Lightable Module Character and Line Limitations*
4GH088 .083"	ABCDEFGH	5 Char. 2 Lines TAB INDEX	8 Char. 3 Lines RESEARCH SYSTEMS 12345678	4 Char. 2 Lines STOP 1234
1GH125 .138"	ABCDE	4 Char. 1 Line OPER	4 Char. 2 Lines CODE SEND	3 Char. 1 Line OFF
3GH187 .207"	ABCD	2 Char. 1 Line ON	3 Char. 1 Line OFF	2 Char. 1 Line ON
2GH250 .276"	ABC	2 Char. 1 Line 15	2 Char. 1 Line 15	N/A N/A

Note: Limitations for legends differ with surface to be printed and actual characters. If your application exceeds the approximations in the chart, contact Grayhill for more information.  
 \* For top and sub-surface printed modules.

**ORDERING INFORMATION:**

**Special Legends**

To order non-standard modules, information is required for the areas listed below.

Your special order will be assigned a part number for future identification. This number is sequentially assigned and is non-descriptive.

**1. Type of Module.** Unlighted: 1-, 2-, 3-, or 6-button. Lightable: 1-, 3-, or 6-button.

**2. Mounting Orientation.** Horizontal or vertical.

**3. Circuitry.** Requirements for each button must be listed by its reference letter designation. For example: Button A = SPST, Button B = 4PST, Button C = 3PST, etc. For coded or other available circuitry patterns a descriptive diagram is required for each button.

**4. Button Type (Legend).** Grayhill offers four legend types: molded-in; top surface printed; sub-surface printed; and insertable. Unlighted modules are available in all types. Lightable modules are available in all types but molded-in legends.

**5. Button Color.** Standard color for molded-in legend modules is gray button with white legend. Special button colors available are white with black legends, red, green or black buttons with white legends. Additional custom colors are available by special order.

Lightable gray modules have a standard translucent white button with black legend. Special button color includes translucent red, amber, yellow, blue and green. Lightable black modules have a special opaque black button; discuss special colors with Grayhill.

Colors can be intermixed, ie. buttons A-E gray; and F, white.

**6. Housing Color.** Base in black. Upper housing is black for lightable legends and gray for all other module styles. Other stock colors available include white, beige and brown.

**7. Legends.** List legend requirement for each button (Button A legend, "10", is type style 4GH088. Button B, "ON", is type style 1GH125, etc.). For legend information, see page D-37.

**Price:** Contact Grayhill

**ORDERING INFORMATION: STANDARD MODULES**

Type of Module	Description	Part No.
Top Half of Telephone Legend (Molded-in)	6 Buttons, SPST	82-601-85
	6 Buttons, 2PST	82-601-86
	6 Buttons, 3PST	82-601-87
	6 Buttons, 4PST	82-601-88
Bottom of Telephone Legend (Molded-in)	6 Buttons, SPST	82-601-89
	6 Buttons, 2PST	82-601-90
	6 Buttons, 3PST	82-601-91
	6 Buttons, 4PST	82-601-92
Unlighted Gray Modules For Legend Inserts	1 Button, SPST	82-101-71
	1 Button, 4PST	82-101-74
	2 Buttons, SPST	82-201-41
	2 Buttons, 4PST	82-201-44
	3 Buttons, SPST	82-301-61
	3 Buttons, 4PST	82-301-64
	6 Buttons, SPST	82-601-81
	6 Buttons, 4PST	82-601-84
Lightable Gray Modules Non-Legend	1 Button, SPST	82-150-17
	1 Button, 2PST	82-150-15
	3 Buttons, SPST	82-350-10
	3 Buttons, 2PST	82-350-8
	6 Buttons, SPST	82-650-10
	6 Buttons, 2PST	82-650-8
Lightable Gray Modules For Legend Inserts	1 Button, SPST	82-150-38
	1 Button, 2PST	82-150-16
	3 Buttons, SPST	82-350-12
	3 Buttons, 2PST	82-350-9
	6 Buttons, SPST	82-650-19
	6 Buttons, 2PST	82-650-9
Lightable Black Modules For Legend Inserts	1 Button, SPST	82-150-211
	1 Button, 2PST	82-150-213
	3 Buttons, SPST	82-350-41
	3 Buttons, 2PST	82-350-43
	6 Buttons, SPST	82-650-71
	6 Buttons, 2PST	82-650-73
Legend Sheets	White: For Unlighted Gray Black: For Lightable Gray Deadfront: For Lightable Black	82AC2017-1 82AC2050-1 82AC2060


**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Keyboards and Keypads

## SERIES 87 Low Profile

### FEATURES

- 1, 2, 3, 4, 5 and 6 Button Individual Keyswitches
- 12 and 16 Button Keypads
- Maintain 1/2" Button Centers, no Matter How You Mount Modules or What Combination You Use
- Up to 3,000,000 Operations per Button
- Low Profile Design

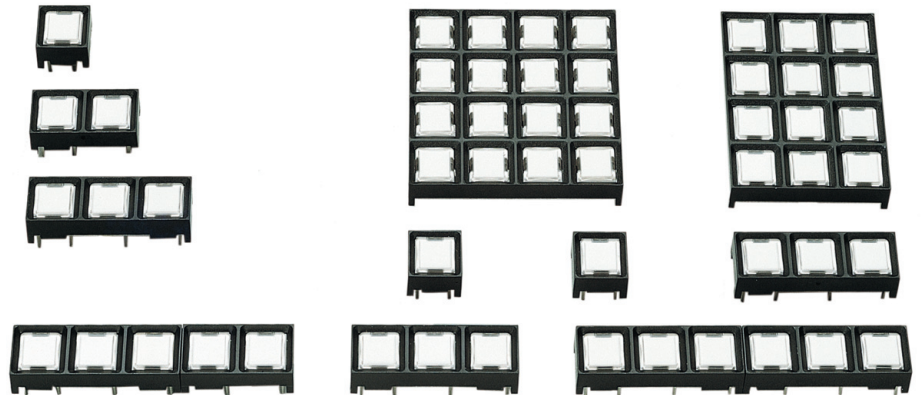

### Legends For Any Need


Design Keyboards and Individual Keyswitches to Virtually any Configuration Without Costly Tooling.

**Prototypes and small quantities:** create your own with economical, insertable legend style modules.

**Production quantities:** choose either custom printing or permanent molded-in legends.


### Snap Dome Contact System Hear and feel button actuation

You're assured of reliable button actuation with the metal snap-dome under each Series 87 button. When actuated, the dome changes shape, providing audible and tactile feedback to the operator.

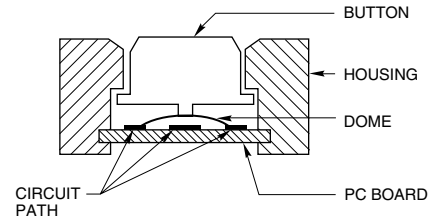


### DIMENSIONS In inches (and millimeters)

#### One Button Module

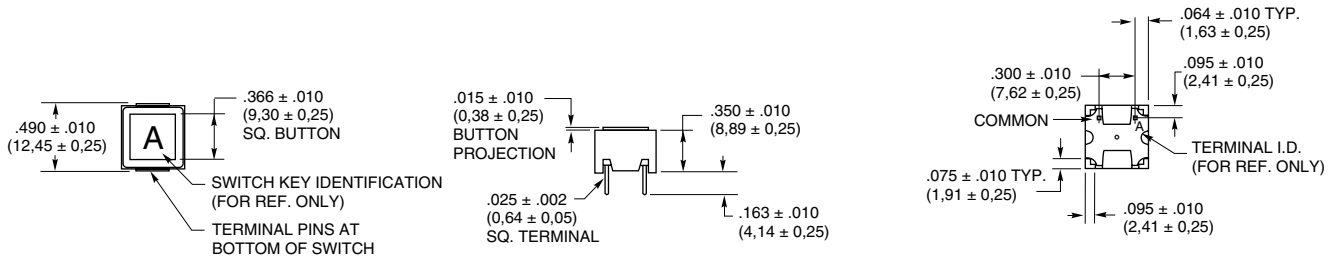


#### Two Button Module

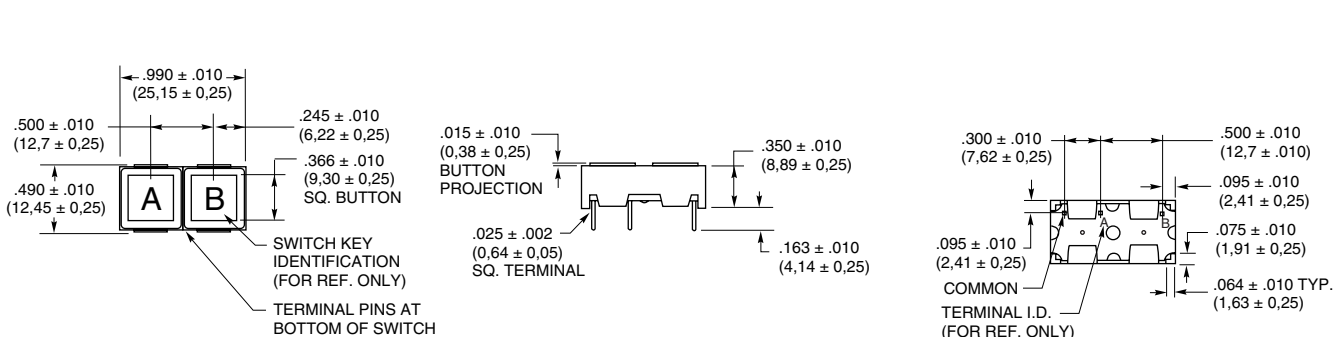


**DIMENSIONS** In inches (and millimeters)


**Three Button Module**

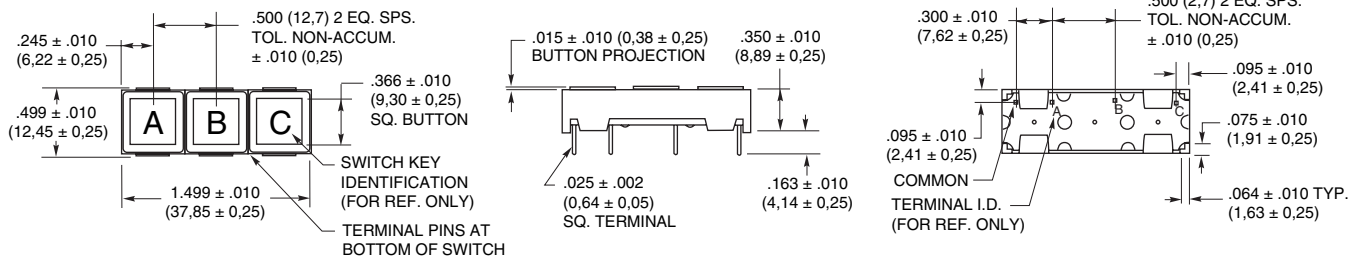


**Four Button Module**

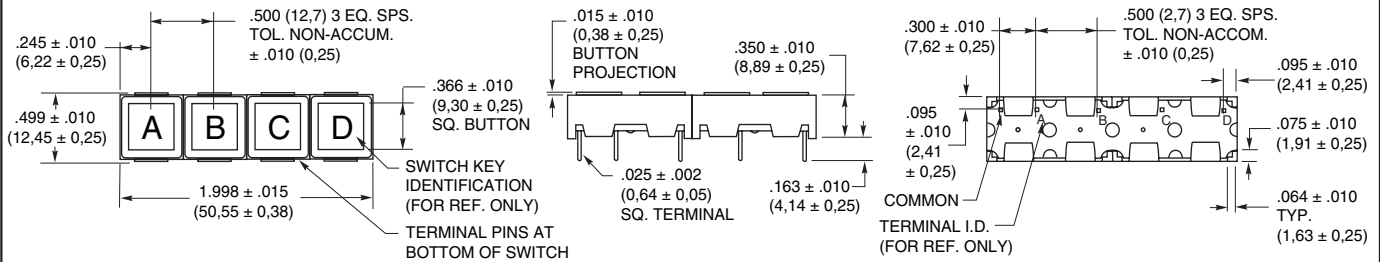

**Five Button Module**

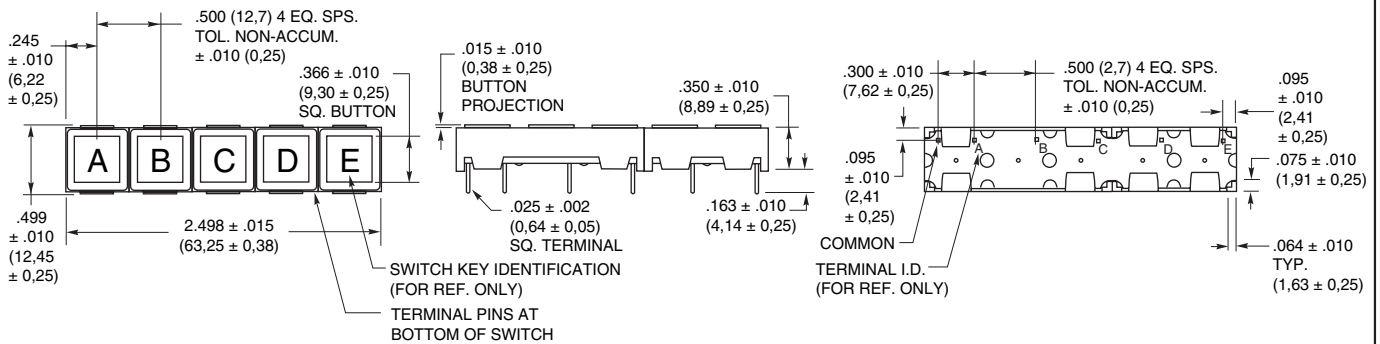


**Six Button Module**

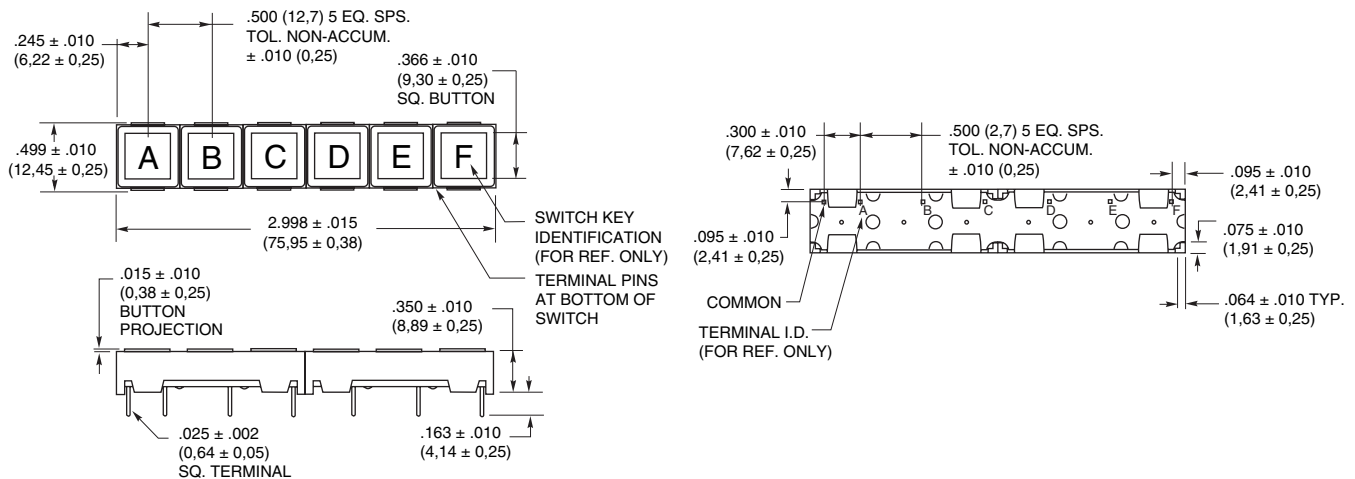





**DIMENSIONS** In inches (and millimeters)

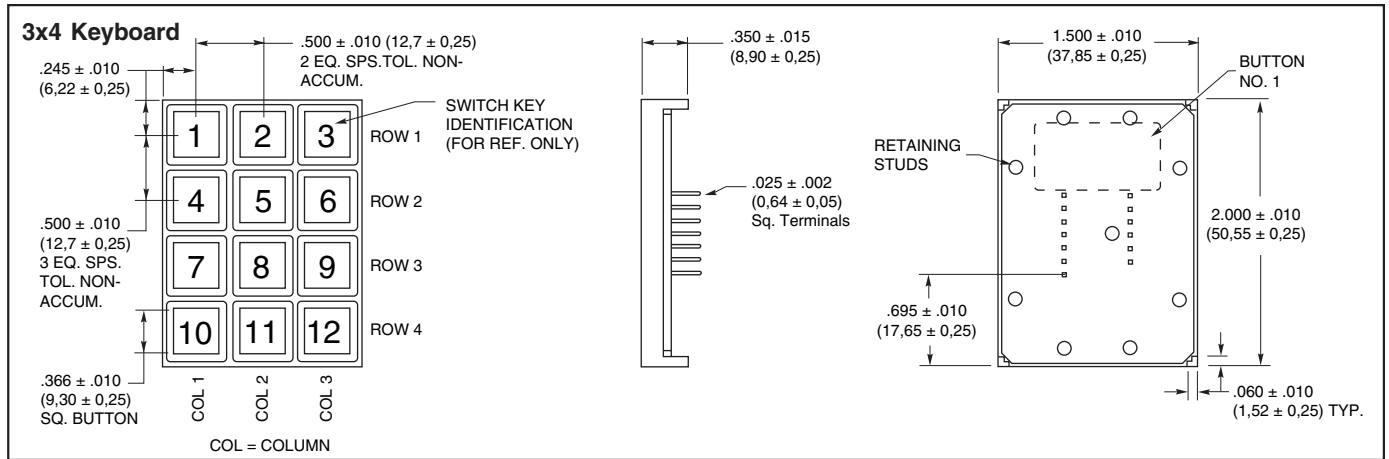


**Termination** In inches (and millimeters)

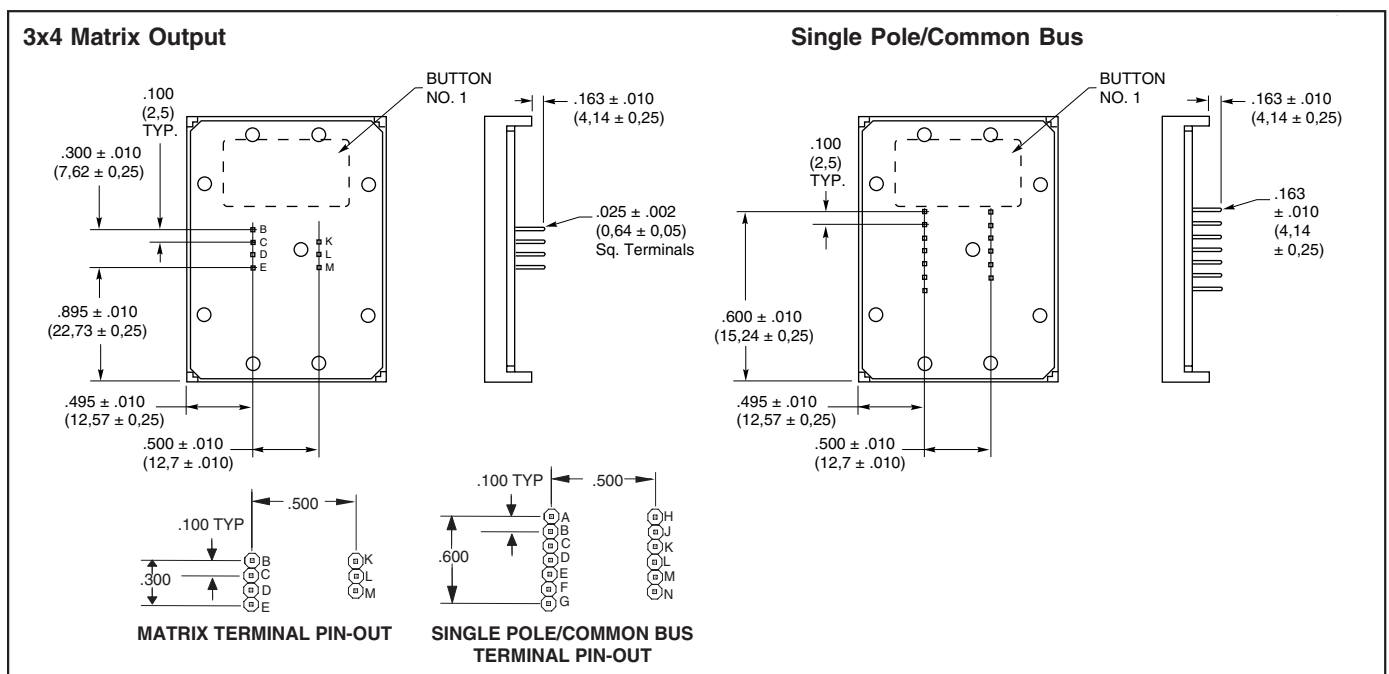

**DIMENSIONS** In inches (and millimeters)

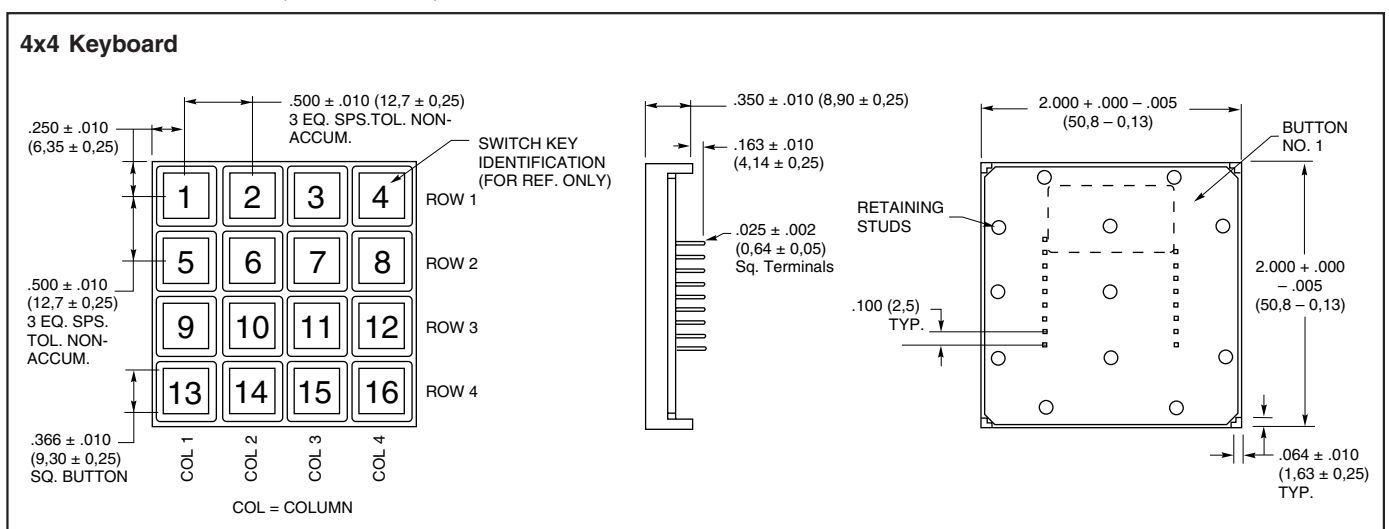

**Termination** In inches (and millimeters)

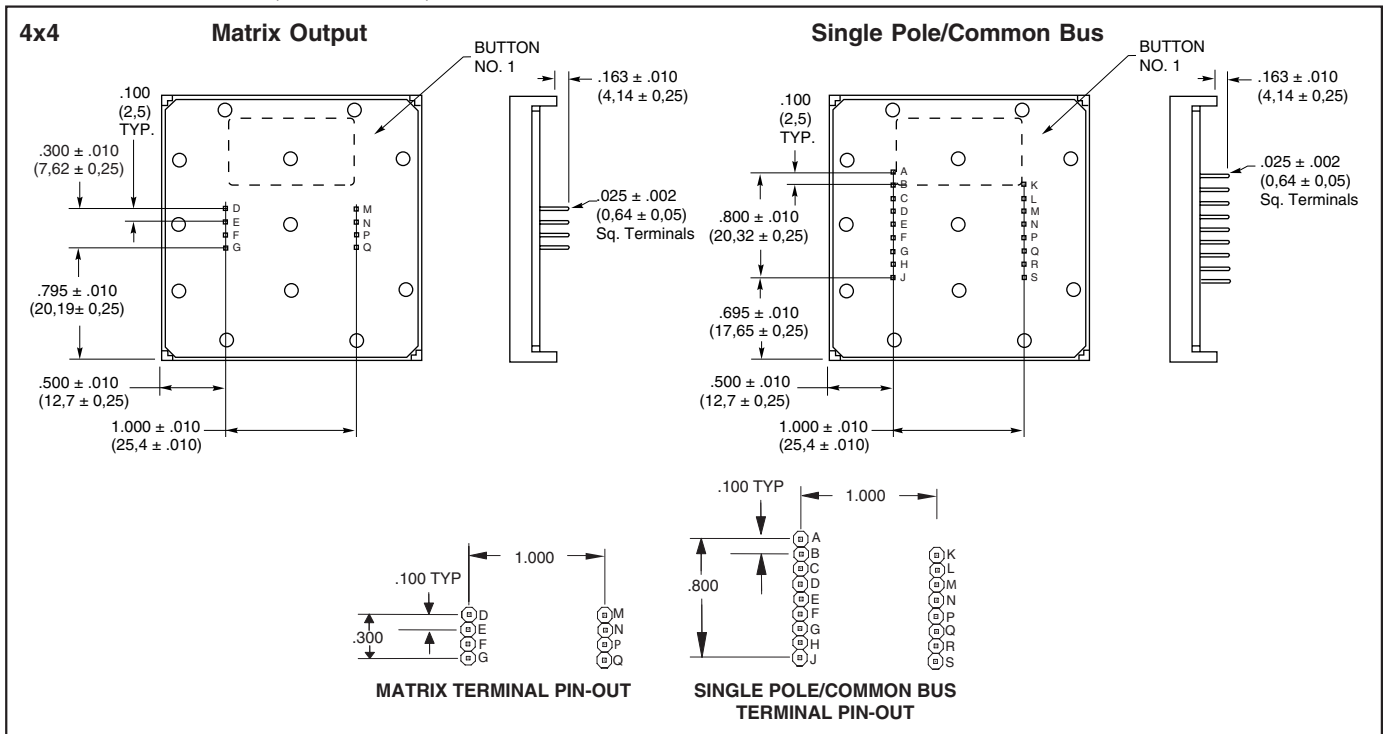


Keyboards and Keypads

**CIRCUITRY, CODE AND TRUTH TABLES**

**Circuitry for Module Strips**

The one-button thru six-button modules have single pole/common bus circuitry as shown in the circuit diagram. The common is located under button A; it is not marked on the actual product.

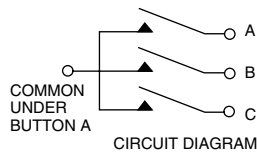

**Code and Truth Table**

Dots in the chart indicate connected terminals when switch is closed. Terminals are identified on the keyboard.

3x4		CODES																			
		Matrix						Single Pole/Common Bus													
BUTTON LOCATION	1	•	•	•	•	•	•	•	•	•	•	•	•								
	2	•	•	•	•	•	•	•	•	•	•	•	•								
	3	•	•	•	•	•	•	•	•	•	•	•	•								
	4	•	•	•	•	•	•	•	•	•	•	•	•								
	5	•	•	•	•	•	•	•	•	•	•	•	•								
	6	•	•	•	•	•	•	•	•	•	•	•	•								
	7	•	•	•	•	•	•	•	•	•	•	•	•								
	8	•	•	•	•	•	•	•	•	•	•	•	•								
	9	•	•	•	•	•	•	•	•	•	•	•	•								
	10	•	•	•	•	•	•	•	•	•	•	•	•								
	11	•	•	•	•	•	•	•	•	•	•	•	•								
	12	•	•	•	•	•	•	•	•	•	•	•	•								
		K	D	E	B	C	L	M	K	H	A	J	C	B	M	E	F	L	N	G	D
		TERMINAL LOCATION																			

4x4		CODES																									
		Matrix								Single Pole/Common Bus																	
BUTTON LOCATION	1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	7	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	11	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	12	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	14	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	15	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
	16	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
		M	N	G	F	D	E	P	Q	K	N	B	A	L	M	D	C	Q	P	F	G	S	R	E	H	J	
		TERMINAL LOCATION																									

**SPECIFICATIONS**

**Rating**

- Rating at 24 Vdc:** 10 milliamps, resistive
- Contact Resistance:** MOS, CMOS, TTL, DTL compatible (10 ohms maximum)
- Voltage Breakdown:** 250 Vac between mutually insulated parts
- Insulation Resistance:** 1,000 megohms min.
- Life Expectancy:** 3,000,000 operations per button
- Contact Bounce:** Less than 4 milliseconds at make, 10 milliseconds at break

**Materials and Finishes**

- Housing:** ABS polycarbonate, black
- Buttons:** ABS plastic, white. Legends are black.
- Snap-On-Cap:** Clear polycarbonate
- Contact Dome:** Stainless steel, selectively gold-plated
- Terminals:** Phosphor bronze

**Operating Features**

- Button Travel:** 0.011" (0,28) nominal, total travel
- Operating Temperature:** -40°C to +80°C
- Typical Operating Force:** 300 grams
- Mounting:** Mounts to 1/32" to 1/8" thick PC board

## STANDARD LEGENDS

### Insertable Style Modules

#### For prototypes and small quantities

Standard insertable legend modules are an economical way to create your own keyboard legend. Just remove the clear button cap, add any legend, and replace the snap-on cap.

### Legend Inserts

#### For insertable legend modules

Give your keyboard modules the appearance of being printed without the cost. Self-adhesive, printed legend inserts are die cut to fit the buttons. Legend sheet includes commonly used symbols, terms, alpha characters A-Z, and numeric characters 0-99 in News Gothic Condensed typestyle, printed in black on clear backing. Legend sheets also include blank inserts for dry transfer lettering.

87 Series Legend Sheet **Part No. 87AC2046**

### Dry Transfer Legends

#### For additional legend inserts

Sheets include A thru Z in upper and lower case, the numeric characters 0 thru 9, as well as commonly used symbols. The typestyle and size are similar to the chart for printed legends shown below.

Small Print **Part No. 87-DT-2096-088**  
 Medium Print **Part No. 87-DT-2096-125**  
 Large Print **Part No. 87-DT-2096-187**

## SPECIAL LEGENDS

### Printed Legends

#### For medium volume or short runs

Virtually any character, symbol or pattern which can be photographed can be printed on the button. Grayhill uses epoxy ink which bonds to the surface of the button.

The legend can be printed on either of two

surfaces: the top surface of a one-piece button, or the internal surface on the snap-on cap style for maximum wear.

The typestyle chart shows the style and the approximate limitations of Grayhill's standard type. However, limitations differ with the surface to be printed and the actual characters to be used. If your legend exceeds the chart limits, contact Grayhill for more information. Unless specified, black legends are printed on white buttons.

**Additional Ink Color:** White ink is stocked for use on dark colored buttons.

**Additional Button Colors:** For a molding charge, we can provide buttons from other colors which we may have in stock, such as black, red, green, blue, or yellow. Non-stock button/ink colors may require minimum material purchase. To order, or to check currently stocked colors, contact Grayhill.

Type No. and Typical Height	Sample Style and Typical Sizes	Sub Surface Character and Line Limitations	Top Surface Character and Line Limitations
4GH088 .083"	ABCDEFGH	4 Characters 2 Lines 	4 Characters 2 Lines 
1GH125 .138"	ABCDE	3 Characters 1 Line 	3 Characters 1 Line 
3GH187 .207"	ABCD	2 Characters 1 Line 	2 Characters 1 Line 
2GH250 .276"	ABC	N/A	2 Characters 1 Line 

### Molded-in Legends

#### For high volume production

For legends that will stand up to abuse and constant wear for the life of your keyboard, use molded-in legends. The two-shot molding process molds the legend and button together. Your special legend can be made from existing Grayhill molds or we can tool special ones.

Buttons are available with black legends molded in white or other light backgrounds, or with white legends molded into dark backgrounds. See Printed Buttons, Additional Button Colors. To order, contact Grayhill.

## ORDERING INFORMATION

Type of Module or Legend	Part Number	Special Legends
1 Button	87CC3-201	
2 Button	87DC3-201	
3 Button	87EC3-201	
4 Button	87FC3-201	
5 Button	87GC3-201	
6 Button	87HC3-201	
12 Button—Matrix	87AB3-201	
12 Button—SP/Com Bus	87AC3-201	
16 Button—Matrix	87BB3-201	
16 Button—SP/Com Bus	87BC3-201	
Insertable Legend Card	87AC2046	
Dry Transfer—Small	87-DT-2096-088	
Dry Transfer—Medium	87-DT-2096-125	
Dry Transfer—Large	87-DT-2096-187	

**Available from your local Grayhill Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

**SERIES 37F**  
**PIEZO Pushbutton Switches**




**FEATURES**


- Fully Sealed
- Virtually Indestructible
- Vandal Resistant
- Indoor and Outdoor Use



**DIMENSIONS** In inches (and millimeters)

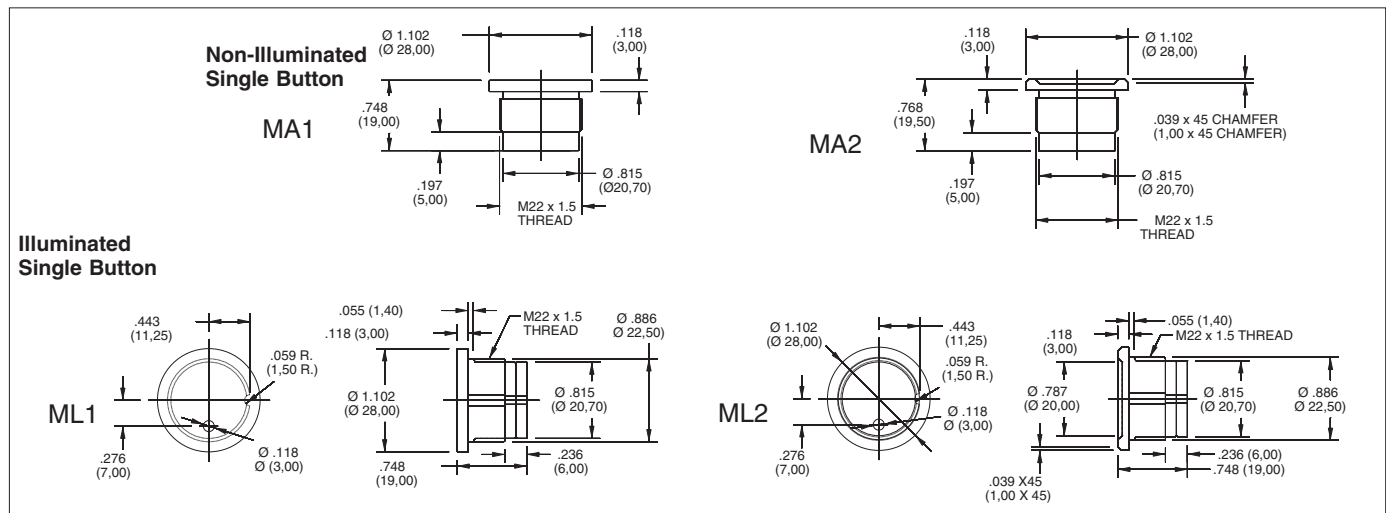


**ORDERING INFORMATION, 37FMA AND 37FML**

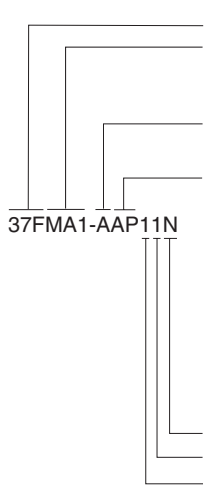

**Grayhill Series**  
**Housing Type**  
 MA1, MA2  
 ML1\*, ML2\*  
**Circuitry**  
 A - N.O., B - N.C.  
**Electrical Specifications**  
 AW - V Max: 24V, I Max: 0.2 A AC/DC, Term: Red wire  
 BW - V Max: 24V, I Max: 0.2 A AC/DC, 150 Transient, Term: Purple wire  
 CW - V Max: 24V, I Max: 1.0 A AC/DC, 150 Transient Term: Orange/White wire  
 EW - V Max: 24V, I Max: 0.2 A AC/DC, Term: Green wire, N.C. Circuitry Option Only  
 AP - V. Max: 24V, I Max 0.2 A AC/DC, Term: PIN  
 CP\*\* - V Max: 24V, I Max: 1.0 A AC/DC, Term: PIN  
**Housing Color:** N - Natural  
**Housing Material:** 1 - Aluminum  
**LED:** 1- Red, 2 - Green, 3 - Yellow, 4 - Red/Green

Wire Colors Change with Electrical Spec Option

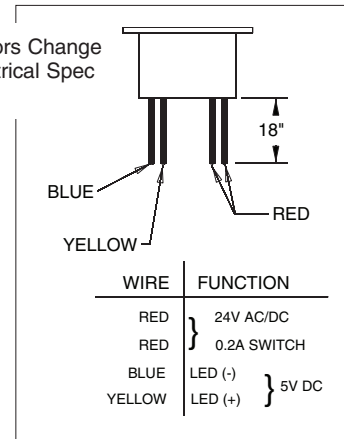


\*LED Option  
 \*\*This Option Not Available with LED Housing ML1 or ML2  
 \*\*\*Only Available with Housing Types ML1 and ML2.

Special colors, S.S. and legends available. Contact Grayhill for more information.

Keyboards and Keypads

**DIMENSIONS** In inches (and millimeters)

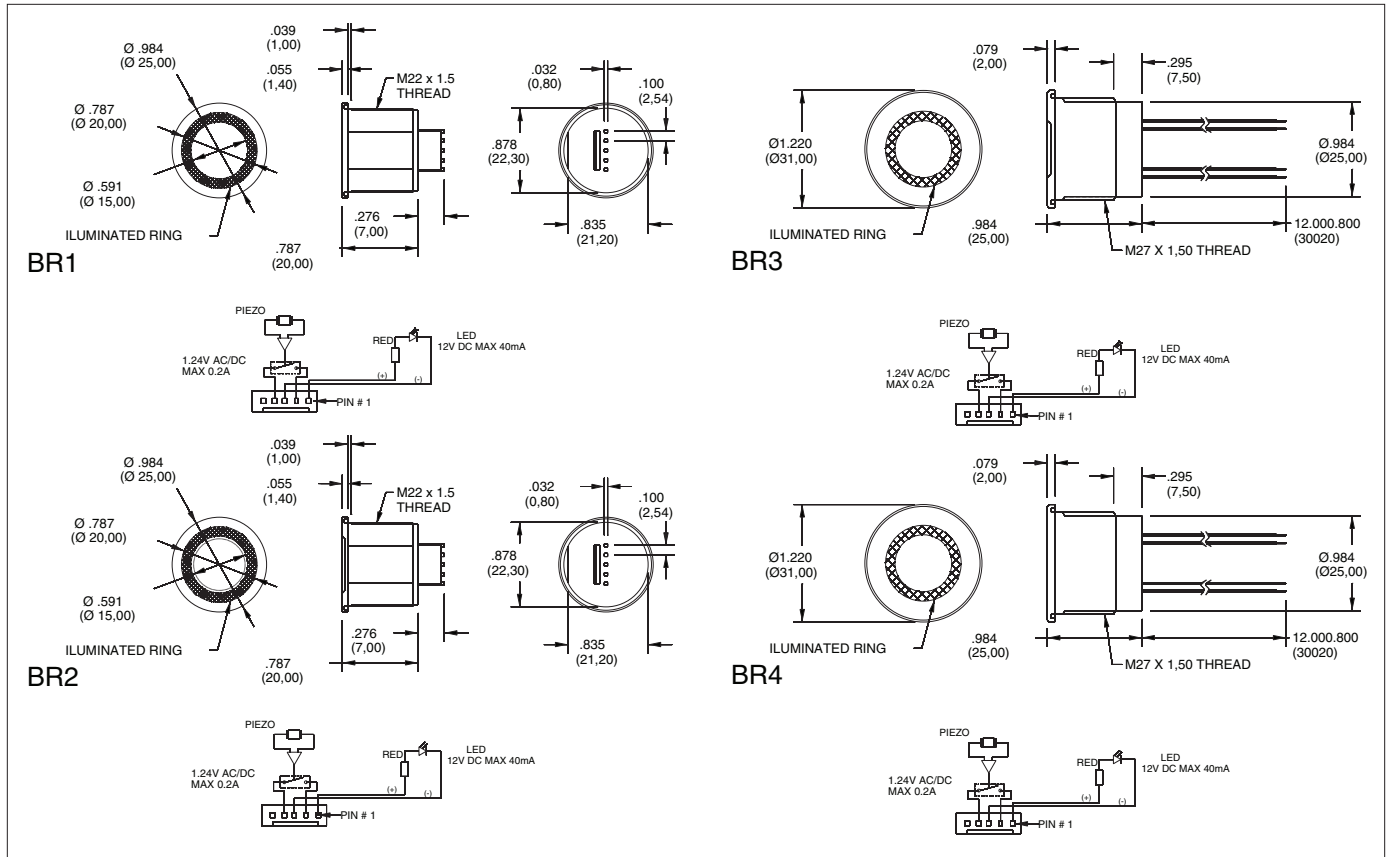

Keyboards and Keypads


**ORDERING INFORMATION, 37FBR**

<p>37FBA1-CAAW1N</p>	<p><b>Grayhill Series</b>  <b>Housing Type</b>          BA1, BA2          BF1, BF2  <b>Switch Type</b>          C - Continuous, T - Toggle  <b>Circuitry</b>          A - N.O., B - N.C.  <b>Electrical Specification</b>          AW: 10-24V, .15A AC/DC,          Wire: 1 - Black, 1 - Brown, 2 - Blue</p> <p><b>Housing Color:</b> N - Natural  <b>Housing Material:</b> 1 - Aluminum</p>	<p>Special colors, S.S. and legends available.          Contact Grayhill for more information.</p>
----------------------	--	--

**Available from your local Grayhill Component Distributor.** For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Special configurations and legends available. Contact Grayhill for more information.

**DIMENSIONS** In inches (and millimeters)

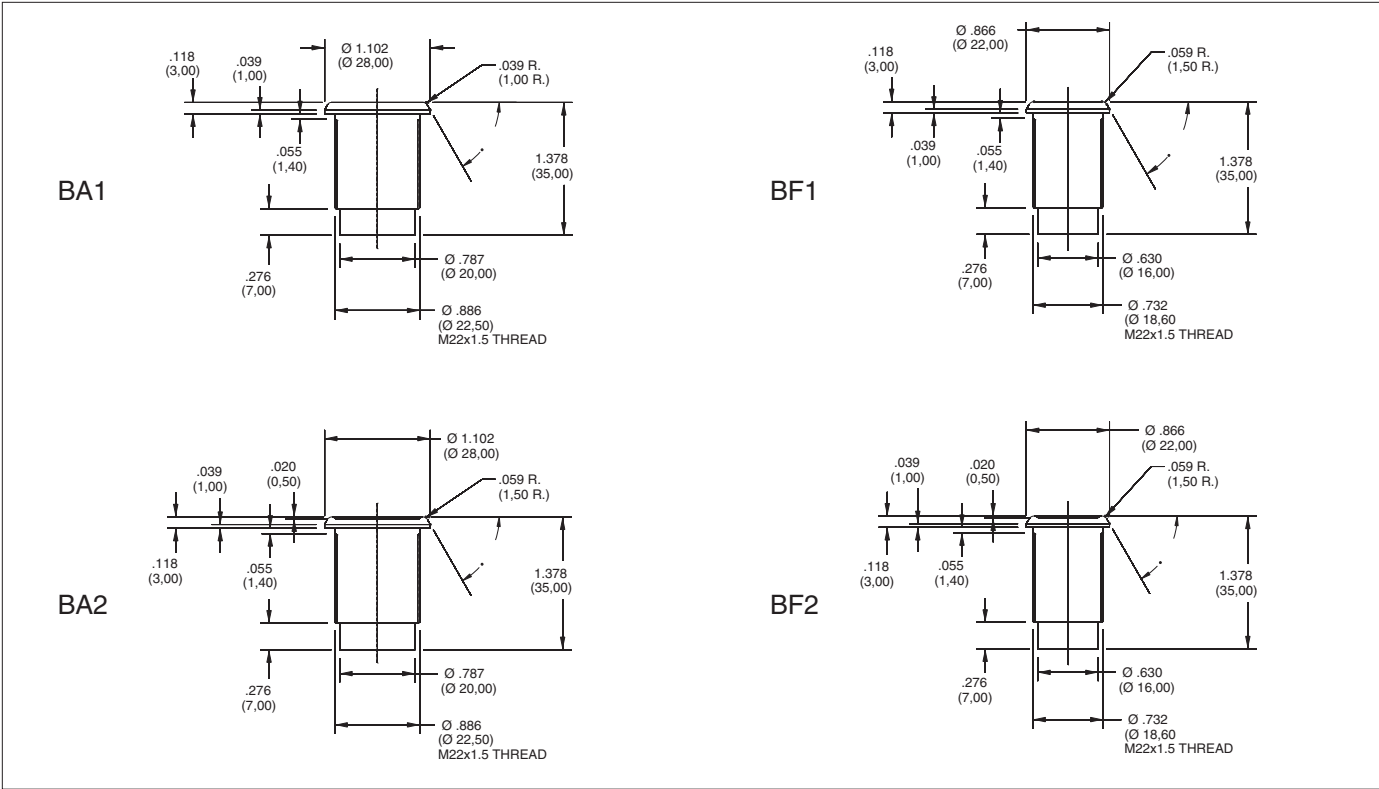

Keypads and Keypads

**SPECIFICATIONS**

**Rated Voltage:** 0-24V AC/DC

**Rate Current:** 0-24 amps.

**Resistance "ON":** <10 Ohms

**Resistance "OFF":** >5 megohms

**Switch Capacitance:** 25pF

**Activation Force:** 3-5N Typ.

**Switch Action:**

**Momentary:** 120 Msec. Pulse type

**Continuous:** Circuit is closed as long as switch is pressed, 30 sec. max.

**Toggle:** Switch changes position at each activation.

**Lifecycle:** >50 million

**Operating Temp:** -40°C- 85°C standard. (-40°C- 125°C upon request)

**Storage Temp:** -40°C- 125°C

**EMI or RFI Effect:** None

**Protection System:** IP68 according to IEC529

**LED:** 5Vdc, 1 max, 10 mA

**Housing Material:** Aluminum

**ORDERING INFORMATION, 37FBR**

37FBA1-CAAW1N

**Grayhill Series**  
**Housing Type**  
 BA1, BA2  
 BF1, BF2  
**Switch Type**  
 C - Continuous, T - Toggle  
**Circuitry**  
 A - N.O., B - N.C.  
**Electrical Specification**  
 AW: 10-24V, .15A AC/DC,  
 Wire: 1 - Black, 1 - Brown, 2 - Blue

**Housing Color:** N - Natural  
**Housing Material:** 1 - Aluminum

Special colors, S.S. and legends available. Contact Grayhill for more information.

Available from your local Grayhill Component Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Grayhill can provide a wide range of custom keypad solutions. Our engineering, project management and manufacturing expertise allows us to provide quick, cost effective custom keypads using the right technology for your individual application need.

**Summary of available technologies:**

**Custom Overlay with Metal Dome and PC Board**

- Dome contact provides audible click and positive tactile feedback
- 3 million cycle per button reliability
- LEDs and backlit versions available
- Custom terminations, bezels and mounting configurations
- EMI shielding available

**Rubber over Metal Dome and PC Board**

- Sealed construction suitable for harsh environments
- Dome contact provides audible click and positive tactile feedback
- Infinite variety of legends, colors, panels sizes and configurations
- 3 million cycle per button reliability
- LEDs and backlit versions available
- Custom terminations, bezels and mounting configurations
- EMI shielding available

**Conductive Rubber with PC Board**

- Economical-conductive rubber provides contact with PC board traces
- Compatible with high resistance logic circuits
- Infinite variety of legends, colors, panels sizes and configurations
- 1 million cycle per button reliability
- LEDs and backlit versions available
- Custom terminations, bezels and mounting configurations
- EMI shielding available



**Custom Conductive Rubber**

**Vandal Resistant Piezo Keypads**

- Suitable for harsh environments, contamination resistant
- Epoxy potted (sealed to IP68) heavy duty machined aluminum or steel construction
- No moving parts, 50 million cycle per button reliability
- Meets MIL-SPEC and CE requirements
- Pulse, momentary or toggle switching available
- Infinite variety of legends, colors, panel sizes and configurations