


SNAP ACTION SWITCH

Features

- Auxiliary Actuators for type VS and VT Micro Switches
- Metal and Plastic material are both available.
- Many options of the button are available.
- Easy to install

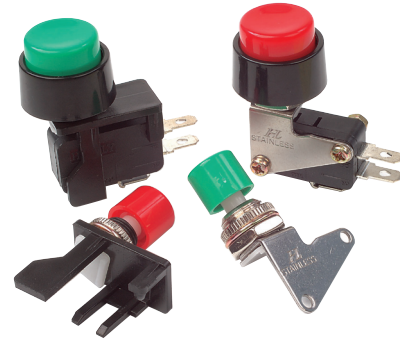

Specifications

Item	Standard
Rating	10A 125VAC /16 250VAC UL1054
Contact Resistance	50mΩ max. (initial)
Dielectric Reseistance	AC 1000V (50/60 Hz for 1minute)
Insulation Resistance	100MΩ min (at 500 VDC)
Electrically Life	100,000 Cycle min
Mechanically Life	1,000,000 Cycle min

Product Selection

VAQ-4 -□-□-□-□

1 2 3 4 5

1.ACTUATOR TYPES

VAQ-4: Nylon(φ 13mm)

VAQ-5: Nylon(φ 19mm)

AB5151: Metal(φ 13mm)

AB6161: Metal(φ 19mm)

2.BUTTON COLOR

R: Red

Y: Yellow

G: Green

3.CURRENT RATING

10: 10A 250VAC VS SERIES(S)

16: 16A 250VAC VT SERIES(C)

__: WITHOUT (S)

4. CONTACT

1: 1 NC & 1NO(S)

2: NC(C)

3: NO(C)

5.TERMINAL

VS SERIES (10A)

A: Solder(C)

B: Screw(C)

C: 250 Quick Connect(C)

C2: 187 Quick Connect(S)

***(S)=Standard (C) =Customization**

VT SERIES(16A)

A: Solder(C)

B: 250 Quick Connect(C)

C2: 187 Quick Connect(C)

HIGHLY

B22

Design, specifications are subject to change without notice.

SNAP ACTION SWITCH

Dimensions



Unit: mm

Item No.

Dimensions



VAQ-4

Assembly VS Series switch

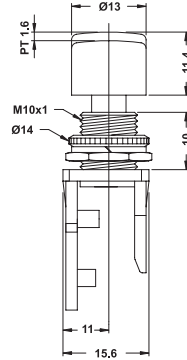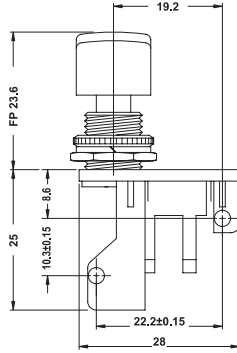



VAQ-5

Assembly VS Series switch





AB5151

Assembly VS Series switch



AB6161

Assembly VS Series switch



HIGHLY

B23

Design, specifications are subject to change without notice.