



# Entertainment Product Solution Guide

Products designed for the most  
demanding applications



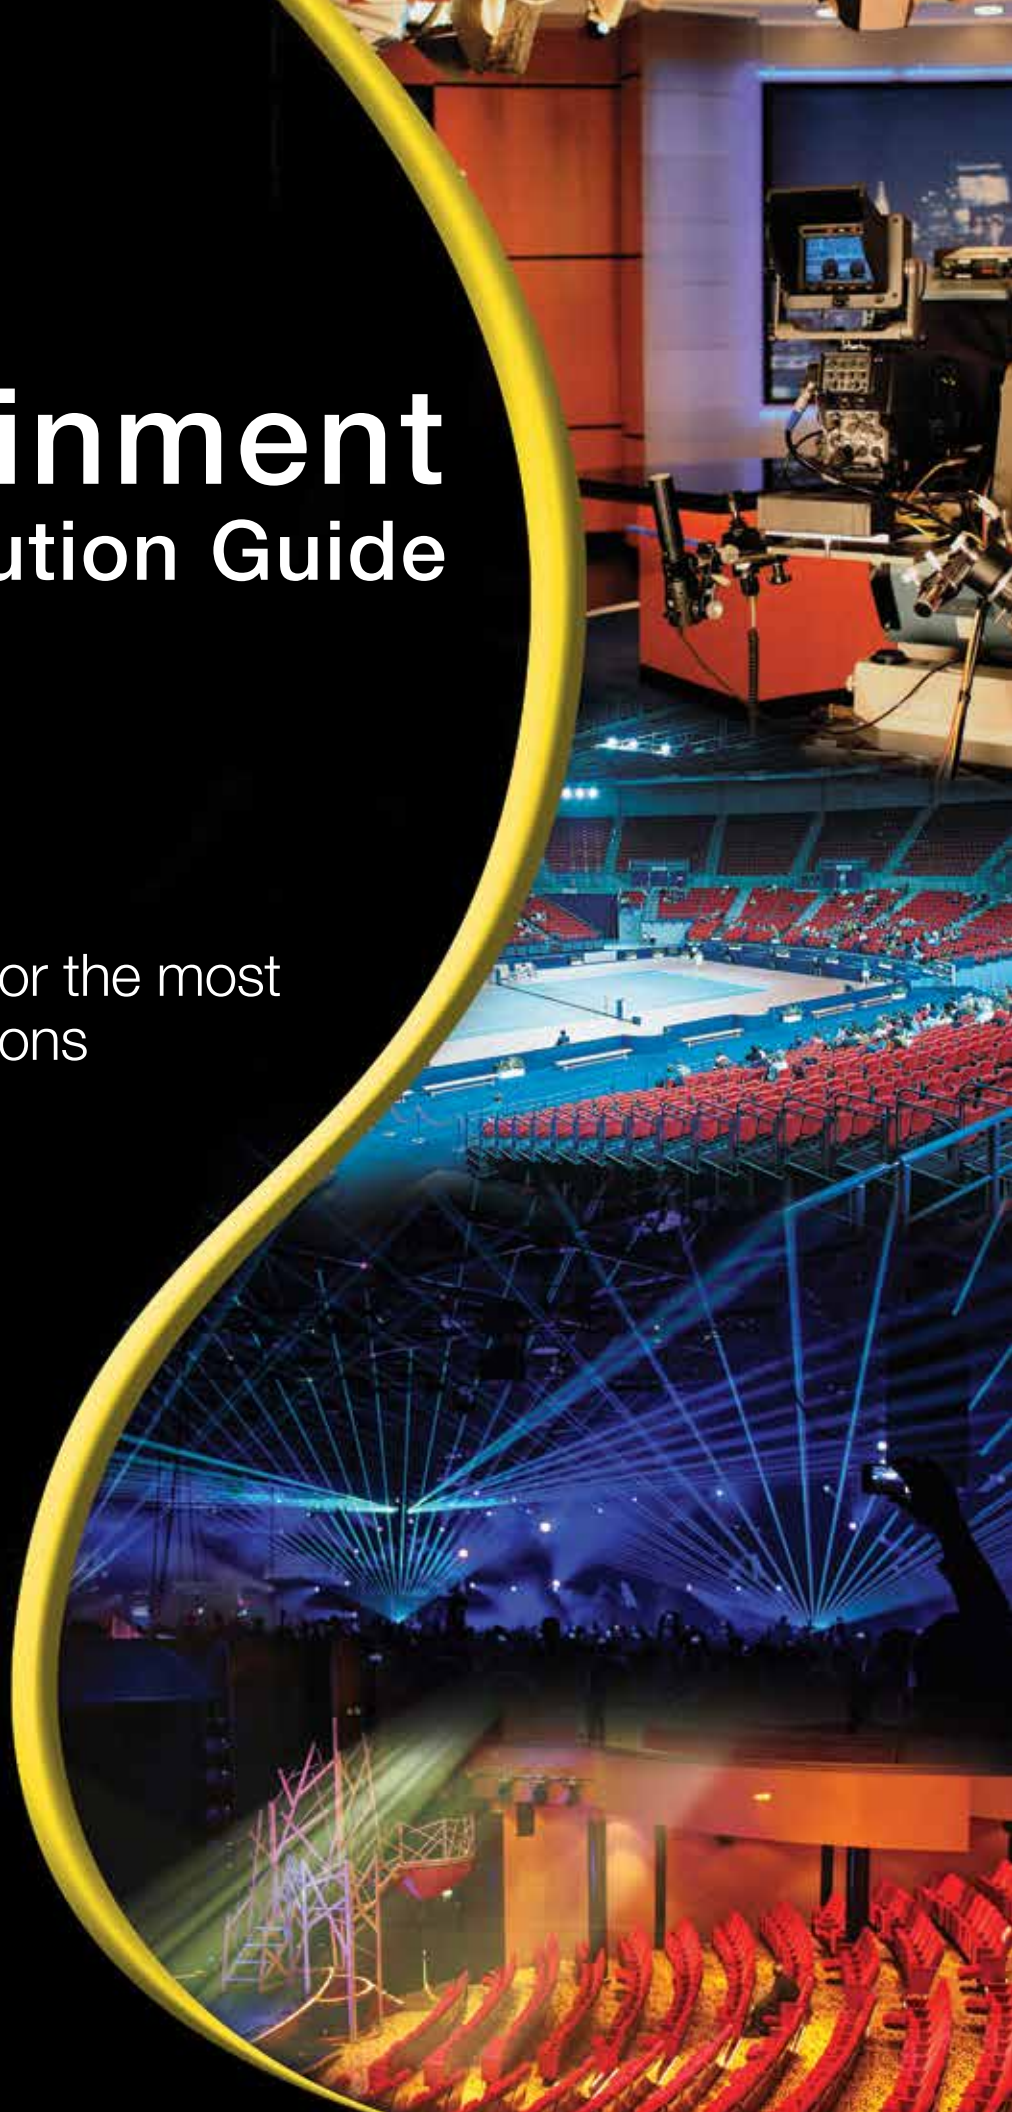

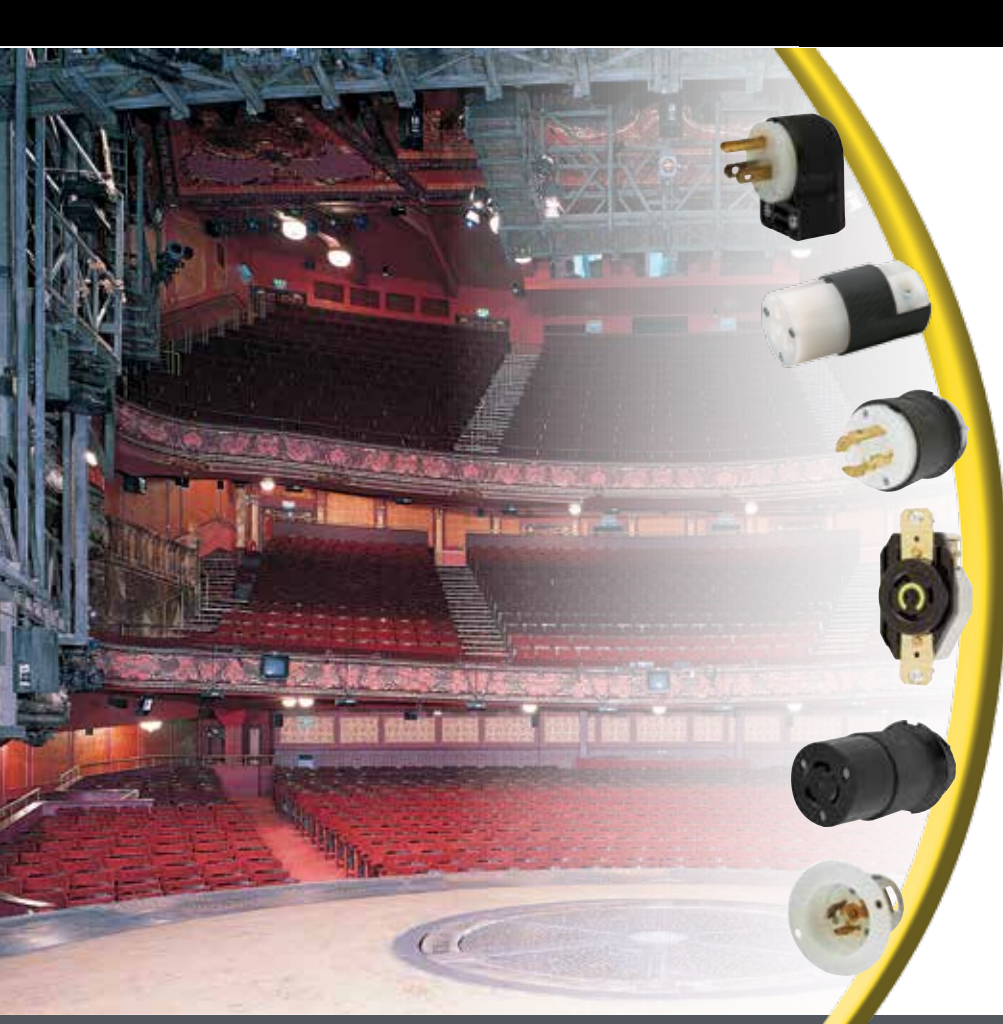

**At Hubbell, We're Never Satisfied,  
But Our Customers Always Are.**

Hubbell Wiring Device-Kellems products have long set the standard for innovation, performance, durability, safety and convenience. There's an underlying secret to our continuing success. It's our philosophy of never leaving well enough alone.

We believe we can always make our products better – and the record shows we have.

The dynamic environments the Entertainment Industry faces are unpredictable and therefore place high demands on all your equipment. Hubbell devices have the proven reliability to deliver secure connections that let you turn your attention to the critical details for a flawless show, no matter what the venue.



Athletic Facilities

Performing Arts



Studio & Television



Amusement & Theme Parks



**Flexible**



**Safe**



**Rugged**



**Reliable**







## Table of Contents

Products	Page
Straight Blade Devices . . . . .	4
Twist-Lock® Devices . . . . .	5
Single Pole Devices . . . . .	6
Pin and Sleeve Devices . . . . .	8
Watertight Devices . . . . .	9
Straight Blade Receptacles and USB Devices . . . . .	10
Portable GFCI and Temporary Power Boxes . . . . .	11
Hose and Cable Protection Systems . .	12
Wire Management . . . . .	13
Data, Video and Communication . . . .	14

We offer products tailored to the entertainment industry requirements for durability, aesthetics and safety. Including all black plugs and connectors that blend into the background, series 15 and 16 single pole devices with a double cam that stand up to repeated mating, angle plugs from 15 to 60 amps that fit into the tight spaces where cable management becomes a more critical issue, and the overall quality that can take on the harsh everyday abuse unique to producing a show. Safety is always a top priority. All Hubbell products are designed and manufactured with this in mind and exceed UL standards so the show can go on.

Since our company was founded more than 125 years ago, Hubbell Wiring Device-Kellems is the standard in the industry. We pride ourselves with the quality and the detail built into every product we make.



# Straight Blade Devices



## Plugs and Connectors

- Durable, impact and chemical-resistant nylon construction ensures reliability
- Integral VARI-SIZE® insert accommodates a wide range of cord diameters (.23 to .72 in.)
- Visible catalog number while in use offers easy identification
- Order EBK version to use flush on to 3 cord

## Flanged Inlets and Receptacles

- Equipment mounting flanges fit flush on panel surfaces
- All nylon construction resists stress cracking and breakage
- Fits with weatherproof covers

## Twist-Lock® Circuit Testers

- Quickly diagnose miss-wiring situation or application
- Great for dark, difficult to reach spaces
- No measurement readings to interpret

## Ordering Information




### Straight Blade Devices

Amps	Volts	NEMA Code#	Poles/Wires	AC HP Rating	Heavy Duty Plug		Connector Body		8-Position Angle Plug	Flanged Inlet	Flanged Receptacle
15	125V	L5-15	2 Pole/ 3 Wire	0.5	<b>HBL5266C</b>	<b>HBL5266CM2</b>	<b>HBL5269C</b>	<b>HBL5269CM2</b>	<b>HBL5266CA</b>	<b>HBL5278C</b>	<b>HBL5279C</b>
	125V	L5-15		0.5		<b>HBL5266EBK</b>		<b>HBL5269EBK</b>			
20	125V	L5-20		1	<b>HBL5366C*</b>	<b>HBL5366CM2</b>	<b>HBL5369C</b>	<b>HBL5369CM2</b>	<b>HBL5366CA</b>	<b>HBL5378C</b>	<b>HBL5379C</b>
	125V	L5-20		1		<b>HBL5366EBK</b>		<b>HBL5369EBK</b>			



### Twist-Lock® Circuit Testers

Description	Rating	20 Amp	30 Amp
Marine	125V		NEMA L5-30P <b>HBL26CM11</b>
3-Phase Circuit Tester	3Ø 120/208V AC Min. Voltage: 90V AC	NEMA L21-20P <b>HBL3PT2511</b>	NEMA L21-30P <b>HBL3PT2811</b>
Circuit Tester	125V	NEMA L5-20P <b>HBLT2311</b>	NEMA L5-30P <b>HBLT2611</b>
	250V	NEMA L6-20P <b>HBLT2321</b>	NEMA L6-30P <b>HBLT2621</b>
	277V	NEMA L7-20P <b>HBLT2331</b>	
	125/250V	NEMA L14-20P <b>HBLT2411</b>	NEMA L14-30P <b>HBLT2711</b>
	347V	NEMA L24-20P <b>HBLT3721</b>	





**Only Hubbell Makes Twist-Lock®**



**Plugs, Connectors and Receptacles**

- Superior cord grip design protects terminations from excess strain
- High performance, reliable terminations for maintaining trouble free connections
- High-impact nylon construction with voltage color-coding resists abuse and facilitates easy identification



**Flanged Inlets and Receptacles**

- Provides versatile mounting for a wide range of applications
- Fits with weatherproof covers for wet and damp locations



**Ordering Information**



**Twist-Lock Devices**



Amps	NEMA Rating Color Coded by Voltage	NEMA Code #	Poles/ Wires	AC HP Rating	Plug		Connector Body		Receptacle	Flanged Receptacle	Flanged Inlet
					Black/White	All Black	Black/White	All Black			
15	125V	L5-15	2 Pole/ 3 Wire	0.5	<b>HBL4720C</b>	<b>HBL4720CBK</b>	<b>HBL4729C</b>	<b>HBL4729CBK</b>	<b>HBL4710</b>	<b>HBL4715C</b>	<b>HBL4716C</b>
	250V	L6-15		1.5	<b>HBL4570C</b>		<b>HBL4579C</b>		<b>HBL4560</b>	<b>HBL4585C</b>	<b>HBL4586C</b>
	125V	L5-20		1	<b>HBL2311</b>	<b>HBL2311BK</b>	<b>HBL2313</b>	<b>HBL2313BK</b>	<b>HBL2310</b>	<b>HBL2316</b>	<b>HBL2315</b>
20	125V	L5-20		1		<b>HBL2311EBK</b>		<b>HBL2313EBK</b>			
	250V	L6-20		2	<b>HBL2321</b>	<b>HBL2321BK</b>	<b>HBL2323</b>	<b>HBL2323BK</b>	<b>HBL2320</b>	<b>HBL2326</b>	<b>HBL2325</b>
	250V	L6-20		2		<b>HBL2321EBK</b>		<b>HBL2323EBK</b>			
	480V AC	L8-20	3	<b>HBL2341</b>		<b>HBL2343</b>		<b>HBL2340</b>	<b>HBL2346</b>	<b>HBL2345</b>	
30	125V	L5-30	3 Pole/ 4 Wire	2	<b>HBL2611</b>	<b>HBL2611BK</b>	<b>HBL2613</b>	<b>HBL2613BK</b>	<b>HBL2610</b>	<b>HBL2616</b>	<b>HBL2615</b>
	250V	L6-30		2	<b>HBL2621</b>	<b>HBL2621BK</b>	<b>HBL2623</b>	<b>HBL2623BK</b>	<b>HBL2620</b>	<b>HBL2626</b>	<b>HBL2625</b>
	480V AC	L8-30		5	<b>HBL2641</b>		<b>HBL2643</b>		<b>HBL2640</b>	<b>HBL2646</b>	<b>HBL2645</b>
20	125/250V	L14-20		2 (1)	<b>HBL2411</b>	<b>HBL2411BK</b>	<b>HBL2413</b>	<b>HBL2413BK</b>	<b>HBL2410</b>	<b>HBL2416</b>	<b>HBL2415</b>
	3Ø 250V AC	L15-20		3	<b>HBL2421</b>		<b>HBL2423</b>		<b>HBL2420</b>	<b>HBL2426</b>	<b>HBL2425</b>
	3Ø 480V AC	L16-20		5	<b>HBL2431</b>		<b>HBL2433</b>		<b>HBL2430</b>	<b>HBL2436</b>	<b>HBL2435</b>
30	125/250V	L14-30	2	<b>HBL2711</b>	<b>HBL2711BK</b>	<b>HBL2713</b>	<b>HBL2713BK</b>	<b>HBL2710</b>	<b>HBL2716</b>	<b>HBL2715</b>	
	3Ø 250V AC	L15-30	3	<b>HBL2721</b>		<b>HBL2723</b>		<b>HBL2720</b>	<b>HBL2726</b>	<b>HBL2725</b>	
	3Ø 480V AC	L16-30	10	<b>HBL2731</b>		<b>HBL2733</b>		<b>HBL2730</b>	<b>HBL2736</b>	<b>HBL2735</b>	
20	3ØY 120/208V AC	L21-20	4 Pole/ 5 Wire	2	<b>HBL2511</b>	<b>HBL2511BK</b>	<b>HBL2513</b>	<b>HBL2513BK</b>	<b>HBL2510</b>	<b>HBL2516</b>	<b>HBL2515</b>
	3ØY 277/480V AC	L22-20		5	<b>HBL2521</b>		<b>HBL2523</b>		<b>HBL2520</b>	<b>HBL2526</b>	<b>HBL2525</b>
30	3ØY 120/208V AC	L21-30		3	<b>HBL2811</b>	<b>HBL2811BK</b>	<b>HBL2813</b>	<b>HBL2813BK</b>	<b>HBL2810</b>	<b>HBL2816</b>	<b>HBL2815</b>
	3ØY 277/480V AC	L22-30		10	<b>HBL2821</b>		<b>HBL2823</b>		<b>HBL2820</b>	<b>HBL2826</b>	<b>HBL2825</b>

**Non-NEMA Devices**

20	20A 250V 10A 600V AC		4 Pole/ 5 Wire		<b>HBL3521C</b>		<b>HBL3523C</b>		<b>HBL3520</b>	<b>HBL3525C</b>	<b>HBL3524C</b>
----	-------------------------	--	-------------------	--	-----------------	--	-----------------	--	----------------	-----------------	-----------------

**50 Amp Devices**

50	125/250V AC		3P/4W		<b>CS6365C</b>		<b>CS6364C</b>		<b>CS6369</b>		<b>CS6375</b>
----	-------------	--	-------	--	----------------	--	----------------	--	---------------	--	---------------





## Series 15 150 Amp, 600V AC/250V DC

- Enclosure Types 3R, 4X, 12
- Combo head, non-metallic safety retaining screw
- Insulgrip body design
- Accepts #8 AWG - #2 AWG wire
- Designed and listed to new UL standard 1691 for intermatatability and performance
- UL and cUL Listed



### Ordering Information

#### 150 Amp, Plugs



Description	Male	Female
Thermoplastic elastomer, cable size #8 - #2 AWG	<b>HBL15Mx</b>	<b>HBL15Fx</b>

#### Tees



Description	Tapping Tee	Paralleling Tee
Fits 150 amp plugs and receptacles	<b>HBL15Tx</b>	<b>HBL15PTx</b>

#### Gender Reversing Devices



Description	Double Male	Double Female
Fits 150 amp plugs and receptacles	<b>HBL15DMx</b>	<b>HBL15DFx</b>

#### Protective Caps



Description	Fits Male Devices	Fits Female Devices
Fits 150 amp plugs and receptacles	<b>HBL15MCAPx</b>	<b>HBL15FCAPx</b>

x=color for 150A: **BK** (Black), **W** (White), **GN** (Green), **R** (Red) and **BL** (Blue).

#### 150 Amp, Receptacles, Stud Type 1/8" x 3/4"



Description	Female	Male
Thermoplastic, panel mount	<b>HBL15FRSx</b>	<b>HBL15MRSx</b>

#### 150 Amp, Receptacles, Double Set Screw



Description	Female	Male
Thermoplastic, cable size #8 - #2 AWG	<b>HBL15FRx</b>	<b>HBL15MRx</b>

#### 150 Amp, Weather Protective Covers



Description	Catalog Number
Use with stud type or double set screw receptacles	<b>HBL15NCx</b>

#### 300/400 Amp, Weather Protective Covers



Description	Catalog Number
Use with stud type or double set screw receptacles	<b>HBLNCxx</b>

xx=color for 300/400A: **BK** (Black), **W** (White), **GN** (Green), **R** (Red), **BL** (Blue), **BN** (Brown), **O** (Orange), **Y** (Yellow) and **C** (Clear).





## Series 16 300 and 400 Amp, 600V AC/250V DC

- Enclosure Types 3R, 4X, 12
- Non-metallic safety retaining screw
- Insulgrip body design
- Accepts #6 AWG - 4/0 wire
- Designed and listed to new UL standard 1691 for intermatibility and performance
- UL and cUL Listed



### Ordering Information

#### 300 Amp, Plugs

Description	Male	Female
Thermoplastic elastomer, cable size #6 - 2/0 AWG	<b>HBL300Mxx</b>	<b>HBL300Fxx</b>

#### 400 Amp, Receptacles, Stud Type

Description	Female	Male
Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs	Through Hole Mounting <b>HBLFRSxx</b>	<b>HBLMRSxx</b>
	Threaded Mounting Hole <b>HBLFRSCxx</b>	<b>HBLMRSCxx</b>

#### 400 Amp, Receptacles, Double Set Screw

Description	Female	Male
Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs	<b>HBLFRxx</b>	<b>HBLMRxx</b>

#### 3-Fers

Description	Male-Fem-Fem-Fem	Fem-Male-Male-Male	Soft 3-Fers
Fits 300 and 400 amp plugs and receptacles	<b>HBLM3Fxx</b>	<b>HBLF3Mxx</b>	<b>HBLM3FSBK</b> <b>HBLF3MSGN</b>

xx=color for 300/400A: **BK** (Black), **W** (White), **GN** (Green), **R** (Red), **BL** (Blue), **BN** (Brown), **O** (Orange) and **Y** (Yellow).

#### 400 Amp, Plugs

Description	Male	Female
Thermoplastic elastomer, cable size 2/0 - 4/0 AWG	<b>HBL400Mxx</b>	<b>HBL400Fxx</b>

#### 400 Amp, Receptacles, Bus Bar Mount

Description	Female	Male
Panel mount, thermoplastic elastomer, mates with 300 and 400 amp plugs	<b>HBLFRBxx</b>	<b>HBLMRBxx</b>

#### Tees

Description	Tapping Tee	Paralleling Tee
Fits 300 and 400 amp plugs and receptacles	<b>HBLTxx</b>	<b>HBLPTxx</b>

#### Gender Reversing Devices

Description	Double Male	Double Female
Fits 300 and 400 amp plugs and receptacles	<b>HBLDMxx</b>	<b>HBLDFxx</b>



# Pin and Sleeve Devices



## IEC Pin and Sleeve



- Provide safe and dependable performance in the most demanding environments
- Heavy duty non-conductive nylon construction provides impact and corrosion protection
- Pin and Sleeve devices are available in configurations from 20A 125V to 100A 600V

## Advantage™ Series



- Switch-rated connectors established new benchmarks for mechanical and electrical performance
- Compact design device is similar in size to standard IEC 60309-2 devices, receptacles mount to standard Hubbell IEC Pin and Sleeve back boxes
- Spring-loaded disconnect button oversized for easy actuation with gloved hands

## Ordering Information



### 20A and 30A, IEC Pin and Sleeve



Rating by Voltage	Color Coded	Poles/Wires	Plug	Connector	Receptacle
20A 120/240V		3 Pole/ 4 Wire	HBL420P12W	HBL420C12W	HBL420R12W
20A 3Ø 480V		3 Pole/ 4 Wire	HBL420P7W	HBL420C7W	HBL420R7W
30A 120/240V		3 Pole/ 4 Wire	HBL430P12W	HBL430C12W	HBL430R12W
30A 3Ø 480V		3 Pole/ 4 Wire	HBL430P7W	HBL430C7W	HBL430R7W
30A, 3ØY 120/208V		4 Pole/ 5 Wire	HBL530P9W	HBL530C9W	HBL530R9W



### 60A and 100A, IEC Pin and Sleeve



Rating by Voltage	Color Coded	Poles/Wires	Plug	Connector	Receptacle
60A 120/240V		3 Pole/ 4 Wire	HBL460P12W	HBL460C12W	HBL460R12W
60A 3Ø 480V		3 Pole/ 4 Wire	HBL460P7W	HBL460C7W	HBL460R7W
60A, 3ØY 120/208V		4 Pole/ 5 Wire	HBL560P9W	HBL560C9W	HBL560R9W
100A 120/240V		3 Pole/ 4 Wire	HBL4100P12W	HBL4100C12W	HBL4100R12W
100A 3Ø 480V		3 Pole/ 4 Wire	HBL4100P7W	HBL4100C7W	HBL4100R7W
100A, 3ØY 120/208V		4 Pole/ 5 Wire	HBL5100P9W	HBL5100C9W	HBL5100R9W



### 30A, Switch-Rated Advantage™ Series



Rating by Voltage	Color Coded	Poles/Wires	Plug	Connector	Receptacle
30A 125/250V		3 Pole/ 4 Wire	HBLS430P12W	HBLS430C12W	HBLS430R12W
30A 3Ø 480V		3 Pole/ 4 Wire	HBLS430P7W	HBLS430C7W	HBLS430R7W
30A 3Ø 250V		3 Pole/ 4 Wire	HBLS430P9W	HBLS430C9W	HBLS430R9W



### 20A and 30A, Low Profile Devices



Rating by Voltage	Color Coded	Poles/Wires	Plug	Receptacle	Cord Diameter Min. Max. Inches (mm)
60A 3Ø 250V		3 Pole/ 4 Wire	A460P9	A460R9	.75" - 1.25" (19.1 - 31.8)
60A, 3ØY 120/208V		4 Pole/ 5 Wire	A560P9	HBL560R9W	.89" - 1.42" (22.6 - 36.1)
100A, 3ØY 120/208V		4 Pole/ 5 Wire	A5100P9	HBL5100R9W	1.34" - 1.50" (34.0 - 38.1)





## Plugs, Connectors and Flanged Inlets



- Maintains UL Type 4X watertight seal when in use and when disconnected
- Safety-shroud recessed blades provide protection against bending and breaking for a longer life
- Neoprene sealing gland and thermoplastic guard assure sealing when fully connected
- Catalog number and color-coded voltage are visible when in use for quick, easy identification



## Watertight Devices



- Double insulated elastomeric cover with thermoplastic body for extra safety and water resistance
- NEMA 4, 4X, 6 and 6P Rated
- Corrosion-resistant nickel plated blades and stainless steel captive assembly screws
- Closure cap seals out water and dirt when not in use



## Ordering Information




### 15A, 20A and 30A, Watertight Devices



NEMA Rating Color Coded by Voltage	Poles/Wires	Plug	Connector	Flanged Inlet	Receptacle	Plug	Connector	Receptacle
15A 125V	2 Pole/ 3 Wire	—	—	—	—	<b>HBL24W47A</b>	<b>HBL25W47</b>	<b>HBL65W47</b>
20A 125V	2 Pole/ 3 Wire	<b>HBL2311SW</b>	<b>HBL2313SW</b>	<b>HBL2315SW</b>	<b>HBL2310SW</b>	<b>HBL26W47</b>	<b>HBL27W47</b>	<b>HBL67W47</b>
20A 250V	2 Pole/ 3 Wire	<b>HBL2321SW</b>	<b>HBL2323SW</b>	<b>HBL2325SW</b>	<b>HBL2320SW</b>	<b>HBL26W48</b>	<b>HBL27W48</b>	<b>HBL67W48</b>
20A 125/250V AC	3 Pole/ 4 Wire	<b>HBL2411SW</b>	<b>HBL2413SW</b>	<b>HBL2415SW</b>	<b>HBL2410SW</b>	<b>HBL26W74</b>	<b>HBL27W74</b>	<b>HBL67W74</b>
20A 3Ø 250V	3 Pole/ 4 Wire	<b>HBL2421SW</b>	<b>HBL2423SW</b>	<b>HBL2425SW</b>	<b>HBL2420SW</b>	<b>HBL26W75</b>	<b>HBL27W75</b>	<b>HBL67W75</b>
20A 3Ø 480V	3 Pole/ 4 Wire	<b>HBL2431SW</b>	<b>HBL2433SW</b>	<b>HBL2435SW</b>	<b>HBL2430SW</b>	<b>HBL26W76</b>	<b>HBL27W76</b>	<b>HBL67W76</b>
30A 125V	2 Pole/ 3 Wire	<b>HBL2611SW</b>	<b>HBL2613SW</b>	<b>HBL2615SW</b>	<b>HBL2610SW</b>	<b>HBL28W47</b>	<b>HBL29W47</b>	<b>HBL69W47</b>
30A 250V	2 Pole/ 3 Wire	<b>HBL2621SW</b>	<b>HBL2623SW</b>	<b>HBL2625SW</b>	<b>HBL2620SW</b>	<b>HBL28W48</b>	<b>HBL29W48</b>	<b>HBL69W48</b>
30A 125/250V	3 Pole/ 4 Wire	<b>HBL2711SW</b>	<b>HBL2713SW</b>	<b>HBL2715SW</b>	<b>HBL2710SW</b>	<b>HBL28W74</b>	<b>HBL29W74</b>	<b>HBL69W74</b>
30A 3Ø 250V	3 Pole/ 4 Wire	<b>HBL2721SW</b>	<b>HBL2723SW</b>	<b>HBL2725SW</b>	<b>HBL2720SW</b>	<b>HBL28W75</b>	<b>HBL29W75</b>	<b>HBL69W75</b>
30A 3Ø 480V	3 Pole/ 4 Wire	<b>HBL2731SW</b>	<b>HBL2733SW</b>	<b>HBL2735SW</b>	<b>HBL2730SW</b>	<b>HBL28W76</b>	<b>HBL29W76</b>	<b>HBL69W76</b>

# Straight Blade Receptacles and USB Devices



## HBL® Extra Heavy Duty Receptacles

- Reinforced thermoplastic polyester base for heat resistance and contact stability
- Exclusive nickel-plated bypass contact design ensures uninterrupted power
- One-piece brass integral contact ground strap for low resistance of fault currents

## Extra Heavy Duty GFCI Receptacles

- Patented tamper-resistant design limits improper access to energized contacts
- Heavy duty brass bridge to withstand abuse
- Self test units continually tests and monitors for protection automatically
- No power at device face if reverse wired, eliminating false assumption of protection
- 10 kA Short Circuit Current Rating



## USB Charger Receptacle and 4 Port

- Two USB ports 3.8 Amp, 5V DC, Type A, class 2.0
- Tamper-Resistant (TR) decorator duplex
- Green LED indicator to show USB power available
- Four USB ports 5 Amp, 5V DC, Type A, class 2.0

## Ordering Information

### HBL® Extra Heavy Duty Industrial Series



Rating	Color	Receptacles		
		Duplex	Weather Resistant	Single
15A 125V	Brown	<b>HBL5262</b>	<b>HBL5262WR</b>	<b>HBL5261</b>
	Black	<b>HBL5262BK</b>	<b>HBL5262BKWR</b>	<b>HBL5261BK</b>
	Gray	<b>HBL5262GY</b>	<b>HBL5262GYWR</b>	—
	Ivory	<b>HBL5262I</b>	<b>HBL5262IWR</b>	<b>HBL5261I</b>
	Red	<b>HBL5262R</b>	<b>HBL5262RWR</b>	—
	White	<b>HBL5262W</b>	<b>HBL5262WWR</b>	—
20A 125V	Brown	<b>HBL5362</b>	<b>HBL5362WR</b>	<b>HBL5361</b>
	Black	<b>HBL5362BK</b>	<b>HBL5362BKWR</b>	<b>HBL5361BK</b>
	Gray	<b>HBL5362GY</b>	<b>HBL5362GYWR</b>	<b>HBL5361GRY</b>
	Ivory	<b>HBL5362I</b>	<b>HBL5362IWR</b>	<b>HBL5361I</b>
	Red	<b>HBL5362R</b>	<b>HBL5362RWR</b>	—
	White	<b>HBL5362W</b>	<b>HBL5362WWR</b>	<b>HBL5361W</b>

### Extra Heavy Duty GFCI Receptacles



Rating	Color	Tamper-Resistant	Weather Resistant
		AUTOGUARD® Self Test	
15A 125V	Brown	<b>GFR5262SG</b>	<b>GFR5262SGWK</b>
	Black	<b>GFR5262SGBK</b>	<b>GFR5262SGBK</b>
	Gray	<b>GFR5262SGGY</b>	<b>GFR5262SGGY</b>
	Ivory	<b>GFR5262SGI</b>	<b>GFR5262SGI</b>
	Red	<b>GFR5262SGR</b>	<b>GFR5262SGR</b>
	White	<b>GFR5262SGW</b>	<b>GFR5262SGW</b>
20A 125V	Brown	<b>GFR5362SG</b>	<b>GFR5362SGBK</b>
	Black	<b>GFR5362SGBK</b>	<b>GFR5362SGBK</b>
	Gray	<b>GFR5362SGGY</b>	<b>GFR5362SGGY</b>
	Ivory	<b>GFR5362SGI</b>	<b>GFR5362SGI</b>
	Red	<b>GFR5362SGR</b>	<b>GFR5362SGR</b>
	White	<b>GFR5362SGW</b>	<b>GFR5362SGW</b>

### USB Charger Tamper-Resistant Receptacle



Description	Color	15A 125V	20A 125V
USB Charger, Two USB Type A, class 2.0 ports, 3.8 Amp, 5 Volt DC, Style Line® decorator	Brown	<b>USB15X2</b>	<b>USB20X2</b>
	Black	<b>USB15X2BK</b>	<b>USB20X2BK</b>
	Gray	<b>USB15X2GY</b>	<b>USB20X2GY</b>
	Ivory	<b>USB15X2I</b>	<b>USB20X2I</b>
	Light Almond	<b>USB15X2LA</b>	<b>USB20X2LA</b>
	White	<b>USB15X2W</b>	<b>USB20X2W</b>

### USB Charger 4 Port Outlet



Description	Color	Catalog Number
USB Charger 4 Port Outlet, Four USB Type A, class 2.0 ports, 5 Amp, 5 Volt DC, Style Line® decorator	Brown	<b>USB4</b>
	Black	<b>USB4BK</b>
	Gray	<b>USB4GY</b>
	Ivory	<b>USB4I</b>
	Light Almond	<b>USB4LA</b>
	White	<b>USB4W</b>







### Portable GFCI Line Cords and Outlets

- Provides a watertight housing for maximum safety in harsh environments
- Available with either automatic and manual set feature to fit the application
- Bright indicator light provides fault confirmation from a distance



### Multiple Outlet Portable GFCI

- Ideal for providing safety in applications requiring multiple outlets
- Features gasketed cover to protect outlets not in use
- Ensures safety by interrupting power when leakage to ground is 4 to 6 milliamperes



### Temporary Power Boxes

- Incorporates the most advanced ground fault module technology for safety
- Accommodates watertight straight blade and Safety-Shroud® Twist-Lock® receptacles
- Heavy Duty UL Type 3R metallic enclosure



## Ordering Information

### Circuit Guard® Portable GFCI Line Cords



Description	Length	GFCI Cord Line	w/ Stripped Leads
15A 120V AC	18 in.	<b>GFP4C15x</b>	—
	6 ft.	<b>GFP6C15x</b>	—
	15 ft.	—	<b>GFPOEMx</b>
	25 ft.	<b>GFP25C15x</b>	—
20A 120V AC	3 ft.	<b>GFP3C20M</b>	—

Note: Replace **x** with **A** (Automatic) or **M** (Manual) set.

### Multiple Outlet Portable GFCI




Description	Rating	Catalog Number
4-Outlet, 2-Duplex, Manual Set	15A 120V AC	<b>GFP15M</b>
	20A 120V AC	<b>GFP20M</b>

### Temporary Power Boxes




Max Rating	Type	Receptacle Rating	Protection Overload/GFI	Receptacle Type	
				Straight Blade	Twist-Lock®
Spider® II	(7) Receptacles	20A 125V	Yes/Yes	<b>SDSB1A</b>	<b>SDTL1A</b>
30A 120/240V AC	(1) Twist-Lock® (inlet & outlet)	30A 120/240V	No/No		
Spider® II	(7) Receptacles	20A 125V	Yes/Yes	<b>SBSB1A</b>	<b>SBTL1A</b>
50A 120/240V AC	(1) Twist-Lock® (inlet & outlet)	50A 125/250V	No/No		
Spider® II	(6) Receptacles	20A 125V	Yes/Yes	<b>SCSB0</b>	<b>SCTL0</b>
60A 3Ø 120/208V	(1) Pin and Sleeve (inlet & outlet)	60A 3ØY 120/208V	No/No		
50A 120/240V AC	(6) Receptacles	20A 125V	Yes/Yes	<b>TPDS</b>	<b>TPDL</b>
	(1) Twist-Lock®	30A 250V	Yes/No		
	(1) Twist-Lock® (inlet & outlet)	50A 125/250V	No/No		

# Hose and Cable Protection Systems

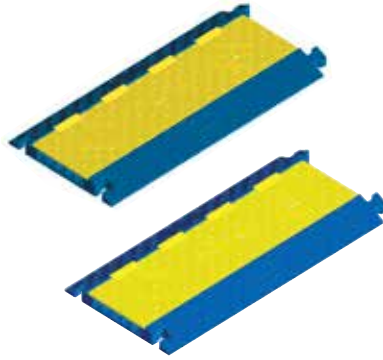

## TrukTrak® and TredTrak®



- Safeguards cables and cords from vehicle and pedestrian traffic
- TrukTrak® is ideal for events where trucks and forklifts are present
- TredTrak® supports pedestrian and light vehicle traffic in public, institutional and commercial applications
- Complies with NEC® Article 525 for insulating cables at carnivals, amusement parks, convention centers and similar public areas

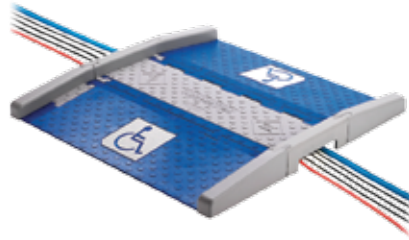

## AccessTrak®

- Modular cable protection for compliance with ADA accessibility guidelines
- Protects cable and hose diameters up to 1.31 inches

## Ordering Information

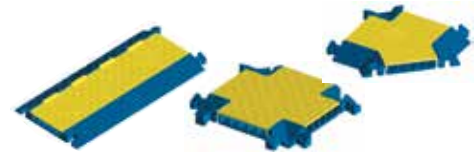

## TrukTrak® and TredTrak® Systems

Description	TrukTrak®	TredTrak®
5 Channel, blue and yellow	<b>HBLTT5B</b>	<b>HBLTRED5B</b>
5 Channel end caps (pair only), yellow	<b>HBLTT5ECB</b>	<b>HBLTRED5ECB</b>
5 Channel female end caps (2 females), yellow	—	<b>HBLTRED5ECFB</b>
5 Channel 45° right turn, blue and yellow	<b>HBLTT545RB</b>	—
5 Channel 45° left turn, blue and yellow	<b>HBLTT545LB</b>	—
5 Channel "X" fitting, blue and yellow	—	<b>HBLTRED5XB</b>
5 Channel "Y" fitting, blue and yellow	—	<b>HBLTRED5YB</b>
3 Channel, blue and yellow	<b>HBLTT3B</b>	—
3 Channel end caps (pair only), yellow	<b>HBLTT3ECB</b>	—
2 Channel, blue and yellow	<b>HBLTT2B</b>	—

## AccessTrak® System

Description	Catalog Number
5 Channel AccessTrak kit*, blue and gray	<b>HBLAT5KITA</b>
5 Channel AccessTrak trough, blue and gray	<b>HBLAT5A</b>
AccessTrak trough end rails (set), gray	<b>HBLAT5ERA</b>
AccessTrak ramps (set), blue	<b>HBLAT5RAMPA</b>
AccessTrak ramp end rails (set), gray	<b>HBLAT5RAMPERA</b>

Note: \*Consists of (1) HBLAT5A; (1 set) HBLAT5ERA; (1 set) HBLAT5RAMPA; (2 sets) HBLRAMPERA.

## Expanded by Length



## Expanded by Width







### Cord Connectors

- GOTCHA® ring incorporates a split hinge design to prevent friction and provide strain relief
- The connector body is a one-piece design with machined threads that provide a strong positive seal
- A tapered interior seats the bushing evenly for a liquidtight seal



### Strain Relief Grips

- Multi-weave grip products provide arc-of-bend control minimizing cable damage and extending cable life
- Ideal for providing maximum safety where conduit is subject to vibration, motion or strain
- Stainless steel mesh is corrosion resistant and optional liquidtight fittings provide a watertight seal



### Support Grips

- Ideal for ensuring safety by supporting electrical cable service drops or hoses
- Available in tin-coated bronze or stainless steel, heavy duty, standard and light duty for a variety of applications

## Ordering Information



### Straight Male

NPT Hub Size	Cord Diameter Inches (mm)	Machined Aluminum	Machined Zinc-Plated Steel	Nylon Gray	Nylon Black
1/2	.38"-.50" (9.7-12.7)	<b>SHC1023</b>	<b>SHC1023ZP</b>	<b>SHC1023CR</b>	<b>SHC2023CR</b>
	.50"-.63" (12.7-15.9)	<b>SHC1024</b>	<b>SHC1024ZP</b>	<b>SHC1024CR</b>	<b>SHC2024CR</b>
3/4	.63"-.75" (15.9-19.0)	<b>SHC1037</b>	<b>SHC1037ZP</b>	<b>SHC1037CR</b>	<b>SHC2037CR</b>

### Single Eye, Closed Mesh\*\*

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	Catalog Number
.50"-.62" (1.27-1.57)	530 (2,357)	<b>02201013</b>
.63"-.74" (1.60-1.88)	790 (3,514)	<b>02201014</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	<b>02201015</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	<b>02201017</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	<b>02201018</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	<b>02201019</b>

Note: \*\*Change catalog number from 022 to 024 for stainless steel. Consult factory for availability.



### Kellems® Deluxe Cord Grips

NPT Thread Size	Grip Diameter Range Inches (cm)	Straight Male Thread	Straight Female Thread	90° Male Thread	45° Male Thread
1/2	.187"-.250" (.47-.63)	<b>07401004</b>	—	<b>07401074</b>	—
	.250"-.375" (.63-.95)	<b>07401006</b>	—	<b>07401076</b>	<b>074011236</b>
	.375"-.500" (.95-1.27)	<b>07401008</b>	<b>07401043</b>	<b>07401078</b>	<b>074011021</b>
3/4	.500"-.625" (1.27-1.59)	<b>07401010</b>	<b>07401045</b>	<b>07401080*</b>	<b>074011237</b>
	.187"-.250" (.47-.63)	<b>07401011</b>	—	—	—
	.250"-.375" (.63-.95)	<b>07401013</b>	—	—	—
	.375"-.500" (.95-1.27)	<b>07401015</b>	—	<b>07401081</b>	—
	.500"-.625" (1.27-1.59)	<b>07401017</b>	<b>07401052</b>	<b>07401083</b>	<b>074011049</b>
	.625"-.750" (1.59-1.90)	<b>07401018</b>	<b>07401053</b>	<b>07401084*</b>	<b>074011051*</b>
.750"-.875" (1.90-2.22)	<b>074011249*</b>	—	<b>074011275*</b>	<b>074011239*</b>	

Note: \*Cable jacket may have to be stripped to pass through connector body.

### Single Eye, Split Mesh, Rod Closing\*\*

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	Catalog Number
.50"-.62" (1.27-1.57)	790 (3,514)	<b>02203013</b>
.63"-.74" (1.60-1.88)	790 (3,514)	<b>02203014</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	<b>02203015</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	<b>02203017</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	<b>02203018</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	<b>02203019</b>

Note: \*\*Change catalog number from 022 to 024 for stainless steel. Consult factory for availability.





## Hubbell Multimedia Connectivity

- The Category 6 system is designed to deliver headroom beyond 500MHz for dependable Multi-gigabit Ethernet applications
- Supports 10/100/1000BASE-T applications with usable bandwidth of 190 MHz in the channel



## Snap Fit Connectors

- Superior performance and signal integrity for clear sound and video
- Easily housed in all Hubbell work station and delivery products

## Ordering Information

### NEXTSPEED® Ascent Jacks

Description	Category 6A	Category 6	Category 5e
Single	<b>HJ6Axx</b>	<b>HXJ6xx</b>	<b>HXJ5Exx</b>
25-Pack	<b>HJ6Axx25</b>	<b>HXJ6xx25</b>	<b>HXJ5Exx25</b>

xx=color: **BK** (Black), **B** (Blue), **GY** (Gray), **GN** (Green), **I** (Ivory), **OW** (Office White), **OR** (orange), **R** (Red), **W** (White) and **Y** (Yellow).

### NEXTSPEED® Ascent Shielded Jacks

Description	Category 6A	Category 6
Single	<b>SJ6A</b>	<b>SJ6</b>
24-Pack	<b>SJ6A24</b>	<b>SJ624</b>

### Data Coupler

Description	Catalog Number
Category 6	<b>SFC6BK</b>
Category 5e	<b>SFC5EBK</b>

### HDMI Decorator Frames

Description	Catalog Number
1-Port	<b>NS801xx</b>
2-Port	<b>NS802xx</b>

xx=color: **AL** (Almond), **BK** (Black), **GY** (Gray), **I** (Ivory), **LA** (Light Almond) and **W** (White).

### HDMI Connectors

Color	Feed-Thru Coupler	Keystone Feed-Thru
Black	<b>HDMIC14</b>	<b>SFHC14BK</b>
White	—	<b>SFHC14W</b>

### USB Coupler

Description	Catalog Number
A to B, Blue	<b>SFUSBABB</b>
A to A, Blue	<b>SFUSBAAB</b>

### F-Type Connectors

Color	F-Connector, Gold, 3 GHz, Pass-Thru, F/F Coupler	F-Connector, Gold, Pass-Thru, F/F Coupler	F-Connector, Gold, Recessed, Pass-Thru, F/F Coupler	RCA to F-Connector, Gold, Pass-Thru, F/F Coupler
Black	<b>SFF3GBK</b>	<b>SFFGBK</b>	<b>SFGRFBK</b>	<b>SFRFBK</b>
Office White	<b>SFF3GOW</b>	<b>SFFGOW</b>	<b>SFGRFOW</b>	<b>SFRFGOW</b>
White	<b>SFF3GW</b>	<b>SFFGW</b>	<b>SFGRFW</b>	<b>SFRFGW</b>

### 3.5mm Stereo Jacks

Color	3.5mm to Solder	3.5mm to Screw Terminal	3.5mm to Pass-Thru, F/F Coupler	3.5mm to Pass-Thru, Gold F/F Coupler	3.5mm 110 Termination
Black	<b>SF35SJBK</b>	<b>SF35STBK</b>	<b>SF35FFBK</b>	<b>SF35GFFBK</b>	<b>SF35110BK</b>
Office White	<b>SF35SJOW</b>	<b>SF35STOW</b>	<b>SF35FFOW</b>	<b>SF35GFFOW</b>	—
White	<b>SF35SJW</b>	<b>SF35STW</b>	<b>SF35FFW</b>	<b>SF35GFFW</b>	—







**Wireless Access Point Ceiling Box**

- Locked and secure for remote locations
- Flexible mounting options
- Ceiling and wall mount enclosures optimize space



**AV In-Wall Enclosure (FPTV)**

- Deep face design delivers increased impact resistance
- Wire leads for fast installation and no exposed metal
- ID marking surface provides quick sure circuit identification



**AV Ceiling Enclosure**

- Manage multiple applications inside one enclosure
- Flush mounted, white enclosure for consistent look when mounted in the ceiling
- Loaded with two Hubbell 20A duplex receptacles and a 2-gang back box

**Ordering Information**

**Wireless Access Point Ceiling Box**

Description	Mounting Plate (HxW)	External Dimensions (HxWxD)	Door Weight Capacity	Total Capacity	Cable Entry	Catalog Number
Universal WAP enclosure	9.7" x 5.25"	4" x 10" x 12.7"	15 lb.	20 lb.	6.5" x 1.2"	<b>WBC1</b>
Cisco® Aironet® 1200 series		10" x 10.5" x 13.2"	15 lb.	20 lb.	6.5" x 1.2"	<b>WBC12</b>



**AV In-Wall Enclosure (FPTV)**

Description	Catalog Number
2-Gang In-Wall Enclosure, White	<b>NSAV62M</b>
Steel Cover for NSAV6, White	<b>NSAV6C</b>

**Power Kit**

Description	Catalog Number
Standard Power Kit, White	<b>NSOKP</b>
Surge Protected Power Kit, Blue	<b>NSOKPS</b>



**AV Ceiling Enclosure**

Description	Height	Width	Depth	Color	Plenum Catalog Number	Non-Plenum Catalog Number
AV Ceiling Enclosure	12" (305)	24" (610)	8" (203)	White	<b>AVCE1P</b>	<b>AVCE1H</b>



# Hubbell Guides



## 2013 Full Line Catalog

The new Hubbell Wiring Device-Kellems catalog showcases our enhanced product offering to provide a breadth of solutions for the industrial, commercial and residential markets.



## Hubbell Safety Brochure

Hubbell has always been focused on safety. That's why Hubbell products are designed and developed to first provide maximum safety against injury and the potential dangers of electricity.



## Hubbell Education Application Guide

Education Application Guide to assist facility managers and engineers in identifying and deploying wiring devices for power, data, voice and multi-media in a variety of education spaces and applications.



## Hubbell Healthcare Application Guide

Healthcare Brochure featuring Hospital Grade Plugs, Connectors, Receptacles and more.

# Hubbell Energy Efficiency Solutions



## Single Pole Devices

Series 15 and 16 Single Pole devices offers temporary power connectors for the most demanding environments.



## Watertight Wiring Devices

Straight Blade and Locking watertight devices include plugs, connectors, receptacles and more.




## Insulgrip Wiring Devices

Complete Brochure for Hubbell's line of Insulgrip products, including Straight Blade Wiring Devices, Twist-Lock, Safety Shroud and Pin and Sleeve Wiring Devices. 15 to 200 amp.



## Advantage™ Series Switch-Rated IEC Pin & Sleeve

Advantage™ Series Devices are IEC 60309-2 compatible devices that are approved as a disconnecting means for motor and branch circuits.



## USB Charger Brochure

Hubbell's USB Charger Receptacle provides both USB and electrical power in a standard single gang electrical opening.

## Literature Support

Hubbell offers an extensive literature library for product support. Downloadable PDFs are available online at [www.hubbell-wiring.com](http://www.hubbell-wiring.com) under the resources tab.