




a light just looks right ...

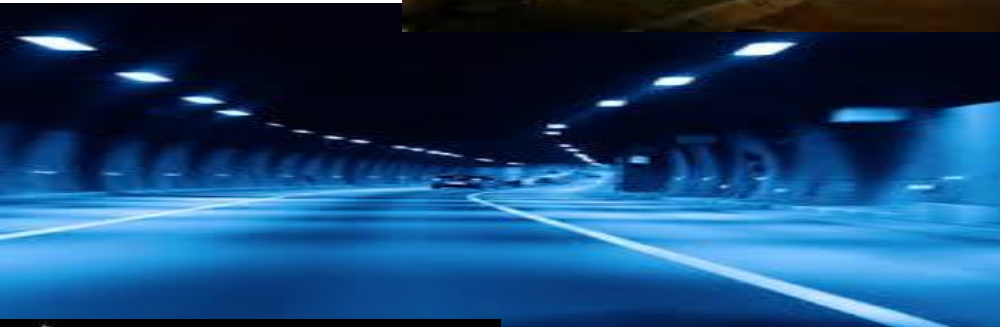

## LED lighting

- Home & Office / T8 & Bulb
- Street Lighting
- High Bay Lighting
- Flood Lighting
- Spot Lighting
- Tunnel Lighting

# Street Light


Part# : LL302-X-PB4A06W-65




60W LED Street Light  
UL Certified  
IP65

Size : 505 x 320 x 126.5 mm  
N.W. : 6.4 Kgs ( 14.08lbs)  
G.W. : 8.4 Kgs ( 18.48lbs)


Peak Point Conical Surface Curve

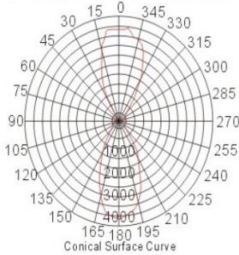

Axial Curve



Plane Equivalent Illuminance Curve

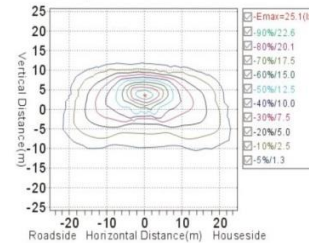

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	60W
Power Factor	>0.95
LEDs	Cree Chip 10 pcs
Luminious Flux	5400 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

# Street Light


Part# : LL313-X-PB4A08W-65




80W LED Street Light  
UL Certified  
IP65

Size : 567 x 320 x 126.5 mm  
N.W. : 7.6 Kgs (16.72lbs)  
G.W. : 9.6 Kgs (21.12lbs)


Peak Point Conical Surface Curve



Axial Curve



Plane Equivalent Illuminance Curve

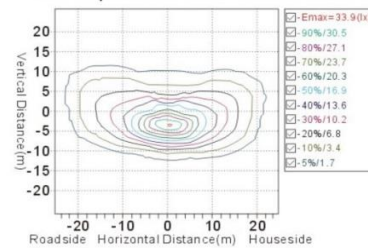

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	80W
Power Factor	>0.95
LEDs	Cree Chip 15 pcs
Luminious Flux	7200 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...



# Street Light


Part# : LL303-X-PB4A10W-65




100W LED Street Light  
UL Certified  
IP65

Size : 567 x 320 x 126.5 mm  
N.W. : 7.6 Kgs (16.72lbs)  
G.W. : 9.6 Kgs (21.12lbs)


Peak Point Conical Surface Curve



Axial Curve



Plane Equivalent Illuminance Curve

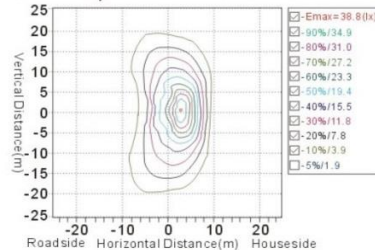

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	100W
Power Factor	>0.95
LEDs	Cree Chip 15 pcs
Luminious Flux	9000 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...



# Street Light


Part# : LL304-X-PB4A12W-65




120W LED Street Light  
UL Certified  
IP65

Size : 630 x 320 x 126.5 mm  
N.W. : 8.9 Kgs (19.58lbs)  
G.W. : 10.9 Kgs (23.98lbs)


Peak Point Conical Surface Curve

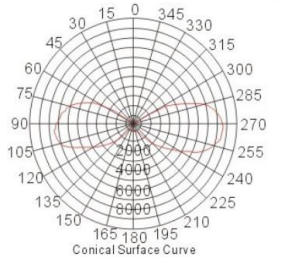

Axial Curve



Plane Equivalent Illuminance Curve

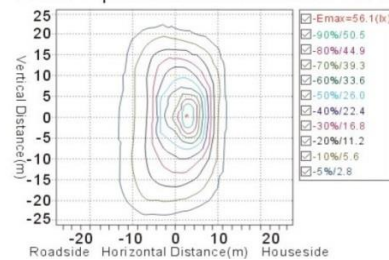

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	120W
Power Factor	>0.95
LEDs	Cree Chip 20 pcs
Luminious Flux	10800 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...



# Street Light


Part# : LL305-X-PB4A16W-65




160W LED Street Light  
UL Certified  
IP65

Size : 691 x 320 x 126.5 mm  
N.W. : 10 Kgs (22lbs)  
G.W. : 12 Kgs (24.4lbs)


Peak Point Conical Surface Curve

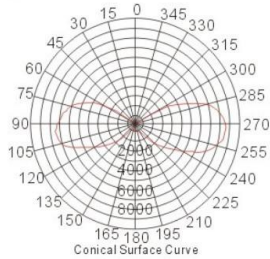

Axial Curve



Plane Equivalent Illuminance Curve

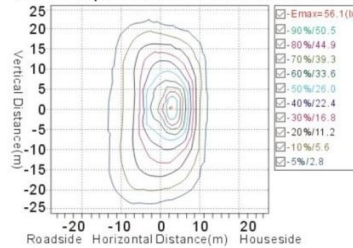

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	160W
Power Factor	>0.95
LEDs	Cree Chip 25 pcs
Luminious Flux	14400 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs




# Street Light

Part# : LL306-X-PB4A20W-65



200W LED Street Light  
UL Certified  
IP65

Size : 755 x 320 x 126.5 mm  
N.W. : 11.1 Kgs (24.42lbs)  
G.W. : 13.1 Kgs (28.82lbs)

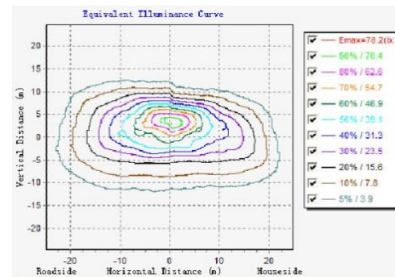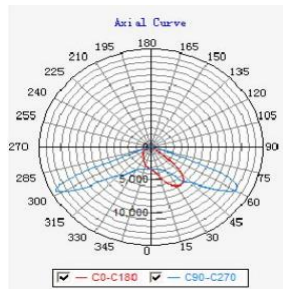

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
  - Optimun heat dissipation design
  - Special air convection design gives LED chips with longer lifespan
  - Mercury-free
  - Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
  - Instant-on light
  - 50,000 hours at 70% lumen maintenance rated life
  - 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.
- Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	200W
Power Factor	>0.95
LEDs	Cree Chip 30 pcs
Luminious Flux	17000 lm
lm/w	85
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...   
KENJITSU




# Street Light

Part# : LL308-X-PB4A25W-65



250W LED Street Light  
UL Certified  
IP65

Size : 880 x 320 x 126.5 mm  
N.W. : 13.6 Kgs (29.92lbs)  
G.W. : 15.6 Kgs (34.32lbs)

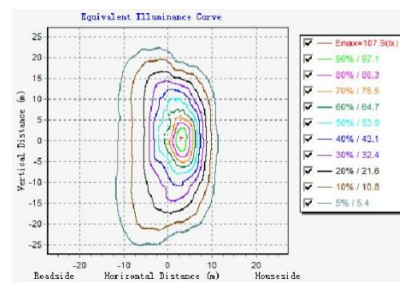

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc.. Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
- Optimun heat dissipation design
- Special air convection design gives LED chips with longer lifespan
- Mercury-free
- Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	250W
Power Factor	>0.95
LEDs	Cree Chip 40 pcs
Luminious Flux	21250 lm
lm/w	85
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...   
KENJITSU






# Street Light

Part# : LL310-X-PB4A30W-65



300W LED Street Light  
UL Certified  
IP65

Size : 1005 x 320 x 126.5 mm  
N.W. : 16.4 Kgs (36.08lbs)  
G.W. : 18.4 Kgs (40.48lbs)

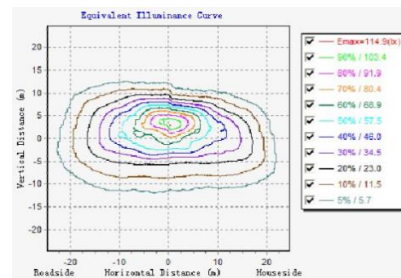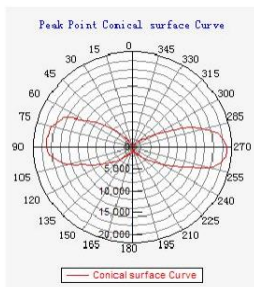

**KENJITSU LED** street light provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc.. Application : Road, park, parking lot, etc

- High Efficient: >90 lm/w, save up to 60% in energy consumption
- Optimun heat dissipation design
- Special air convection design gives LED chips with longer lifespan
- Mercury-free
- Compliance with : UL1598 / DLC,IDA / TM21 / 3G vibration rating(ANSI C136) / Anti-salty fog (ASTM B117) / FCC B15 / IP65 / IEC-EN62471 / CE-IEC60598 / RoHs
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made of aluminum alloy with minimum 2 mil power coation, rust free.

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	90 °
Vertical Angle	69 °
Power	300W
Power Factor	>0.95
LEDs	Cree Chip 50 pcs
Luminious Flux	25500 lm
lm/w	85
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

a light just looks right ...   
KENJITSU




# High Bay / Flood Light / Spot Light / Tunnel Light

Part# : HCL502-X-PB4A05W-65



50W LED High Bay Lighting  
UL Certified  
IP65

Size : W320 x D270 x H263 mm  
N.W. : 4.7 Kgs  
G.W. : 7 Kgs

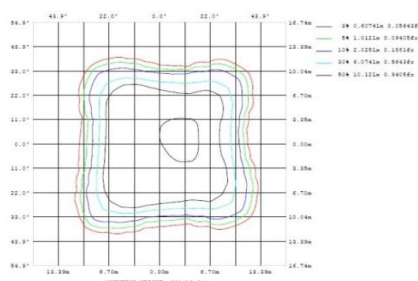

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc.. Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration, anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	50W
Power Factor	>0.99
LEDs	Cree Chip 10 pcs
Luminous Flux	4500 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ... 




# High Bay / Flood Light / Spot Light / Tunnel Light

Part# : HCL503-X-PB4A08W-65



80W LED High Bay Lighting  
UL Certified  
IP65

Size : W320 x D328 x H263 mm  
N.W. : 5.9 Kgs  
G.W. : 8 Kgs

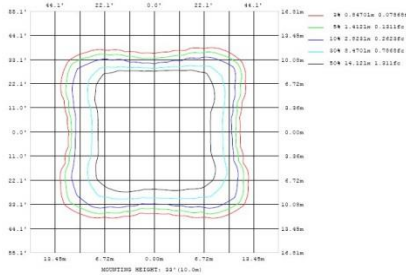

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc.. Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration, anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	80W
Power Factor	>0.99
LEDs	Cree Chip 15 pcs
Luminous Flux	7000 lm
lm/w	87
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ...   
KENJITSU

# High Bay / Flood Light / Spot Light / Tunnel Light

Part# : HCL504-X-PB4A10W-65



100W LED High Bay Lighting  
UL Certified  
IP65

Size : W320 x D328 x H263 mm  
N.W. : 7.1 Kgs  
G.W. : 9 Kgs



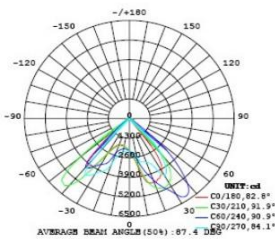


Chart 7: Polar Candela Distribution

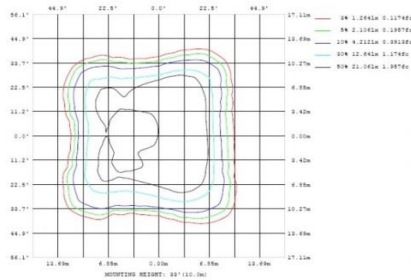

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc.. Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration, anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	100W
Power Factor	>0.99
LEDs	Cree Chip 20 pcs
Luminous Flux	9400 lm
lm/w	94
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ... 



# High Bay / Flood Light / Spot Light / Tunnel Light

Part# : HCL505-X-PB4A12W-65



120W LED High Bay Lighting  
UL Certified  
IP65

Size : W320 x D442 x H263 mm  
N.W. : 8.3 Kgs  
G.W. : 11 Kgs

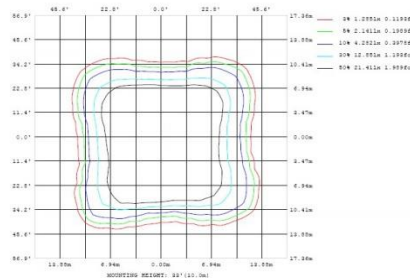



# High Bay / Flood Light / Spot Light / Tunnel Light



Part# : HCL506-X-PB4A16W-65

160W LED High Bay Lighting  
UL Certified  
IP65

Size : W320 x D500 x H263 mm  
N.W. : 10 Kgs  
G.W. : 12 Kgs

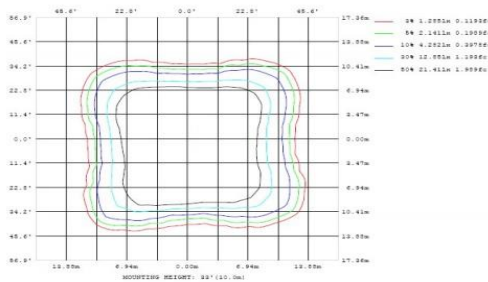




# High Bay / Flood Light / Spot Light / Tunnel Light (E Series)

Part# : HCL504E-X-PB4A10W-65



100W LED High Bay Lighting  
UL Certified (on process)  
IP65

Size : W320 x D337 x H274 mm  
N.W. : 5.9 Kgs  
G.W. : 8 Kgs

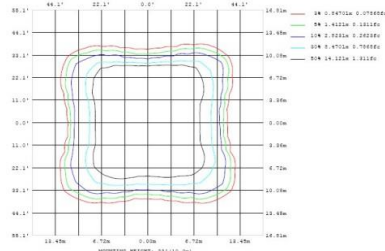

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..

Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration,anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	100W
Power Factor	>0.99
LEDs	Cree Chip 15 pcs
Luminous Flux	9000 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ...   
KENJITSU




# High Bay / Flood Light / Spot Light / Tunnel Light (E Series)

Part# : HCL505E-X-PB4A12W-65



120W LED High Bay Lighting  
UL Certified (on process)  
IP65

Size : W320 x D400 x H274 mm  
N.W. : 7.1 Kgs  
G.W. : 9 Kgs

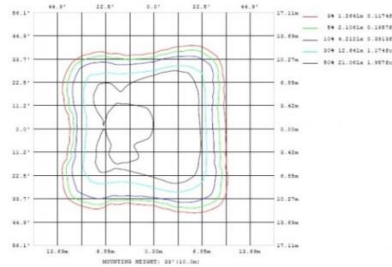

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..

Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration, anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	120W
Power Factor	>0.99
LEDs	Cree Chip 20 pcs
Luminous Flux	10800 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution :** Risk of electric shock (do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right...   
KENJITSU






# High Bay / Flood Light / Spot Light / Tunnel Light (E Series)

Part# : HCL506E-X-PB4A16W-65



160W LED High Bay Lighting  
UL Certified (on process)  
IP65

Size : W320 x D462 x H274 mm  
N.W. : 8.3 Kgs  
G.W. : 11 Kgs

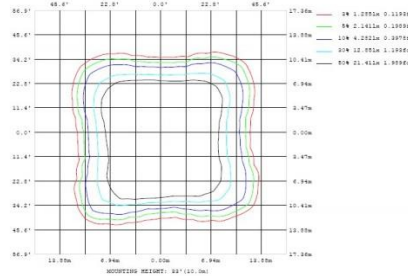

**KENJITSU LED** High Bay light (Flood Light/Spot Light/Tunnel Light) provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration,anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	160W
Power Factor	>0.99
LEDs	Cree Chip 25 pcs
Luminous Flux	14400 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right...   
KENJITSU




# High Bay / Flood Light / Spot Light / Tunnel Light (E Series)

Part# : HCL516E-X-PB4A20W-65



200W LED High Bay Lighting  
UL Certified (on process)  
IP65

Size : W320 x D524 x H274 mm  
N.W. : 10 Kgs  
G.W. : 12 Kgs

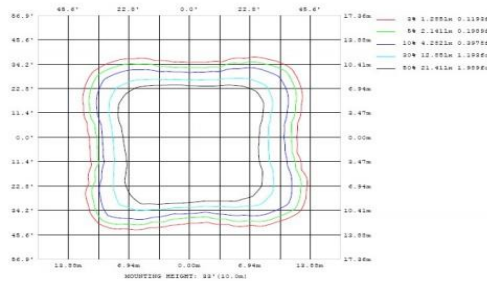


**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration, anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	200W
Power Factor	>0.99
LEDs	Cree Chip 30 pcs
Luminous Flux	18000 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution** :Risk of electric shock(do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ...   
KENJITSU




# High Bay / Flood Light / Spot Light / Tunnel Light (E Series)

Part# : HCL508E-X-PB4A25W-65



250W LED High Bay Lighting  
UL Certified (on process)  
IP65

Size : W320 x D649 x H274 mm  
N.W. : 14 Kgs  
G.W. : 16 Kgs

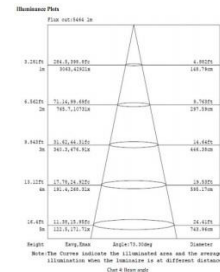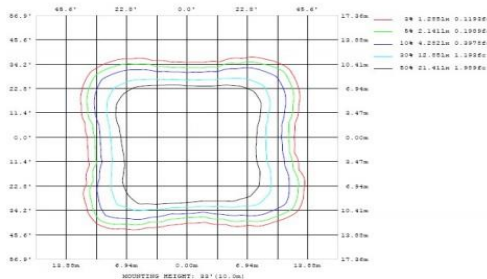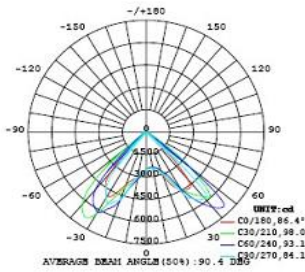

**KENJITSU LED High Bay light (Flood Light/Spot Light/Tunnel Light)** provides elegant industry design, simple and clean structured, but with best function. The integrated structure results to excellent heat dispersion and convenience for installation and replacement. Extremely power saving, long lifespan, fast responding, low maintenance cost, etc..  
Application : Warehouse, Public Area, Commercial center, Road, park, parking

- Energy Efficient: >85 lumens/watt, save up to 60% in energy costs
- High lumen output
- Well air convection design gives more lifespan to chip & helps on heat dispersion
- Mercury-free
- 3D vibration,anti-salty fog
- The arch design shell to prevent dirt stay on the top of lampshade
- Instant-on light
- 50,000 hours at 70% lumen maintenance rated life
- 5 years warranty / Lamp Body made in aluminum alloy, rust free, anti-corrosion

Input Voltage	110Vac - 277Vac
Working Voltage	90Vac - 305Vac
Horizontal Angle	135 °
Vertical Angle	43 °
Power	250W
Power Factor	>0.99
LEDs	Cree Chip 40 pcs
Luminous Flux	22500 lm
lm/w	90
Color Temp.	3000K - 6500K
Working Temp.	-35°C - +50°C
Material	Aluminium Alloy
Lifespan	50,000 hrs
Warranty	5 yrs

**Caution :** Risk of electric shock (do not open when lamp operating). Turn power off before inspection, installation, or removal.

a light just looks right ... 

## Home & Office LED Light (T8 Tube)



Part# : B4A010-T8W-06-CC  
 B4A010-T8Y-06-CC  
 B4A010-T8W-06-MC  
 B4A010-T8Y-06-MC

10W T8/G13 LED Tube  
 UL Certified  
 Removable LED Driver  
 Size :  $\Phi$  32\*L590mm

- \* Wide input voltage range:  
85V~277Vac/47~63Hz
- \* Removable LED Driver with structure  
Patent: No. 201220175072.6
- \* Reduce 90% maintenance cost and  
lasting 2 times longer lifespan
- \* 270 degree wide viewing angle  
Equipped with high CRI and low
- \* luminous decay LED light source,  
luminous efficacy >90lm/w  
Great lighting performance and heat
- \* dissipation, patent solution for heat  
management.
- \* Easy & convenient replacement/  
installation.  
No UV or IR radiation emitted; No
- \* Mercury; No noise or Flickering; Instant on  
and instant off

Power	10W
Length	590mm (2ft)
Input	120Vac -277Vac 50Hz - 60Hz
LED Chip	SMD3528
LEDs	96 pcs
Angle	Beam 140 ° Viewing 270 °
Luminous Flux	950lm +/- 10%
lm/W	95
PC Cover	Milky / Clear
Base	G13
CRI	>70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.95
Lifespan	50,000 hrs
Warranty	2 yrs

## Home & Office LED Light (T8 Tube)



Part# : B4A018-T8W-12-CC  
 B4A018-T8Y-12-CC  
 B4A018-T8W-12-MC  
 B4A018-T8Y-12-MC

18W T8/G13 LED Tube  
 UL Certified  
 Removable LED Driver  
 Size :  $\Phi$  32\*L1198mm

- \* Wide input voltage range:  
85V~277Vac/47~63Hz
- \* Removable LED Driver with structure  
Patent: No. 201220175072.6
- \* Reduce 90% maintenance cost and  
lasting 2 times longer lifespan
- \* 270 degree wide viewing angle  
Equipped with high CRI and low
- \* luminous decay LED light source,  
luminous efficacy >90lm/w  
Great lighting performance and heat
- \* dissipation, patent solution for heat  
management.
- \* Easy & convenient replacement/  
installation.  
No UV or IR radiation emitted; No
- \* Mercury; No noise or Flickering; Instant on  
and instant off

Power	18W
Length	1198mm (4ft)
Input	120Vac -277Vac 50Hz - 60Hz
LED Chip	SMD3528
Angle	Beam 140 ° Viewing 270 °
LEDs	192 pcs
Luminous Flux	1750lm +/- 10%
lm/W	97
PC Cover	Milky / Clear
Base	G13
CRI	>70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.95
Lifespan	50,000 hrs
Warranty	2 yrs

## Home & Office LED Light (T8 Tube)



Part# : B4A009E-T8W-06-CC  
B4A009E-T8Y-06-CC  
B4A009E-T8W-06-MC  
B4A009E-T8Y-06-MC

9W T8/G13 LED Tube  
CE/RoSH  
Size :  $\Phi$  26\*L590mm

- \* low maintenance cost, longer lifespan.
- \* 180 degree wide viewing angle.
- \* Equipped with high CRI, high luminous efficacy.
- \* Great light performance, excellent heat dissipation.
- \* Easy installation. Instant on and instant off.
- \* No UV or IR radiation emitted; no Mercury; No noise or Flickering.

Power	9W
Length	590mm (2ft)
Input	85Vac -265Vac 50Hz - 60Hz
Angle	Beam 120 ° Viewing 180 °
LED Chip	SMD2835
LEDs	48 pcs
Luminous Flux	800lm +/- 10%
lm/W	88
PC Cover	Milky / Clear
Base	G13
CRI	>70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.9
Lifespan	50,000 hrs
Warranty	2 yrs

## Home & Office LED Light (T8 Tube)



Part# : B4A020E-T8W-12-CC  
B4A020E-T8Y-12-CC  
B4A020E-T8W-12-MC  
B4A020E-T8Y-12-MC

20W T8/G13 LED Tube  
CE/RoSH  
Size :  $\Phi$  26\*L1198mm

- \* low maintenance cost, longer lifespan.
- \* 180 degree wide viewing angle.
- \* Equipped with high CRI, high luminous efficacy.
- \* Great light performance, excellent heat dissipation.
- \* Easy installation. Instant on and instant off.
- \* No UV or IR radiation emitted; no Mercury; No noise or Flickering.

Power	20W
Length	1198mm (4ft)
Input	85Vac -265Vac 50Hz - 60Hz
Angle	Beam 120 ° Viewing 180 °
LED Chip	SMD2835
LEDs	96 pcs
Luminous Flux	1750lm +/- 10%
lm/W	87
PC Cover	Milky / Clear
Base	G13
CRI	>70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.9
Lifespan	50,000 hrs
Warranty	2 yrs

## Home & Office LED Light (T8 Tube)



Part# : B4A036E-T8W-24-CC  
B4A036E-T8Y-24-CC  
B4A036E-T8W-24-MC  
B4A036E-T8Y-24-MC

36W T8/G13 LED Tube  
CE/RoSH  
Size :  $\Phi 26 \times L2367\text{mm}$

- \* low maintenance cost, longer lifespan.
- \* 180 degree wide viewing angle.
- \* Equipped with high CRI, high luminous efficacy.
- \* Great light performance, excellent heat dissipation.
- \* Easy installation. Instant on and instant off.
- \* No UV or IR radiation emitted; no Mercury; No noise or Flickering.

Power	360W
Length	2367mm (8ft)
Input	100Vac -240Vac 50Hz - 60Hz
Angle	Beam 120 ° Viewing 180 °
LED Chip	SMD2835
LEDs	192 pcs
Luminous Flux	3200lm +/- 10%
lm/W	88
PC Cover	Milky / Clear
Base	G13
CRI	>70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.9
Lifespan	50,000 hrs
Warranty	2 yrs

a light just looks right ...





## Home & Office LED Light (Bulb Type)



5W/7W/9W LED Bulb  
 E27 base  
 CE / RoHS  
 Energy Saving  
 Environmental Friendly

Part#	B4A005-BW B4A005-BY	B4A007-BW B4A007-BY	B4A009-BW B4A009-BY
Power	5W	7W	9W
Input	85Vac - 265Vac 50Hz - 60Hz		
Diameter	55mm	62mm	69mm
Luminous Flux	375lm +/- 10%	540lm +/- 10%	720lm +/- 10%
lm/W	75	78	80
Material	PC cover + Aluminium		
Base	E27		
CRI	> 70		
Color Temp.	2700K - 6500K		
Working Temp.	-35°C - +45°C		
IP Level	IP60		
Power Factor	> 0.9		
Lifespan	30,000 hrs		
Warranty	2 yrs		


## Home & Office LED Light (Bulb Type)



10W LED Bulb  
E27 base  
CE / RoHS  
Energy Saving  
Environmental Friendly

Part#	B4A010-BW B4A010-BY
Power	10W
Input	85Vac - 265Vac 50Hz - 60Hz
Diameter	70mm
Luminous Flux	900lm
lm/W	90
Material	PC cover
Base	E27
CRI	> 70
Color Temp.	2700K - 6500K
Working Temp.	-35°C - +45°C
IP Level	IP60
Power Factor	> 0.9
Lifespan	30,000 hrs
Warranty	2 yrs

# Home & Office LED Light (Smart LED Bulb Type)



6W/8W Smart LED Bulb (with sensor)  
 E27 base  
 FCC / CE / TUV  
 Energy Saving  
 Environmental Friendly

Patents in USA / Japan / Taiwan / EU / Korea / China / Germany / Russia ...

Part#	B4A006-BSW B4A006-BSY	B4A008-BSW B4A008-BSY
Power	6W	8W
Input	120Vac +/- 25% 50Hz - 60Hz	
Diameter	Ø 65mm	
Luminous Flux	480lm	680lm
lm/W	80	85
Material	PC cover	
Base	E27	
CRI	> 80	
Color Temp.	2700K - 6500K	
Working Temp.	0°C - +40°C	
IP Level	for indoor application	
Power Factor	> 0.9	
Lifespan	40,000 hrs	
Warranty	2 yrs	

a light just looks right ...





**Kenjitsu Latam SAPI de CV**

Velazquez de Leon #10-2A, Col. San Rafael, CP06470, Mex DF

Tel. 55.6269.2229 [www.kenjitsulataam.com](http://www.kenjitsulataam.com)