

***Our complete line of Decorator devices combine today's design aesthetics — with ease of installation, reliability, and performance that never goes out of style.***

<b>Device</b>	<b>Page Number</b>
Specification Grade Decorator & Combination Switches	E-2, E-3, E-7, E-8
TradeMaster® Decorator & Combinations	E-4 – E-6, E-9 – E-11, E-20, E-21
Home Locator Switches	E-12
PlugTail™ Decorator Receptacles	E-13
Hospital & Specification Grade Decorator Receptacles	E-14 , E-15
Heavy-Duty Tamper-Resistant Decorator Receptacles	E-16
Specification Grade Combination & Decorator Receptacles	E-17
TradeMasterr® Tamper-Resistant Receptacles	E-18
Weather-Resistant Receptacles	E-19
Recessed TV Boxes	E-22
TradeMaster®, Specification & Hospital Grade GFCI & Combination Receptacles	E-22 – E-32
PlugTail™ GFCI Receptacles	E-33 – E-36
TVSS Straight Blade Receptacles	E-37, E-38
Vacancy & Occupancy Sensors	E-39 – E-45
Timers	E-46 – E-48
LightSense™ Control	E-49 – E-52
Scene Director & Leandro®	E-53 – E-55
Harmony™ Dimmers & Fan Speed Controls	E-56
LS Series	E-57 – E-59
DR Series	E-60
Wide Slide Series	E-61, E-62
Titan™ Series	E-63 – E-69
P&S Signature™ Devices & Wall Plates	E-70 – E-77
Decorator Wall Plates	E-78 – E-81

# Decorator Devices Specification Grade Decorator Switches

**Heavy gauge steel strap** is double-plated for superior physical strength.

**Impact-resistant polycarb back body and frame**, for structural strength and impact resistance.


**Cushioned thermoplastic paddle** assures smooth, quiet long-term operation.

**Auto-ground clip on strap** speeds up installation and holds mounting screws in position.

**Single rocking butterfly contact design** has fewer moving parts — for longer life, and smoother, quieter operation.


**Oversized silver alloy contacts** integrally formed to the butterfly spring — assure high reliability.

**Brass terminal screws. Internal screw-pressure-plate and side wire capability.** Common terminal has two back wire holes for more wiring flexibility.

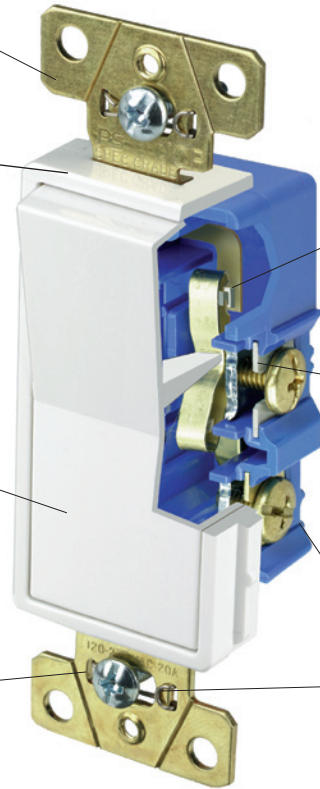

2601W

## Wiring Diagram: Single Pole, Double Pole, 3-Way & 4-Way

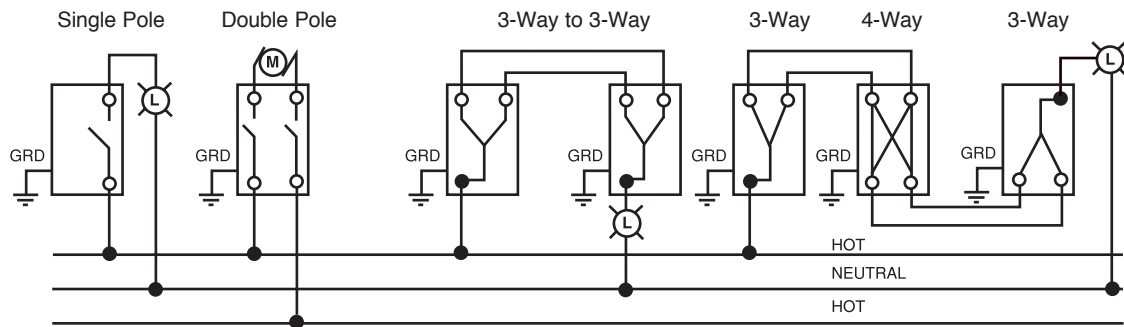




# Decorator Devices Specification Grade Decorator Switches

15, 120/277 & 347VAC; 20A, 120VAC

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>Impact-resistant polycarb back body and frame.</li> <li>Cushioned thermoplastic paddle assures smooth, quiet, long term operation.</li> <li>Unique single rocking butterfly contact provides long term consistent performance with significantly fewer moving parts.</li> <li>Internal screw-pressure-plate back and side wire capability for easy installation with #14 – #10 stranded or solid copper/copper clad wire. Terminals made of high conductivity brass and serrated for maximum wire gripping.</li> </ul>	<ul style="list-style-type: none"> <li>Silver alloy contacts integrally formed to the butterfly actuator assures reliable performance.</li> <li>Integral auto-ground clip for positive ground to metal boxes.</li> <li>Tri-drive ground, terminal and mounting screws. All terminal screws backed out, ready-to-install.</li> </ul>

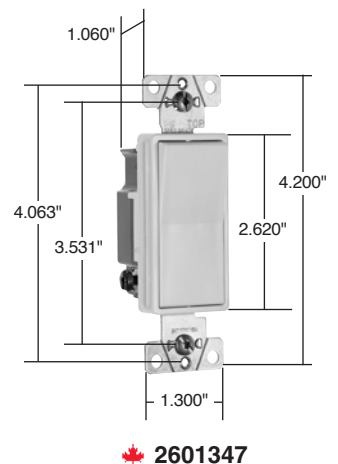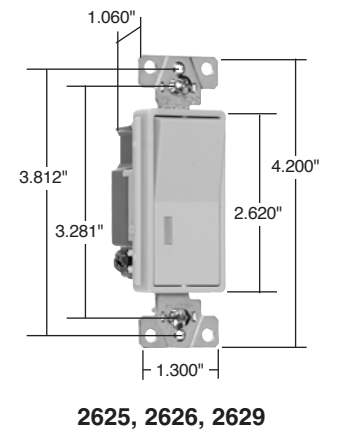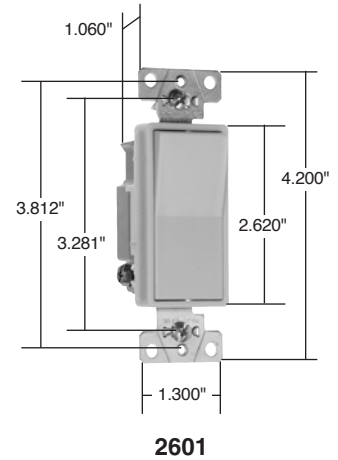

Catalog Number				Rating A. VAC	Color	3rd Party Compliance	
Single Pole	Double Pole	Three-Way	Four-Way			UL20	C22.2 111
<b>Specification Grade Decorator Switches Back &amp; Side Wire*</b>							
2601I		2603I	2604I	15 120/277	Ivory	•	•
2601W		2603W	2604W	15 120/277	White	•	•
2601GRY		2603GRY		15 120/277	Gray	•	•
2601BK		2603BK		15 120/277	Black	•	•
2601LA		2603LA	2604LA	15 120/277	Light Almond	•	•
2621I	2622I	2623I	2624I	20 120/277	Ivory	•	•
2621W	2622W	2623W	2624W	20 120/277	White	•	•
2621	2622	2623	2624	20 120/277	Brown	•	•
2621GRY	2622GRY	2623GRY	2624GRY	20 120/277	Gray	•	•
2621BK	2622BK	2623BK	2624BK	20 120/277	Black	•	•
2621RED		2623RED	2624RED	20 120/277	Red	•	•
2621LA	2622LA	2623LA	2624LA	20 120/277	Light Almond	•	•
<b>Illuminated Decorator Switches (Lighted when OFF) Back &amp; Side Wire*</b>							
2625I		2626I	2628I	20 120	Ivory	•	•
2625W		2626W	2628W	20 120	White	•	•
2625				20 120	Brown	•	•
2625LA		2626LA	2628LA	20 120	Light Almond	•	•
<b>Pilot Lighted Decorator Switches (Lighted when ON) Back &amp; Side Wire*</b>							
2629I				20 120	Ivory	•	•
2629W				20 120	White	•	•
2629LA				20 120	Light Almond	•	•

\*For Configurable Solutions, see Page U-1.

Catalog Number				Rating A. VAC	Color	3rd Party Compliance	
Single Pole	Three-Way	Four-Way	A. VAC			UL20	C22.2 111
<b>Specification Grade Decorator Switches Back &amp; Side Wire</b>							
2601347I	2603347I			15 347	Ivory	•	•
2601347W	2603347W			15 347	White	•	•
2601347GRY				15 347	Gray	•	•
2601347LA				15 347	Light Almond	•	•
2621347I	2623347I	2624347I		20 347	Ivory	•	•
2621347W	2623347W	2624347W		20 347	White	•	•
2621347GRY	2623347GRY			20 347	Gray	•	•
2621347BK	2623347BK			20 347	Black	•	•
2621347RED	2623347RED			20 347	Red	•	•
2621347LA	2623347LA	2624347LA		20 347	Light Almond	•	•
* Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.							

All devices listed on this page conform to NEMA WD-1 and WD-6.


# Decorator Devices TradeMaster® Decorator Switches



**Low profile paddle** offers the quality look and feel builders and homeowners love.

**Extra-long, through-body strap** eliminates floating installations and imperfect applications.

TM870LA

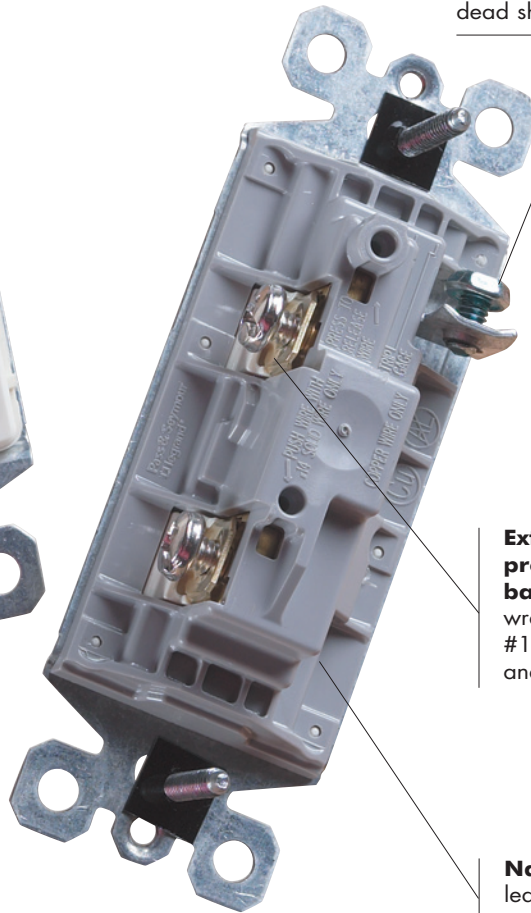

**Ground screw location** maximizes distance from terminal screw on adjacent device to eliminate risk of dead shorts.

**External screw-pressure-plate back wire** eliminates wrapping. Accepts #12 and #14 stranded and solid wire.

**Narrow back body** leaves more room for wires in the box.


# Decorator Devices TradeMaster® Decorator Switches

15A, 120/277VAC


Pass & Seymour




Features	
<ul style="list-style-type: none"> <li>■ Designer-style satin-finish rocker.</li> <li>■ High-impact resistant thermoplastic construction.</li> <li>■ External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.</li> <li>■ Push wire #14 AWG.</li> <li>■ Narrow back body leaves more room for wires in the box.</li> </ul>	<ul style="list-style-type: none"> <li>■ Extra-long, through-body strap eliminates floating installations and imperfect applications.</li> <li>■ Smooth, quiet paddle action.</li> <li>■ Easy-access green hex head ground screw.</li> <li>■ Tri-drive ground, terminal and mounting screws.</li> <li>■ ON-OFF switches conform to NEC 430-104 requirements for kitchen disposal units.</li> </ul>




TM870LA



TM870LAON



TM873LA



TM874LA

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			UL UL20	CS C22.2 111
<b>Single Pole Decorator Switches</b> Grounding*				
TM870I	15 120/277	Ivory	•	•
TM870W	15 120/277	White	•	•
TM870	15 120/277	Brown	•	•
TM870GRY	15 120/277	Gray	•	•
TM870BK	15 120/277	Black	•	•
TM870LA	15 120/277	Light Almond	•	•
<b>Single Pole Decorator Switches</b> Grounding with ON-OFF Indication				
TM870ION	15 120/277	Ivory	•	•
TM870WON	15 120/277	White	•	•
TM870BKON	15 120/277	Black	•	•
TM870LAON	15 120/277	Light Almond	•	•
<b>Three-Way Decorator Switches</b> Grounding*				
TM873I	15 120/277	Ivory	•	•
TM873W	15 120/277	White	•	•
TM873	15 120/277	Brown	•	•
TM873GRY	15 120/277	Gray	•	•
TM873BK	15 120/277	Black	•	•
TM873LA	15 120/277	Light Almond	•	•
<b>Four-Way Decorator Switches</b> Grounding				
TM874I	15 120/277	Ivory	•	•
TM874W	15 120/277	White	•	•
TM874	15 120/277	Brown	•	•
TM874BK	15 120/277	Black	•	•
TM874LA	15 120/277	Light Almond	•	•

\*For Configurable Solutions, see Page U-1.




# Decorator Devices TradeMaster® Decorator Illuminated & Self-Grounding Switches

15A, 120 & 120/277VAC



TM870LASL



TM870SLA

### Features

- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A. VAC		Color	3rd Party Compliance	
				UL UL20	CS C22.2 111
<b>Single Pole Illuminated Decorator Switches</b> Grounding (Lighted when OFF)					
TM870ISL	15	120/277	Ivory	•	•
TM870WSL	15	120/277	White	•	•
TM870LASL	15	120/277	Light Almond	•	•
<b>Self-Grounding Single Pole Decorator Switches</b>					
TM870SI	15	120/277	Ivory	•	•
TM870SW	15	120/277	White	•	•
TM870S	15	120/277	Brown	•	•
TM870SBK	15	120/277	Black	•	•
TM870SLA	15	120/277	Light Almond	•	•
<b>Three-Way Illuminated Decorator Switches</b> Grounding (Lighted when OFF)					
TM873ISL	15	120	Ivory	•	•
TM873WSL	15	120	White	•	•
TM873LASL	15	120	Light Almond	•	•
<b>Self-Grounding Three-Way Decorator Switches</b>					
TM873SI	15	120/277	Ivory	•	•
TM873SW	15	120/277	White	•	•
TM873S	15	120/277	Brown	•	•
TM873SBK	15	120/277	Black	•	•
TM873SLA	15	120/277	Light Almond	•	•
<b>Four-Way Illuminated Decorator Switches</b> Grounding (Lighted when OFF)					
TM874ISL	15	120/277	Ivory	•	•
TM874WSL	15	120/277	White	•	•
TM874LASL	15	120/277	Light Almond	•	•
<b>Self-Grounding Four-Way Decorator Switches</b>					
TM874SI	15	120/277	Ivory	•	•
TM874SW	15	120/277	White	•	•
TM874S	15	120/277	Brown	•	•
TM874SBK	15	120/277	Black	•	•
TM874SLA	15	120/277	Light Almond	•	•

**NEW**

**NEW**

**NEW**

**NEW**


# Decorator Devices Decorator & Specification Grade Combination Momentary & Maintained Contact Switches

15A, 120 & 120/277VAC

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>■ Designer-style satin-finish rocker.</li> <li>■ High-impact resistant thermoplastic construction.</li> <li>■ External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.</li> <li>■ Push wire #14 AWG.</li> <li>■ Narrow back body leaves more room for wires in the box.</li> </ul>	<ul style="list-style-type: none"> <li>■ Extra-long, through-body strap eliminates floating installations and imperfect applications.</li> <li>■ Smooth, quiet paddle action.</li> <li>■ Easy-access green hex head ground screw.</li> <li>■ Tri-drive ground, terminal and mounting screws.</li> </ul>




TM870STMLACC

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			UL20	C22.2 111
<b>Single Pole Decorator Momentary Contact Switches</b>				
TM870STMICC	15 120/277	Ivory	•	•
TM870STMWCC	15 120/277	White	•	•
TM870STMLACC	15 120/277	Light Almond	•	•
TM870STMBKCC	15 120/277	Black	•	•


Features	
<ul style="list-style-type: none"> <li>■ Unique “Up/Down” switches match the look and feel of standard decorator switches.</li> <li>■ Impact-resistant face and body.</li> <li>■ Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.</li> <li>■ All screws are tri-drive.</li> </ul>	<ul style="list-style-type: none"> <li>■ Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.</li> <li>■ Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.</li> </ul>



Catalog Number	Rating A. VAC	Color	3rd Party Compliance		
			cULus	UL20	UL508
<b>Specification Grade Double Throw Momentary Contact Switches</b>					
TM811DTMO	15 120	Ivory	•	•	•
TM811DTMOW	15 120	White	•	•	•
TM811DTMOLA	15 120	Light Almond	•	•	•
<b>Specification Grade Double Throw Maintained Contact Switches</b>					
TM811DTMA	15 120	Ivory	•	•	•
TM811DTMAW	15 120	White	•	•	•
TM811DTMALA	15 120	Light Almond	•	•	•




Momentary Contact



Maintained Contact

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour



15 & 20 Amp

# Decorator Devices Specification Grade Decorator Combination Switches

20A, 277VAC

### Features

- Unique “Up/Down” switches match the look and feel of standard decorator switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.
- Patent-pending snap-in light module (sold separately) transforms a combination switch into an illuminated switch.
- Identification modules (sold separately) identifies each switch — light, fan, heat lamp. See Page E-9 for details.

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			cULus cULus	UL UL20
<b>Two Single Pole Switches</b>				
PS81120I	20 277	Ivory	•	•
PS81120W	20 277	White	•	•
PS81120LA	20 277	Light Almond	•	•
<b>Three Single Pole Switches</b>				
PS811120I	20 277	Ivory	•	•
PS811120W	20 277	White	•	•
PS811120LA	20 277	Light Almond	•	•
<b>Snap-In Light Module*</b>				
PS8LM	— —	Clear		

\*For use with PS81120 and PS811120 only.



# Decorator Devices TradeMaster® Decorator Combination Switches

Pass & Seymour




**Unique "Up/Down" switches** match the look and feel of standard Decorator switches.

**Easy-to-use oversized main switch** for primary load.

**Patented Snap-In Light Module** (sold separately) transforms a combination switch into an illuminated switch in seconds.

**Identification modules** (sold separately) identifies each switch — light, fan, heat lamp.

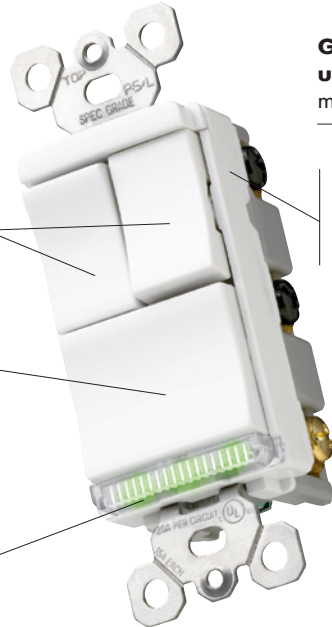

**TM8113WCC**  
Shown with Snap-In Light Module TM8LMCC.

**Fully rounded back body** protects wires from being damaged by sharp edges.

**Ground screw position under the end of the strap** minimizes the risk of contact.

**Impact-resistant face and body.**

**Full wraparound metal strap**, commercial grade with lock-in tabs.




**All screws are tri-drive.**

**Patented split circuit tab** — easily accessible, and can be reinstalled without a tool.

**External screw-pressure-plate back and side wired.** Accepts #12 and #14 AWG.

## Adding a Snap-In Light Module

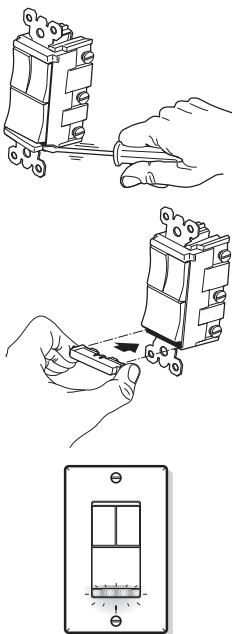

## Features

- Module simply snaps-in for easy installation.
- Can be installed with the following devices: TM811, TM813, TM833, TM818, TM838, TM8111, TM8113, TM81111, TM8118 and the LS Series of Dimmers & Fan Speed Controls (see Pages N-15 through N-17).

## Snap-In Light Module:


- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.




Catalog Number	Rating A. VAC	Color	3rd Party Compliance cULus cULus
<b>Snap-In Light Module</b>			
TM8LMCC	15 120/125	Clear	•
<b>Identification Modules</b>			
TM8IDICC	— —	Ivory	
TM8IDWCC	— —	White	
TM8IDCC	— —	Brown	
TM8IDBKCC	— —	Black	
TM8IDLACC	— —	Light Almond	

For Decorator Hallway Lights and Combination Devices, see Pages E-17, E-18, E-21, E-30, E-36, and E-72.


Pass & Seymour



TM811WCC



TM8111WCC



TM81111WCC

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices TradeMaster® Decorator Combination Switches

15A, 120VAC

### Features


- Impact-resistant face and body.
- Fully rounded back body protects wires from being damaged by sharp edges.
- Clear identification of circuits.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Full wraparound metal strap with lock-in tabs.
- Patented split circuit tab – easily accessible, and can be reinstalled without a tool.
- Unique “Up/Down” switches match the look and feel of standard Decorator switches.
- Largest breadth of 15 amp offering.
- All screws are tri-drive.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects (see Page E-11).

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			UL <sup>®</sup> UL20	cUL <sup>us</sup> cULus
<b>Two Single Pole Switches</b>				
TM811ICC	15 120	Ivory	•	•
TM811WCC	15 120	White	•	•
TM811CC	15 120	Brown	•	•
TM811BKCC	15 120	Black	•	•
TM811LACC	15 120	Light Almond	•	•
<b>Two Single Pole Switches with Pilot Light</b>				
TM811PLICC	15 120	Ivory	•	•
TM811PLWCC	15 120	White	•	•
TM811PLBKCC	15 120	Black	•	•
TM811PLLACC	15 120	Light Almond	•	•
<b>Single Pole Switch &amp; Three-Way Switch</b>				
TM813ICC	15 120	Ivory	•	•
TM813WCC	15 120	White	•	•
TM813CC	15 120	Brown	•	•
TM813BKCC	15 120	Black	•	•
TM813LACC	15 120	Light Almond	•	•
<b>Single Pole Switch with Pilot Light &amp; Three-Way Switch</b>				
TM813PLICC	15 120	Ivory	•	•
TM813PLWCC	15 120	White	•	•
TM813PLBKCC	15 120	Black	•	•
TM813PLLACC	15 120	Light Almond	•	•
<b>Two Three-Way Switches</b>				
TM833ICC	15 120	Ivory	•	•
TM833WCC	15 120	White	•	•
TM833CC	15 120	Brown	•	•
TM833BKCC	15 120	Black	•	•
TM833LACC	15 120	Light Almond	•	•
<b>Three Single Pole Switches</b>				
TM8111ICC	15 120	Ivory	•	•
TM8111WCC	15 120	White	•	•
TM8111CC	15 120	Brown	•	•
TM8111BKCC	15 120	Black	•	•
TM8111LACC	15 120	Light Almond	•	•
<b>Two Single Pole Switches &amp; Three-Way Switch</b>				
TM8113ICC	15 120	Ivory	•	•
TM8113WCC	15 120	White	•	•
TM8113CC	15 120	Brown	•	•
TM8113BKCC	15 120	Black	•	•
TM8113LACC	15 120	Light Almond	•	•
<b>Four Single Pole Switches</b>				
TM81111ICC	15 120	Ivory	•	•
TM81111WCC	15 120	White	•	•
TM81111CC	15 120	Brown	•	•
TM81111BKCC	15 120	Black	•	•
TM81111LACC	15 120	Light Almond	•	•


# Decorator Devices TradeMaster® Decorator Combination Switches

15A, 120/125VAC


Pass & Seymour



TM818TRWCC



TM818WCC



TM8118TRWCC

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL <sub>20</sub>	UL <sub>498</sub>	cUL <sub>us</sub>
<b>NEW Tamper-Resistant Single Pole Switch &amp; Single Receptacle</b>						
TM818TRICC	15 120/125	Ivory	5-15R	•	•	•
TM818TRWCC	15 120/125	White	5-15R	•	•	•
TM818TRCC	15 120/125	Brown	5-15R	•	•	•
TM818TRBKCC	15 120/125	Black	5-15R	•	•	•
TM818TRLACC	15 120/125	Light Almond	5-15R	•	•	•
<b>NEW Tamper-Resistant Single Pole Switch &amp; Single Receptacle with Pilot Light</b>						
TM818TRPLICC	15 120/125	Ivory	5-15R	•	•	•
TM818TRPLWCC	15 120/125	White	5-15R	•	•	•
TM818TRPLBKCC	15 120/125	Black	5-15R	•	•	•
TM818TRPLLACC	15 120/125	Light Almond	5-15R	•	•	•
<b>NEW Tamper-Resistant Three-Way Switch &amp; Single Receptacle</b>						
TM838TRICC	15 120/125	Ivory	5-15R	•	•	•
TM838TRWCC	15 120/125	White	5-15R	•	•	•
TM838TRCC	15 120/125	Brown	5-15R	•	•	•
TM838TRBKCC	15 120/125	Black	5-15R	•	•	•
TM838TRLACC	15 120/125	Light Almond	5-15R	•	•	•
<b>NEW Tamper-Resistant Two Single Pole Switches &amp; Single Receptacle</b>						
TM8118TRICC	15 120/125	Ivory	5-15R	•	•	•
TM8118TRWCC	15 120/125	White	5-15R	•	•	•
TM8118TRCC	15 120/125	Brown	5-15R	•	•	•
TM8118TRBKCC	15 120/125	Black	5-15R	•	•	•
TM8118TRLACC	15 120/125	Light Almond	5-15R	•	•	•
<b>Single Pole Switch &amp; Single Receptacle</b>						
TM818ICC	15 120/125	Ivory	5-15R	•	•	•
TM818WCC	15 120/125	White	5-15R	•	•	•
TM818CC	15 120/125	Brown	5-15R	•	•	•
TM818BKCC	15 120/125	Black	5-15R	•	•	•
TM818LACC	15 120/125	Light Almond	5-15R	•	•	•
<b>Single Pole Switch &amp; Single Receptacle with Pilot Light</b>						
TM818PLICC	15 120/125	Ivory	5-15R	•	•	•
TM818PLWCC	15 120/125	White	5-15R	•	•	•
TM818PLBKCC	15 120/125	Black	5-15R	•	•	•
TM818PLLACC	15 120/125	Light Almond	5-15R	•	•	•
<b>Three-Way Switch &amp; Single Receptacle</b>						
TM838ICC	15 120/125	Ivory	5-15R	•	•	•
TM838WCC	15 120/125	White	5-15R	•	•	•
TM838CC	15 120/125	Brown	5-15R	•	•	•
TM838BKCC	15 120/125	Black	5-15R	•	•	•
TM838LACC	15 120/125	Light Almond	5-15R	•	•	•
<b>Two Single Pole Switches &amp; Single Receptacle</b>						
TM8118ICC	15 120/125	Ivory	5-15R	•	•	•
TM8118WCC	15 120/125	White	5-15R	•	•	•
TM8118CC	15 120/125	Brown	5-15R	•	•	•
TM8118BKCC	15 120/125	Black	5-15R	•	•	•
TM8118LACC	15 120/125	Light Almond	5-15R	•	•	•
<b>Single Pole Switch &amp; Pilot Light</b>						
TM81PLICC	15 120/125	Ivory		•	•	•
TM81PLWCC	15 120/125	White		•	•	•
TM81PLBKCC	15 120/125	Black		•	•	•
TM81PLLACC	15 120/125	Light Almond		•	•	•
<b>Three-Way Switch &amp; Pilot Light</b>						
TM83PLICC	15 120/125	Ivory		•	•	•
TM83PLWCC	15 120/125	White		•	•	•
TM83PLBKCC	15 120/125	Black		•	•	•
TM83PLLACC	15 120/125	Light Almond		•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices


TradeMaster® Decorator Combination Switches

Pass & Seymour



## Decorator Devices Decorator Home Locator Switches

15A, 120VAC



TM8LOCATORLA

### Application

In an emergency, seconds can make all the difference. Easily make a home instantly identifiable with a P&S Decorator Home Locator Switch. Just a single touch on its lower push button flashes the front outside lights continuously. The switch's LED flashes red to indicate the locator is in operation. When the locator flasher isn't in use, the switch's LED glows green for easy location in the dark.

### Features

- ON/OFF switch with normal paddle operation.
- Locator function flashes the outdoor light ON and OFF signaling SOS in Morse Code.
- Green LED illuminates and differentiates switch for easy location in emergency.
- Red LED indicates the emergency function is enabled.
- Wires the same as a single pole switch.
- cULus Listed.

Catalog Number	Description	Rating	Color
<b>Decorator Home Locator Switches</b>			
TM8LOCATORI	Emergency Decorator Home Locator	500 Watts, 15A, 120VAC	Ivory
TM8LOCATORW			White
TM8LOCATORLA			Light Almond


# Decorator Devices PlugTail™ Decorator Receptacles

15 & 20A, 125V


Pass & Seymour




- | Features  |  |
|---|--|
| <ul style="list-style-type: none"> <li>.036 inch thick, brass, triple-wipe power contacts for lasting retention.</li> <li>Plated steel wrap strap design for maximum durability and corrosion resistance.</li> <li>No exposed terminals create a finger safe application before, during, and after installation.</li> <li>Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.</li> <li>Crimped and welded contacts.</li> </ul> | <ul style="list-style-type: none"> <li>Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.</li> <li>Large brass contacts snugly terminate on device blade terminals.</li> <li>Pre-stripped connector leads fasten to conductors, easier than standard pigtailed.</li> <li>Auto-ground clip assures positive ground.</li> <li>Isolated ground version features nylon isolator plate for isolating ground from strap and box system.</li> </ul> |

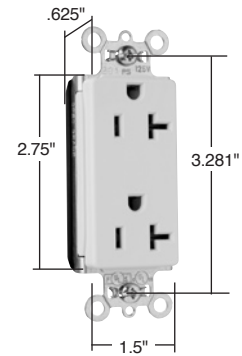

PT26352LA

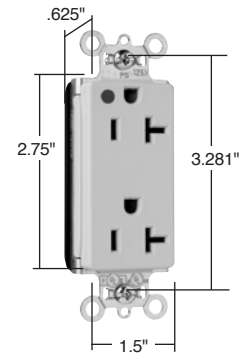

PT26362HGI

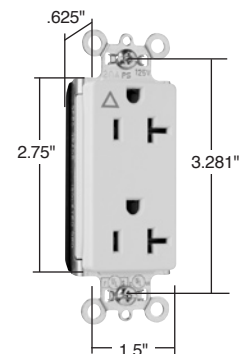


PTIG26362LA

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				cULus UL498	FSUL WC596
<b>Duplex Receptacles</b>					
PT26252I	15 125	Ivory	5-15R	•	•
PT26252W	15 125	White	5-15R	•	•
PT26252	15 125	Brown	5-15R	•	•
PT26252GRY	15 125	Gray	5-15R	•	•
PT26252BK	15 125	Black	5-15R	•	•
PT26252RED	15 125	Red	5-15R	•	•
PT26252LA	15 125	Light Almond	5-15R	•	•
PT26352I	20 125	Ivory	5-20R	•	•
PT26352W	20 125	White	5-20R	•	•
PT26352	20 125	Brown	5-20R	•	•
PT26352GRY	20 125	Gray	5-20R	•	•
PT26352BK	20 125	Black	5-20R	•	•
PT26352RED	20 125	Red	5-20R	•	•
PT26352LA	20 125	Light Almond	5-20R	•	•
<b>Hospital Grade Duplex Receptacles</b>					
PT26262HGI	15 125	Ivory	5-15R	•	•
PT26262HGW	15 125	White	5-15R	•	•
PT26262HGGRY	15 125	Gray	5-15R	•	•
PT26262HGRED	15 125	Red	5-15R	•	•
PT26362HGI	20 125	Ivory	5-20R	•	•
PT26362HGW	20 125	White	5-20R	•	•
PT26362HGGRY	20 125	Gray	5-20R	•	•
PT26362HGRED	20 125	Red	5-20R	•	•
PT26362HGLA	20 125	Light Almond	5-20R	•	•
<b>Isolated Ground Duplex Receptacles</b>					
PTIG26262I	15 125	Ivory	5-15R	•	•
PTIG26262W	15 125	White	5-15R	•	•
PTIG26262	15 125	Orange	5-15R	•	•
PTIG26262GRY	15 125	Gray	5-15R	•	•
PTIG26262RED	15 125	Red	5-15R	•	•
PTIG26262LA	15 125	Light Almond	5-15R	•	•
PTIG26362I	20 125	Ivory	5-20R	•	•
PTIG26362W	20 125	White	5-20R	•	•
PTIG26362	20 125	Orange	5-20R	•	•
PTIG26362GRY	20 125	Gray	5-20R	•	•
PTIG26362RED	20 125	Red	5-20R	•	•
PTIG26362LA	20 125	Light Almond	5-20R	•	•

NEW

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

For PlugTail Connectors, see Page B-3.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1-U-3.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Decorator Devices

PlugTail™ Decorator Receptacles




# Decorator Devices Heavy-Duty Hospital Grade & Specification Grade Decorator Receptacles


15 & 20A, 125V

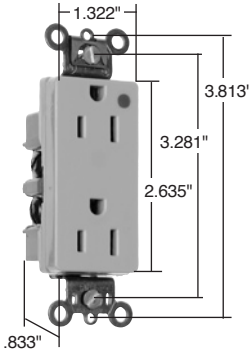

26262HGI

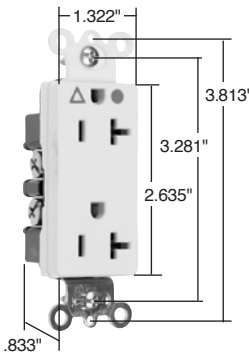

IG26262HGI

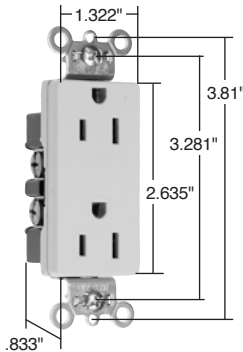

26252I

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

### Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	cUL/CSA
<b>Hospital Grade Duplex Receptacles Back &amp; Side Wire</b>						
26262HGI	15 125	Ivory	5-15R	•	•	•
26262HGW	15 125	White	5-15R	•	•	•
26262HGGRY	15 125	Gray	5-15R	•	•	•
26262HGRED	15 125	Red	5-15R	•	•	•
26362HGI	20 125	Ivory	5-20R	•	•	•
26362HGW	20 125	White	5-20R	•	•	•
26362HG	20 125	Brown	5-20R	•	•	•
26362HGGRY	20 125	Gray	5-20R	•	•	•
26362HGRED	20 125	Red	5-20R	•	•	•
26362HGLA	20 125	Light Almond	5-20R	•	•	•
<b>Hospital Grade Isolated Ground Duplex Receptacles Back &amp; Side Wire</b>						
IG26262HGW	15 125	White	5-15R	•		•
IG26262HG	15 125	Orange	5-15R	•		•
IG26262HGRED	15 125	Red	5-15R	•		•
IG26362HGW	20 125	White	5-20R	•		•
IG26362HG	20 125	Orange	5-20R	•		•
IG26362HGGRY	20 125	Gray	5-20R	•		•
IG26362HGBK	20 125	Black	5-20R	•		•
IG26362HGRED	20 125	Red	5-20R	•		•
<b>Hospital Grade Illuminated Duplex Receptacles Back &amp; Side Wire</b>						
26222HGI	15 125	Ivory	5-15R	•		•
26322HGI	20 125	Ivory	5-20R	•		•
26322HGW	20 125	White	5-20R	•		•
26322HGRED	20 125	Red	5-20R	•		•


<b>Specification Grade Duplex Receptacles Back &amp; Side Wire</b>						
26252I	15 125	Ivory	5-15R	•	•	•
26252W	15 125	White	5-15R	•	•	•
26252	15 125	Brown	5-15R	•	•	•
26252GRY	15 125	Gray	5-15R	•	•	•
26252BK	15 125	Black	5-15R	•	•	•
26252RED	15 125	Red	5-15R	•	•	•
26252LA	15 125	Light Almond	5-15R	•	•	•
26352I	20 125	Ivory	5-20R	•	•	•
26352W	20 125	White	5-20R	•	•	•
26352	20 125	Brown	5-20R	•	•	•
26352GRY	20 125	Gray	5-20R	•	•	•
26352BK	20 125	Black	5-20R	•	•	•
26352RED	20 125	Red	5-20R	•	•	•
26352LA	20 125	Light Almond	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices Specification Grade Decorator Receptacles

15 & 20A, 125 & 250V


Pass & Seymour

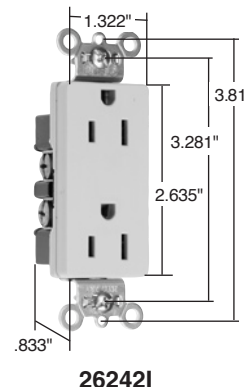

- | Features   |  |
|--|--|
| <ul style="list-style-type: none"> <li>Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.</li> <li>One-piece, brass, triple-wipe power contacts for lasting retention.</li> <li>Heavy-duty compact design for easier installation and long lasting performance.</li> <li>Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.</li> </ul> | <ul style="list-style-type: none"> <li>Impact-resistant nylon face.</li> <li>Terminal compartments isolated from each other for positive conductor containment.</li> <li>Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.</li> <li>All devices fit standard #26 opening wall plate.</li> <li>Tri-drive terminal and mounting screws.</li> <li>Auto-ground clip assures positive ground.</li> </ul> |

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	cUL/CSA
<b>Duplex Receptacles Back &amp; Side Wire</b>						
26652I	15 250	Ivory	6-15R	•	•	•
26652W	15 250	White	6-15R	•	•	•
26652	15 250	Brown	6-15R	•	•	•
26652GRY	15 250	Gray	6-15R	•	•	•
26652BK	15 250	Black	6-15R	•	•	•
26652RED	15 250	Red	6-15R	•	•	•
26852I	20 250	Ivory	6-20R	•	•	•
26852W	20 250	White	6-20R	•	•	•
26852	20 250	Brown	6-20R	•	•	•
26852GRY	20 250	Gray	6-20R	•	•	•
26852BK	20 250	Black	6-20R	•	•	•
26852RED	20 250	Red	6-20R	•	•	•
26852LA	20 250	Light Almond	6-20R	•	•	•
<b>Duplex Receptacles Side Wire Only</b>						
26242I	15 125	Ivory	5-15R	•	•	•
26242W	15 125	White	5-15R	•	•	•
26242	15 125	Brown	5-15R	•	•	•
26242GRY	15 125	Gray	5-15R	•	•	•
26242BK	15 125	Black	5-15R	•	•	•
26242RED	15 125	Red	5-15R	•	•	•
26342I	20 125	Ivory	5-20R	•	•	•
26342W	20 125	White	5-20R	•	•	•
26342	20 125	Brown	5-20R	•	•	•
26342GRY	20 125	Gray	5-20R	•	•	•
26342BK	20 125	Black	5-20R	•	•	•
26342RED	20 125	Red	5-20R	•	•	•

2 Pole, 3 Wire

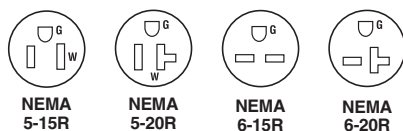

For Configurable Solutions, see Page U-1.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour




# Decorator Devices Heavy-Duty Tamper-Resistant Decorator Receptacles

15 & 20A, 125V



TR26362I



TR26362HGI

### Features

- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	cUL/CSA
<b>NEW Tamper-Resistant Decorator Duplex Receptacles – Back &amp; Side Wire</b>						
TR26262I	15 125	Ivory	5-15R	•	•	•
TR26262W	15 125	White	5-15R	•	•	•
TR26262	15 125	Brown	5-15R	•	•	•
TR26262GRY	15 125	Gray	5-15R	•	•	•
TR26262BK	15 125	Black	5-15R	•	•	•
TR26262RED	15 125	Red	5-15R	•	•	•
TR26262LA	15 125	Light Almond	5-15R	•	•	•
TR26362I	20 125	Ivory	5-20R	•	•	•
TR26362W	20 125	White	5-20R	•	•	•
TR26362	20 125	Brown	5-20R	•	•	•
TR26362GRY	20 125	Gray	5-20R	•	•	•
TR26362BK	20 125	Black	5-20R	•	•	•
TR26362RED	20 125	Red	5-20R	•	•	•
TR26362LA	20 125	Light Almond	5-20R	•	•	•
<b>NEW Tamper-Resistant Hospital Grade Duplex Receptacles – Back &amp; Side Wire</b>						
TR26262HGI	15 125	Ivory	5-15R	•	•	•
TR26262HW	15 125	White	5-15R	•	•	•
TR26262HG	15 125	Brown	5-15R	•	•	•
TR26262HGGRY	15 125	Gray	5-15R	•	•	•
TR26262HGBK	15 125	Black	5-15R	•	•	•
TR26262HGRE	15 125	Red	5-15R	•	•	•
TR26262HGGLA	15 125	Light Almond	5-15R	•	•	•
TR26362HGI	20 125	Ivory	5-20R	•	•	•
TR26362HW	20 125	White	5-20R	•	•	•
TR26362HG	20 125	Brown	5-20R	•	•	•
TR26362HGGRY	20 125	Gray	5-20R	•	•	•
TR26362HGBK	20 125	Black	5-20R	•	•	•
TR26362HGRE	20 125	Red	5-20R	•	•	•
TR26362HGGLA	20 125	Light Almond	5-20R	•	•	•



NEMA  
5-15R



NEMA  
5-20R



# Decorator Devices Specification Grade Combination & Decorator Receptacles


15 & 20A, 125 & 250V; 20A, 120/125VAC

Pass & Seymour




## Features

- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.



PS8HWLLA

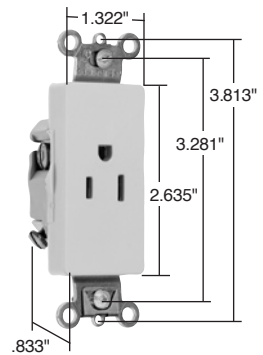

262611



Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance	
					UL <sup>®</sup> US UL498	
<b>Specification Grade Decorator Hallway Light &amp; Single Receptacle</b>						
PS8HWLI	20 120/125	0.2561	Ivory	5-20R		•
PS8HWLW	20 120/125	0.2561	White	5-20R		•
PS8HWLLA	20 120/125	0.2561	Light Almond	5-20R		•

\*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See Page U-55 for more information.

## Features

- Corrosion-resistant, plated wraparound steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

2 Pole, 3 Wire




Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL <sup>®</sup> UL498	FSUL WC596	cUL/CSA
<b>Heavy-Duty Specification Grade Single Receptacles Back &amp; Side Wire</b>						
262611	15 125	Ivory	5-15R	•	•	•
26261W	15 125	White	5-15R	•	•	•
26261	15 125	Brown	5-15R	•	•	•
26261GRY	15 125	Gray	5-15R	•	•	•
26261BK	15 125	Black	5-15R	•	•	•
263611	20 125	Ivory	5-20R	•	•	
26361W	20 125	White	5-20R	•	•	
26361	20 125	Brown	5-20R	•	•	
26361GRY	20 125	Gray	5-20R	•	•	
26361BK	20 125	Black	5-20R	•	•	
26361LA	20 125	Light Almond	5-20R	•	•	
266611	15 250	Ivory	6-15R	•	•	•
26661W	15 250	White	6-15R	•	•	•
26661GRY	15 250	Gray	6-15R	•	•	•
26661BK	15 250	Black	6-15R	•	•	•
268611	20 250	Ivory	6-20R	•	•	
26861W	20 250	White	6-20R	•	•	
26861	20 250	Brown	6-20R	•	•	
26861GRY	20 250	Gray	6-20R	•	•	
26861BK	20 250	Black	6-20R	•	•	
26861LA	20 250	Light Almond	6-20R	•	•	



All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour

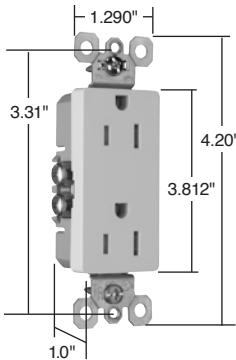

885TRSLA


# Decorator Devices TradeMaster® Tamper-Resistant Receptacles

15A, 125V

### Features

- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet “caps” or “protection plates.”
- Low profile face.
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	C22.2 No. 42	cULus
<b>Decorator Tamper-Resistant Receptacles</b>						
885TRI	15 125	Ivory	5-15R	•	•	•
885TRW	15 125	White	5-15R	•	•	•
885TR	15 125	Brown	5-15R	•	•	•
885TRGRY	15 125	Gray	5-15R	•	•	•
885TRBK	15 125	Black	5-15R	•	•	•
885TRLA	15 125	Light Almond	5-15R	•	•	•
<b>Self-Grounding Decorator Tamper-Resistant Receptacles</b>						
885TRSI	15 125	Ivory	5-15R	•	•	•
885TRSW	15 125	White	5-15R	•	•	•
885TRSLA	15 125	Light Almond	5-15R	•	•	•



TM8HWLTRLACC

### Features

- Impact-resistant face and body.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- GE Lexan™ high impact-resistant lens.
- Tri-drive screws.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.
- UL tested shutter mechanism for protection against improper object insertion per UL498.
- Specially designed for increased protection of children in their homes.
- Superior protection than traditional outlet “caps” or “protection plates.”

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance
					cULus UL498
<b>Decorator Hallway Light with High Output Light &amp; Tamper-Resistant Single Receptacle</b>					
TM8HWLTRICC	15 125	0.2561	Ivory	5-15R	•
TM8HWLWRCC	15 125	0.2561	White	5-15R	•
TM8HWLWRBKCC	15 125	0.2561	Black	5-15R	•
TM8HWLWTRCC	15 125	0.2561	Brown	5-15R	•
TM8HWLWTRLACC	15 125	0.2561	Light Almond	5-15R	•

\* FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-55 for more information.

2 Pole, 3 Wire



NEMA  
5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices Weather-Resistant Receptacles


Pass & Seymour



Residential Weather-Resistant Receptacles are Tamper-Resistant as required by 2008 National Electrical Code®


Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:

- Ultraviolet light exposure test
- Cold impact test
- Accelerated aging test
- Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.

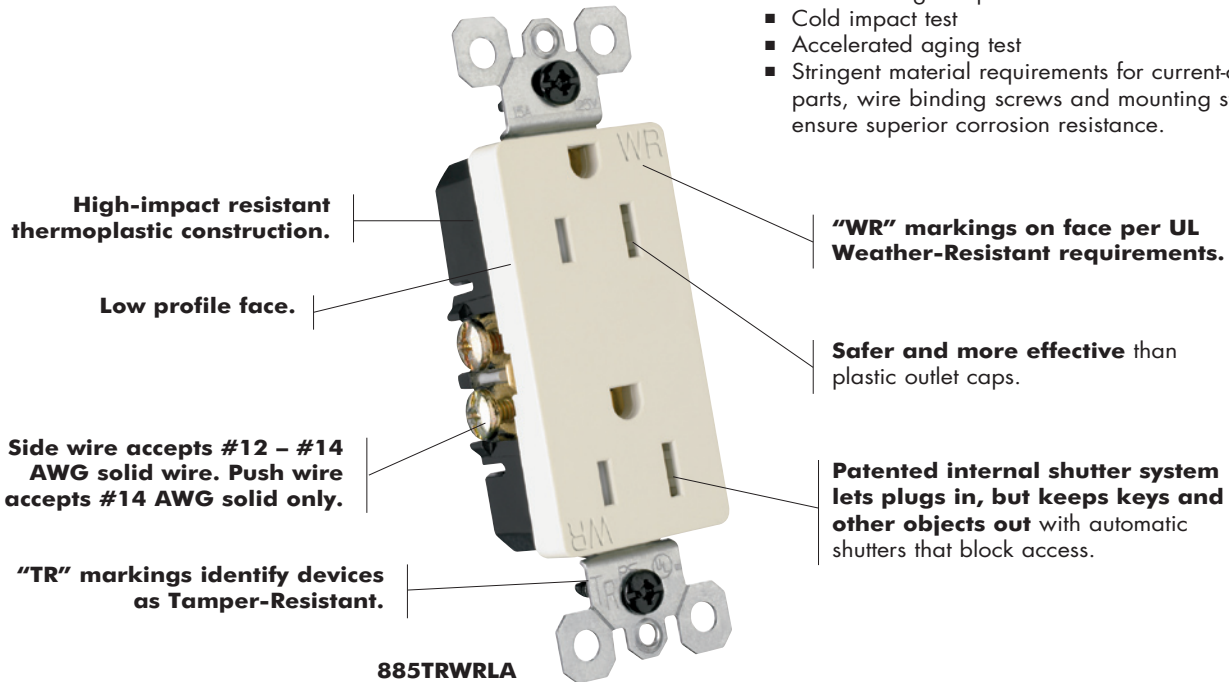

885TRWRLA

Features	
<ul style="list-style-type: none"> <li>■ Specifically designed for increased protection of children in the home.</li> <li>■ Extra-long strap.</li> </ul>	<ul style="list-style-type: none"> <li>■ Quickloop wire looping aid.</li> <li>■ Long-term blade retention.</li> </ul>

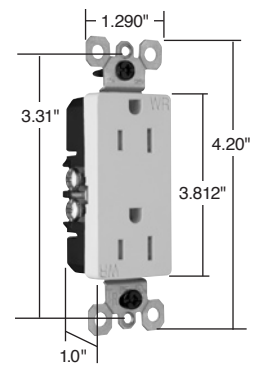


885TRWRW

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	CS C22.2 No. 42	cULus cULus
<b>Decorator Weather-Resistant Duplex Receptacles</b>						
885TRWRI	15 125	Ivory	5-15R	•	•	•
885TRWRW	15 125	White	5-15R	•	•	•
885TRWR	15 125	Brown	5-15R	•	•	•
885TRWRLA	15 125	Light Almond	5-15R	•	•	•


**2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.**

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.


2 Pole, 3 Wire



NEMA 5-15R

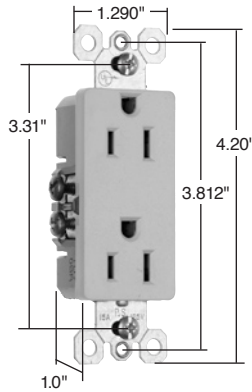

8851

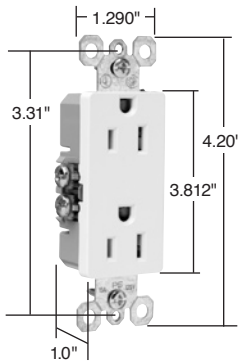

TM885W

2 Pole, 3 Wire



NEMA 5-15R

# Decorator Devices TradeMaster® Decorator Receptacles

15A, 125V

### Features

- High impact-resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Tri-drive screws.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL498	C22.2 42
<b>Decorator Duplex Receptacles</b>					
8851	15 125	Ivory	5-15R	•	•
885W	15 125	White	5-15R	•	•
885	15 125	Brown	5-15R	•	•
885BK	15 125	Black	5-15R	•	•
885LA	15 125	Light Almond	5-15R	•	•
<b>Self-Grounding Decorator Duplex Receptacles</b>					
885SI	15 125	Ivory	5-15R	•	•
885SW	15 125	White	5-15R	•	•
885SLA	15 125	Light Almond	5-15R	•	•

For Configurable Solutions, see Page U-1.

### Features

- Longer steel straps than competitive devices, still fits under a standard wall plate.
- High-impact thermoplastic face and back body eliminate cracks, breaks and callbacks.
- Ultrasonic welding of face to back body.
- Patented design provides better plug retention.
- External screw-pressure-plate back wire on all four terminal screws and ground screw eliminates wrapping.
- Accepts #12 and #14 stranded and solid wire.
- Break-off tabs that are big enough to grab hold of – even if the contact screws are backed-out. Scored deeper, for fast, clean breaks every time.
- All four contact screws and the ground screw are backed-out.
- All screws are tri-drive.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance
				cULus UL498
<b>Decorator Duplex Receptacles with Pressure Plates</b>				
TM885I	15 125	Ivory	5-15R	•
TM885W	15 125	White	5-15R	•
TM885	15 125	Brown	5-15R	•
TM885GRY	15 125	Gray	5-15R	•
TM885BK	15 125	Black	5-15R	•
TM885LA	15 125	Light Almond	5-15R	•
<b>Decorator Duplex Receptacles with Pressure Plates Self-Grounding</b>				
TM885SI	15 125	Ivory	5-15R	•
TM885SW	15 125	White	5-15R	•
TM885SLA	15 125	Light Almond	5-15R	•
<b>Decorator Duplex Receptacles with Pressure Plates Bulk Pack of 150</b>				
TM885I150	15 125	Ivory	5-15R	•
TM885W150	15 125	White	5-15R	•
TM885LA150	15 125	Light Almond	5-15R	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices TradeMaster® Decorator Hallway Lights & Combination Devices

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>Impact-resistant face and body.</li> <li>GE Lexan™ high impact-resistant lens.</li> <li>External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.</li> <li>Ground screw position under the end of the strap minimizes the risk of contact.</li> </ul>	<ul style="list-style-type: none"> <li>Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.</li> <li>Sensor automatically turns light ON in the dark.</li> <li>Increased light output for better illumination.</li> <li>Light sensor for enhanced sensitivity.</li> </ul>

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	3rd Party Compliance
				cUL <sup>us</sup> UL1598
<b>TradeMaster® Decorator Full Hallway Light</b>				
TMHWLCC	— 120	0.1328	Clear	•
<b>Enhanced Decorator Full Hallway Light with Light Sensor</b>				
TMHWLECC	— 120	1.079	Clear	•
<b>Enhanced Decorator Full Hallway Light without Light Sensor</b>				
TMHWLENSCC	— 120	1.113	Clear	•
<b>Full Hallway Decorator Light for use with P&amp;S Metal Louver Plates**</b>				
TMHWLLOUVCC	— 120	0.0843	Clear	•

\*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See Page U-55 for more information.  
\*\*For Louver Plates, see Page S-20.

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance
					cUL <sup>us</sup> UL498
<b>TradeMaster® Decorator Hallway Light &amp; Single Receptacle</b>					
TM8HWLIC	15 120/125	0.1442	Ivory	5-15R	•
TM8HWLWCC	15 120/125	0.1442	White	5-15R	•
TM8HWLBKCC	15 120/125	0.1442	Black	5-15R	•
TM8HWLCC	15 120/125	0.1442	Brown	5-15R	•
TM8HWLLACC	15 120/125	0.1442	Light Almond	5-15R	•
<b>Enhanced Decorator Hallway Light &amp; Single Receptacle</b>					
TM8HWLEICC	15 120/125	0.2561	Ivory	5-15R	•
TM8HWLEWCC	15 120/125	0.2561	White	5-15R	•
TM8HWLELACC	15 120/125	0.2561	Light Almond	5-15R	•


\*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See Page U-55 for more information.

2 Pole, 3 Wire




NEMA 5-15R


For complete line of Decorator Combination Devices and Hallway Lights, see Pages E-7 – E-11, E-17, E-18, E-21, E-30, E-36, and E-72.




TMHWLCC



TMHWLECC



TM8HWLWCC



TM8HWLEWCC4

All devices listed on this page conform to NEMA WD-1 and WD-6.

## Decorator Devices Recessed TV Boxes

***Ideal for flat-screen TVs, home office, kitchen counter tops, and behind furniture to allow snug-to-wall placement.***

Today's homeowners have more multimedia choices than ever — including flat panel, wall-mounted televisions. P&S Recessed TV Boxes offer a clean installation with the versatility to handle up to 12 multimedia connections, while providing surge protected power.

Their recessed design saves space and simplifies connections to cable or satellite boxes, DVRs, DVD players, surround-sound systems and more.

And they're available with or without TVSS receptacles to protect costly electronics from potentially damaging surges.



TV3WTVSSLA



TV1WW



TV1WTVSSBK

Features	
<ul style="list-style-type: none"> <li>■ Clean, flush-mount appearance — snap-on end caps hide mounting screws.</li> <li>■ Flexible — position either line voltage or low-voltage in all three openings.</li> <li>■ Low-voltage connectors offer both terminated and pull-through capability.</li> <li>■ Plugs and multimedia connections stay recessed behind the wall surface.</li> </ul>	<ul style="list-style-type: none"> <li>■ Molded-in template and rectangular cut-out.</li> <li>■ Accepts standard TP wall plates.</li> <li>■ Metal swing brackets ensure a solid mounting.</li> <li>■ Uses old-work-style boxes for line voltage.</li> <li>■ Accepts all P&amp;S keystone low-voltage connectors, including Cat 5e and F-connectors (both supplied with TVSS kit), as well as RCA and audio binding posts.</li> </ul>

Catalog Number	Description	Color
<b>Recessed TV Boxes</b>		
TV1WW TV1WBK TV1WLA	Single Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV1WTVSSW TV1WTVSSBK TV1WTVSSLA	Single Gang Recessed TV Box with TVSS & Low-Voltage Kit. Includes TVSS Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond
TV3WW TV3WBK TV3WLA	3 Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV3WTVSSW TV3WTVSSBK TV3WTVSSLA	Single Gang Recessed TV Box with TVSS & Low-Voltage Kit. Includes TVSS Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond

**Single gang dimensions:** 7.25" L x 4.875" W x 2.25" D

**Three gang dimensions:** 8.5" L x 4.875" W x 2.25" D

# Decorator Devices Tamper-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Decorator Devices

Features	
<ul style="list-style-type: none"> <li>Protects children: patented shutter system helps prevent improper insertion of foreign objects.</li> <li>Meets 2008 National Electrical Code® Tamper-Resistant requirements.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>FSUL Listed (Federal Specification WC596).</li> <li>Trip indicator light (red LED).</li> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> </ul>	<ul style="list-style-type: none"> <li>Two back wire holes per terminal.</li> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132 VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>

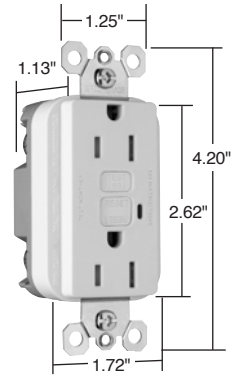

1595TRW

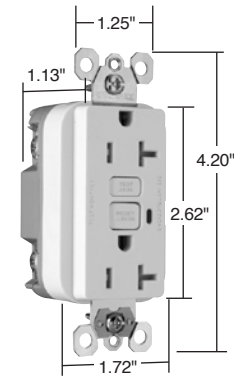

2095TRSW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI</b>							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
<b>TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI with Auto-Ground</b>							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade Tamper-Resistant 20 Amp Duplex GFCI</b>							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
<b>Specification Grade Tamper-Resistant 20 Amp Duplex GFCI with Auto-Ground</b>							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.


**2008 National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.**

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Tamper-Resistant GFCI Receptacles

Pass & Seymour

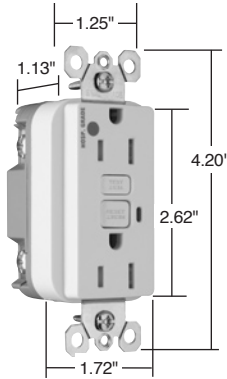

1595HGTRW

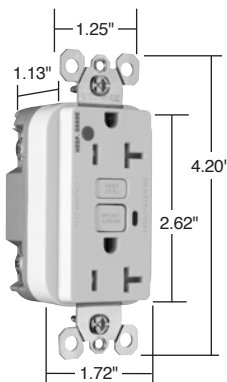

2095HGTRW

## Decorator Devices Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

### Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- Trip Threshold: 5± 1mA
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI</b>							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
<b>Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI</b>							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.



# Decorator Devices TradeMaster® & Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Decorator Devices

## Features


- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- GFCIs with Auto-Ground assure a positive ground to metal box.

## Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

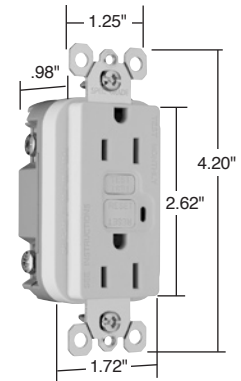

1595W

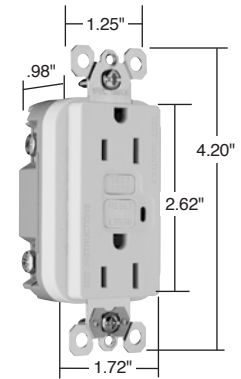

1595SW

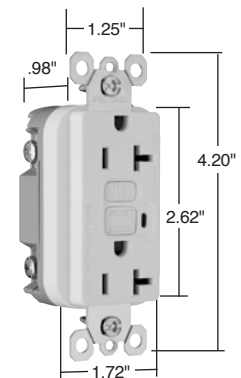

2095W



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI</b>							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
<b>TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground</b>							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI</b>							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
<b>Specification Grade 20 Amp Duplex GFCI with Auto-Ground</b>							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

For Configurable Solutions, see Page U-1.

Available in Bulk Packaging, i.e. 1595W20 is 20 pack, 1595W100 is 100 pack. Please contact Customer Support at 1-800-223-4189.

All devices listed on this page conform to NEMA WD-1 and WD-6.


TradeMaster® & Spec Grade GFCI Receptacles

Pass & Seymour




## Decorator Devices Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

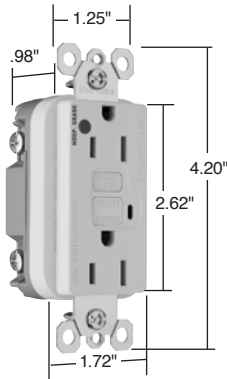

1595HGW

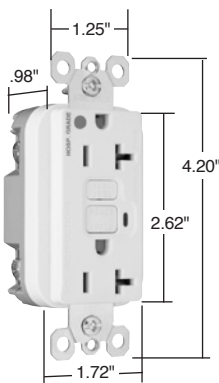

2095HGW

### Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>Hospital Grade 15 Amp Duplex GFCI</b>						
1595HGI	15 125	Ivory	5-15R	•	•	•
1595HGW	15 125	White	5-15R	•	•	•
1595HG	15 125	Brown	5-15R	•	•	•
1595HGGRY	15 125	Gray	5-15R	•	•	•
1595HGRED	15 125	Red	5-15R	•	•	•
1595HGLA	15 125	Light Almond	5-15R	•	•	•
<b>Hospital Grade 20 Amp Duplex GFCI</b>						
2095HGI	20 125	Ivory	5-20R	•	•	•
2095HGW	20 125	White	5-20R	•	•	•
2095HG	20 125	Brown	5-20R	•	•	•
2095HGGRY	20 125	Gray	5-20R	•	•	•
2095HGRED	20 125	Red	5-20R	•	•	•
2095HGLA	20 125	Light Almond	5-20R	•	•	•



NEMA  
5-15R



NEMA  
5-20R

For Configurable Solutions, see Page U-1.


# Decorator Devices Illuminated GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>FSUL Listed (Federal Specification WC596).</li> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>Two back wire holes per terminal.</li> </ul>	<ul style="list-style-type: none"> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132 VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>

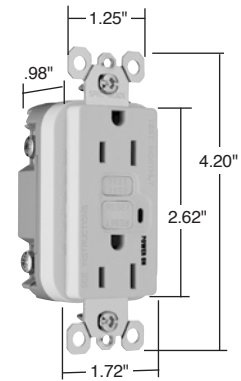

1595WL

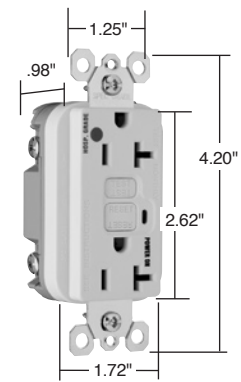

2095HGWL

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade Illuminated 15 Amp Duplex GFCI</b>							
1595IL	15	125	Ivory	5-15R	•	•	•
1595WL	15	125	White	5-15R	•	•	•
1595L	15	125	Brown	5-15R	•	•	•
1595LAL	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade Illuminated 20 Amp Duplex GFCI</b>							
2095IL	20	125	Ivory	5-20R	•	•	•
2095WL	20	125	White	5-20R	•	•	•
2095L	20	125	Brown	5-20R	•	•	•
2095GRYL	20	125	Gray	5-20R	•	•	•
2095LAL	20	125	Light Almond	5-20R	•	•	•
<b>Hospital Grade Illuminated 15 Amp Duplex GFCI</b>							
1595HGIL	15	125	Ivory	5-15R	•	•	•
1595HGWL	15	125	White	5-15R	•	•	•
1595HGL	15	125	Brown	5-15R	•	•	•
1595HGGRYL	15	125	Gray	5-15R	•	•	•
1595HGREDL	15	125	Red	5-15R	•	•	•
1595HGLAL	15	125	Light Almond	5-15R	•	•	•
<b>Hospital Grade Illuminated 20 Amp Duplex GFCI</b>							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGL	20	125	Brown	5-20R	•	•	•
2095HGGRYL	20	125	Gray	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•
2095HGLAL	20	125	Light Almond	5-20R	•	•	•



For Configurable Solutions, see Page U-1.



2085W

## Decorator Devices Specification Grade Dead Front GFCI

20A, 125VAC

### Features

- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to the load is disconnected.
- Prevents line-load reversal miswire: no power to the load or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz.
- Supply Voltage Range: 102-132 VAC.
- Trip Threshold: 5± 1mA.
- Trip Time: 0.025 sec., nominal per UL Standard.
- 20 Amp feed-thru capacity.

Rating Catalog Number	A.	VAC	Color	3rd Party Compliance	
				UL943 C22.2 No. 144	UL508 C22.2 No. 14
<b>Specification Grade Dead Front GFCI – 1½ HP Motor Control Rating</b>					
2085I	20	125	Ivory	•	•
2085W	20	125	White	•	•
2085BK	20	125	Black	•	•
2085LA	20	125	Light Almond	•	•

For Configurable Solutions, see Page U-1.

Catalog Number	Description
<b>Accessories – GFCIs</b>	
1594TPAI	7.0 cu. in. Extension Ring, Ivory
1594TPAW	7.0 cu. in. Extension Ring, White
1594TPA	7.0 cu. in. Extension Ring, Brown
1594TPALA	7.0 cu. in. Extension Ring, Light Almond


# Decorator Devices Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>Protects children: patented shutter system helps prevent improper insertion of foreign objects.</li> <li>Meets 2008 National Electrical Code® Tamper-Resistant requirements.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Up-down switching.</li> <li>15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>Trip indicator light (red LED).</li> <li>Two back wire holes per terminal.</li> </ul>	<ul style="list-style-type: none"> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132 VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>

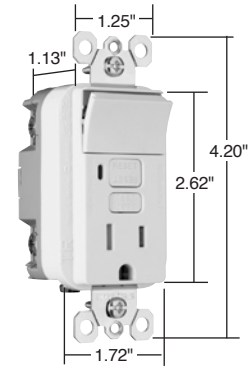


1595SWTTRWCC4

Catalog Number	Switch Rating A. VAC	Receptacle Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL943 C22.2 No. 144	cUL498 C22.2 No. 42	cUL20 C22.2 No. 111
<b>NEW</b> <b>Combination Tamper-Resistant Single Pole Switch/GFCI</b>							
1595SWTTRICC4	15 120	15 125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15 120	15 125	White	5-15R	•	•	•
1595SWTTRBKCC4	15 120	15 125	Black	5-15R	•	•	•
1595SWTTRLACC4	15 120	15 125	Light Almond	5-15R	•	•	•




NEMA  
5-15R



Pass & Seymour

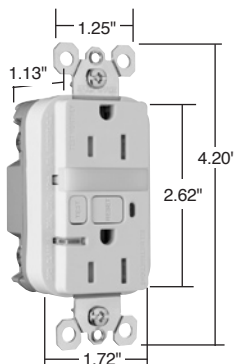

1595NLTTRWCC4

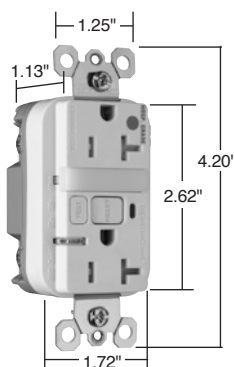

2095HGNTLTRW



# Decorator Devices Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

15 & 20A, 125VAC

### Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- Trip Threshold: 5± 1mA
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance				
					cUL943 UL943 C22.2 No. 144	cUL498 UL498 C22.2 No. 42	FSUL WC596		
<b>NEW</b> <b>Combination Tamper-Resistant 15 Amp Nightlight/GFCI</b>									
1595NLTTRICC4	15 125	0.180	Ivory	5-15R	•	•	•		
1595NLTTRWCC4	15 125	0.180	White	5-15R	•	•	•		
1595NLTTRBKCC4	15 125	0.180	Black	5-15R	•	•	•		
1595NLTTRLACC4	15 125	0.180	Light Almond	5-15R	•	•	•		
<b>NEW</b> <b>Combination Tamper-Resistant 20 Amp Nightlight/GFCI</b>									
2095NLTTRI	20 125	0.180	Ivory	5-20R	•	•	•		
2095NLTTRW	20 125	0.180	White	5-20R	•	•	•		
2095NLTTRGRY	20 125	0.180	Gray	5-20R	•	•	•		
2095NLTTRRED	20 125	0.180	Red	5-20R	•	•	•		
2095NLTTRLA	20 125	0.180	Light Almond	5-20R	•	•	•		
<b>NEW</b> <b>Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI</b>									
1595HGNTLTRI	15 125	0.180	Ivory	5-15R	•	•	•		
1595HGNTLTRW	15 125	0.180	White	5-15R	•	•	•		
1595HGNTLTR	15 125	0.180	Brown	5-15R	•	•	•		
1595HGNTLTRGRY	15 125	0.180	Gray	5-15R	•	•	•		
1595HGNTLTRRED	15 125	0.180	Red	5-15R	•	•	•		
1595HGNTLTRLA	15 125	0.180	Light Almond	5-15R	•	•	•		
<b>NEW</b> <b>Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI</b>									
2095HGNTLTRI	20 125	0.180	Ivory	5-20R	•	•	•		
2095HGNTLTRW	20 125	0.180	White	5-20R	•	•	•		
2095HGNTLTR	20 125	0.180	Brown	5-20R	•	•	•		
2095HGNTLTRGRY	20 125	0.180	Gray	5-20R	•	•	•		
2095HGNTLTRRED	20 125	0.180	Red	5-20R	•	•	•		
2095HGNTLTRLA	20 125	0.180	Light Almond	5-20R	•	•	•		

\*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-55 for more information.

All devices listed on this page conform to NEMA WD-1 and WD-6.


# Decorator Devices Weather-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>Weather-Resistant: Meets 2008 National Electrical Code® Weather-Resistant requirements.</li> <li>Tamper-Resistant: Meets 2008 National Electrical Code® Tamper-Resistant requirements.</li> <li>Protects children: patented shutter system helps prevent improper insertion of foreign objects.</li> <li>Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:                             <ul style="list-style-type: none"> <li>Ultraviolet light exposure test</li> <li>Cold impact test</li> <li>Accelerated aging test</li> <li>Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.</li> </ul> </li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> </ul>	<ul style="list-style-type: none"> <li>FSUL Listed (Federal Specification WC596).</li> <li>Trip indicator light (red LED).</li> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>Two back wire holes per terminal.</li> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long nickel post-plated steel mounting strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132 VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>

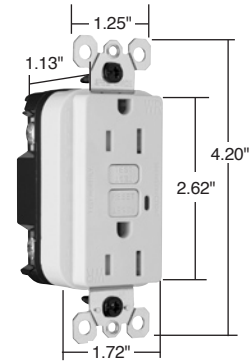


1595TRWRW

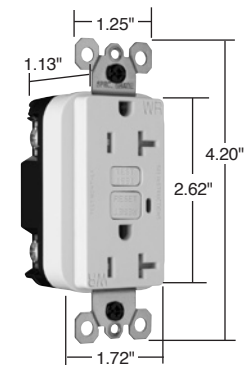

2095TRWRW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI</b>							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRRWR	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade Weather-Resistant 20 Amp Duplex GFCI</b>							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRRWR	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•




For Configurable Solutions, see Page U-1.

**2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.**

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Pass & Seymour

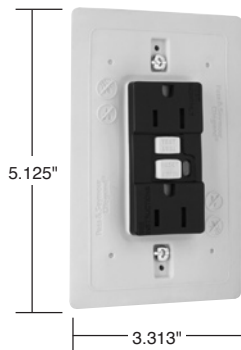

1595DSWRBKCC4



# Decorator Devices Weather-Resistant DuraShield™ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

### Features

- Designed for extra durability and a long service life when installed in harsh environments: outdoor, garages, workshops, wash down areas, commercial kitchens, and labs.
- Weather-Resistant: Meets 2008 National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Dust- and insect-resistant.
- Rubber curtains let plug blades in; keep dust, water and insects out.
- Integral gasket seals receptacle, protecting critical electronic components.
- Exceeds UL corrosion requirements – survives 4X the required corrosion test cycles.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance	
					cUL <sup>us</sup> UL943 C22.2 No. 144	cUL <sup>us</sup> UL498 C22.2 No. 42
<b>NEW</b> Specification Grade Weather-Resistant DuraShield™ 15 Amp Duplex GFCI						
1595DSWRBKCC4	15	125	Black	5-15R	•	•
<b>NEW</b> Specification Grade Weather-Resistant DuraShield™ 20 Amp Duplex GFCI						
2095DSWRBK	20	125	Black	5-20R	•	•



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

**2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.**

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.




# Decorator Devices PlugTail™ Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>■ Faster, more reliable installation.</li> <li>■ No exposed terminals create a finger safe application before, during, and after installation.</li> <li>■ Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.</li> <li>■ GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.</li> <li>■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>■ FSUL Listed (Federal Specification WC596).</li> </ul>	<ul style="list-style-type: none"> <li>■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>■ Trip indicator light (red LED).</li> <li>■ Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>■ High-impact-resistant thermoplastic construction.</li> <li>■ Zinc-plated steel mounting strap.</li> <li>■ Button colors match the device face.</li> <li>■ Dual-direction test and reset buttons.</li> <li>■ Class A rated GFCI.</li> <li>■ Supplied with matching TP26 nylon wall plate.</li> <li>■ Tri-drive screws.</li> </ul>
Specifications	
<ul style="list-style-type: none"> <li>■ Supply Voltage: 125VAC, 60 Hz</li> <li>■ Supply Voltage Range: 102-132 VAC</li> <li>■ Trip Threshold: 5± 1mA</li> </ul>	<ul style="list-style-type: none"> <li>■ Trip Time: 0.025 sec., nominal per UL Standard</li> <li>■ 20 Amp feed-thru capacity</li> </ul>

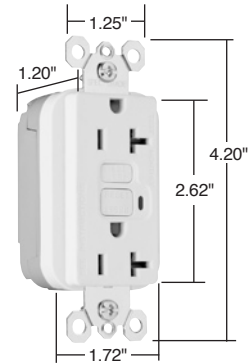

PT2095W





Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>NEW</b> Specification Grade 15 Amp Duplex GFCI							
PT1595I	15	125	Ivory	5-15R	•	•	•
PT1595W	15	125	White	5-15R	•	•	•
PT1595	15	125	Brown	5-15R	•	•	•
PT1595GRY	15	125	Gray	5-15R	•	•	•
PT1595BK	15	125	Black	5-15R	•	•	•
PT1595RED	15	125	Red	5-15R	•	•	•
PT1595LA	15	125	Light Almond	5-15R	•	•	•
<b>NEW</b> Specification Grade 20 Amp Duplex GFCI							
PT2095I	20	125	Ivory	5-20R	•	•	•
PT2095W	20	125	White	5-20R	•	•	•
PT2095	20	125	Brown	5-20R	•	•	•
PT2095GRY	20	125	Gray	5-20R	•	•	•
PT2095BK	20	125	Black	5-20R	•	•	•
PT2095RED	20	125	Red	5-20R	•	•	•
PT2095LA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors – Right Angle</b>		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, use Configurable Solutions to order.

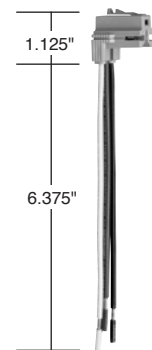


PTRA6STR

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour

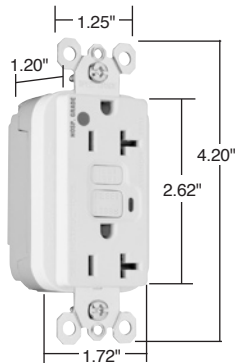

PT2095HGW



## Decorator Devices PlugTail™ Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


### Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>NEW Hospital Grade 15 Amp Duplex GFCI</b>						
PT1595HGI	15 125	Ivory	5-15R	•	•	•
PT1595HGW	15 125	White	5-15R	•	•	•
PT1595HG	15 125	Brown	5-15R	•	•	•
PT1595HGGRY	15 125	Gray	5-15R	•	•	•
PT1595HGRED	15 125	Red	5-15R	•	•	•
PT1595HGLA	15 125	Light Almond	5-15R	•	•	•
<b>NEW Hospital Grade 20 Amp Duplex GFCI</b>						
PT2095HGI	20 125	Ivory	5-20R	•	•	•
PT2095HGW	20 125	White	5-20R	•	•	•
PT2095HG	20 125	Brown	5-20R	•	•	•
PT2095HGGRY	20 125	Gray	5-20R	•	•	•
PT2095HGRED	20 125	Red	5-20R	•	•	•
PT2095HGLA	20 125	Light Almond	5-20R	•	•	•



PTRA6STR

Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors – Right Angle</b>		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"



For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, use Configurable Solutions to order.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

# Decorator Devices PlugTail™ Specification & Hospital Grade Tamper-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Decorator Devices


Features	
<ul style="list-style-type: none"> <li>Protects children: patented shutter system helps prevent improper insertion of foreign objects.</li> <li>Meets 2008 National Electrical Code® Tamper-Resistant requirements.</li> <li>Faster, more reliable installation.</li> <li>No exposed terminals create a finger safe application before, during, and after installation.</li> <li>Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.</li> <li>GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> </ul>	<ul style="list-style-type: none"> <li>FSUL Listed (Federal Specification WC596).</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>Trip indicator light (red LED).</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Zinc-plated steel mounting strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul>

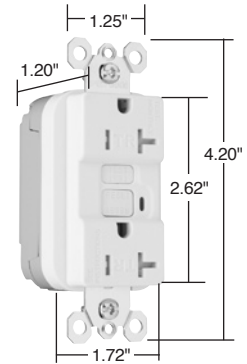

PT2095TRW

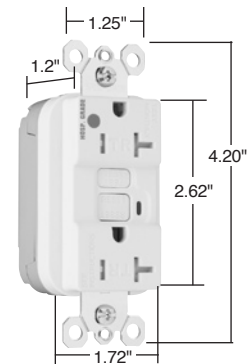


PT2095HGTRW



PTR66STR

For PlugTail Connector catalog numbers, see Page B-3.



NEMA 5-15R



NEMA 5-20R


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL <sup>us</sup> 943 C22.2 No. 144	UL <sup>us</sup> 498 C22.2 No. 42	FSUL WC596
<b>NEW Specification Grade Tamper-Resistant 15 Amp Duplex GFCI</b>							
PT1595TRI	15	125	Ivory	5-15R	•	•	•
PT1595TRW	15	125	White	5-15R	•	•	•
PT1595TR	15	125	Brown	5-15R	•	•	•
PT1595TRGRY	15	125	Gray	5-15R	•	•	•
PT1595TRBK	15	125	Black	5-15R	•	•	•
PT1595TRRED	15	125	Red	5-15R	•	•	•
PT1595TRLA	15	125	Light Almond	5-15R	•	•	•
<b>NEW Specification Grade Tamper-Resistant 20 Amp Duplex GFCI</b>							
PT2095TRI	20	125	Ivory	5-20R	•	•	•
PT2095TRW	20	125	White	5-20R	•	•	•
PT2095TR	20	125	Brown	5-20R	•	•	•
PT2095TRGRY	20	125	Gray	5-20R	•	•	•
PT2095TRBK	20	125	Black	5-20R	•	•	•
PT2095TRRED	20	125	Red	5-20R	•	•	•
PT2095TRLA	20	125	Light Almond	5-20R	•	•	•
<b>NEW Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI</b>							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
<b>NEW Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI</b>							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.


All devices listed on this page conform to NEMA WD-1 and WD-6.

PlugTail™ Tamper-Resistant GFCIs


Pass & Seymour

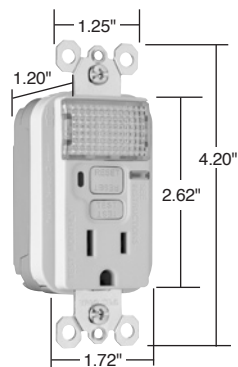

PT1595NTLLA

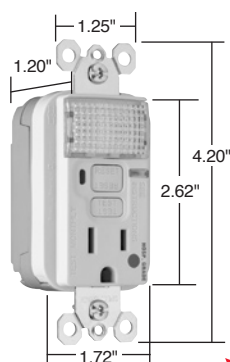

PT1595HGNTLLA



PTR66STR

For PlugTail Connector catalog numbers, see Page B-3.



NEMA 5-15R



NEMA 5-20R

# Decorator Devices PlugTail™ Specification & Hospital Grade Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

### Features

- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>Specification Grade 15 Amp Combination Nightlight/GFCI</b>							
PT1595NTLI	15	125	Ivory	5-15R	•	•	•
PT1595NTLW	15	125	White	5-15R	•	•	•
PT1595NTLGRY	15	125	Gray	5-15R	•	•	•
PT1595NTLBK	15	125	Black	5-15R	•	•	•
PT1595NTLRED	15	125	Red	5-15R	•	•	•
PT1595NTLLA	15	125	Light Almond	5-15R	•	•	•
<b>Specification Grade 20 Amp Combination Nightlight/GFCI</b>							
PT2095NTLI	20	125	Ivory	5-20R	•	•	•
PT2095NTLW	20	125	White	5-20R	•	•	•
PT2095NTLGRY	20	125	Gray	5-20R	•	•	•
PT2095NTLBK	20	125	Black	5-20R	•	•	•
PT2095NTLRED	20	125	Red	5-20R	•	•	•
PT2095NTLLA	20	125	Light Almond	5-20R	•	•	•
<b>Hospital Grade 15 Amp Combination Nightlight/GFCI</b>							
PT1595HGNTLI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLW	15	125	White	5-15R	•	•	•
PT1595HGNTLGRY	15	125	Gray	5-15R	•	•	•
PT1595HGNTLRED	15	125	Red	5-15R	•	•	•
PT1595HGNTLLA	15	125	Light Almond	5-15R	•	•	•
<b>Hospital Grade 20 Amp Combination Nightlight/GFCI</b>							
PT2095HGNTLI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLW	20	125	White	5-20R	•	•	•
PT2095HGNTLGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNTLRED	20	125	Red	5-20R	•	•	•
PT2095HGNTLLA	20	125	Light Almond	5-20R	•	•	•


# Decorator Devices Hospital Grade TVSS Duplex Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



Specifications	
<ul style="list-style-type: none"> <li>UL1449 (latest revision). (1.2 x 50μs 6000V, 8 x 20μs 3000A).</li> <li>1 filtering capacitor for 7 to 1 average noise reduction.</li> <li>Nominal let-through (suppressed) voltage in all 3 modes, 500V.</li> <li>Response time less than 1 nanosecond for unmounted MOV.</li> <li>Overcurrent protection in all 3 modes.</li> <li>Electronic components potted for electrical, mechanical and thermal stability.</li> <li>Thermal protection in all 3 modes.</li> <li>Leakage current: 0.5mA at 25°C/120VAC.</li> </ul>	<ul style="list-style-type: none"> <li>3 18mm dual pack MOVs to suppress transients in all modes – equally.</li> <li>Common mode noise attenuation: 500 KHz to 30 MHz; up to 35dB (50 ohm source impedance)</li> <li>Varistor voltage: 150V RMS.</li> <li>Back and side wire capability including ground terminal.</li> <li>Operating temperature: -40°C to 85°C (-40°F to 185°F)</li> <li>Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.</li> </ul>
Specification, Hospital and Isolated Ground Receptacles	
<ul style="list-style-type: none"> <li>Audible alarm able to be turned on/off.</li> <li>LED indicator light.</li> <li>280 joules of energy absorption in each of the three modes.</li> </ul>	<ul style="list-style-type: none"> <li>18,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground.</li> <li>Isolated Ground version complies with NEC 410-56 (C) and 250-74 exception 4.</li> </ul>
Commercial Receptacles	
<ul style="list-style-type: none"> <li>LED indicator light.</li> <li>140 joules of energy absorption in each of the three modes.</li> </ul>	<ul style="list-style-type: none"> <li>9,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground.</li> </ul>

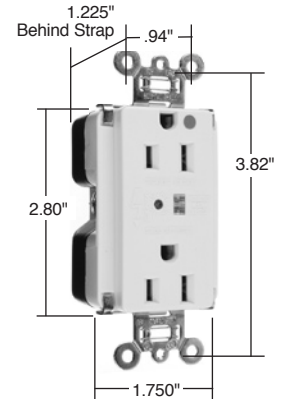

8200ISP

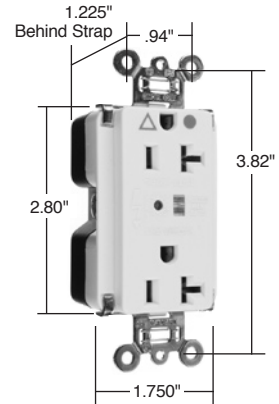

IG8300ISP

## Audible Alarm with LED Indicator

Catalog Number	Rating		NEMA Config. No.	Color	3rd Party Compliance			
	A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
<b>Duplex Receptacles Back &amp; Side Wire</b>								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
<b>Isolated Ground Duplex Receptacles Back &amp; Side Wire</b>								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•



All devices listed on this page conform to NEMA WD-1 and WD-6.




Decorator Devices


**Specification Grade TVSS Duplex Receptacles**

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

**Audible Alarm with LED Indicator**


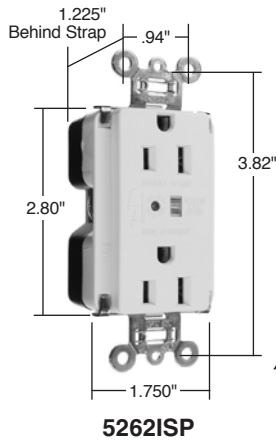


Catalog Number	Rating		NEMA Config. No.	Color	3rd Party Compliance			
	A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
<b>Extra Heavy-Duty Duplex Receptacles Back &amp; Side Wire*</b>								
5262ISP	15	125	5-15R	Ivory	•	•	•	•
5262WSP	15	125	5-15R	White	•	•	•	•
5262SP	15	125	5-15R	Brown	•	•	•	•
5262GRYSP	15	125	5-15R	Gray	•	•	•	•
5262REDSP	15	125	5-15R	Red	•	•	•	•
5262LASP	15	125	5-15R	Light Almond	•	•	•	•
5262BLSP	15	125	5-15R	Blue	•	•	•	•
5262BKSP	15	125	5-15R	Black	•	•	•	•
5362ISP	20	125	5-20R	Ivory	•	•	•	•
5362WSP	20	125	5-20R	White	•	•	•	•
5362SP	20	125	5-20R	Brown	•	•	•	•
5362GRYSP	20	125	5-20R	Gray	•	•	•	•
5362REDSP	20	125	5-20R	Red	•	•	•	•
5362LASP	20	125	5-20R	Light Almond	•	•	•	•
5362BLSP	20	125	5-20R	Blue	•	•	•	•
<b>Isolated Ground Duplex Receptacles Back &amp; Side Wire</b>								
IG5262ISP	15	125	5-15R	Ivory	•	•	•	•
IG5262WSP	15	125	5-15R	White	•	•	•	•
IG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
IG5262BLSP	15	125	5-15R	Blue	•	•	•	•
IG5262OSP	15	125	5-15R	Orange	•	•	•	•
IG5362ISP	20	125	5-20R	Ivory	•	•	•	•
IG5362WSP	20	125	5-20R	White	•	•	•	•
IG5362SP	20	125	5-20R	Brown	•	•	•	•
IG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
IG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
IG5362BLSP	20	125	5-20R	Blue	•	•	•	•
IG5362OSP	20	125	5-20R	Orange	•	•	•	•

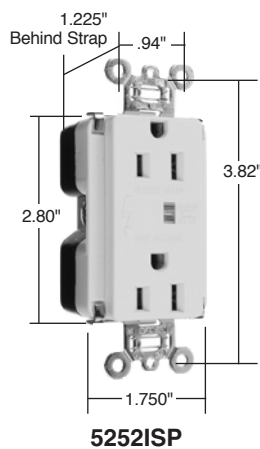

**LED Indicator Only**

Catalog Number	Rating		NEMA Config. No.	Color	3rd Party Compliance			
	A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
<b>Duplex Receptacles Back &amp; Side Wire*</b>								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•



\*For Configurable Solutions, see Page U-1.

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.




# Decorator Devices Residential Vacancy Sensors

Passive Infrared (PIR)


Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>California Title 24 compliant.</li> <li>Replaces a standard light or fan single pole switch.</li> <li>Lighted switch for visibility in darkened rooms.</li> <li>Manual-ON operation.</li> <li>Fixed 30-minute time delay, no adjustment necessary.</li> <li>Low-profile styling with uniform color-matched lens and device.</li> <li>Coverage: 180°, max. 600 ft.<sup>2</sup> (56m<sup>2</sup>).</li> </ul>	<ul style="list-style-type: none"> <li>cULus listed.</li> <li>5-year warranty.</li> </ul> <p><b>RW500B only</b></p> <ul style="list-style-type: none"> <li>Incandescent.</li> </ul> <p><b>RWU600B only</b></p> <ul style="list-style-type: none"> <li>Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.</li> </ul>

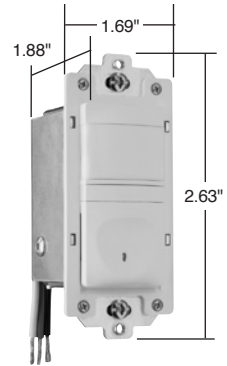


RW500BLACC4

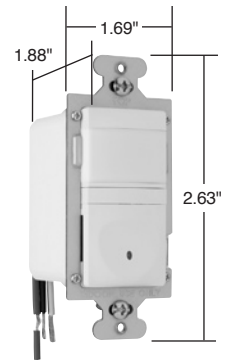


RWU600BLACC4

Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
<b>Single Pole Vacancy Sensors</b>							
RW500BICC4 RW500BWCC4 RW500BBKCC4 RW500BLACC4	No neutral required, ideal for bedrooms and baths	120VAC 60 Hz	25-500W Incandescent	No	Yes	No	Ivory White Black Lt. Almond
RWU600BICC4 RWU600BWCC4 RWU600BBKCC4 RWU600BLACC4	Neutral required, ideal for bedrooms and baths	120VAC 60 Hz	0-600W All	No	Yes	No	Ivory White Black Lt. Almond

Coverage

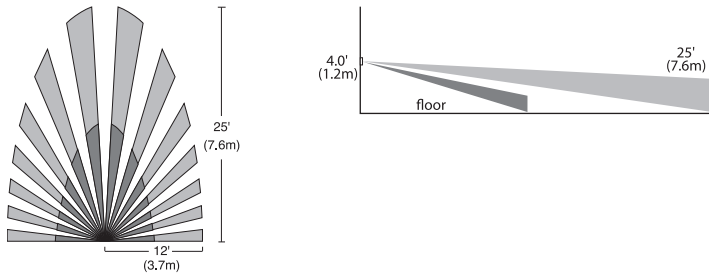


RW500B Wiring

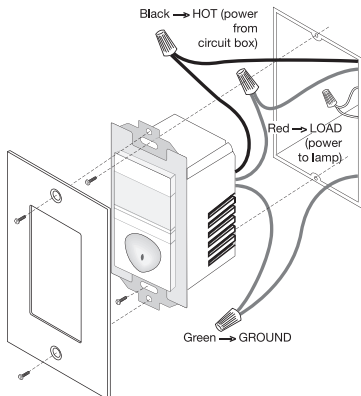

Wiring for RW500B does not require a neutral.

RWU600B Wiring

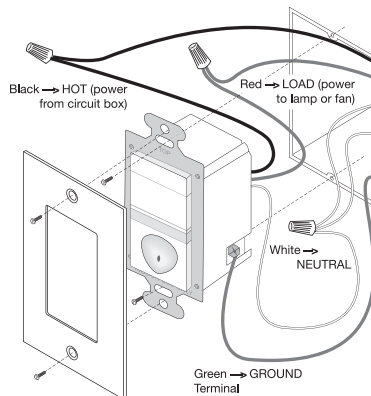


Wiring for RWU600B requires a neutral.


All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices Residential Occupancy Sensors

Passive Infrared (PIR)

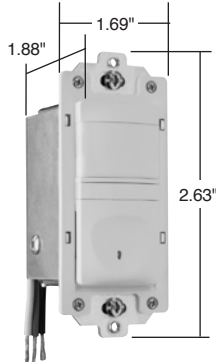

RW500ULACC4

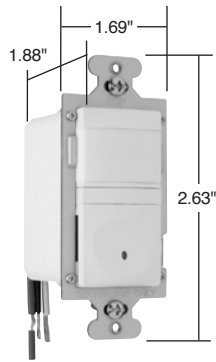

RWU600ULACC4


### Features

- Replaces a standard light or fan single pole switch.
  - Lighted switch for visibility in darkened rooms.
  - Automatic-ON operation.
  - Fixed five-minute time delay.
  - Low-profile styling with uniform color-matched lens and device.
  - Coverage: 180°, max. 600 ft.<sup>2</sup> (56m<sup>2</sup>)
  - cULus listed.
  - 5-year warranty.
  - Works with most common residential lighting types
- RWU600U only**
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp




Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
<b>Single Pole Occupancy Sensors</b>							
RW500UICC4 RW500UWCC4 RW500UBKCC4 RW500ULACC4	No neutral required, ideal for storage and utility rooms	120VAC 60 Hz	25-500W Incandescent	Yes Yes Yes Yes	No No No No	No No No No	Ivory White Black Lt. Almond
RWU600UICC4 RWU600UWCC4 RWU600UBKCC4 RWU600ULACC4	Neutral required, controls most types of lighting, ideal for storage & utility rooms	120VAC 60 Hz	0-600W All	Yes Yes Yes Yes	No No No No	No No No No	Ivory White Black Lt. Almond

### Coverage

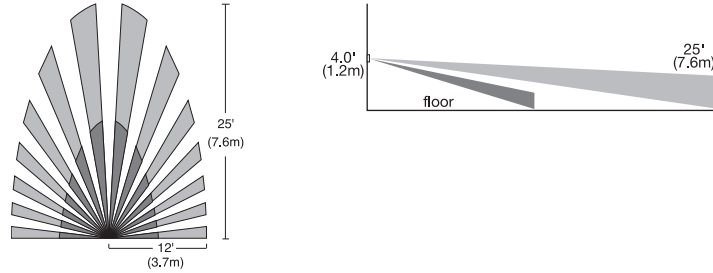


### RW500U Wiring

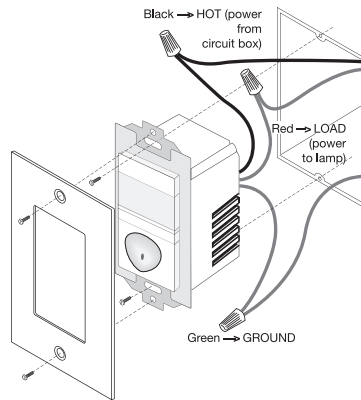

Wiring for RW500U does not require a neutral.

### RWU600U Wiring

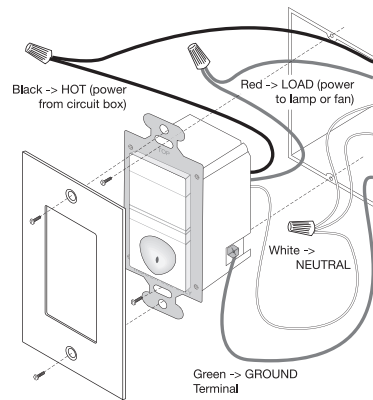

Wiring for RWU600U requires a neutral.





# Decorator Devices Residential Occupancy/ Vacancy Sensors

3-Way Passive Infrared (PIR)

Pass & Seymour



**RW3U600W  
shown with  
SWP26W**



**RW3U600W**

## Applications

The RW3U600 has the flexibility to work in a variety of applications including hallways, stairways, bathrooms, living and dining rooms, and other areas with multiple entries. The RW3U600 vacancy sensor allows true multi-way operation with automatic ON/OFF control.


## Features

- California Title 24 compliant.
- Occupancy-based control plus multi-way operation.
- Two or more RW3U600s connected together will allow enhanced coverage of the controlled space.
- Works with most common residential lighting types.
- Adjustable time delay of 15 seconds to 30 minutes.
- Light level sensing prevents automatic ON of lights when adequate daylight exists.
- Replaces three-way or four-way switches when used with other RW3U600s.
- Lighted switch for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable light level setting of 10 to 150 fc (100 to 1500 lux).
- Coverage: 180°, max. 600 ft.<sup>2</sup> (56m<sup>2</sup>).
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color	Light Level Sensing
<b>Single Pole/3-Way Occupancy/Vacancy Sensors*</b>								
RW3U600I	Light-level sensing for optimum operation –	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Ivory	Yes
RW3U600W	ideal for rooms with			Yes	Yes	Yes	White	Yes
RW3U600BK	multiple entrances			Yes	Yes	Yes	Black	Yes
RW3U600LA				Yes	Yes	Yes	Lt. Almond	Yes

\*In multi-way circuits, unit operates properly when used with other RW3U600 sensors only.


## Coverage

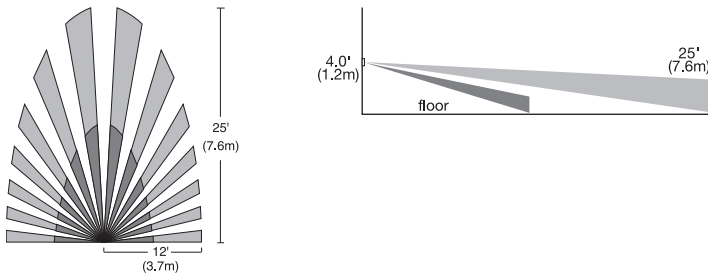

## RW3U600 Wiring for 3-Way Operation

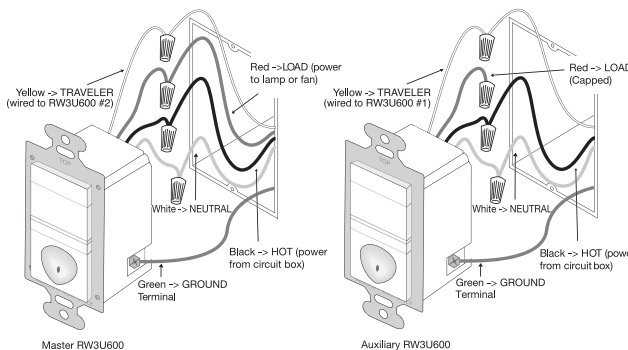


## Product Controls



All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices Residential Occupancy/ Vacancy Sensors

Passive Infrared (PIR) with Dimmer

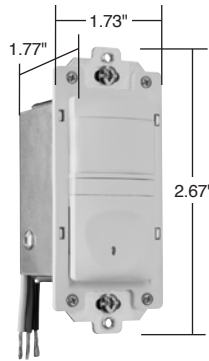


RWDU500W

### Features


- California Title 24 compliant.
- Replaces standard single pole switch or incandescent dimmer.
- Low-profile styling with uniform color-matched lens and device.
- Lighted pushbutton for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable time delay from 15 seconds to 30 minutes.
- Soft start technology to prolong lamp life.
- Air gap isolation switch for safe relamping.
- If enabled, light level sensing prevents automatic-ON when adequate daylight exists.
- Adjustable light level setting from 10-150 fc (100-1500 lux) for daylight sensing.
- Operating conditions: 32°-104°F (0°-40°C), 95% RH, noncondensing.
- Coverage: 180°, max. 600 ft<sup>2</sup> (56 m<sup>2</sup>).
- cULus listed.
- 5-year warranty.

Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
<b>Occupancy/Vacancy Sensors with Preset Dimmers</b>							
RWDU500I	Neutral required, ideal for living, dining and family rooms, master bathrooms and bedrooms	120VAC	25-500 Incandescent	Yes	Yes	Yes	Ivory
RWDU500W				Yes	Yes	Yes	White
RWDU500BK		60Hz		Yes	Yes	Yes	Black
RWDU500LA				Yes	Yes	Yes	Lt. Almond

### Coverage



### RWDU500 Wiring

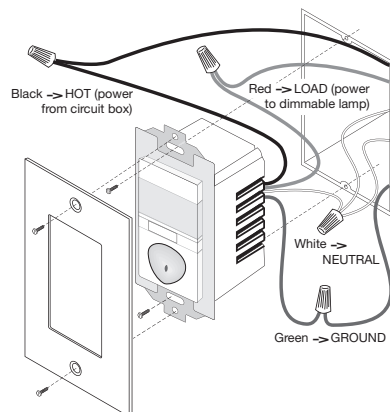


### De-rating

When more than one dimmer is installed in a multi-gang box, it is necessary to reduce the maximum load on each dimmer.

- For an RWDU500 in either end position of a multi-gang box, reduce the maximum load by 50W.
- For an RWDU500 in a central position of a multi-gang box, reduce its maximum load by 100W. Mounting in a deep electrical box is recommended.

### Product Controls



RWDU500




# Decorator Devices Commercial Occupancy Sensors

Wall Box Passive Infrared (PIR)

Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>■ Detection Signature Analysis provides high immunity to RFI and EMI.</li> <li>■ Compact, decorator design replaces existing wall switch.</li> <li>■ Integrated light level sensor works from 10 to 150 footcandles.</li> <li>■ Compatible with all electronic and magnetic ballasts, PL lamp ballasts, compact fluorescent.</li> <li>■ Adjustable time delay of 30 seconds to 30 minutes.</li> <li>■ Dual 120/277VAC operation.</li> </ul>	<ul style="list-style-type: none"> <li>■ 30% to 60% energy savings.</li> <li>■ Positive detection indicator.</li> <li>■ No minimum load requirement.</li> <li>■ Adjustable sensitivity from 20% to 100%.</li> <li>■ Patented voltage drop protection.</li> <li>■ Patented Zero Crossing Circuitry.</li> <li>■ 180° coverage of up to 900 sq. ft.</li> <li>■ cULus listed.</li> <li>■ 5-year warranty.</li> </ul>

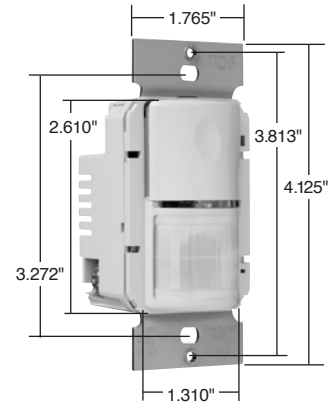

WSP200LA


Catalog Number	Description	Voltage	Load	Color
<b>Automatic Wall Switches – 3 Wire Technology</b>				
WSP200I WSP200W WSP200GRY WSP200LA	PIR Occupancy Sensor	120/277VAC; 60 Hz	800W Max. at 120V 1200W Max. at 277V	Ivory White Gray Light Almond

### Planning a Layout

The WSP200's 2-level lens provides superior coverage at desktop level by allowing the sensor to detect vertical as well as horizontal motion. Coverage shown is for walking motion. Under optimum conditions with a high level of activity and with no barriers or obstacles, coverage can reach a maximum of 900 square feet. Under a typical, desktop level of activity, when mounted at 4 feet, coverage is 300 square feet.


Placement for PIR wall switch sensor

WSP200

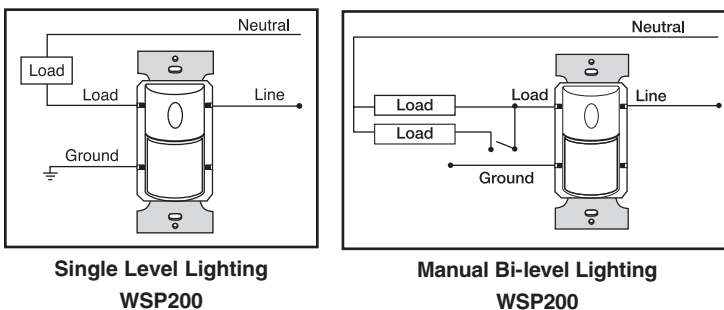

Technical Specifications on Page U-127.

All devices listed on this page conform to NEMA WD-1 and WD-6.



OS300SW

# Decorator Devices Commercial Occupancy/ Vacancy Sensors

Wall Box Passive Infrared (PIR)




### Features

- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Walk-through mode turns lifts off 3 minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
<b>Single-Pole Occupancy/Vacancy Sensors</b>						
OS300SI	Self-adaptive design remembers ON/OFF cycles	120/230/277VAC; 50/60 Hz.	All	Yes	Yes	Ivory
OS300SW		@ 120VAC, 0-800 W ballast or tungsten, 1/6 hp.		Yes	Yes	White
OS300SGRY		@ 230/277VAC, 0-1200 W ballast.		Yes	Yes	Gray
OS300SLA				Yes	Yes	Lt. Almond




### Coverage

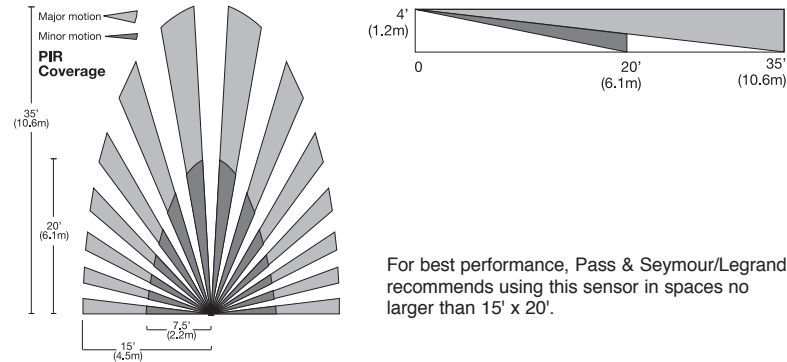

For best performance, Pass & Seymour/Legrand recommends using this sensor in spaces no larger than 15' x 20'.

### Product Controls

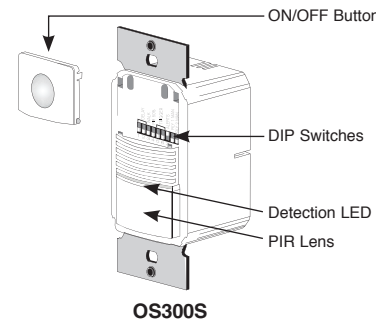

OS300S

### DIP Switch Settings

<b>Time Delay</b>	1	2	3
Auto/Test	↓	↓	↓
5 minutes	↓	↓	↑
10 minutes	↓	↑	↑
15 minutes	↓	↑	↑
20 minutes	↓	↓	↓
25 minutes	↑	↓	↑
30 minutes	↑	↑	↑
⊗ override	↑	↑	↑

<b>Walk-Through</b>	4
Disabled	↓
Enabled	↑

<b>PIR Sensitivity</b>	5
High	↓
Low, 50%	↑

<b>Visible Alert</b>	6
Disabled	↓
Enabled	↑

<b>Audible Alert</b>	7
Disabled	↓
Enabled	↑

<b>Relay 1 Mode</b>	8
Auto On	↓
Manual On	↑

⊗ Bypass occupancy & light level functions. Loads are manually controlled with PW-200 buttons.

↑=ON ↓=OFF ◀=Factory Setting

Technical Specifications on Page U-127.


All devices listed on this page conform to NEMA WD-1 and WD-6.



# Decorator Devices Commercial Occupancy/ Vacancy Sensors

Bi-Level Wall Box Passive Infrared (PIR)

Pass & Seymour

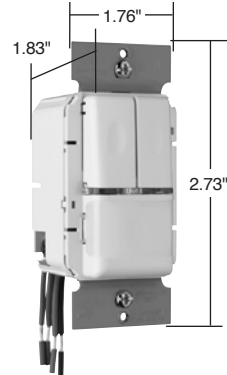

OSR300SW


### Features

- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation, selectable for each relay.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Selectable walk-through mode turns lights off three minutes after the room is initially occupied if no motion is detected after the first 30 seconds.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.




Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
<b>Single-Pole Dual-Relay Occupancy/Vacancy Sensors</b>						
OSR300SI	Operates both circuits of a bi-level lighting system	120/230/277VAC; 50/60 Hz. @ 120VAC, 0-800 W ballast or tungsten, 1/6 hp. @ 230/277VAC, 0-1200 W ballast.	All	Yes	Yes	Ivory
OSR300SW				Yes	Yes	White
OSR300SGRY				Yes	Yes	Gray
OSR300SLA				Yes	Yes	Lt. Almond


### Coverage

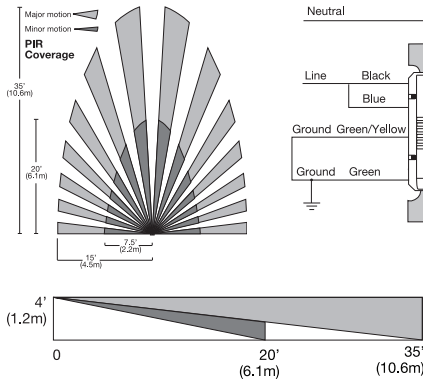

### OSR300S Bi-Level Wiring




### OSR300S Two Circuit Level Wiring



For best performance, Pass & Seymour/Legrand recommends using this sensor in spaces no larger than 15' x 20'.

### Product Controls

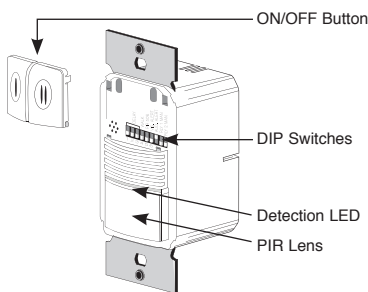

OSR300S

### DIP Switch Settings

<b>Time Delay</b>	1	2	3
Auto/Test	↓	↓	↓
5 minutes	↓	↓	↓
10 minutes	↓	↓	↓
15 minutes	↓	↓	↓
20 minutes	↓	↓	↓
25 minutes	↓	↓	↓
30 minutes	↓	↓	↓
⊗ override	↑	↑	↑
<b>Walk-Through</b>	4		
Disabled	↓		
Enabled	↑		
<b>Relay 1 Mode</b>	8		
Auto On	↓		
Manual On	↑		
<b>Relay 2 Mode</b>	9		
Auto On	↓		
Manual On	↑		
<b>Audible Alert</b>	7		
Disabled	↓		
Enabled	↑		
<b>PIR Sensitivity</b>	5		
High	↓		
Low, 50%	↑		
<b>Visible Alert</b>	6		
Disabled	↓		
Enabled	↑		

⊗ Bypass occupancy & light level functions. Loads are manually controlled with PW-200 buttons.

↑=ON ↓=OFF ←=Factory Setting

Technical Specifications on Page U-127.

All devices listed on this page conform to NEMA WD-1 and WD-6.

# Decorator Devices Timers



RT1  
shown with  
SWP26



RT1

### Features


- Seven-button preset time switch.
- Manual ON/OFF.
- Adjustable time delay: 1, 5, 10, 20, 30, 60 minutes.
- Lighted switch for visibility in darkened rooms.
- Controls most types of lighting.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp




### Digital Timers

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
RT1I				No	Ivory
RT1W				No	White
RT1BK				No	Black
RT1LA				No	Light Almond
RT1I	7-Button Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	No	

### RT1 Wiring

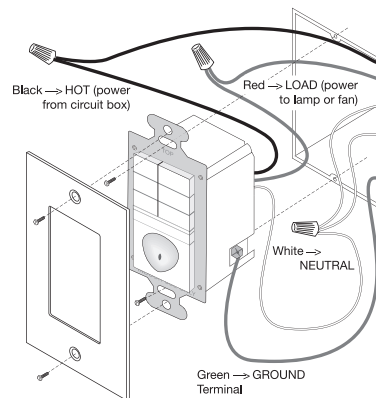

### Product Controls





# Decorator Devices Timers


Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>■ Programmable countdown time switch</li> <li>■ Manual ON/OFF.</li> <li>■ Digital countdown display.</li> <li>■ Adjustable time delay from 5-55 minutes (five-minute increments) to 1-12 hours (15-minute increments).</li> <li>■ Audible beep and visible light flash warnings before automatic-OFF.</li> </ul>	<ul style="list-style-type: none"> <li>■ Lighted switch for visibility in darkened rooms.</li> <li>■ Works with most common lighting types.</li> <li>■ cULus listed.</li> <li>■ 5-year warranty.</li> <li>■ Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp</li> </ul>



RT12  
shown with  
SWP26

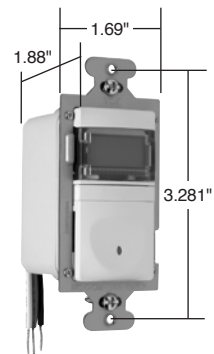

RT12




RT24  
shown with  
wall plate




Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
<b>Digital Timers</b>					
RT12I	12-Hour Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	Yes	Ivory
RT12W				Yes	White
RT12BK				Yes	Black
RT12LA				Yes	Light Almond

### RT12 Wiring

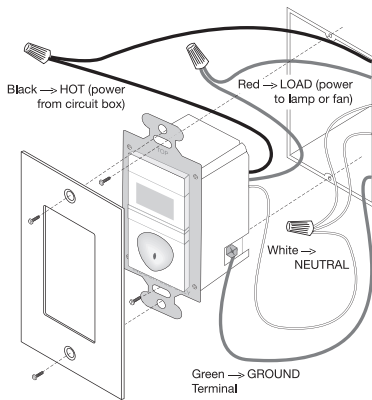

### Product Controls



RT12

Features	
<ul style="list-style-type: none"> <li>■ Manual or programmed ON/OFF switching.</li> <li>■ Real time clock with day/date calendar.</li> <li>■ Easy to read LED display.</li> <li>■ Programming buttons accessible without removing wall plate.</li> <li>■ Eight programs can be assigned to any day or combination of days of the week.</li> <li>■ Automatically calculates sunrise and sunset times based on latitude and longitude.</li> </ul>	<ul style="list-style-type: none"> <li>■ Audible or visual occupant warning before OFF.</li> <li>■ Power failure memory.</li> <li>■ Zero crossing circuitry.</li> <li>■ cULus listed.</li> <li>■ 5-year warranty.</li> <li>■ Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp</li> </ul>



Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
<b>Astronomic Programmable Timers</b>					
RT24I	24-Hour Programmable Timer	0-800W @ 120V 0-1200W @ 277V 1/6 hp @ 120/277V	All	Yes	Ivory
RT24W				Yes	White
RT24BK				Yes	Black
RT24LA				Yes	Light Almond

Available Spring 2009.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour



## Decorator Devices Wall Box Timers

125, 125-T, 250 & 277VAC, 60 Hz

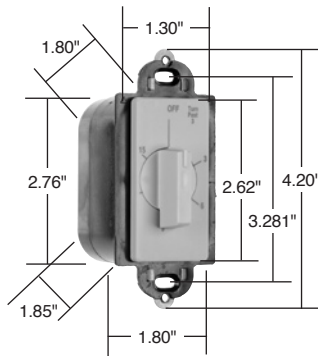

97015I

### Applications

- Lighting
- Whirlpools and spas
- Heating and heat lamps
- Exhaust fans
- Saunas
- Ventilating and air conditioning

### Features

- Units with "Hold" feature may be turned counter-clockwise to hold the load on without timing function.
- Turning clockwise causes unit to time load off after desired time delay.
- Quiet operation.
- Time range from 5 minutes to 12 hours.
- Available with or without hold.
- Decorator styling.
- Easily installed.
- Large head screw terminals.
- Accurate to ± 5 percent.
- Motor rated.
- Energy saving.

Catalog Number	Description	Time Range	Color
<b>Specification Grade Decorator Rotary Timers</b>			
97015I 97015W 97015LA	Timeout, No Hold	15 Minutes	Ivory White Light Almond
97030I 97030W 97030LA	Timeout, No Hold	30 Minutes	Ivory White Light Almond
97060I 97060W	Timeout, No Hold	60 Minutes	Ivory White
97115I 97115W	Timeout, With Hold	15 Minutes	Ivory White
97130I 97130W	Timeout, With Hold	30 Minutes	Ivory White
97160I 97160W	Timeout, With Hold	60 Minutes	Ivory White

Catalog Number	Color
<b>Replacement Knobs</b> (without plate)	
PS55A1	White
PS55B1	Ivory
PS55G1	Light Almond

VAC	Hz	Amp	HP
<b>Ratings</b>			
125	60	20	1
125T	60	7	7
250	60	10	1
277	60	10	1





# Decorator Devices LightSense™ RF Wireless Master Controllers

Pass & Seymour




## Features

- No control wiring necessary.
  - Topdog™ RF communication protocol; 900MHz radio, bidirectional.
  - Recalls scene information stored in the dimmers and switches.
  - Configuration lock prevents unwanted tampering with programmed scenes.
  - Includes preprinted scene labels.
  - Fits within standard wallbox.
  - Compatible with Decorator wall plates.
  - 5-year warranty.
- PSWCH**
- Program and recall 5 house scenes, two sets of scenes.
- PSWCR**
- Program and recall 5 room scenes, three sets of scenes.

Catalog Number	Description	Ratings	Color
<b>NEW</b> Wall Mount Wireless Whole House Scene Master Controllers			
PSWCHI PSWCHW PSWCHBK PSWCHLA	RF Wireless House Scene Controllers	120V	Ivory White Light Almond Black
<b>NEW</b> Wall Mount Wireless Room Scene Master Controllers			
PSWCRI PSWCRW PSWCRBK PSWCRLA	RF Wireless Room Scene Controllers	120V	Ivory White Black Light Almond


For LightSense™ complete lighting control system including remotes, masters, and wiring diagrams, see Pages N-4 – N-10.

For more information about LightSense™ layout and programming, consult the Specification & Design Guide (part no. BR1579) and the Wireless Installation Guide (part no. FY1623).

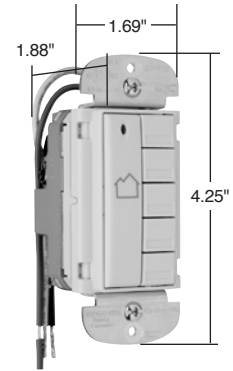


PSWCHLA

PSWCH/PSWCR  
Wiring Diagram



# Decorator Devices LightSense™ RF Wireless Dimmers

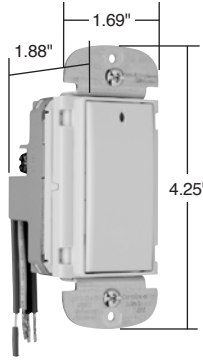


PSWDILA  
PSWDULA


Features	
<ul style="list-style-type: none"> <li>No control wiring necessary.</li> <li>Topdog™ RF communication protocol; 900MHz radio, bidirectional.</li> <li>Large surface-mounted antenna ensures maximum broadcast coverage.</li> <li>Ability to recall last lighting level (preset).</li> <li>Stores room and house scenes.</li> <li>Support PANIC mode operation.</li> <li>Default fade rate (two seconds).</li> <li>Square law dimming curve.</li> <li>Soft start technology significantly extends lamp life by limiting inrush current.</li> </ul>	<ul style="list-style-type: none"> <li>Power failure restore to last-used level.</li> <li>Compatible with Decorator wall plates.</li> <li>Patented overload and short circuit protection.</li> <li>Dimmers must be de-rated when ganged or when used with non-incandescent loads.</li> <li>5-year warranty.</li> </ul> <p><b>PSWDI</b></p> <ul style="list-style-type: none"> <li>No neutral required.</li> </ul> <p><b>PSWDU</b></p> <ul style="list-style-type: none"> <li>Neutral required.</li> <li>Incandescent, MLV, ELV, and Advance MK 10 dimmable fluorescent ballasts.</li> </ul>

Catalog Number	Description	Voltage	Min. Watt	Max. Watt	Load	Color
<b>NEW Incandescent Wireless Dimmers</b>						
PSWDII PSWDIW PSWDIBK PSWDILA	RF Wireless Multi-Location Dimmer	120V	60W	600W	Incandescent Only	Ivory White Black Light Almond
<b>NEW Universal Wireless Dimmers</b>						
PSWDUI PSWDUW PSWDUBK PSWDULA	RF Wireless Universal Dimmer	120V	25W	600W	All	Ivory White Black Light Almond

PSWDI Wiring Diagram

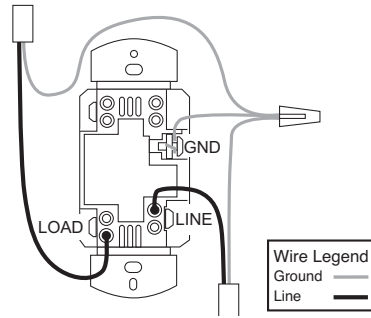

PSWDU Wiring Diagram



Mounting dimmers in deep electrical boxes is recommended.

For de-rating chart, see Page N-10.

For LightSense™ complete lighting control system including remotes, masters, and wiring diagrams, see Pages N-4 – N-10.

For more information about LightSense™ layout and programming, consult the Specification & Design Guide (part no. BR1579) and the Wireless Installation Guide (part no. FY1623).




# Decorator Devices LightSense™ RF Wireless Switches, Fan Speed Controls & Controllers

Pass & Seymour




Decorator Devices


Features	
<ul style="list-style-type: none"> <li>No control wiring necessary.</li> <li>Topdog™ RF communication protocol; 900MHz radio, bidirectional.</li> <li>Large surface-mounted antenna ensures maximum broadcast coverage.</li> <li>Stores room and house scenes.</li> <li>Neutral required.</li> <li>Power failure restore to last used level.</li> </ul>	<ul style="list-style-type: none"> <li>Patented overload and short circuit protection.</li> <li>Compatible with Decorator wall plates.</li> <li>5-year warranty.</li> </ul> <p><b>PSWS</b></p> <ul style="list-style-type: none"> <li>Switches support PANIC mode operation.</li> </ul> <p><b>PSWCF</b></p> <ul style="list-style-type: none"> <li>Fan speed controls provide previous speed recall (preset).</li> </ul>

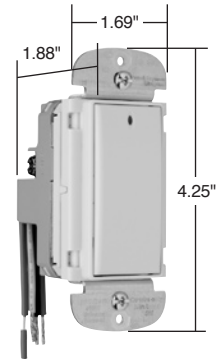

PSWSLA




PSWCFLA



PSWCSLA

PSWCS Wiring Diagram

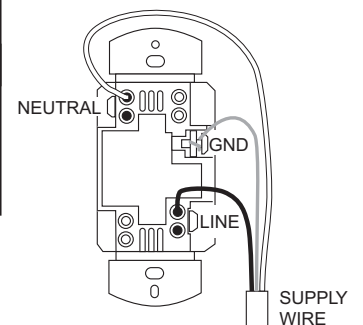

LightSense™ Wireless Switches & Controls


NEW

NEW

Catalog Number	Description	Voltage	Max. Watt	Load	Color
<b>Universal Wireless Switches</b>					
PSWSI PSWSW PSWSBK PSWSLA	RF Wireless Universal Switch	120V	800W	Lighting, 1/8 hp motor	Ivory White Black Light Almond
<b>Wireless De-Hummer* Fan Speed Controls</b>					
PSWCFI PSWCFW PSWCFBK PSWCFLA	RF Wireless Fan Speed Control	120V	—	1.5A	Ivory White Black Light Almond



\* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

PSWS Wiring Diagram



PSWCF Wiring Diagram

Mounting controls in deep electrical boxes is recommended.

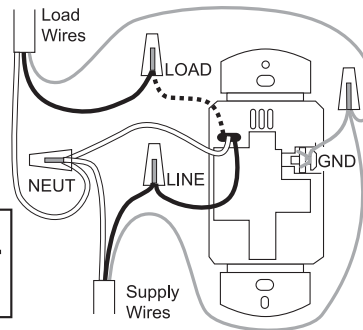

Features	
<ul style="list-style-type: none"> <li>Can raise/lower grouped lighting level.</li> <li>Controls dimmers, switches, and fan speeds from multiple locations.</li> </ul>	

NEW


Catalog Number	Description	Voltage	Color
<b>Multi-Location Wireless Controller Switches</b>			
PSWCSI PSWCSW PSWCSBK PSWCSLA	RF Wireless Accessory Controller	120V	Ivory White Black Light Almond

For LightSense™ complete lighting control system including remotes, masters, and wiring diagrams, see Pages N-4 – N-10.


For more information about LightSense™ layout and programming, consult the Specification & Design Guide (part no. BR1579) and the Wireless Installation Guide (part no. FY1623).

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

# Decorator Devices LightSense™ Matching Wired Devices

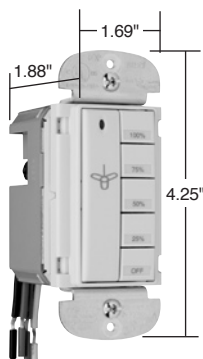

PSHCFLA



PSHSILA

Features	
<ul style="list-style-type: none"> <li>Dimmers must be de-rated when ganged or when used with non-incandescent loads.</li> <li>Compatible with Decorator wall plates.</li> <li>5-year warranty.</li> </ul>	<p><b>PSHDI</b></p> <ul style="list-style-type: none"> <li>No neutral required.</li> </ul> <p><b>PSHDU</b></p> <ul style="list-style-type: none"> <li>Neutral required.</li> </ul>

Catalog Number	Description	Voltage	Watt/Amp at 120V	Watt at 277V	Color
<b>NEW Incandescent Dimmers</b>					
PSHDII PSHDIW PSHDIBK PSHDILA	Multi-Location Dimmer Incandescent Only	120V	600W	—	Ivory White Black Light Almond
<b>NEW Universal Dimmers</b>					
PSHDUI PSHDIW PSHDUBK PSHDULA	Universal Dimmer Multi-Location Incandescent, MLV, ELV, and Advance MK 10 dimmable fluorescent ballasts	120V	600W	—	Ivory White Black Light Almond
<b>NEW Accessory Controls</b>					
PSHCI PSHCW PSHCBK PSHCLA	Multi-Location Accessory Control	120/277V	N/A	—	Ivory White Black Light Almond
<b>NEW De-Hummer* Fan Speed Controls</b>					
PSHCFI PSHCFW PSHCFBK PSHCFLA	De-Hummer Fan Speed Control	120V	1.5A	—	Ivory White Black Light Almond
<b>NEW Single Pole Switches</b>					
PSHS1I PSHS1W PSHS1BK PSHS1LA	Single Pole Switch	120/277	1500W 1/4HP	3000W	Ivory White Black Light Almond

\* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rate dimmers as follows:			
	Single Dimmer	MAXIMUM CAPACITY	
		Dimmer at end of multi-gang	Dimmer in middle of a multi-gang
Incandescent / Quartz Halogen	600W	500W	400W
Magnetic Low-Voltage	500W	400W	300W
Electronic Low-Voltage	500W	400W	300W
Cold Cathode / Neon	500W	400W	300W
Fluorescent:			
– 2 Wire	500W	400W	300W
– Compact Fluorescent	500W	400W	300W

For LightSense™ complete lighting control system including remotes, masters, and wiring diagrams, see Pages N-4 – N-10.

For more information about LightSense™ layout and programming, consult the Specification & Design Guide (part no. BR1579) and the Wireless Installation Guide (part no. FY1623).

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.



# Decorator Devices Scene Director

Pass & Seymour



*For everything people do at home, there's a combination of light sources and levels that will work best. P&S Scene Director Controls let homeowners capture these combinations (or scenes) — and recall them whenever they want at the touch of a button.*



## P&S Scene Director Master

**No tools or plate removal necessary for programming** with our exclusive, patent-pending system. Set light levels with product fully installed.

**Easy to install, program, and operate** for sophisticated scene control dimming.

**Constant memory** returns lights to previously selected level after power failure. No need to reset.

**Controls up to 30 dimmers per Master**, providing the ability to control even complex, multiroom scenes.

**Available infrared remote (SCIR)** provides mobile control flexibility.

**Matching Fan Speed Control available.**



SCMC5WV

Buttons glow when selected — glow levels are adjustable, too.

**Raises or lowers all lights** in any scene simultaneously.

**One-touch selection** for up to five lighting environments (scenes) — plus full Off.

**Programmable fade rates** enable users to easily select the speed of fade-up and fade-down.

**Provides powerful control via conventional wall-box wiring.** Wires like a 3-way switch. Communication among devices requires just one additional conductor.

## P&S Scene Director Dimmer


**Works in conjunction with a P&S Scene Director Master.**

**Red LED glows** when dimmer is OFF.

**Green LEDs** indicate light level selected and preset level.

**Can be operated individually.**

SC600LAV

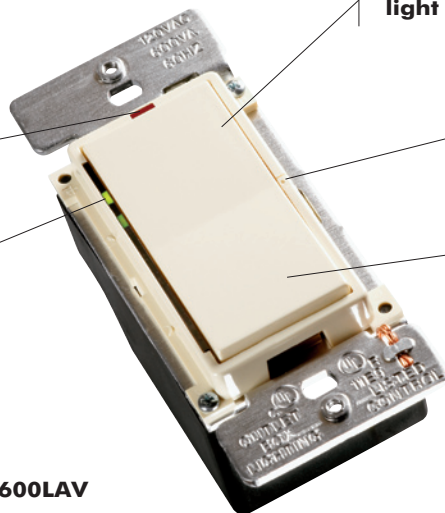

**Touch pad raises or lowers individual light** levels without affecting preset.

**Unobtrusive set button** for simple programming of preset scenes.


**Sleek, ergonomic P&S Decorator style** matches other Decorator devices.

**Constant memory** returns lights to previously selected level after power failure.


# Decorator Devices Scene Director




**SC600LAV  
SCELV300LAV  
SCFB600LAV**




**SCMC5WV**



**SCRLAV**



**SCIR**



**SCDH15LAV**


Catalog Number	Description	Ratings	Color
<b>600W Incandescent Scene Director Control Dimmers</b>			
SC600IV SC600WV SC600LAV	Preset, Controls 1 Load in a Scene	120V, 600 Watt	Ivory White Light Almond
<b>300VA Electronic Low-Voltage Scene Director Control Dimmers</b>			
SCELV300IV SCELV300WV SCELV300LAV	Preset, Controls 1 Load in a Scene	120V, 300VA	Ivory White Light Almond
<b>600VA Fluorescent Ballast Scene Director Control Dimmers*</b>			
SCFB600IV SCFB600WV SCFB600LAV	Preset, Controls 1 Load in a Scene	120V, 600VA	Ivory White Light Almond
<b>5 Scene Director Master Controllers</b>			
SCMC5IV SCMC5WV SCMC5LAV	5-Button Preset Scene Controller	120V	Ivory White Light Almond
<b>Remote Location Control</b>			
SCRIV SCRWV SCRLAV	For Full Dimming or Fan Speed Control of 1 Load from Two or More Locations	120V	Ivory White Light Almond
<b>Accessories</b>			
SCIR SCMCK	Infrared Hand-Held Remote Preprinted Inserts for Master Controller		
<b>1.5A De-Hummer** Fan Speed Controllers</b>			
SCDH15IV SCDH15WV SCDH15LAV	Preset, Controls 1 Fan Load in a Scene	120V, 1.5A	Ivory White Light Almond

\*Use with Advance Mark X® dimmable fluorescent ballasts.

\*\* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

Note: All Dimmers on this page may be ganged without de-rating.

### Wiring Diagram

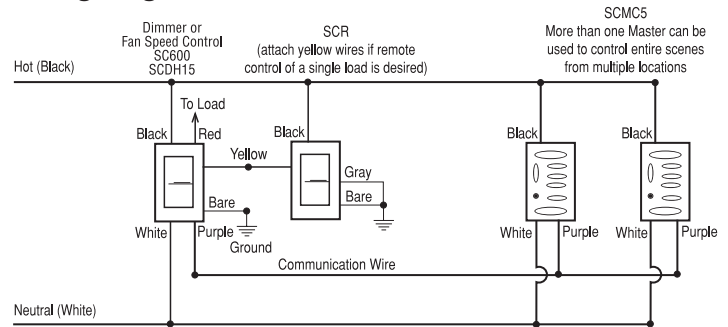

Add additional dimmers, fan speed controls, and remotes (up to 30) as needed to control more loads. Use same wiring practices as above.




Features	
<ul style="list-style-type: none"> <li>Enables full dimming control from up to 30 locations using the matching remote dimmers.</li> <li>Constant memory returns lights to previous level after power failure.</li> <li>LED indicators keep you informed. Green LEDs indicate preset level and current light level. Red LED night light glows when load is OFF.</li> <li>Easy operation — Tap up once for preset, twice for full ON. Tap down once for full OFF. Hold paddle up to raise lights, down to lower.</li> </ul>	<ul style="list-style-type: none"> <li>Sleek, ergonomic P&amp;S Decorator style matches other Decorator devices.</li> <li>Unobtrusive preset selection button helps prevent accidental setting changes.</li> <li>Elegant fade ON and OFF extends bulb life. Easy on the eyes, too.</li> <li>Installs easily using the same wiring as conventional 3-way switches.</li> <li>Change light level without affecting preset.</li> </ul>

Catalog Number	Description	Ratings	Color
<b>600W Incandescent Preset Dimmers†</b>			
D600MIV D600MWV D600MBKV D600MLAV	Preset, Single Pole and 3-Way	120V 600 Watt	Ivory White Black Light Almond
<b>1000W Incandescent Preset Dimmers†</b>			
D1000MIV D1000MWV D1000MLAV	Preset, Single Pole and 3-Way	120V 1000 Watt	Ivory White Light Almond
<b>600VA Low-Voltage Preset Dimmers**†</b>			
DLV600MIV DLV600MWV DLV600MLAV	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
<b>600VA Fluorescent Ballast Preset Dimmers***†</b>			
DFB600MIV DFB600MWV DFB600MLAV	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
<b>Remote Dimmers†</b>			
DRMIV DRMWV DRMBKV DRMLAV	Full Dimming or Fan Speed Control from Two or More Locations	120V	Ivory White Black Light Almond
<b>1.5A De-Hummer†† Fan Controls</b>			
DDH15MIV DDH15MWV DDH15MLAV	Preset, Single Pole, 3-Speed	120V 1.5A	Ivory White Light Almond


\* Use with MR16s with magnetic transformers, neon, cold cathode, general inductive loads.  
 \*\* Use with Advance Mark X® dimmable fluorescent ballasts.  
 † All dimmers and fan controls can be dimmed from more than one location when used with DRM remotes. Uses standard 3-way wiring. See wiring diagram.  
 †† Feature specially designed capacitive circuitry to virtually eliminate fan motor “hum.”

**Wiring Diagrams**




\* Neutral required on DLV, DFB and DDH models. (No common neutral on dimmed circuits.)


**Full Dimming & Fan Speed Control from Two or More Locations**

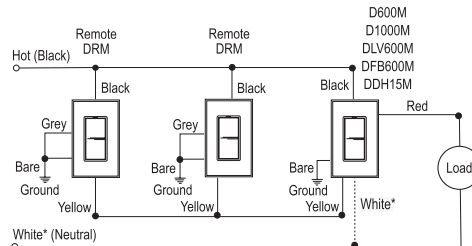


\* Neutral required on DLV, DFB and DDH models. (No common neutral on dimmed circuits.)  
 Can be used with up to 30 dimmers, fan speed controls, and remotes.



**D600MLAV  
DFB600MLAV  
DLV600MLAV  
DRMLAV**



**D1000MLAV**



**DDH15MLAV**

Max. Load Rating	Fins Removed	
	One Side	Two Side
600W/VA	No De-Rating Required	
1000W	800W	600W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

# Decorator Devices Harmony™ Dimmers & Fan Speed Controls



### Features

- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
  - Green LED glows when OFF to make dimmer easy to find in the dark.
  - Constant memory returns lights to previous level after a power failure.
  - Sleek, ergonomic P&S Decorator style matches other Decorator devices.
  - Higher ratings.
  - Single pole and 3-way operation.
  - Works with standard 3-way switches and wiring.
  - Screw-pressure-plate backwire terminals save time, space and money.
- D703P, DLV703P, DDH16P**
- No de-rating.
  - No fins to break.

Catalog Number	Description	Ratings	Color
<b>NEW Incandescent Single Pole/3-Way Dimmers*</b>			
D703PI D703PW D703P D703PBK D703PLA	Incandescent Single Pole and 3-Way	120V, 700W	Ivory White Brown Black Light Almond
D1103PI D1103PW D1103P D1103PBK D1103PLA	Incandescent Single Pole and 3-Way	120V, 1100W	Ivory Ivory Brown Black Light Almond
<b>NEW Magnetic Low-Voltage Single Pole/3-Way Dimmers</b>			
DLV703PI DLV703PW DLV703P DLV703PBK DLV703PLA	Magnetic Low Voltage Single Pole and 3-Way	120V, 700VA	Ivory White Brown Black Light Almond
DLV1103PI DLV1103PW DLV1103P DLV1103PBK DLV1103PLA	Magnetic Low Voltage Single Pole and 3-Way	120V, 1100VA	Ivory White Brown Black Light Almond
<b>NEW Fluorescent Single Pole/3-Way Dimmers**</b>			
DFB8PI DFB8PW DFB8P DFB8PBK DFB8PLA	Two Wire Fluorescent Single Pole and 3-Way	120V, 8A	Ivory White Brown Black Light Almond
<b>NEW De-Hummer† Fan Speed Controls</b>			
DDH16PI DDH16PW DDH16P DDH16PBK DDH16PLA	De-Hummer Fan Speed Control	120V, 1.6A	Ivory White Brown Black Light Almond

\* Available in visionPak™ packaging, add "V" to Catalog Number. Example: D703PLAV.

\*\* For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.

† Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for Harmony Dimmers							
Catalog Number	Maximum Load	Multi-Gang De-Rating		Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang			2 Gang	3 Gang
D703P	700W	700W	700W	DLV1103P	1100VA	950VA	700VA
D1103P	1100W	1100W	800W	DFB8P	8A	8A	6.5A
DLV703P	700VA	700VA	650VA	DDH16	1.6A	1.6A	1.6A






# Decorator Devices LS Series Dimmers

Pass & Seymour





## Features

- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page E-58 for information.



LS600LA



LS1000PLA

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
<b>600W Incandescent Slide Dimmers*</b>				
LS600I LS600W LS600 NEW NEW LS600BK LS600LA		Non-Preset	120V, 600W max.	Ivory White Brown Black Light Almond
LS600PI LS600PW LS600P NEW NEW LS600PBK LS600PLA	LS603PI LS603PW LS603P NEW NEW LS603PBK LS603PLA	Preset	120V, 600W max.	Ivory White Brown Black Light Almond
<b>1000W Incandescent Slide Dimmers*</b>				
LS1000I LS1000W LS1000 NEW NEW LS1000BK LS1000LA		Non-Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
LS1000PI LS1000PW LS1000P NEW NEW LS1000PBK LS1000PLA	LS1003PI LS1003PW LS1003P NEW NEW LS1003PBK LS1003PLA	Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
<b>600VA Magnetic Low-Voltage Slide Dimmers**</b>				
LSLV600I LSLV600W LSLV600 NEW NEW LSLV600BK LSLV600LA		Non-Preset	120V, 600VA max.	Ivory White Brown Black Light Almond
LSLV600PI LSLV600PW LSLV600P NEW NEW LSLV600PBK LSLV600PLA	LSLV603PI LSLV603PW LSLV603P NEW NEW LSLV603PBK LSLV603PLA	Preset	120V, 600VA max.	Ivory White Brown Black Light Almond

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.


\*\* Available in boxed packaging only.

For wiring diagrams, see Page U-24.


Max. Load Rating	Fins Removed	
	One Side	Two Side
<b>De-Rating Chart</b>		
LS600, LS603	No De-Rating Required	
LS1000P, LS1003P	900W	750W
LS1000	850W	700W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

# Decorator Devices LS Series Dimmers



LSDS300PW



LSDD300W



TM8LMCC

Catalog Number	Description	Ratings		Color
		Dimmer	Switch	
<b>NEW</b> Single Pole/3-Way Preset Dimmers & Switches				
LSDS300PI LSDS300PW LSDS300P LSDS300PBK LSDS300PLA	Single Pole/3-Way Preset Dimmer and Independent Single Pole/3-Way Switch	120V 300W	7A general purpose resistive and ballast, 1/4 hp 900W tungsten	Ivory White Brown Black Light Almond
<b>NEW</b> Dual Slide to OFF Single Pole Dimmers				
LSDD300I LSDD300W LSDD300 LSDD300BK LSDD300LA	Dual Slide to OFF Single Pole Dimmers	120V 300W	—	Ivory White Brown Black Light Almond

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
<b>De-Rating Chart</b>			
LSDS300	300W	300W	300W
LSDD300	300W	300W	300W

For wiring diagrams, see Page U-24.

Features	
<ul style="list-style-type: none"> <li>■ No tool needed, module snaps-in.</li> <li>■ Lights when OFF.</li> <li>■ Uses energy-efficient 1/4 watt LED light.</li> </ul>	<ul style="list-style-type: none"> <li>■ LED light will not generate heat and will last on average 47 years.</li> </ul>

Catalog Number	Rating A.	VAC	Color
<b>Snap-In Light Module</b>			
TM8LMCC	15	120/125	Clear

Catalog Number	Description	Color
<b>Accessories for LS Series</b>		
LRKIV LRKWV LRKV LRKBKV LRKLAV	Replacement Knobs for Decorator Dual Slides	Ivory White Brown Black Light Almond
LLRKIV LLRKWV LLRKV LLRKBKV LLRKLAV	Large Replacement Knobs for Decorator Single Slides	Ivory White Brown Black Light Almond






# Decorator Devices LS Series Fan Speed Controls


Pass & Seymour



Features	
<ul style="list-style-type: none"> <li>■ Tough impact-resistant thermoplastic housing.</li> <li>■ Power-failure memory.</li> <li>■ Superior heat management: no time wasting break off tabs.</li> <li>■ Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.</li> <li>■ Can be used with patented Snap-In Light Module (sold separately).</li> </ul>	

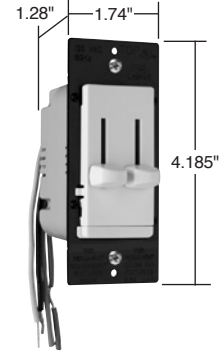

LSDC16LAV

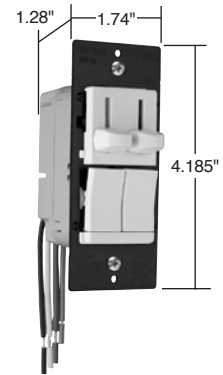

LSDC163PLAV

Catalog Number	Description	Ratings	Color
<b>Decorator Slide Fan Speed Controls*</b>			
<b>NEW</b> <b>NEW</b> LSSC5I LSSC5W LSSC5 LSSC5BK LSSC5LA	Non-Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
<b>NEW</b> <b>NEW</b> LSSC5PI LSSC5PW LSSC5P LSSC5PBK LSSC5PLA	Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
<b>Decorator Slide De-Hummer Controls**</b>			
<b>NEW</b> <b>NEW</b> LSDH16IV LSDH16WV LSDH16V LSDH16BKV LSDH16LAV	Non-Preset, 4-Speed Fan Control	1.6A	Ivory White Brown Black Light Almond
<b>Dual Control Decorator Slides**</b>			
<b>NEW</b> <b>NEW</b> LSDC16IV LSDC16WV LSDC16V LSDC16BKV LSDC16LAV	Non-Preset, 3-Speed De-Hummer Fan Control with Single Pole Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
<b>NEW</b> <b>NEW</b> <b>NEW</b> <b>NEW</b> <b>NEW</b> LSDC163PIV LSDC163PWV LSDC163PV LSDC163PBKV LSDC163PLAV	Preset, Single Pole/3-Way 3-Speed De-Hummer Fan Control with Single Pole/3-Way Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
<b>NEW</b> <b>NEW</b> LSDV25IV LSDV25WV LSDV25V LSDV25BKV LSDV25LAV	Non-Preset, Variable Speed Fan Control With Single Pole Dimmer	2.5A/300W	Ivory White Brown Black Light Almond

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LSSC5IV.


\*\* Available in VisionPak™ only.

Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."


For wiring diagrams, see Page U-24.

# Decorator Devices

## Decorator Rotary DR Series



DR703PLAV



DR1103PWV



Illuminated knob indicates light level.

Features	
<ul style="list-style-type: none"> <li>■ A new style that matches P&amp;S Decorator Combination devices.</li> <li>■ Accepts Snap-In Light Module (sold separately) to convert decorator rotary devices into illuminated-type in moments; makes devices easy to find in the dark. See Page N-20.</li> <li>■ Screw-pressure-plate backwiring speeds installation and ensures solid, high-quality electrical connections. Also supports traditional, wire-loop side wiring.</li> </ul>	<ul style="list-style-type: none"> <li>■ Heavy-gauge black anodized aluminum strap provides superior heat management and structural strength for mounting against wall surfaces.</li> <li>■ Slim design leaves more room in the box and makes installation faster and easier.</li> <li>■ Higher ratings of 700 and 1100 watts.</li> <li>■ No de-rating of 700 watt devices.</li> <li>■ Single pole and 3-way in same device.</li> </ul>

Catalog Number	Description	Ratings	Color
<b>NEW Incandescent Preset Dimmers</b>			
DR703PIV DR703PWV DR703PV DR703PBKV DR703PLAV	Single Pole/3-Way Dimmer with Pilot Light	120V, 700W	Ivory White Brown Black Light Almond
DR1103PIV DR1103PWV DR1103PV DR1103PBKV DR1103PLAV	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100W	Ivory White Brown Black Light Almond
<b>NEW Magnetic Low-Voltage Dimmers</b>			
DRLV703PIV DRLV703PWV DRLV703PV DRLV703PBKV DRLV703PLAV	Single Pole/3-Way Dimmer with Pilot Light	120V, 700VA	Ivory White Brown Black Light Almond
DRLV1103PIV DRLV1103PWV DRLV1103PV DRLV1103PBKV DRLV1103PLAV	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100VA	Ivory White Brown Black Light Almond
<b>NEW Continuously Variable Preset Fan Speed Controls</b>			
DRSC53PIV DRSC53PWV DRSC53PV DRSC53PBKV DRSC53PLAV	Single Pole/3-Way Fan Speed Control	120V, 5A	Ivory White Brown Black Light Almond
<b>NEW 3-Speed De-Hummer* Preset Fan Speed Controls</b>			
DRDH163PIV DRDH163PWV DRDH163PV DRDH163PBKV DRDH163PLAV	Single Pole/3-Way Fan Speed Control with back-lit speed indication	120V, 1.6A	Ivory White Brown Black Light Almond

Available in VisionPak™ only.

\* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for DR Series			
Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
DR703	No De-Rating Required		
DR1103	1100W	900W	750W



# Decorator Devices Wide Slide Series


Pass & Seymour




### Full-On Bypass

When the dimmer is placed in the full-On position, the dimming circuitry is bypassed by latching contacts. This feature allows for 100% lighting output and extends dimmer life by eliminating heat build-up.

Features	
<ul style="list-style-type: none"> <li>Maximum ratings are for continuous full load.</li> <li>Many 1000W models fit standard Decorator plates.</li> <li>RFI suppression built in.</li> <li>Full-On bypass.</li> </ul>	<ul style="list-style-type: none"> <li>Preset "ON/OFF" switch automatically returns controlled lights to preset level without readjusting dimmer setting.</li> <li>600W maximum rated dimmers can be ganged without de-rating.</li> </ul>



P 90680    P 90683  
N 90681



P 91180    P 91183  
N 91181

P = Preset  
N = Non-Preset


Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
<b>600W Incandescent Specification Grade Slide Dimmers</b>				
90680I* 90680W* 90680GRY 90680LA*	90683I* 90683W* 90683GRY 90683LA*	Preset	120V 600W max.	Ivory White Gray Light Almond
90681I* 90681W* 90681GRY 90681LA*		Non-Preset	120V 600W max.	Ivory White Gray Light Almond
<b>1000W Incandescent Specification Grade Slide Dimmers</b>				
91180I 91180W 91180GRY 91180LA	91183I 91183W 91183GRY 91183LA	Preset	120V 1000W max.	Ivory White Gray Light Almond
91181I 91181W 91181LA		Non-Preset	120V 1000W max.	Ivory White Light Almond




\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 90680IV.

Max. Load Rating	Fins Removed	
	One Side	Two Side
<b>De-Rating Chart</b>		
1000W	800W	700W

Note: Each side removed reduces plate size by 3/8".

Slide Dimmer 3-Way Wiring Diagram

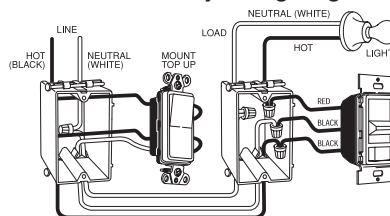

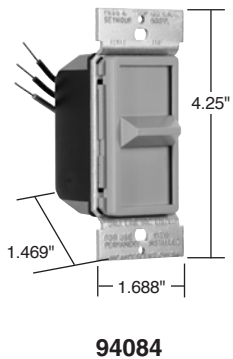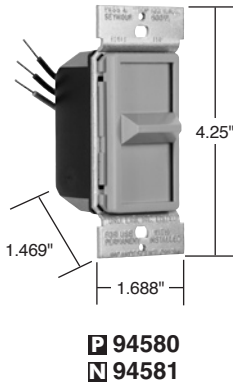

**P** = Preset  
**N** = Non-Preset

## Decorator Devices Wide Slide Series



### Full-ON Bypass

When the dimmer or control is placed in the full-ON position, the dimming or speed control circuitry is bypassed by latching contacts. This feature allows for 100% motor output and extends dimmer or speed control's life by eliminating heat build-up.

### Field Adjustable Trim

This feature allows the user to set the minimum speed level desired and helps prevent damage to motor due to stalling. Models without field adjustable trims feature factory settings for minimum anti-stall levels.

Features	
<ul style="list-style-type: none"> <li>■ Maximum rating for full continuous load.</li> <li>■ Full-ON bypass.</li> <li>■ 600VA dimmers may be ganged without de-rating.</li> </ul>	<ul style="list-style-type: none"> <li>■ Compatible with Decorator wall plates.</li> <li>■ RFI suppression built-in.</li> </ul>

Catalog Number	Description	Ratings	Color
<b>Magnetic Low-Voltage* Specification Grade Slide Dimmers</b>			
95681I 95681W 95681LA	Non-Preset/Full-ON Bypass, MLV	120V 600VA max.	Ivory White Light Almond

\* For use with magnetic transformer supplied incandescent low-voltage lighting.

Max. Load Rating	Fins Removed	
	One Side	Two Side
<b>De-Rating Chart</b>		
1000VA	800VA	700VA

Features	
<ul style="list-style-type: none"> <li>■ Full range speed control.</li> <li>■ Compatible with Decorator wall plates.</li> <li>■ 100% tested for symmetry for extended fan life.</li> </ul>	<ul style="list-style-type: none"> <li>■ Ground lead provided.</li> <li>■ Ferrite bar coil choke for excellent RFI suppression.</li> </ul>

Catalog Number	Description	Ratings	Color
<b>5A Max. Slide Fan Speed Controls</b>			
94580I 94580W	Preset, Full-ON Bypass, Adjustable Trim May Be Ganged Without De-Rating	120V 5A max.	Ivory White
94581I* 94581W* 94581LAV**	Non-Preset, Full-ON Bypass, Adjustable Trim, May Be Ganged Without De-Rating	120V 5A max.	Ivory White Light Almond

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94581IV.

\*\*Available in VisionPak™ only.

### No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary, and dual styles with virtually no fan motor noise.

Catalog Number	Description	Ratings	Color
<b>1.5A Max. No-Noise De-Hummer Specification Grade Fan Speed Controls – RFI Protected</b>			
94084I* 94084W* 94084GRY 94084LA*	3-Speed, Single Pole	120V 1.5A max.	Ivory White Gray Light Almond

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94084LAV.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.



# Decorator Devices Titan™ Series

Pass & Seymour



**A complete solution for easy, economical multi-gang installations.**

The P&S Titan™ Series have key features designed to increase installer productivity. Each comes with all the screwless wall plate components necessary for single gang or multi-gang installations. No need to order any additional components such as long-lead time custom wall plates to finish the job. Complete the installation with everything right out of the box, increasing productivity by finishing up in one visit instead of several.

**Included screwless wall plate components** make it easy to assemble a custom multi-gang wall plate in any configuration — saving money and time.

**Power-failure memory** retains presets through power outages.

**Widest choice of amperage ratings** with minimal or no de-rating for faster job planning.

**Preset models** feature large ON/OFF button and single pole/three-way functionality.

**High-reliability design** with built-in surge and static protection plus oversize output devices to stand up to abuse.

**Exclusive labeling system has a built-in label holder** enabling instant circuit identification; looks clean and professional.

**Included end-caps and spacers** screw directly to heat sinks; center plate snaps easily on and off.



**Enclosed slider** helps prevent dust and dirt contamination.

**Exclusive adjustable limit control in incandescent dimmers** saves energy and extends bulb life — reduces maximum output by up to 10 percent.

**Air-gap switch**

**Improved heat management** enables superior load ratings.

CD703PW



CDADAPTORKITW



**Adaptor kit enables matching installation of standard P&S Decorator Devices** — outlets, switches, GFCIs and more.




# Decorator Devices Titan™ Series Incandescent Dimmers




**CD703PW**  
Narrow



**CD1100W**  
Narrow



**CD1603PW**  
Wide



**CD2003PW**  
Wide

### Features

- Field configurable wall plate system.
- Labeling system.
- Adjustable top end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page E-65.)
- Blank center plate included.



Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>Incandescent</b>				
CD700I CD700W CD700 CD700GRY CD700BK CD700LA	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD703PI CD703PW CD703P CD703PGRY CD703PBK CD703PLA	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD1100I CD1100W CD1100 CD1100GRY CD1100BK CD1100LA	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1103PI CD1103PW CD1103P CD1103PGRY CD1103PBK CD1103PLA	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1600I CD1600W CD1600 CD1600GRY CD1600BK CD1600LA	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD1603PI CD1603PW CD1603P CD1603PGRY CD1603PBK CD1603PLA	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD2000I CD2000W CD2000 CD2000GRY CD2000BK CD2000LA	Single Pole, Slide-to-OFF	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond
CD2003PI CD2003PW CD2003P CD2003PGRY CD2003PBK CD2003PLA	Single Pole/3-Way, Preset	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, and rough-in box charts, see Pages U-134 and U-135.


All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.






# Decorator Devices Titan™ Series Magnetic Low-Voltage Dimmers & Adaptor Kit

Pass & Seymour



**CDLV700W  
Narrow**



**CDLV1103PW  
Wide**



**CDADAPTORKITW**

Adaptor kit enables matching installation of standard P&S Decorator Devices – outlets, switches, GFCIs and more. See Page E-63.

## Features


- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system.
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>Magnetic Low-Voltage</b>				
<b>NEW</b> CDLV700I CDLV700W CDLV700 CDLV700GRY CDLV700BK CDLV700LA	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV703PI CDLV703PW CDLV703P CDLV703PGRY CDLV703PBK CDLV703PLA	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1100I CDLV1100W CDLV1100 CDLV1100GRY CDLV1100BK CDLV1100LA	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1103PI CDLV1103PW CDLV1103P CDLV1103PGRY CDLV1103PBK CDLV1103PLA	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1600I CDLV1600W CDLV1600 CDLV1600GRY CDLV1600BK CDLV1600LA	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CDLV1603PI CDLV1603PW CDLV1603P CDLV1603PGRY CDLV1603PBK CDLV1603PLA	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
<b>Adaptor Kit</b>				
<b>NEW</b> CDADAPTORKITI CDADAPTORKITW CDADAPTORKIT CDADAPTORKITGRY CDADAPTORKITBK CDADAPTORKITLA	Decorator Device Adaptor Kit		Narrow	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, and rough-in box charts, see Pages U-134 and U-135.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

# Decorator Devices Titan™ Series Fluorescent 2 Wire Dimmers



**CDFB5W**  
Narrow

### Features

- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page E-65.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>Fluorescent</b>				
CDFB5I CDFB5W CDFB5 CDFB5GRY CDFB5BK CDFB5LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB8I CDFB8W CDFB8 CDFB8GRY CDFB8BK CDFB8LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB10I CDFB10W CDFB10 CDFB10GRY CDFB10BK CDFB10LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB16I CDFB16W CDFB16 CDFB16GRY CDFB16BK CDFB16LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB7277I CDFB7277W CDFB7277 CDFB7277GRY CDFB7277BK CDFB7277LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB10277I CDFB10277W CDFB10277 CDFB10277GRY CDFB10277BK CDFB10277LA	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond

*For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages U-136 and U-137.*



# Decorator Devices Titan™ Series Fluorescent 2 Wire Dimmers

Pass & Seymour




## Features


- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page E-65.)
- Blank center plate included.

**NEW**

Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>Fluorescent</b>				
CDFB53PI CDFB53PW CDFB53P CDFB53PGRY CDFB53PBK CDFB53PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB83PI CDFB83PW CDFB83P CDFB83PGRY CDFB83PBK CDFB83PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB103PI CDFB103PW CDFB103P CDFB103PGRY CDFB103PBK CDFB103PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB163PI CDFB163PW CDFB163P CDFB163PGRY CDFB163PBK CDFB163PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB73P277I CDFB73P277W CDFB73P277 CDFB73P277GRY CDFB73P277BK CDFB73P277LA	2 Wire, Electronic, Single Pole/3-Way, Preset	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB103P277I CDFB103P277W CDFB103P277 CDFB103P277GRY CDFB103P277BK CDFB103P277LA	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond




**CDFB53PW  
Narrow**



**CDFB103PW  
Wide**

For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages U-136 and U-137.

# Decorator Devices Titan™ Series Fluorescent 3 Wire Dimmers



CD3FB163PW  
Narrow

### Features

- For use with 3 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page E-65.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>Fluorescent</b>				
CD3FB161 CD3FB16W CD3FB16 CD3FB16GRY CD3FB16BK CD3FB16LA	3 Wire Electronic, Single Pole, Slide-to-OFF	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB163PI CD3FB163PW CD3FB163P CD3FB163PGRY CD3FB163PBK CD3FB163PLA	3 Wire Electronic, Single Pole/3-Way, Preset	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB10277I CD3FB10277W CD3FB10277 CD3FB10277GRY CD3FB10277BK CD3FB10277LA	3 Wire Electronic, Single Pole, Slide-to-OFF	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB103P277I CD3FB103P277W CD3FB103P277 CD3FB103P277GRY CD3FB103P277BK CD3FB103P277LA	3 Wire Electronic, Single Pole/3-Way, Preset	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond

Available Winter 2008.




# Decorator Devices Titan™ Series Fluorescent 4 Wire Dimmers

Pass & Seymour



## Features

- For use with 0-10V, 4 wire, 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Must be used with power pack.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page E-65.)
- Blank center plate included.



CD4FB73P120277W  
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
<b>NEW</b> Fluorescent				
CD4FB7120277I CD4FB7120277W CD4FB7120277 CD4FB7120277GRY CD4FB7120277BK CD4FB7120277LA	Single Pole, Slide-to-OFF	120/277V, 7A	Narrow	Ivory White Brown Gray Black Light Almond
CD4FB73P120277I CD4FB73P120277W CD4FB73P120277 CD4FB73P120277GRY CD4FB73P120277BK CD4FB73P120277LA	Single Pole/3-Way, Preset	120/277V, 7A	Narrow	Ivory White Brown Gray Black Light Almond
PWP2120	Power pack for switching load up to 20A	120V	—	
PWP2277	Power pack for switching load up to 20A	277V	—	

Available Spring 2009.

## Decorator Devices

# P&S Signature™ Devices & Wall Plates

## Product Selection & Installation

### **Product Selection Process**

- **Identify device**, see Pages E-71 through E-75.
- **Select wall plate shape** – straight, curved or molding, see Pages E-76 and E-77.
- **Select base wall plate color** (match device) – White, Light Almond or Black.
- **Select end cap trim color or finish** – 11 different colors and finishes to choose from:  
Aged Bronze, Aged Copper, Black, Brushed Brass, Brushed Nickel, Green Tea, Light Almond, Regatta Blue, Stainless Steel, Summerfield Yellow, or White.

### **Device Installation**



- Wire the same as standard P&S devices and have the same great features, quality, and reliability.
- Decorator insert available to convert a toggle switch to Decorator, see Page E-75.

### **Wall Plate Features**

- Screwless wall plates with no sub-plates.
- Modular “end cap” design hides screws.
- 45 different styles (available in one through four gang = 180 Total SKUs).
- Five distinct shapes with straight or curved end cap trims and moldings – crown, beaded, and dentil.
- 11 end cap trim colors and finishes available including vivid colors and metallics or monochromatic.

### **Wall Plate Installation & Removal**

- Screwless with no sub-plate required.
- End caps snap on without tools.
- Use a small screwdriver to remove.

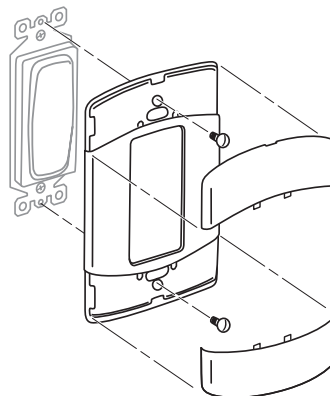

# Decorator Devices P&S Signature™ Decorator Switches

15A, 120/277VAC

Pass & Seymour




Decorator Devices

Features	
<ul style="list-style-type: none"> <li>Stylish rounded corners match Signature wall plates and devices.</li> <li>Designer-style satin-finish rocker.</li> <li>High-impact resistant thermoplastic construction.</li> <li>External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.</li> <li>Push wire #14 AWG.</li> </ul>	<ul style="list-style-type: none"> <li>Narrow back body leaves more room for wires in the box.</li> <li>Extra-long, through-body strap eliminates floating installations and imperfect applications.</li> <li>Smooth, quiet paddle action.</li> <li>Easy-access green hex head ground screw.</li> <li>Tri-drive ground, terminal and mounting screws.</li> </ul>



STM870LACC10

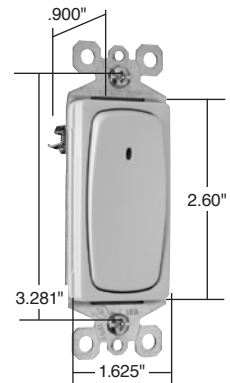

STM870LASLCC10

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			cULus	
<b>NEW Single Pole Decorator Switches</b>				
STM870WCC10	15 120/277	White	•	
STM870BKCC10	15 120/277	Black	•	
STM870LACC10	15 120/277	Light Almond	•	
<b>NEW Single Pole Illuminated Decorator Switches</b>				
STM870WSLCC10	15 120/277	White	•	
STM870BKSLCC10	15 120/277	Black	•	
STM870LASLCC10	15 120/277	Light Almond	•	
<b>NEW 3-Way Decorator Switches</b>				
STM873WCC10	15 120/277	White	•	
STM873BKCC10	15 120/277	Black	•	
STM873LACC10	15 120/277	Light Almond	•	
<b>NEW 3-Way Illuminated Decorator Switches</b>				
STM873WSLCC10	15 120/277	White	•	
STM873BKSLCC10	15 120/277	Black	•	
STM873LASLCC10	15 120/277	Light Almond	•	
<b>NEW 4-Way Decorator Switches</b>				
STM874WCC10	15 120/277	White	•	
STM874BKCC10	15 120/277	Black	•	
STM874LACC10	15 120/277	Light Almond	•	
<b>NEW 4-Way Illuminated Decorator Switches</b>				
STM874WSLCC10	15 120/277	White	•	
STM874BKSLCC10	15 120/277	Black	•	
STM874LASLCC10	15 120/277	Light Almond	•	

Catalog Number	Rating A. VAC	Color	3rd Party Compliance	
			cULus	
<b>NEW Decorator Momentary Contact Garbage Disposal Switches</b>				
STM870STMWCC10	15 120/277	White	•	
STM870STMBKCC10	15 120/277	Black	•	
STM870STMLACC10	15 120/277	Light Almond	•	


All devices listed on this page conform to NEMA WD-1 and WD-6.

P&S Signature™ Decorator Switches




# Decorator Devices P&S Signature™ Decorator Receptacles & GFCI Receptacles


15A, 125V

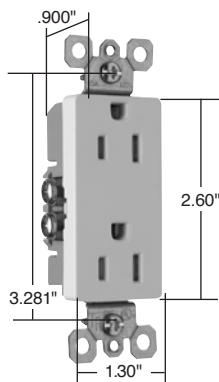

S885TRLACC14

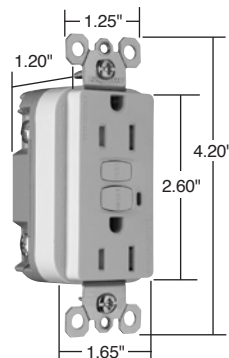

S1595TRLACC8

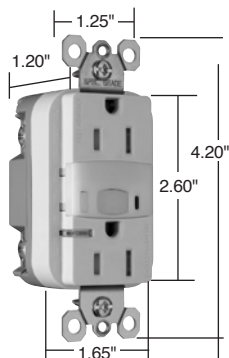

S1595NTLTRLACC8



NEMA 5-15R

### Features

- Stylish rounded corners match Signature wall plates and devices.
- Tamper-resistant models have dual mechanical shutter system to help prevent insertion of foreign objects.
- High impact-resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Tri-drive screws.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.

NEW

NEW

NEW

NEW

NEW

NEW

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				cUL <sub>US</sub>	
<b>Tamper-Resistant Decorator Duplex Receptacles</b>					
S885TRWCC14	15 125	White	5-15R		•
S885TRBKCC14	15 125	Black	5-15R		•
S885TRLACC14	15 125	Light Almond	5-15R		•
<b>Decorator Duplex Receptacles</b>					
S885WCC14	15 125	White	5-15R		•
S885BKCC14	15 125	Black	5-15R		•
S885LACC14	15 125	Light Almond	5-15R		•

### Features

- Stylish rounded corners match Signature wall plates and devices.
- Tamper-resistant models have dual mechanical shutter system to help prevent insertion of foreign objects.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Tri-drive screws.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				cUL <sub>US</sub>	FSUL WC596
<b>Tamper-Resistant GFCI Receptacles</b>					
S1595TRWCC8	15 125	White	5-15R	•	•
S1595TRBKCC8	15 125	Black	5-15R	•	•
S1595TRLACC8	15 125	Light Almond	5-15R	•	•
<b>GFCI Receptacles</b>					
S1595WCC8	15 125	White	5-15R	•	•
S1595BKCC8	15 125	Black	5-15R	•	•
S1595LACC8	15 125	Light Almond	5-15R	•	•
<b>Tamper-Resistant Decorator Combination Nightlight/GFCI Receptacles</b>					
S1595NTLTRWCC8	15 125	White	5-15R	•	•
S1595NTLTRBKCC8	15 125	Black	5-15R	•	•
S1595NTLTRLACC8	15 125	Light Almond	5-15R	•	•
<b>Decorator Combination Nightlight/GFCI Receptacles</b>					
S1595NTLWCC8	15 125	White	5-15R	•	•
S1595NTLBKCC8	15 125	Black	5-15R	•	•
S1595NTLLACC8	15 125	Light Almond	5-15R	•	•






# Decorator Devices P&S Signature™ Decorator Slide & Multi-Location Dimmers & Controllers

Pass & Seymour




## Features


- Stylish rounded corners match Signature wall plates and devices.
- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing.
- Preset models ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.

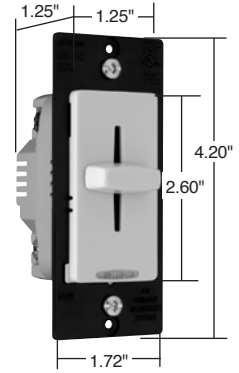


SLS600LACC6

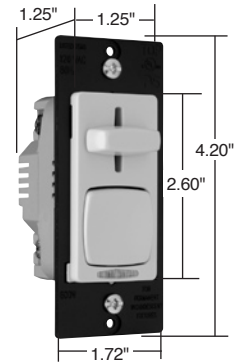

SLS603PLACC6

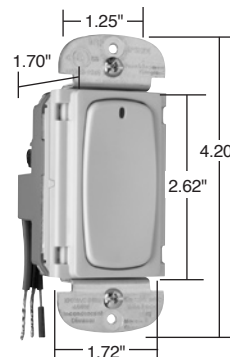

SPSHDILACC6

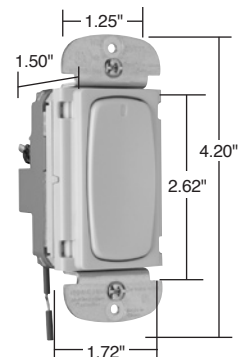


SPSHCLACC6


Catalog Number	Ratings	Color	3rd Party Compliance	
			cULus	
<b>NEW Decorator Single Pole Incandescent Slide Dimmers</b>				
SLS600WCC6	600W	White	•	
SLS600BKCC6	600W	Black	•	
SLS600LACC6	600W	Light Almond	•	
<b>NEW Decorator Single Pole/3-Way Incandescent Preset Slide Dimmers</b>				
SLS603PWCC6	600W	White	•	
SLS603PBKCC6	600W	Black	•	
SLS603PLACC6	600W	Light Almond	•	
<b>NEW Decorator Dual Control Slides – 3-Speed Fan Control with Single Pole Dimmer</b>				
SLSDC16WCC6	300W 1.6A	White	•	
SLSDC16BKCC6	300W 1.6A	Black	•	
SLSDC16LACC6	300W 1.6A	Light Almond	•	
<b>NEW Decorator Multi-Location Controllers</b>				
SPSHCWCC6	600W	White	•	
SPSHCBKCC6	600W	Black	•	
SPSHCLACC6	600W	Light Almond	•	
<b>NEW Decorator Multi-Location Incandescent Dimmers</b>				
SPSHDIWCC6	600W	White	•	
SPSHDIBKCC6	600W	Black	•	
SPSHDILACC6	600W	Light Almond	•	
<b>NEW Decorator Multi-Location Universal Dimmers</b>				
SPSHDUWCC6	600W	White	•	
SPSHDUBKCC6	600W	Black	•	
SPSHDULACC6	600W	Light Almond	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.


# Decorator Devices P&S Signature™ Harmony™ Dimmers & Fan Speed Controls

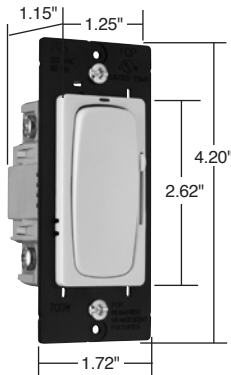

SD703PLACC6

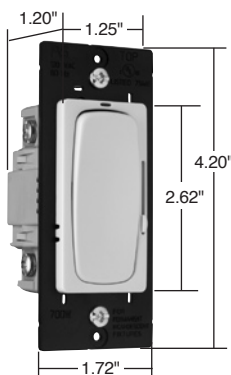

SDLV703PLACC6

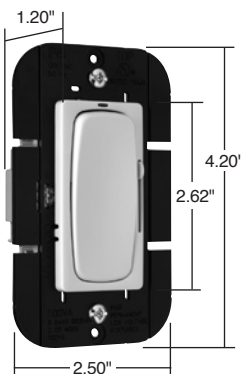

SD1103PLACC6

### Features

- Stylish rounded corners match Signature wall plates and devices.
- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
- Green LED glows when off to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate backwire terminals save time, space and money.

**SD703P, SDLV703P, DDH16P**


- No derating.
- No fins to break.



Catalog Number	Ratings	Color	3rd Party Compliance
			cULus
<b>Decorator Single Pole/3-Way Incandescent Preset Dimmers</b>			
SD703PWCC6	700W	White	•
SD703PBKCC6	700W	Black	•
SD703PLACC6	700W	Light Almond	•
SD1103PWCC6	1100W	White	•
SD1103PBKCC6	1100W	Black	•
SD1103PLACC6	1100W	Light Almond	•
<b>Decorator Single Pole/3-Way Magnetic Low-Voltage Preset Dimmers</b>			
SDLV703PWCC6	700VA	White	•
SDLV703PBKCC6	700VA	Black	•
SDLV703PLACC6	700VA	Light Almond	•
SDLV1103PWCC6	1100VA	White	•
SDLV1103PBKCC6	1100VA	Black	•
SDLV1103PLACC6	1100VA	Light Almond	•
<b>Decorator De-Hummer* Fan Speed Controls</b>			
SDDH16PWCC6	1.6A	White	•
SDDH16PBKCC6	1.6A	Black	•
SDDH16PLACC6	1.6A	Light Almond	•



\*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

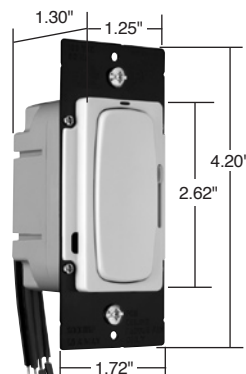


SDDH16PLACC6

# Decorator Devices P&S Signature™ Decorator Communication Devices & Inserts


Pass & Seymour




Features	
<ul style="list-style-type: none"> <li>■ Stylish rounded corners match Signature wall plates and devices.</li> <li>■ Face constructed of high-impact thermoplastic.</li> <li>■ Zinc-plated steel strap.</li> </ul>	<ul style="list-style-type: none"> <li>■ Nickel-plated "F" type cable connector.</li> <li>■ RJ11 modular telephone jack.</li> <li>■ Threaded on each end.</li> </ul>

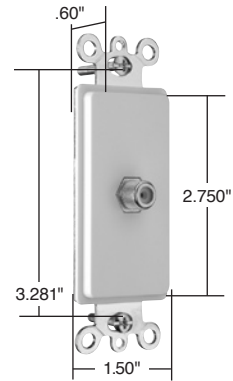

**S26CATVLACC14**

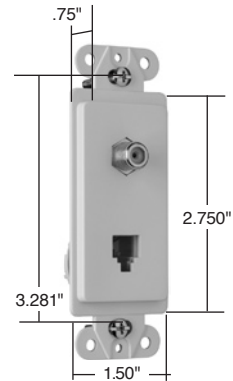

**S26TELTVLACC14**

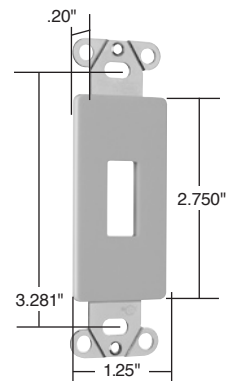

**S26TOGGLELACC10**





Catalog Number	Description	Color	3rd Party Compliance	
			UL	
<b>NEW Decorator Single Cable TV Connectors</b>				
S26CATVWCC14	F-Type COAX Connector	White	•	
S26CATVBKCC14	F-Type COAX Connector	Black	•	
S26CATVLACC14	F-Type COAX Connector	Light Almond	•	
<b>NEW Decorator Single Telephone Jacks</b>				
S26TE14WCC14	RJ11, 4 Conductor	White	•	
S26TE14BKCC14	RJ11, 4 Conductor	Black	•	
S26TE14LACC14	RJ11, 4 Conductor	Light Almond	•	
<b>NEW Decorator Combination Telephone Jack &amp; Cable TV Connector</b>				
S26TELTVWCC14	F-Type COAX Connector with 4 Conductor RJ-11 Jack	White	•	
S26TELTVBKCC14		Black	•	
S26TELTVLACC14		Light Almond	•	

Catalog Number	Description	Color	3rd Party Compliance	
			cULus	
<b>NEW Decorator Insert for Toggle Switch</b>				
S26TOGGLEWCC10	Decorator Insert for Toggle Switch	White	•	
S26TOGGLEBKCC10		Black	•	
S26TOGGLELACC10		Light Almond	•	



# Decorator Devices P&S Signature™ Decorator Wall Plates

With Straight & Bead, Crown & Dentil Molding End Cap Trims

<b>One Gang Example</b> <i>White Base with Bead Molding End Cap Trim</i> 	<b>Two Gang Example</b> <i>White Base with Dentil Molding End Cap Trim</i> 	<b>Three Gang Example</b> <i>Black Base with Black End Cap Trim</i> 	<b>Four Gang Example</b> <i>Light Almond Base with Brushed Nickel End Cap Trim</i> 
<b>One Gang</b> Catalog Number	<b>Two Gang</b> Catalog Number	<b>Three Gang</b> Catalog Number	<b>Four Gang</b> Catalog Number

Base Color	End Cap Trim Color	One Gang Catalog Number	Two Gang Catalog Number	Three Gang Catalog Number	Four Gang Catalog Number
<b>NEW</b> Straight Wall Plates					
Black	Aged Bronze	SWS26BKABCC10	SWS262BKABCC10	SWS263BKAB	SWS264BKAB
Lt. Almond	Bronze	SWS26LAABCC10	SWS262LAABCC10	SWS263LAAB	SWS264LAAB
Black	Aged Copper	SWS26BKACCC10	SWS262BKACCC10	SWS263BKAC	SWS264BKAC
Lt. Almond	Copper	SWS26LAACCC10	SWS262LAACCC10	SWS263LAAC	SWS264LAAC
Black	Black	SWS26BKCC10	SWS262BKCC10	SWS263BKCC10	SWS264BKCC10
Black	Brushed Brass	SWS26BKBBCC10	SWS262BKBBCC10	SWS263BKBB	SWS264BKBB
Lt. Almond	Brass	SWS26LABBCC10	SWS262LABBCC10	SWS262LABB	SWS264LABB
Black	Brushed Nickel	SWS26BKBN	SWS262BKBN	SWS263BKBN	SWS264BKBN
Lt. Almond		SWS26LABNCC10	SWS262LABNCC10	SWS263LABN	SWS264LABN
White		SWS26WBNCC10	SWS262WBNCC10	SWS263WBN	SWS264WBN
Lt. Almond	Green Tea	SWS26LAGN	SWS262LAGN	SWS263LAGN	SWS264LAGN
White		SWS26WGNCC10	SWS262WGNCC10	SWS263WGN	SWS264WGN
Lt. Almond	Light Almond	SWS26LACC10	SWS262LACC10	SWS263LACC10	SWS264LACC10
Black	Regatta Blue	SWS26BKBL	SWS262BKBL	SWS263BKBL	SWS264BKBL
White		SWS26WBLCC10	SWS262WBLCC10	SWS263WBL	SWS264WBL
Black	Stainless Steel	SWS26BKSSCC10	SWS262BKSSCC10	SWS263BKSS	SWS264BKSS
Lt. Almond		SWS26LASS	SWS262LASS	SWS263LASS	SWS264LASS
White		SWS26WSS	SWS262WSS	SWS263WSS	SWS264WSS
Lt. Almond	Summer Field Yellow	SWS26LAYL	SWS262LAYL	SWS263LAYL	SWS264LAYL
White		SWS26WYLCC10	SWS262WYLCC10	SWS263WYL	SWS264WYL
White	White	SWS26WCC10	SWS262WCC10	SWS263WCC10	SWS264WCC10
White	Bead Molding	SWS26WBMCC10	SWS262WBMCC10	SWS263WBMCC10	SWS264WBMCC10
White	Crown Molding	SWS26WCMCC10	SWS262WCMCC8	SWS263WCMCC8	SWS264WCMCC8
White	Dentil Molding	SWS26WDMCC10	SWS262WDMCC8	SWS263WDMCC8	SWS264WDMCC8

See Page E-70 for product selection, features, and installation.

# Decorator Devices

## P&S Signature™ Decorator Wall Plates

With Curved End Cap Trims

**Pass & Seymour**



<b>One Gang Example</b> <i>Light Almond Base with Brushed Nickel End Cap Trim</i>	<b>Two Gang Example</b> <i>Black Base with Stainless Steel End Cap Trim</i>	<b>Three Gang Example</b> <i>Light Almond Base with Aged Copper End Cap Trim</i>	<b>Four Gang Example</b> <i>Light Almond Base with Light Almond End Cap Trim</i>
<b>One Gang Catalog Number</b>	<b>Two Gang Catalog Number</b>	<b>Three Gang Catalog Number</b>	<b>Four Gang Catalog Number</b>



Base Color	End Cap Trim Color	One Gang Catalog Number	Two Gang Catalog Number	Three Gang Catalog Number	Four Gang Catalog Number
<b>Curved Wall Plates</b>					
Black	Aged Bronze	SWC26BKAB	SWC262BKAB	SWC263BKAB	SWC264BKAB
Lt. Almond	Aged Bronze	SWC26LAABCC10	SWC262LAAB	SWC263LAAB	SWC264LAAB
Black	Aged Copper	SWC26BKACCC10	SWC262BKAC	SWC263BKAC	SWC264BKAC
Lt. Almond	Aged Copper	SWC26LAAC	SWC262LAAC	SWC263LAAC	SWC264LAAC
Black	Black	SWC26BKCC10	SWC262BKCC10	SWC263BKCC10	SWC264BKCC10
Black	Brushed Brass	SWC26BKBBCC10	SWC262BKBB	SWC263BKBB	SWC264BKBB
Lt. Almond	Brushed Brass	SWC26LABB	SWC262LABB	SWC263LABB	SWC264LABB
Black	Brushed Nickel	SWC26BKBNCC10	SWC262BKBNCC10	SWC263BKBN	SWC264BKBN
Lt. Almond		SWC26LABNCC10	SWC262LABNCC10	SWC263LABN	SWC264LABN
White		SWC26WBN	SWC262WBN	SWC263WBN	SWC264WBN
Lt. Almond	Green Tea	SWC26LAGNCC10	SWC262LAGNCC10	SWC263LAGN	SWC264LAGN
White		SWC26WGNCC10	SWC262WGN	SWC263WGN	SWC264WGN
Lt. Almond	Light Almond	SWC26LACC10	SWC262LACC10	SWC263LACC10	SWC264LACC10
Black	Regatta Blue	SWC26BKBLCC10	SWC262BKBLCC10	SWC263BKBL	SWC264BKBL
Lt. Almond		SWC26LABL	SWC262LABL	SWC263LABL	SWC264LABL
White		SWC26WBLCC10	SWC262WBLCC10	SWC263WBL	SWC264WBL
Black	Stainless Steel	SWC26BKSS	SWC262BKSS	SWC263BKSS	SWC264BKSS
Lt. Almond		SWC26LASS	SWC262LASS	SWC263LASS	SWC264LASS
White		SWC26WSSCC10	SWC262WSSCC10	SWC263WSS	SWC264WSS
Lt. Almond	Summer Field Yellow	SWC26LAYL	SWC262LAYL	SWC263LAYL	SWC264LAYL
White		SWC26WYLCC10	SWC262WYL	SWC263WYL	SWC264WYL
White	White	SWC26WCC10	SWC262WCC10	SWC263WCC10	SWC264WCC10

**Dimensions:**

<b>One Gang</b>	3.10" x 4.87"	<b>Three Gang</b>	6.75" x 4.87"
<b>Two Gang</b>	4.901" x 4.87"	<b>Four Gang</b>	8.50" x 4.87"

*For additional information, visit [www.ps-signature.com](http://www.ps-signature.com).*

All devices listed on this page conform to NEMA WD-1 and WD-6.




One Gang  
Brushed Nickel



Two Gang  
Brushed Copper



Three Gang  
Stainless Steel

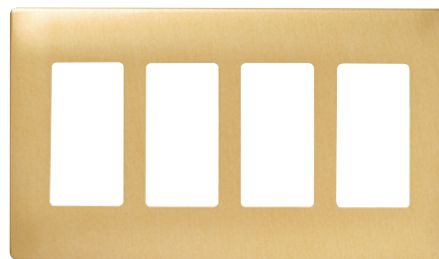


Four Gang  
Brass




One Gang  
Brushed Bronze



Two Gang  
Maple

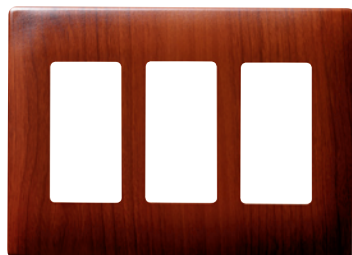

Three Gang  
Mahogany

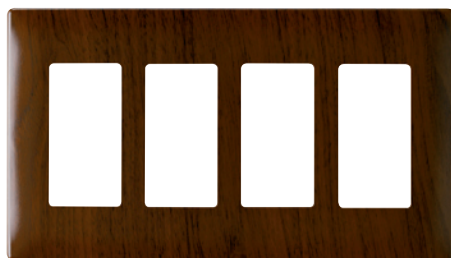

Four Gang  
Walnut



Description	Color	Metal Subplate	Plastic Subplate
<b>Screwless Decorator Openings</b> — subplate included			
<p>One Gang</p>	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	SW26BN SW26BC SW26SS SW26BR SW26BB SW26MA SW26MH SW26WA	SWP26BN SWP26BC SWP26SS SWP26BR SWP26BB SWP26MA SWP26MH SWP26WA
<p>Two Gang</p>	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	SW262BN SW262BC SW262SS SW262BR SW262BB SW262MA SW262MH SW262WA	SWP262BN SWP262BC SWP262SS SWP262BR SWP262BB SWP262MA SWP262MH SWP262WA
<p>Three Gang</p>	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	SW263BN SW263BC SW263SS SW263BR SW263BB SW263MA SW263MH SW263WA	SWP263BN SWP263BC SWP263SS SWP263BR SWP263BB SWP263MA SWP263MH SWP263WA
<p>Four Gang</p>	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	SW264BN SW264BC SW264SS SW264BR SW264BB SW264MA SW264MH SW264WA	SWP264BN SWP264BC SWP264SS SWP264BR SWP264BB SWP264MA SWP264MH SWP264WA

For Screwless Wall Plate, Metal Subplate, and Plastic Subplate dimensions, see Page E-79.







# Decorator Devices


## Screwless Decorator Openings

Polycarbonate


Pass & Seymour



Description	Color	Metal Subplate	Plastic Subplate
<b>Screwless Decorator Openings</b> — subplate included <span style="float: right; border: 1px solid red; padding: 2px;">NEW</span>			
<b>One Gang</b> 	Ivory White Brown Gray Black Light Almond	SW26I SW26W SW26 SW26GRY SW26BK SW26LA	SWP26I SWP262 SWP26 SWP26GRY SWP26BK SWP26LA
<b>Two Gang</b> 	Ivory White Brown Gray Black Light Almond	SW262I SW262W SW262 SW262GRY SW262BK SW262LA	SWP262I SWP262W SWP262 SWP262GRY SWP262BK SWP262LA
<b>Three Gang</b> 	Ivory White Brown Gray Black Light Almond	SW263I SW263W SW263 SW263GRY SW263BK SW263LA	SWP263I SWP263W SWP263 SWP263GRY SWP263BK SWP263LA
<b>Four Gang</b> 	Ivory White Brown Gray Black Light Almond	SW264I SW264W SW264 SW264GRY SW264BK SW264LA	SWP264I SWP264W SWP264 SWP264GRY SWP264BK SWP264LA
<b>Five Gang</b> 	Ivory White Brown Gray Black Light Almond	SW265I SW265W SW265 SW265GRY SW265BK SW265LA	
<b>Six Gang</b> 	Ivory White Brown Gray Black Light Almond	SW266I SW266W SW266 SW266GRY SW266BK SW266LA	




One Gang

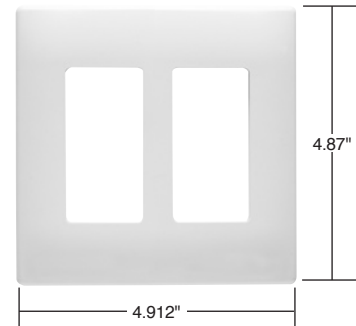

Two Gang

Description	Height	Width
<b>Screwless Wall Plate Dimensions</b>		
One Gang	4.87"	3.10"
Two Gang	4.87"	4.912"
Three Gang	4.87"	6.724"
Four Gang	4.87"	8.536"
Five Gang	4.87"	10.348"
Six Gang	4.87"	12.16"


Description	Height	Width
<b>Screwless Subplate Dimensions</b>		
One Gang	4.62"	2.85"
Two Gang	4.62"	4.662"
Three Gang	4.62"	6.474"
Four Gang	4.62"	8.286"
Five Gang	4.62"	10.098"
Six Gang	4.62"	11.910"




One Gang Metal Subplate



Two Gang Metal Subplate











One Gang Plastic Subplate



Two Gang Plastic Subplate

# Decorator Devices Decorator Openings

Standard Size Plastic & Metal

Description	Color	Nylon	Thermoset	Metal	
		TradeMaster® Plates	Smooth	Material	Smooth
<b>Decorator Openings</b>					
<b>One Gang</b> 	Ivory White Brown Gray Black Red Light Almond Blue Orange	TP26I TP26W TP26 TP26GRY TP26BK TP26RED TP26LA TP26BL TP26OR	SP26I SP26W SP26 SP26GRY SP26BK  SP26LA	Aluminum Brass Polished Brass 430S/S 302S/S Brushed Bronze Chrome	SA26 SB26 SB26PB SL26 SS26 SB26BZ SB26CH
<b>Two Gang</b> 	Ivory White Brown Gray Black Red Light Almond Blue Orange	TP262I TP262W TP262 TP262GRY TP262BK TP262RED TP262LA TP262BL TP262OR	SP262I SP262W SP262 SP262GRY SP262BK  SP262LA	Aluminum Brass Polished Brass 430S/S 302S/S	SA262 SB262 SB262PB SL262 SS262
<b>Three Gang</b> 	Ivory White Brown Gray Black Red Light Almond	TP263I TP263W TP263 TP263GRY TP263BK TP263RED TP263LA	SP263I SP263W  SP263GRY SP263BK  SP263LA	Brass Polished Brass  302S/S	SB263 SB263PB  SS263
<b>Four Gang</b> 	Ivory White Brown Gray Black Red Light Almond	TP264I TP264W TP264 TP264GRY TP264BK TP264RED TP264LA	SP264I SP264W SP264 SP264GRY SP264BK  SP264LA	Brass Polished Brass  302S/S	SB264 SB264PB  SS264
<b>Five Gang</b> 	Ivory White Brown Gray Black Red Light Almond	TP265I TP265W TP265 TP265GRY TP265BK  TP265LA	SP265I SP265W  SP265GRY SP265BK SP265RED SP265LA	302S/S	SS265
<b>Six Gang</b> 	Ivory White Brown Gray Black Light Almond	TP266I TP266W TP266 TP266GRY TP266BK TP266LA	SP266I SP266W SP266 SP266GRY SP266BK SP266LA	302S/S	SS266
<b>Seven Gang</b> 				302S/S 302S/S Painted Ivory 302S/S Painted White	SS267 SS267I SS267W
<b>Eight Gang</b> 				302S/S 302S/S Painted Ivory 302S/S Painted White	SS268 SS268I SS268W







# Decorator Devices Decorator Openings

Junior-Jumbo & Jumbo Plastic & Metal

**Pass & Seymour**



Description	Color	Nylon	Thermoset		Metal		
		TradeMaster® Jumbo	Junior-Jumbo	Jumbo	Material	Junior-Jumbo	Jumbo
Decorator Openings							
<b>One Gang</b> 	Ivory White Brown Gray Red Light Almond	TPJ26I TPJ26W TPJ26 TPJ26GRY TPJ26RED TPJ26LA	SPJ26I SPJ26W SPJ26  SPJ26LA	SPO26I SPO26W SPO26  SPO26LA	Brass 302S/S	SBJ26 SSJ26	SBO26 SSO26
<b>Two Gang</b> 	Ivory White Brown Gray Light Almond	TPJ262I TPJ262W TPJ262 TPJ262GRY TPJ262LA	SPJ262I SPJ262W SPJ262  SPJ262LA	SPO262I SPO262W SPO262	302S/S	SSJ262	SSO262
<b>Three Gang</b> 	Ivory White Brown Gray Light Almond	TPJ263I TPJ263W TPJ263 TPJ263GRY TPJ263LA	SPJ263I SPJ263W SPJ263  SPJ263LA		302S/S	SSJ263	
<b>Four Gang</b> 	Ivory White Brown Gray Light Almond	TPJ264I TPJ264W TPJ264 TPJ264GRY TPJ264LA	SPJ264I SPJ264W SPJ264  SPJ264LA				