

P&S innovations – from the first GFCI receptacle to SafeLock™ Protection.



In 1971, we introduced the first GFCI receptacle. Soon, our invention was preventing injuries and saving lives throughout North America.

That spirit of innovation and commitment to safety continues. In 2002, we introduced SafeLock™ Protection – and made it standard in all our GFCI receptacles. It goes beyond UL® standards to provide our best GFCI safety ever. With SafeLock Protection, if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

Today, you'll find P&S innovation and safety throughout a broad range of GFCI products – products that offer new versatility, save installation time, and solve problems. And products that continue a proud safety tradition that we began more than 30 years ago.

A full range of intelligently engineered, highly durable, and reliable GFCIs — whether you require receptacle, combination, portable, or in-line ground fault protection.

Index

Device	Rating	Page Number
TradeMaster® & Specification Grade GFCI Receptacles	15 & 20A, 125VAC	C-2 & C-5
Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-3
Hospital Grade Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-4
Hospital Grade GFCI Receptacles	15 & 20A, 125VAC	C-6
Illuminated GFCI Receptacles	15 & 20A, 125VAC	C-7
Specification Grade Dead Front GFCIs	20A, 125VAC	C-8
Decorator Combination Tamper-Resistant Switch/GFCI Receptacles	15A, 125VAC	C-9
Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles	15 & 20A, 125VAC	C-10
Weather-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-11
Weather-Resistant DuraShield™ GFCI Receptacles	15 & 20A, 125VAC	C-12
PlugTail™ Specification Grade GFCI Receptacles	15 & 20A, 125VAC	C-13
PlugTail™ Hospital Grade GFCI Receptacles	15 & 20A, 125VAC	C-14
PlugTail™ Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-15
PlugTail™ Nightlight/GFCI Receptacles	15 & 20A, 125VAC	C-16
GFCI Portables		C-17 – C-19

GFCIs TradeMaster® & Specification Grade GFCI Receptacles

GFCIs with patented SafeLock™ Protection
If critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.

High-impact-resistant, thermoplastic construction for superior strength and durability.

Back wire clamp allows for fast installation of ground wires.



Trip indicator light (LED) makes it easy to identify tripped condition.

Captive screws make for easier installation.

Two back wire holes per termination add wiring flexibility, eliminate pigtailing, and save box space.

Extra-long strap for better sheet rock contact eliminates "floaters" yet takes standard wall plate.


1595LA

Side or internal screw-pressure-plate back wire termination takes #10-#14 AWG stranded or solid, copper or copper-clad conductors.

1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.

The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

FSUL Listed (Federal Specification WC596).

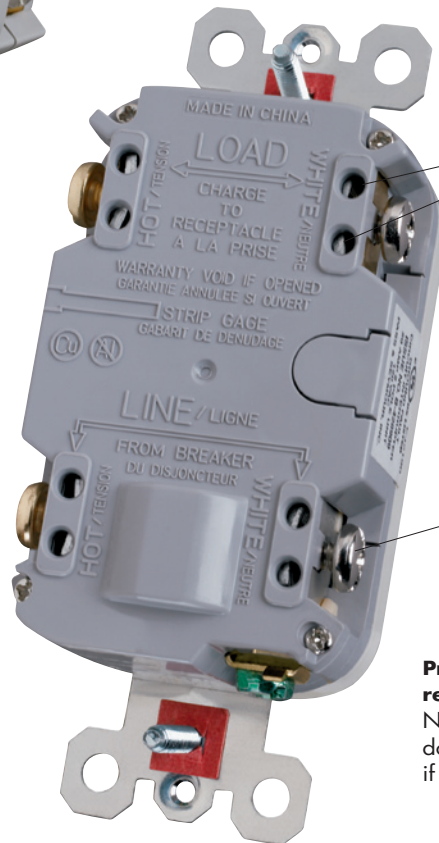

Prevents line-load reversal miswire: No power to the face or downstream receptacles if wired incorrectly.

GFCIs Tamper-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features	
<ul style="list-style-type: none"> Protects children: patented shutter system helps prevent improper insertion of foreign objects. Meets 2008 National Electrical Code® Tamper-Resistant requirements. SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. 	<ul style="list-style-type: none"> Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

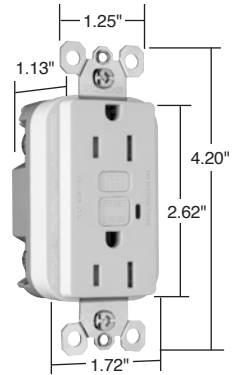

1595TRW

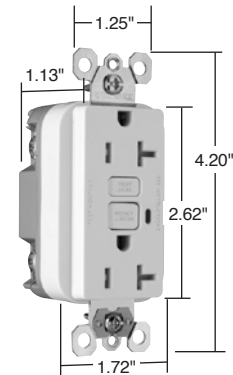

2095TRSW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI with Auto-Ground							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI with Auto-Ground							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•

NEW

NEW




For Configurable Solutions, see Page U-1.

2008 National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.


In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Tamper-Resistant GFCI Receptacles

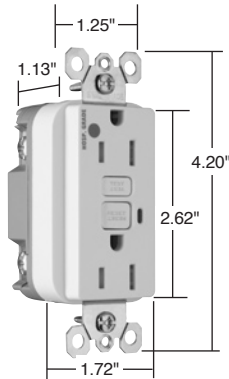

1595HGTRW

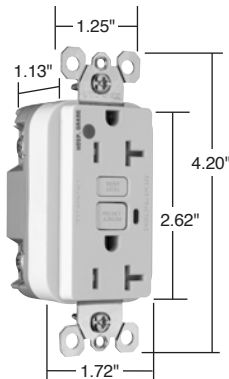

2095HGTRW

GFCIs Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI						
1595HGTRI	15 125	Ivory	5-15R	•	•	•
1595HGTRW	15 125	White	5-15R	•	•	•
1595HGTR	15 125	Brown	5-15R	•	•	•
1595HGTRGRY	15 125	Gray	5-15R	•	•	•
1595HGTRRED	15 125	Red	5-15R	•	•	•
1595HGTRLA	15 125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI						
2095HGTRI	20 125	Ivory	5-20R	•	•	•
2095HGTRW	20 125	White	5-20R	•	•	•
2095HGTR	20 125	Brown	5-20R	•	•	•
2095HGTRGRY	20 125	Gray	5-20R	•	•	•
2095HGTRRED	20 125	Red	5-20R	•	•	•
2095HGTRLA	20 125	Light Almond	5-20R	•	•	•



For Configurable Solutions, see Page U-1.

GFCIs TradeMaster® & Specification Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs


Features	
<ul style="list-style-type: none"> SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 	<ul style="list-style-type: none"> 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws. GFCIs with Auto-Ground assure a positive ground to metal box.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

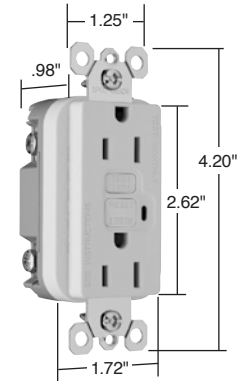

1595W

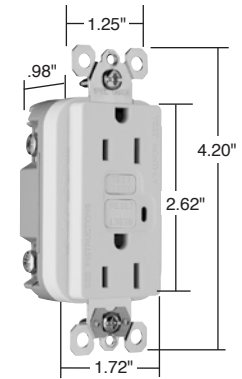

1595SW

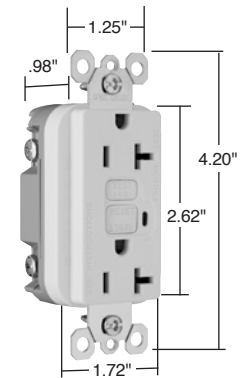

2095W



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
Specification Grade 20 Amp Duplex GFCI with Auto-Ground							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

For Configurable Solutions, see Page U-1.

Available in Bulk Packaging, i.e. 1595W20 is 20 pack, 1595W100 is 100 pack. Please contact Customer Support at 1-800-223-4189.


All devices listed on this page conform to NEMA WD-1 and WD-6.

TradeMaster® & Spec Grade GFCI Receptacles




GFCIs Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

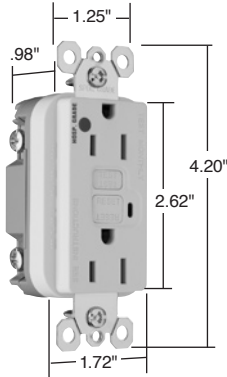

1595HGW

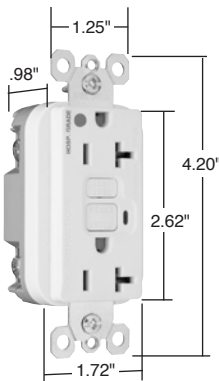

2095HGW

Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI						
1595HGI	15 125	Ivory	5-15R	•	•	•
1595HGW	15 125	White	5-15R	•	•	•
1595HG	15 125	Brown	5-15R	•	•	•
1595HGGRY	15 125	Gray	5-15R	•	•	•
1595HGRED	15 125	Red	5-15R	•	•	•
1595HGLA	15 125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI						
2095HGI	20 125	Ivory	5-20R	•	•	•
2095HGW	20 125	White	5-20R	•	•	•
2095HG	20 125	Brown	5-20R	•	•	•
2095HGGRY	20 125	Gray	5-20R	•	•	•
2095HGRED	20 125	Red	5-20R	•	•	•
2095HGLA	20 125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

GFCIs

Illuminated GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features	
<ul style="list-style-type: none"> ■ Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits. ■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. ■ Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. ■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. ■ FSUL Listed (Federal Specification WC596). ■ Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. ■ Two back wire holes per terminal. 	<ul style="list-style-type: none"> ■ Ground screw has a back wire clamp for easy installation. ■ 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. ■ Mounting screws are shipped captive in the device and wall plate for easier installation. ■ High-impact-resistant thermoplastic construction. ■ Extra-long strap. ■ Button colors match the device face. ■ Dual-direction test and reset buttons. ■ Class A rated GFCI. ■ Supplied with matching TP26 nylon wall plate. ■ Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> ■ Supply Voltage: 125VAC, 60 Hz ■ Supply Voltage Range: 102-132 VAC ■ Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> ■ Trip Time: 0.025 sec., nominal per UL Standard ■ 20 Amp feed-thru capacity

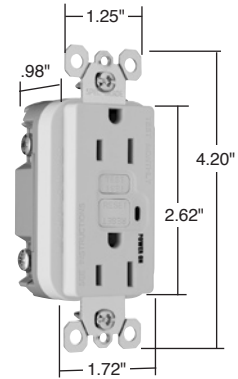


1595WL

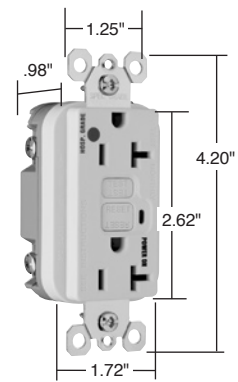

2095HGWL

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL ^{us} UL943 C22.2 No. 144	cUL ^{us} UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Illuminated 15 Amp Duplex GFCI							
1595IL	15	125	Ivory	5-15R	•	•	•
1595WL	15	125	White	5-15R	•	•	•
1595L	15	125	Brown	5-15R	•	•	•
1595LAL	15	125	Light Almond	5-15R	•	•	•
Specification Grade Illuminated 20 Amp Duplex GFCI							
2095IL	20	125	Ivory	5-20R	•	•	•
2095WL	20	125	White	5-20R	•	•	•
2095L	20	125	Brown	5-20R	•	•	•
2095GRYL	20	125	Gray	5-20R	•	•	•
2095LAL	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Illuminated 15 Amp Duplex GFCI							
1595HGIL	15	125	Ivory	5-15R	•	•	•
1595HGWL	15	125	White	5-15R	•	•	•
1595HGL	15	125	Brown	5-15R	•	•	•
1595HGGRYL	15	125	Gray	5-15R	•	•	•
1595HGREDL	15	125	Red	5-15R	•	•	•
1595HGLAL	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGL	20	125	Brown	5-20R	•	•	•
2095HGGRYL	20	125	Gray	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•
2095HGLAL	20	125	Light Almond	5-20R	•	•	•



For Configurable Solutions, see Page U-1.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Illuminated GFCI Receptacles



GFCIs Specification Grade Dead Front GFCI

20A, 125VAC

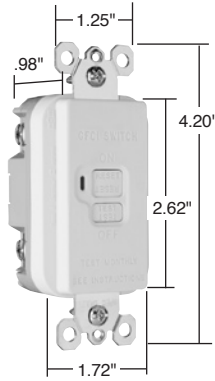

2085W

Features

- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to the load is disconnected.
- Prevents line-load reversal miswire: no power to the load or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz.
- Supply Voltage Range: 102-132 VAC.
- Trip Threshold: 5± 1mA.
- Trip Time: 0.025 sec., nominal per UL Standard.
- 20 Amp feed-thru capacity.

Rating Catalog Number	A.	VAC	Color	3rd Party Compliance	
				UL943 C22.2 No. 144	UL508 C22.2 No. 14
Specification Grade Dead Front GFCI – 1½ HP Motor Control Rating					
2085I	20	125	Ivory	•	•
2085W	20	125	White	•	•
2085BK	20	125	Black	•	•
2085LA	20	125	Light Almond	•	•

For Configurable Solutions, see Page U-1.

Catalog Number	Description
Accessories – GFCIs	
1594TPAI	7.0 cu. in. Extension Ring, Ivory
1594TPAW	7.0 cu. in. Extension Ring, White
1594TPA	7.0 cu. in. Extension Ring, Brown
1594TPALA	7.0 cu. in. Extension Ring, Light Almond

GFCIs


Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC

Pass & Seymour



Features	
<ul style="list-style-type: none"> ■ Protects children: patented shutter system helps prevent improper insertion of foreign objects. ■ Meets 2008 National Electrical Code® Tamper-Resistant requirements. ■ SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. ■ Up-down switching. ■ 15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals. ■ Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. ■ Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. ■ Trip indicator light (red LED). ■ Two back wire holes per terminal. 	<ul style="list-style-type: none"> ■ Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. ■ Ground screw has a back wire clamp for easy installation. ■ 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. ■ Mounting screws are shipped captive in the device and wall plate for easier installation. ■ High-impact-resistant thermoplastic construction. ■ Extra-long strap. ■ Button colors match the device face. ■ Dual-direction test and reset buttons. ■ Class A rated GFCI. ■ Supplied with matching TP26 nylon wall plate. ■ Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> ■ Supply Voltage: 125VAC, 60 Hz ■ Supply Voltage Range: 102-132 VAC ■ Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> ■ Trip Time: 0.025 sec., nominal per UL Standard ■ 20 Amp feed-thru capacity

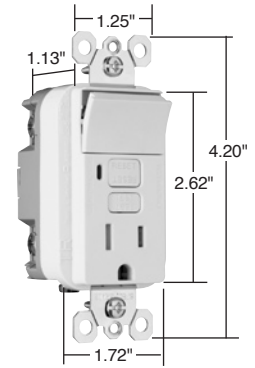


1595SWTTRWCC4

Catalog Number	Switch Rating A. VAC	Receptacle Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL ^{us} UL943 C22.2 No. 144	cUL ^{us} UL498 C22.2 No. 42	cUL ^{us} UL20 C22.2 No. 111
Combination Tamper-Resistant Single Pole Switch/GFCI							
1595SWTTRICC4	15 120	15 125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15 120	15 125	White	5-15R	•	•	•
1595SWTTRBKCC4	15 120	15 125	Black	5-15R	•	•	•
1595SWTTRLACC4	15 120	15 125	Light Almond	5-15R	•	•	•




NEMA
5-15R


All devices listed on this page conform to NEMA WD-1 and WD-6.

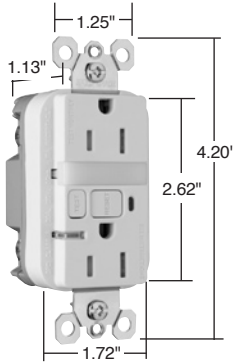

1595NLTTRWCC4

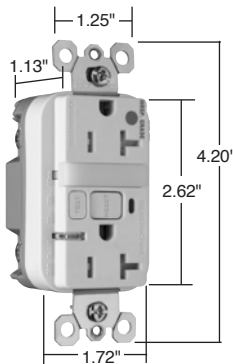

2095HGNTLTRW



GFCIs Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

15 & 20A, 125VAC

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- Trip Threshold: 5± 1mA
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance		
					cUL943 UL943 C22.2 No. 144	cUL498 UL498 C22.2 No. 42	FSUL WC596
NEW Combination Tamper-Resistant 15 Amp Nightlight/GFCI							
1595NLTTRICC4	15 125	0.180	Ivory	5-15R	•	•	•
1595NLTTRWCC4	15 125	0.180	White	5-15R	•	•	•
1595NLTTRBKCC4	15 125	0.180	Black	5-15R	•	•	•
1595NLTTRLACC4	15 125	0.180	Light Almond	5-15R	•	•	•
NEW Combination Tamper-Resistant 20 Amp Nightlight/GFCI							
2095NLTTRI	20 125	0.180	Ivory	5-20R	•	•	•
2095NLTTRW	20 125	0.180	White	5-20R	•	•	•
2095NLTTRGRY	20 125	0.180	Gray	5-20R	•	•	•
2095NLTTRRED	20 125	0.180	Red	5-20R	•	•	•
2095NLTTRLA	20 125	0.180	Light Almond	5-20R	•	•	•
NEW Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI							
1595HGNTLTRI	15 125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15 125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15 125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15 125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15 125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15 125	0.180	Light Almond	5-15R	•	•	•
NEW Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI							
2095HGNTLTRI	20 125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20 125	0.180	White	5-20R	•	•	•
2095HGNTLTR	20 125	0.180	Brown	5-20R	•	•	•
2095HGNTLTRGRY	20 125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20 125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20 125	0.180	Light Almond	5-20R	•	•	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-55 for more information.

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Weather-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features	
<ul style="list-style-type: none"> Weather-Resistant: Meets 2008 National Electrical Code® Weather-Resistant requirements. Tamper-Resistant: Meets 2008 National Electrical Code® Tamper-Resistant requirements. Protects children: patented shutter system helps prevent improper insertion of foreign objects. Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including: <ul style="list-style-type: none"> Ultraviolet light exposure test Cold impact test Accelerated aging test Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance. SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. 	<ul style="list-style-type: none"> FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long nickel post-plated steel mounting strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

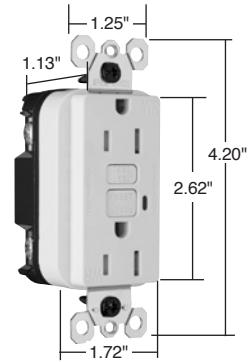


1595TRWRW

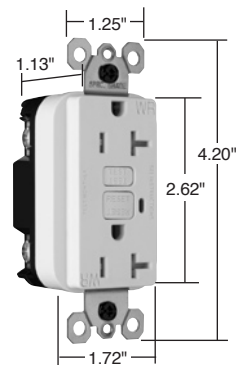

2095TRWRW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRWRW	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Weather-Resistant 20 Amp Duplex GFCI							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRWRW	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•



For Configurable Solutions, see Page U-1.

2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Weather-Resistant GFCI Receptacles



1595DSWRBKCC4



GFCIs Weather-Resistant DuraShield™ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Features

- Designed for extra durability and a long service life when installed in harsh environments: outdoor, garages, workshops, wash down areas, commercial kitchens, and labs.
- Weather-Resistant: Meets 2008 National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
 - Ultraviolet light exposure test
 - Cold impact test
 - Accelerated aging test
 - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Dust- and insect-resistant.
- Rubber curtains let plug blades in; keep dust, water and insects out.
- Integral gasket seals receptacle, protecting critical electronic components.
- Exceeds UL corrosion requirements – survives 4X the required corrosion test cycles.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance	
					c(UL)93 UL943 C22.2 No. 144	c(UL)98 UL498 C22.2 No. 42
NEW Specification Grade Weather-Resistant DuraShield™ 15 Amp Duplex GFCI						
1595DSWRBKCC4	15	125	Black	5-15R	•	•
NEW Specification Grade Weather-Resistant DuraShield™ 20 Amp Duplex GFCI						
2095DSWRBK	20	125	Black	5-20R	•	•



NEMA 5-15R



NEMA 5-20R

For Configurable Solutions, see Page U-1.

2008 National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

GFCIs

PlugTail™ Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

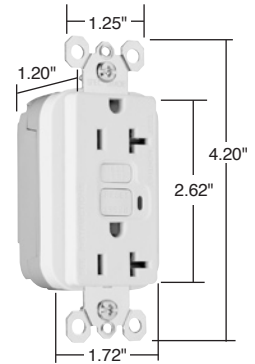

PT2095W




Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL ^{us} UL943 C22.2 No. 144	cUL ^{us} UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade 15 Amp Duplex GFCI							
PT1595I	15	125	Ivory	5-15R	•	•	•
PT1595W	15	125	White	5-15R	•	•	•
PT1595	15	125	Brown	5-15R	•	•	•
PT1595GRY	15	125	Gray	5-15R	•	•	•
PT1595BK	15	125	Black	5-15R	•	•	•
PT1595RED	15	125	Red	5-15R	•	•	•
PT1595LA	15	125	Light Almond	5-15R	•	•	•
NEW Specification Grade 20 Amp Duplex GFCI							
PT2095I	20	125	Ivory	5-20R	•	•	•
PT2095W	20	125	White	5-20R	•	•	•
PT2095	20	125	Brown	5-20R	•	•	•
PT2095GRY	20	125	Gray	5-20R	•	•	•
PT2095BK	20	125	Black	5-20R	•	•	•
PT2095RED	20	125	Red	5-20R	•	•	•
PT2095LA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"


For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, use Configurable Solutions to order.




Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

All devices listed on this page conform to NEMA WD-1 and WD-6.



PTRA6STR

PlugTail™ Spec Grade GFCIs

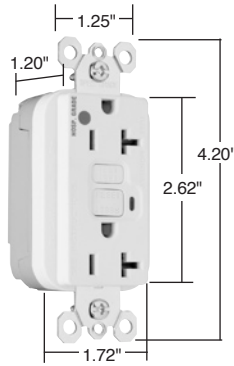

PT2095HWG



GFCIs PlugTail™ Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications



- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Hospital Grade 15 Amp Duplex GFCI							
PT1595HGI	15	125	Ivory	5-15R	•	•	•
PT1595HWG	15	125	White	5-15R	•	•	•
PT1595HG	15	125	Brown	5-15R	•	•	•
PT1595HGGRY	15	125	Gray	5-15R	•	•	•
PT1595HGRED	15	125	Red	5-15R	•	•	•
PT1595HGLA	15	125	Light Almond	5-15R	•	•	•
NEW Hospital Grade 20 Amp Duplex GFCI							
PT2095HGI	20	125	Ivory	5-20R	•	•	•
PT2095HWG	20	125	White	5-20R	•	•	•
PT2095HG	20	125	Brown	5-20R	•	•	•
PT2095HGGRY	20	125	Gray	5-20R	•	•	•
PT2095HGRED	20	125	Red	5-20R	•	•	•
PT2095HGLA	20	125	Light Almond	5-20R	•	•	•



PTR66STR

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTR66STR	Stranded	6"
PTR66SOL	Solid	6"



For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, use Configurable Solutions to order.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

PlugTail™ Specification & Hospital Grade Tamper-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs


Features	
<ul style="list-style-type: none"> Protects children: patented shutter system helps prevent improper insertion of foreign objects. Meets 2008 National Electrical Code® Tamper-Resistant requirements. Faster, more reliable installation. No exposed terminals create a finger safe application before, during, and after installation. Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector. GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings. SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. 	<ul style="list-style-type: none"> FSUL Listed (Federal Specification WC596). Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. Trip indicator light (red LED). Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Zinc-plated steel mounting strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.

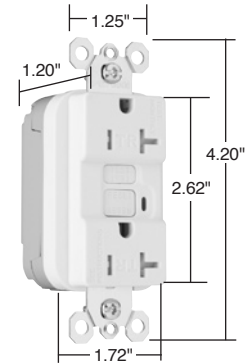

PT2095TRW

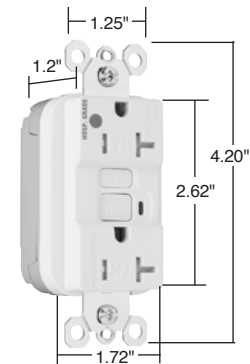

PT2095HGTRW



PTR6A6STR



Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595TRI	15	125	Ivory	5-15R	•	•	•
PT1595TRW	15	125	White	5-15R	•	•	•
PT1595TR	15	125	Brown	5-15R	•	•	•
PT1595TRGRY	15	125	Gray	5-15R	•	•	•
PT1595TRBK	15	125	Black	5-15R	•	•	•
PT1595TRRED	15	125	Red	5-15R	•	•	•
PT1595TRLA	15	125	Light Almond	5-15R	•	•	•
NEW Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRI	20	125	Ivory	5-20R	•	•	•
PT2095TRW	20	125	White	5-20R	•	•	•
PT2095TR	20	125	Brown	5-20R	•	•	•
PT2095TRGRY	20	125	Gray	5-20R	•	•	•
PT2095TRBK	20	125	Black	5-20R	•	•	•
PT2095TRRED	20	125	Red	5-20R	•	•	•
PT2095TRLA	20	125	Light Almond	5-20R	•	•	•
NEW Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
NEW Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.


All devices listed on this page conform to NEMA WD-1 and WD-6.

PlugTail™ Tamper-Resistant GFCIs




GFCIs PlugTail™ Specification & Hospital Grade Nightlight/GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

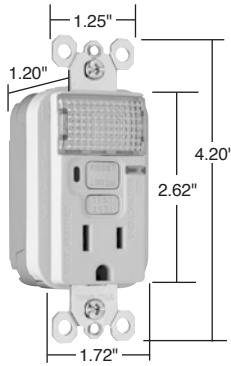

PT1595NTLLA


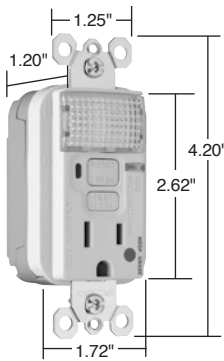


PT1595HGNTLLA



PTR6STR

For PlugTail Connector catalog numbers, see Page C-13 or C-14.



Features

- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photozell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade 15 Amp Combination Nightlight/GFCI							
PT1595NTLI	15	125	Ivory	5-15R	•	•	•
PT1595NTLW	15	125	White	5-15R	•	•	•
PT1595NTLGRY	15	125	Gray	5-15R	•	•	•
PT1595NTLBK	15	125	Black	5-15R	•	•	•
PT1595NTLRED	15	125	Red	5-15R	•	•	•
PT1595NTLLA	15	125	Light Almond	5-15R	•	•	•
NEW Specification Grade 20 Amp Combination Nightlight/GFCI							
PT2095NTLI	20	125	Ivory	5-20R	•	•	•
PT2095NTLW	20	125	White	5-20R	•	•	•
PT2095NTLGRY	20	125	Gray	5-20R	•	•	•
PT2095NTLBK	20	125	Black	5-20R	•	•	•
PT2095NTLRED	20	125	Red	5-20R	•	•	•
PT2095NTLLA	20	125	Light Almond	5-20R	•	•	•
NEW Hospital Grade 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLW	15	125	White	5-15R	•	•	•
PT1595HGNTLGRY	15	125	Gray	5-15R	•	•	•
PT1595HGNTLRED	15	125	Red	5-15R	•	•	•
PT1595HGNTLLA	15	125	Light Almond	5-15R	•	•	•
NEW Hospital Grade 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLW	20	125	White	5-20R	•	•	•
PT2095HGNTLGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNTLRED	20	125	Red	5-20R	•	•	•
PT2095HGNTLLA	20	125	Light Almond	5-20R	•	•	•


Applications
All Pass & Seymour/Legrand Portable GFCIs meet OSHA and NEC requirements to provide ground fault protection for personnel utilizing temporary power during construction, remodeling, maintenance, repair and demolition. Can be used with power tools, high-pressure power washers, wet vacuums, and grounds keeping equipment. Also used on spas, hot tubs, vending machines, and portable signs to provide ground fault protection.

Open Neutral Protection
All Pass & Seymour/Legrand portable GFCIs have an open neutral relay that automatically cuts off power to the line (hot) conductor of the device in the event that the neutral wire preceding the GFCI becomes severed. For example, if your portable GFCI were plugged into an extension cord that was supplying the power and the neutral conductor on that extension cord was accidentally cut (as can happen on a job site), the open neutral relay would shut off power to the hot conductor. This provides an additional level of safety from possible ground faults.

Manual Reset GFCI
Requires the GFCI to be manually set for use by pressing the reset button upon plug in and after loss of primary power (power failure or unplugging the device). Must be manually reset after a ground fault condition. Ideal for applications where operator injury might occur if equipment were to restart after a power failure. Typical equipment includes power drills, saws, lathes, and grinders.

Automatic Reset GFCI
Automatically energizes or sets the GFCI for use upon plug in and after the loss of primary power (power failure or unplugging the device). After a ground fault condition, must be reset by pushing the reset button. This feature eliminates the need for unit to be reset each time it is plugged in or powered up. Ideal for equipment intended for continuous use where a temporary power failure is likely and undesirable. Examples are pumps, pressure washers, portable signs, or lighting and engine heaters.

- Features & Specifications**
- Durable polycarbonate case withstands hard use.
 - Open neutral protection.
 - Supply Voltage: 125VAC, 60 Hz
 - Supply Voltage Range: 102-132VAC
 - Operating Temperature: -35°C (-30°F) to +66°C (150°F)
 - Trip Time: .025 sec., nominal per UL Standard
 - Trip Threshold: 5±1mA
 - Cord Grip Range: .30"-.46"

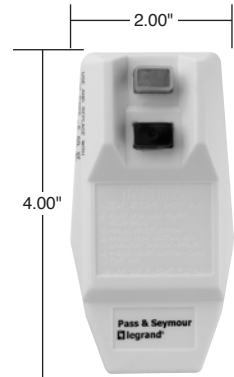


1594CMM


Catalog Number	Reset	Rating A. VAC	NEMA Config. No.	GFCI	Right Angle Plug	3rd Party Compliance		
						UL943	UL498	C22.2 No. 144
Right Angle Plug – Portable GFCI								
1594CMM	Manual	15 125	5-15P		User attachable	•	•	•
1594CMA	Automatic	15 125	5-15P		User attachable	•	•	•




GFCIs Portables




1594PC2A



1594TC2A



1594TL2M




2094PC2A

Features & Specifications

- Durable polycarbonate case withstands hard use.
- In-line has power indicator light that is on when power is available.
- Open neutral protection.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Optional tri-cord connector handles up to three loads.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Operating Temperature: -35°C (-30°F) to +66°C (150°F)
- Trip Time: .025 sec., nominal per UL Standard
- Trip Threshold: 5±1mA

Catalog Number	Description	Reset	Rating A. VAC	NEMA Config. No.	Plug	Conn.	3rd Party Compliance		
							UL943	UL498	C22.2 No. 144
15 Amp In-Line – Portable GFCI									
1594PC6M	6' cord, straight blade	Manual	15 125	5-15P/R			•	•	•
1594PC2M	2' cord, straight blade	Manual	15 125	5-15P/R			•	•	•
1594PC2A	2' cord, straight blade	Auto.	15 125	5-15P/R			•	•	•
1594TC2M	2' cord with tri-cord connector	Manual	15 125	5-15P/R			•	•	•
1594TC2A	2' cord with tri-cord connector	Auto.	15 125	5-15P/R			•	•	•
1594TL2M	2' cord, Turnlok®	Manual	15 125	L5-15P/R			•	•	•
1594TL2A	2' cord, Turnlok®	Auto.	15 125	L5-15P/R			•	•	•
20 Amp In-Line Portable GFCI									
2094PC2A	2' cord, straight blade	Auto.	20 125	5-20P/R			•	•	•
2094PC2M	2' cord, straight blade	Manual	20 125	5-20P/R			•	•	•
2094TL2A	2' cord, Turnlok®	Auto.	20 125	L5-20P/R			•	•	•
2094TL2M	2' cord, Turnlok®	Manual	20 125	L5-20P/R			•	•	•

Catalog Number	Description	Reset	Rating A. VAC	NEMA Config. No.	Plug	Conn.	3rd Party Compliance		
							UL943	UL498	C22.2 No. 144
Cord Set – Portable GFCI									
1594CS1M	1' cord with connector	Manual	15 125	5-15P/R			•	•	•
1594CS1A	1' cord with connector	Automatic	15 125	5-15P/R			•	•	•



1594CS1M
1594CS1A

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs Portables

Pass & Seymour



Features & Specifications

- Handles up to four loads.
- Open neutral protection.
- High-impact-resistant thermoplastic housing.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5±1mA
- Trip Time: .025 sec., nominal per UL Standard
- Case Material: Yellow Thermoplastic

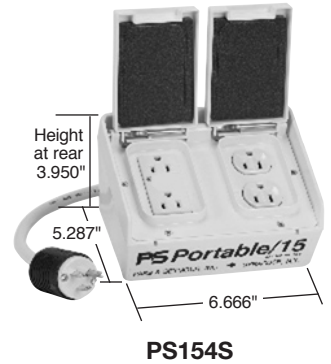

Catalog Number	Description	Rating A. VAC	NEMA Config. No.	Plug	Receptacle	3rd Party Compliance	
						UL943	UL498
Auto Reset Boxes – Portable GFCI							
PS154S	Four 15A, 125V straight blade outlets. Cord has 15A, 125V plug	15 125	5-15P 5-15R				• •
PS204S	Four 20A, 125V straight blade outlets. Cord has 20A, 125V plug	20 125	5-20P 5-20R				• •
PL204L	Two 20A, 125V straight blade outlets and one 20A 125V locking outlet has 20A, 125V locking plug	20 125	L5-20P L5-20R 5-20R				• •