

Hospital Grade Devices

Pass & Seymour



Auto-ground clip assures positive ground.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

No exposed terminals create a finger safe application before, during, and after installation.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face.

PT8300W

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Pre-stripped connector leads fasten to conductors, easier than standard pigtailed.

All of our Hospital Grade devices are designed for optimum durability, performance, and reliability — to help make today's facility maintenance operations more productive and consistent.

Index

Device	Rating	Page Number
Receptacle Test Requirements		F-2
PlugTail™ Extra Heavy-Duty & Tamper-Resistant Receptacles	15 & 20A, 125V	F-3, F-4
Extra Heavy-Duty Receptacles	15 & 20A, 125V; 20A, 250V	F-5
Extra Heavy-Duty MRI Receptacles	15 & 20A, 125V	F-6
Heavy-Duty Receptacles	15 & 20A, 125V	F-7, F-8
Single Receptacles	15 & 20A, 125V; 20A, 250V	F-9
Tamper-Resistant Receptacles	15 & 20A, 125V	F-10
PlugTail™ Decorator Receptacles	15 & 20A, 125V	F-11
Heavy-Duty Decorator Receptacles	15 & 20A, 125VAC	F-12
GFCI Receptacles	15 & 20A, 125VAC	F-13
Illuminated GFCI Receptacles	15 & 20A, 125VAC	F-14
Decorator Combination Nightlight/GFCI TR Receptacles	15 & 20A, 125VAC	F-15
PlugTail™ GFCI Receptacles	15 & 20A, 125VAC	F-16
PlugTail™ Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	F-17
PlugTail™ Nightlight/GFCI Receptacles	15 & 20A, 125VAC	F-18
Extra Heavy-Duty TVSS Duplex Receptacles	15 & 20A, 125VAC	F-19
Straight Blade Plugs & Connectors	15 & 20A, 125 & 250V	F-20
Quad Receptacles	20A, 125V	F-21

Hospital Grade Devices Receptacle Test Requirements

All straight blade receptacles must pass a sequence of tests established in UL498. To earn the "Hospital Grade" rating a device must pass an additional series of abuse and performance tests.

Abrupt Plug Removal Test

After ten conditioning insertion and withdrawal cycles of an attachment plug of matching configuration and ground pin, each outlet is to hold without any displacement a fully inserted test pin for at least one minute from a face down horizontal position. Then each receptacle is mounted to represent a typical installation and go through a series of abrupt removal tests – the full insertion of a test plug that is removed by dropping an attached 10-pound weight two feet, thus exerting excessive force on the receptacle face and contacts. Each outlet must go through eight cycles of this test, two in the initial position, then rotated 180 degrees for the next four cycles, then back to the original position for the final two cycles. Duplex receptacles are tested by having one outlet with the ground pin in the 12 o'clock and 6 o'clock positions, the other in the 3 o'clock and 9 o'clock positions. After testing, each outlet, while in the face down horizontal position must hold without displacement a .184" diameter 4-ounce ground pin for one minute. The outlet must have no breakage that would interfere with its function and integrity.

Ground Contact Overstress Test


The receptacle ground contact is conditioned with twenty cycles of full insertion and withdrawal of a .204" oversized test pin. Then, with the receptacle in a horizontal face down position, the same contact must retain a .184" diameter 4-ounce test pin for at least one minute without any displacement.

Impact Test


Receptacles mounted in a cast metal box are placed on a steel plate facing upward. A 5-pound weight is dropped from 18" above the device impacting at the center of the outlet. The device must withstand the impact without having any breakage that hinders its function.

Assembly Security Test


A device, supported at its mounting screws, must withstand 100 pounds through the slots in the receptacle face without cracking the device back body or deforming the yoke.

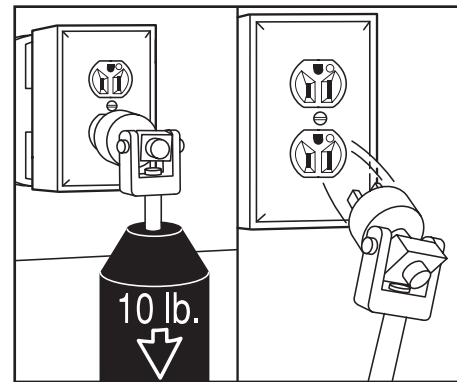


Abrupt Plug Removal Test

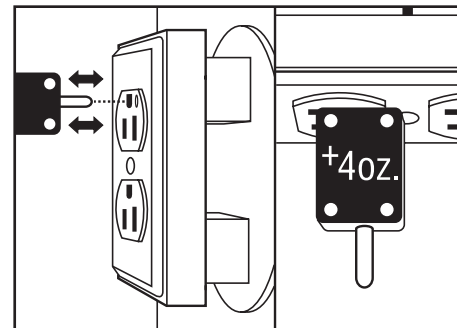

Ground Contact Overstress Test

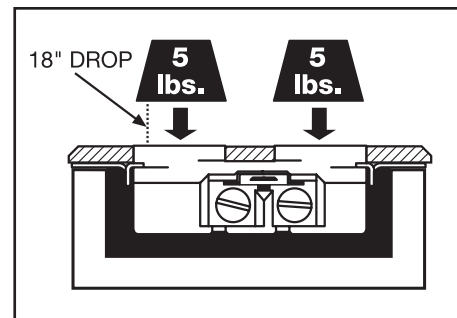

Impact Test

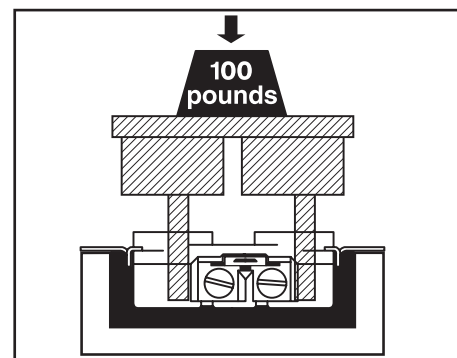


Assembly Security Test


Hospital Grade Devices PlugTail™ Extra Heavy-Duty Receptacles & Tamper-Resistant Receptacles

15 & 20A, 125V

Pass & Seymour

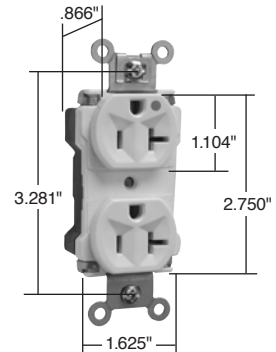

PT8300W

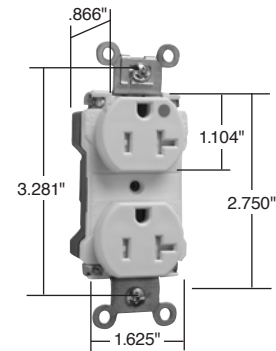

PTTR63HW



2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.


Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance	
	A.	V.			cUL ^{US} UL498	FSUL WC596
Duplex Receptacles						
PT8200I	15	125	Ivory	5-15R	•	•
PT8200W	15	125	White	5-15R	•	•
PT8200	15	125	Brown	5-15R	•	•
PT8200GRY	15	125	Gray	5-15R	•	•
PT8200BK	15	125	Black	5-15R	•	•
PT8200BL	15	125	Blue	5-15R	•	•
PT8200RED	15	125	Red	5-15R	•	•
PT8200LA	15	125	Light Almond	5-15R	•	•
PT8300I	20	125	Ivory	5-20R	•	•
PT8300W	20	125	White	5-20R	•	•
PT8300	20	125	Brown	5-20R	•	•
PT8300GRY	20	125	Gray	5-20R	•	•
PT8300BK	20	125	Black	5-20R	•	•
PT8300BL	20	125	Blue	5-20R	•	•
PT8300RED	20	125	Red	5-20R	•	•
PT8300LA	20	125	Light Almond	5-20R	•	•
Tamper-Resistant Duplex Receptacles						
PTTR62HI	15	125	Ivory	5-15R	•	•
PTTR62HW	15	125	White	5-15R	•	•
PTTR62H	15	125	Brown	5-15R	•	•
PTTR62HGRY	15	125	Gray	5-15R	•	•
PTTR62HBK	15	125	Black	5-15R	•	•
PTTR62HBL	15	125	Blue	5-15R	•	•
PTTR62HRED	15	125	Red	5-15R	•	•
PTTR62HLA	15	125	Light Almond	5-15R	•	•
PTTR63HI	20	125	Ivory	5-20R	•	•
PTTR63HW	20	125	White	5-20R	•	•
PTTR63H	20	125	Brown	5-20R	•	•
PTTR63HGRY	20	125	Gray	5-20R	•	•
PTTR63HBK	20	125	Black	5-20R	•	•
PTTR63HBL	20	125	Blue	5-20R	•	•
PTTR63HRED	20	125	Red	5-20R	•	•
PTTR63HLA	20	125	Light Almond	5-20R	•	•

For PlugTail Connectors, see Page F-11.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1-U-3.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour

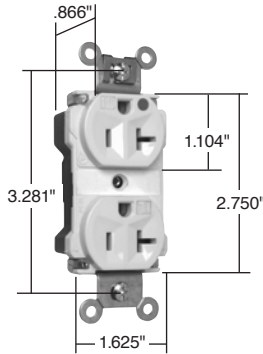

PT8300ILLA

Hospital Grade Devices PlugTail™ Extra Heavy-Duty Illuminated Receptacles

15 & 20A, 125V

Features

- Molded-in "IL" markings on face of product.
- Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.



Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				cUL ^{us} UL498	FSUL WC596
Illuminated Duplex Receptacles					
PT8200ILI	15 125	Ivory	5-15R	•	•
PT8200ILW	15 125	White	5-15R	•	•
PT8200ILGRY	15 125	Gray	5-15R	•	•
PT8200ILBK	15 125	Black	5-15R	•	•
PT8200ILRED	15 125	Red	5-15R	•	•
PT8200ILLA	15 125	Light Almond	5-15R	•	•
PT8300ILI	20 125	Ivory	5-20R	•	•
PT8300ILW	20 125	White	5-20R	•	•
PT8300IL	20 125	Brown	5-20R	•	•
PT8300ILGRY	20 125	Gray	5-20R	•	•
PT8300ILBK	20 125	Black	5-20R	•	•
PT8300ILRED	20 125	Red	5-20R	•	•
PT8300ILLA	20 125	Light Almond	5-20R	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R

For PlugTail Connectors, see Page F-11.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1-U-3.

Features

- Ensures proper connections and power presence at both rough-in and device-out stages during P&S PlugTail Device installation.
- Fast, easy identification of circuit connections.
- Easy-to-see indicator lights.
- Sturdy construction for long-term dependability.
- Helps prevent call backs.
- Ensures proper wiring.



PTTESTER



Catalog Number	Description
P&S PlugTail™ Tester	
PTTESTER	Red PlugTail Tester for Receptacles and Tails

Hospital Grade Devices Extra Heavy-Duty Receptacles


15 & 20A, 125V; 20A, 250V

Pass & Seymour




Features

- One-piece brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Illuminated version features exclusive LED lamp with solder connection for long durable life (10-12 years).

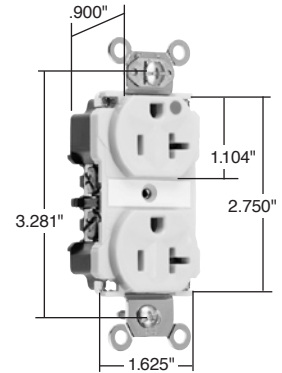


8300I

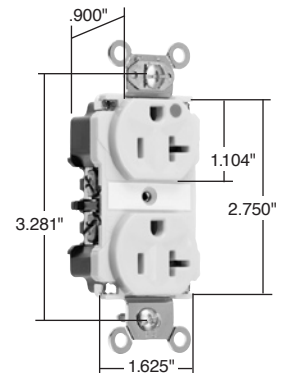

8300ILI

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Duplex Receptacles Back & Side Wire						
8200I	15 125	Ivory	5-15R	•	•	•
8200W	15 125	White	5-15R	•	•	•
8200	15 125	Brown	5-15R	•	•	•
8200GRY	15 125	Gray	5-15R	•	•	•
8200BK	15 125	Black	5-15R	•	•	•
8200RED	15 125	Red	5-15R	•	•	•
8200LA	15 125	Light Almond	5-15R	•	•	•
8300I	20 125	Ivory	5-20R	•	•	•
8300W	20 125	White	5-20R	•	•	•
8300	20 125	Brown	5-20R	•	•	•
8300GRY	20 125	Gray	5-20R	•	•	•
8300BK	20 125	Black	5-20R	•	•	•
8300RED	20 125	Red	5-20R	•	•	•
8300LA	20 125	Light Almond	5-20R	•	•	•
8800I	20 250	Ivory	6-20R	•	•	•
8800W	20 250	White	6-20R	•	•	•
8800	20 250	Brown	6-20R	•	•	•
8800GRY	20 250	Gray	6-20R	•	•	•
8800BK	20 250	Black	6-20R	•	•	•
8800LA	20 250	Light Almond	6-20R	•	•	•
8800RED	20 250	Red	6-20R	•	•	•
LED Illuminated Face Duplex Receptacles Back & Side Wire						
8200ILI	15 125	Ivory	5-15R	•	•	•
8200ILRED	15 125	Red	5-15R	•	•	•
8200ILW	15 125	White	5-15R	•	•	•
8300ILI	20 125	Ivory	5-20R	•	•	•
8300ILRED	20 125	Red	5-20R	•	•	•
8300ILLA	20 125	Light Almond	5-20R	•	•	•
8300ILGRY	20 125	Gray	5-20R	•	•	•

2 Pole, 3 Wire



For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Pass & Seymour



Hospital Grade Devices Extra Heavy-Duty MRI Receptacles

15 & 20A, 125V

Receptacles designed expressly for MRI applications – We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.

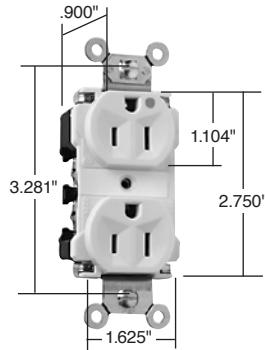

8200LAMRI

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Hospital Grade Duplex Receptacles Back & Side Wire						
8200IMRI	15 125	Ivory	5-15R	•	•	•
8200WMRI	15 125	White	5-15R	•	•	•
8200MRI	15 125	Brown	5-15R	•	•	•
8200GRYMRI	15 125	Gray	5-15R	•	•	•
8200BKMRI	15 125	Black	5-15R	•	•	•
8200REDMRI	15 125	Red	5-15R	•	•	•
8200LAMRI	15 125	Light Almond	5-15R	•	•	•
8300IMRI	20 125	Ivory	5-20R	•	•	•
8300WMRI	20 125	White	5-20R	•	•	•
8300MRI	20 125	Brown	5-20R	•	•	•
8300GRYMRI	20 125	Gray	5-20R	•	•	•
8300BKMRI	20 125	Black	5-20R	•	•	•
8300REDMRI	20 125	Red	5-20R	•	•	•
8300LAMRI	20 125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire

NEMA
5-15RNEMA
5-20R

Hospital Grade Devices Heavy-Duty Receptacles


15 & 20A, 125V

Pass & Seymour




Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.
- Smooth face version features an impact-resistant nylon face for ease of cleaning and less dirt build-up.

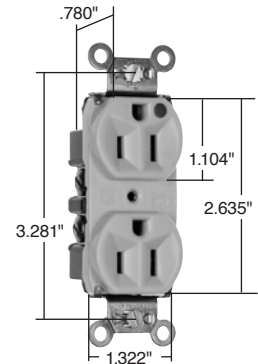

PS8200HI

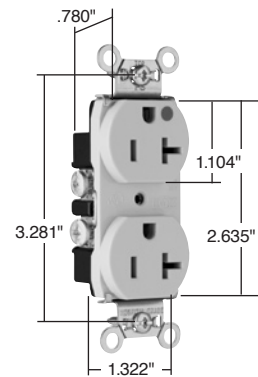

PS8300HSLA

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL	FSUL	SP
Duplex Receptacles Back & Side Wire							
PS8200HI	15	125	Ivory	5-15R	•	•	•
PS8200HW	15	125	White	5-15R	•	•	•
PS8200H	15	125	Brown	5-15R	•	•	•
PS8200HGRY	15	125	Gray	5-15R	•	•	•
PS8200HRED	15	125	Red	5-15R	•	•	•
PS8200HLA	15	125	Light Almond	5-15R	•	•	•
PS8300HI	20	125	Ivory	5-20R	•	•	•
PS8300HW	20	125	White	5-20R	•	•	•
PS8300H	20	125	Brown	5-20R	•	•	•
PS8300HGRY	20	125	Gray	5-20R	•	•	•
PS8300HRED	20	125	Red	5-20R	•	•	•
PS8300HLA	20	125	Light Almond	5-20R	•	•	•
Duplex Receptacles – Smooth Face Back & Side Wire							
PS8200HSI	15	125	Ivory	5-15R	•	•	•
PS8200HSW	15	125	White	5-15R	•	•	•
PS8200HS	15	125	Brown	5-15R	•	•	•
PS8200HSGRY	15	125	Gray	5-15R	•	•	•
PS8200HSBK	15	125	Black	5-15R	•	•	•
PS8200HSRED	15	125	Red	5-15R	•	•	•
PS8200HSLA	15	125	Light Almond	5-15R	•	•	•
PS8300HSI	20	125	Ivory	5-20R	•	•	•
PS8300HSW	20	125	White	5-20R	•	•	•
PS8300HS	20	125	Brown	5-20R	•	•	•
PS8300HSGRY	20	125	Gray	5-20R	•	•	•
PS8300HSBK	20	125	Black	5-20R	•	•	•
PS8300HSRED	20	125	Red	5-20R	•	•	•
PS8300HSLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R


For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.




Hospital Grade Devices Heavy-Duty Compact Design Receptacles

15 & 20A, 125V; 20A, 250V

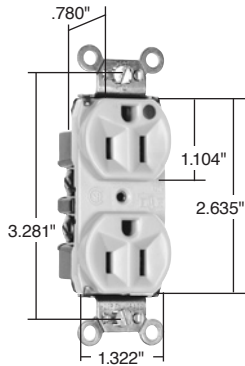

8200HI

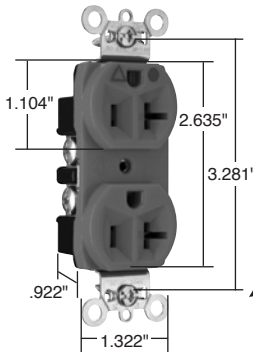

IG8300

Features

- Impact-resistant nylon face.
- One-piece heat-treated triple-wipe brass power contacts.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Back wire holes allow entry of conductor insulation partially into body but not into wiring compartment.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Duplex Receptacles – Compact Design Back & Side Wire						
8200HI	15 125	Ivory	5-15R	•	•	•
8200HW	15 125	White	5-15R	•	•	•
8200H	15 125	Brown	5-15R	•	•	•
8200HGRY	15 125	Gray	5-15R	•	•	•
8200HRED	15 125	Red	5-15R	•	•	•
8200HLA	15 125	Light Almond	5-15R	•	•	•
8300HI	20 125	Ivory	5-20R	•	•	•
8300HW	20 125	White	5-20R	•	•	•
8300H	20 125	Brown	5-20R	•	•	•
8300HGRY	20 125	Gray	5-20R	•	•	•
8300HBK	20 125	Black	5-20R	•	•	•
8300HRED	20 125	Red	5-20R	•	•	•
8300HLA	20 125	Light Almond	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire						
NEW IG8200I	15 125	Ivory	5-15R	•	•	•
IG8200	15 125	Orange	5-15R	•	•	•
IG8200RED	15 125	Red	5-15R	•	•	•
NEW IG8300I	20 125	Ivory	5-20R	•	•	•
NEW IG8300W	20 125	White	5-20R	•	•	•
IG8300	20 125	Orange	5-20R	•	•	•
IG8300RED	20 125	Red	5-20R	•	•	•
NEW IG8300LA	20 125	Light Almond	5-20R	•	•	•
IG8800	20 250	Orange	6-20R	•	•	•
NEW IG8800LA	20 250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R





NEMA
6-20R

Hospital Grade Devices Single Receptacles

15 & 20A, 125V; 20A, 250V

Pass & Seymour

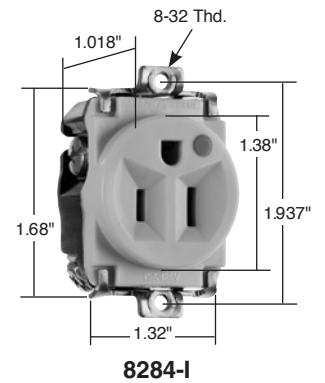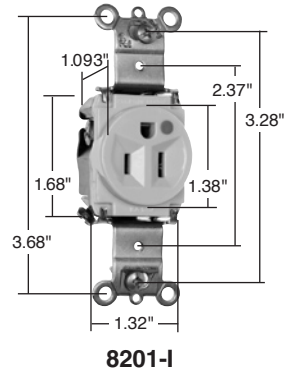

NEW

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	cUL/CSA
Single Receptacles Back & Side Wire						
8201I	15 125	Ivory	5-15R	•	•	•
8201W	15 125	White	5-15R	•	•	•
8201	15 125	Brown	5-15R	•	•	•
8201GRY	15 125	Gray	5-15R	•	•	•
8201BK	15 125	Black	5-15R	•	•	•
8201RED	15 125	Red	5-15R	•	•	•
8201LA	15 125	Light Almond	5-15R	•	•	•
8301I	20 125	Ivory	5-20R	•	•	•
8301W	20 125	White	5-20R	•	•	•
8301	20 125	Brown	5-20R	•	•	•
8301GRY	20 125	Gray	5-20R	•	•	•
8301RED	20 125	Red	5-20R	•	•	•
8801I	20 250	Ivory	6-20R	•	•	•
8801W	20 250	White	6-20R	•	•	•
8801	20 250	Brown	6-20R	•	•	•
8801GRY	20 250	Gray	6-20R	•	•	•
8801RED	20 250	Red	6-20R	•	•	•
Short Strap Single Receptacles 1.937" Screw Spacing, Back & Side Wire						
8284I	15 125	Ivory	5-15R	•	•	•
8284	15 125	Brown	5-15R	•	•	•
8384I	20 125	Ivory	5-20R	•	•	•
8384	20 125	Brown	5-20R	•	•	•
Isolated Ground Single Receptacles Back & Side Wire						
IG8301	20 125	Orange	5-20R	•	•	•

For Hospital Use Power Interrupting Device consult Turnlok® Section I.

2 Pole, 3 Wire



NEMA
5-15R



NEMA
5-20R




NEMA
6-20R



Hospital Grade Devices Tamper-Resistant Receptacles

15 & 20A, 125V

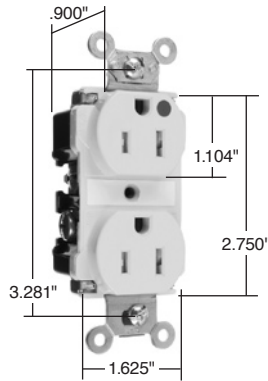


TR62HI

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.


Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	CS C22.2 No. 42
Duplex Receptacles Back & Side Wire						
TR62HI	15 125	Ivory	5-15R	•	•	•
TR62HW	15 125	White	5-15R	•	•	•
TR62H	15 125	Brown	5-15R	•	•	•
TR62HGROY	15 125	Gray	5-15R	•	•	•
TR62HRED	15 125	Red	5-15R	•	•	•
NEW TR62HLA	15 125	Light Almond	5-15R	•	•	•
TR63HI	20 125	Ivory	5-20R	•	•	•
TR63HW	20 125	White	5-20R	•	•	•
TR63H	20 125	Brown	5-20R	•	•	•
TR63HGROY	20 125	Gray	5-20R	•	•	•
TR63HRED	20 125	Red	5-20R	•	•	•
TR63HLA	20 125	Light Almond	5-20R	•	•	•
NEW TR63HBL	20 125	Blue	5-20R	•	•	•




Consult Straight Blade Devices Section B for non-Hospital Grade Tamper-Resistant Receptacles.

For PlugTail™ Tamper-Resistant Receptacles, see Pages B-3, B-4, and F-3.


The Mechanical Shutter System



Thermoplastic shutter in closed position covers access to contacts.



Insertion of object in any one side does not open shutter.



Two-bladed plug or grounding plug compresses spring and simultaneously opens both shutters.

This tamper-resistant receptacle, like all others, can be defeated by actions such as inserting foreign objects in both sides of the slots simultaneously.

2008 NEC® section 517.18(C) Pediatric Locations.


Receptacles located within the rooms, bathrooms, playrooms, activity rooms, and patient care areas of pediatric wards shall be listed under tamper resistant or employ a listed tamper resistant cover.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices PlugTail™ Decorator Receptacles

15 & 20A, 125V

Pass & Seymour

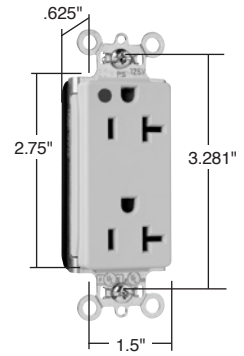

PT26362HGI




Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				cUL ^{us} UL498	FSUL WC596
Duplex Receptacles					
PT26262HGI	15 125	Ivory	5-15R	•	•
PT26262HGW	15 125	White	5-15R	•	•
PT26262HGGRY	15 125	Gray	5-15R	•	•
PT26262HGRED	15 125	Red	5-15R	•	•
PT26362HGI	20 125	Ivory	5-20R	•	•
PT26362HGW	20 125	White	5-20R	•	•
PT26362HGGRY	20 125	Gray	5-20R	•	•
PT26362HGRED	20 125	Red	5-20R	•	•
NEW PT26362HGLA	20 125	Light Almond	5-20R	•	•


2 Pole, 3 Wire



NEMA
5-15R

NEMA
5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
NEW PlugTail Connectors – Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
NEW PlugTail Connectors – Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

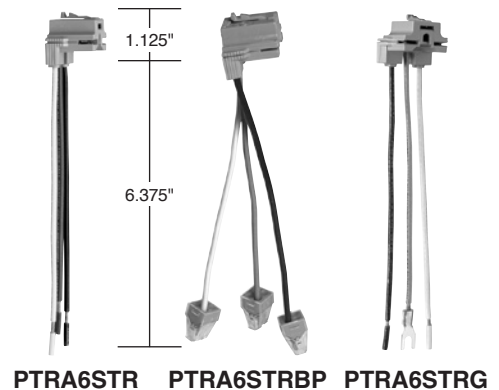

PTRA6STR PTRA6STRBP PTRA6STRG

All Plugtail Connectors are available in any wire length up to 25 inches, use Configurables Solutions to order.


Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1–U-3.

All devices listed on this page conform to NEMA WD-1 and WD-6.




Hospital Grade Devices Heavy-Duty Decorator Receptacles

15 & 20A, 125V

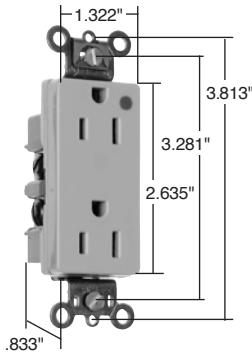


26262HGI

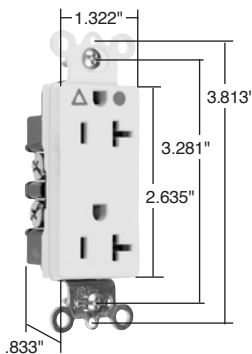


IG26262HGI

2 Pole, 3 Wire



NEMA 5-15R

NEMA 5-20R

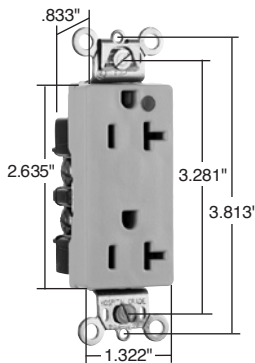

26322HGI

Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire						
26262HGI	15 125	Ivory	5-15R	•	•	•
26262HGW	15 125	White	5-15R	•	•	•
26262HGGRY	15 125	Gray	5-15R	•	•	•
26262HGRED	15 125	Red	5-15R	•	•	•
26362HGI	20 125	Ivory	5-20R	•	•	•
26362HGW	20 125	White	5-20R	•	•	•
26362HG	20 125	Brown	5-20R	•	•	•
26362HGGRY	20 125	Gray	5-20R	•	•	•
26362HGRED	20 125	Red	5-20R	•	•	•
26362HGLA	20 125	Light Almond	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire						
IG26262HGW	15 125	White	5-15R	•		•
IG26262HG	15 125	Orange	5-15R	•		•
IG26262HGRED	15 125	Red	5-15R	•		•
IG26362HGW	20 125	White	5-20R	•		•
IG26362HG	20 125	Orange	5-20R	•		•
IG26362HGGRY	20 125	Gray	5-20R	•		•
IG26362HGBK	20 125	Black	5-20R	•		•
IG26362HGRED	20 125	Red	5-20R	•		•
Illuminated Duplex Receptacles Back & Side Wire						
26222HGI	15 125	Ivory	5-15R	•		•
26322HGI	20 125	Ivory	5-20R	•		•
26322HGW	20 125	White	5-20R	•		•
26322HGRED	20 125	Red	5-20R	•		•

NEW

NEW

NEW

For Configurable Solutions, see Page U-1.

Catalog Number	Description
Accessories – Decorator Duplex Receptacles	
SS26	Stainless Steel Decorator Wall Plate
SS26IG*	Stainless Steel Decorator Wall Plate
TP26	Thermoplastic Decorator Wall Plate
TP26IG*	Thermoplastic Decorator Wall Plate, Orange

*Wall Plates for Isolated Ground System.

Consult Wall Plate Section S for additional openings and colors.


Hospital Grade Devices GFCI Receptacles

15 & 20A, 125VAC


Pass & Seymour




Features	
<ul style="list-style-type: none"> SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. 	<ul style="list-style-type: none"> Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity
Tamper-Resistant Models	
<ul style="list-style-type: none"> Protects children: patented shutter system helps prevent improper insertion of foreign objects. Meets 2008 National Electrical Code® Tamper-Resistant requirements. 	

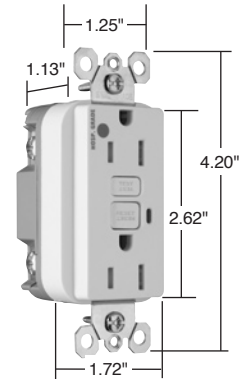

1595HGTRW

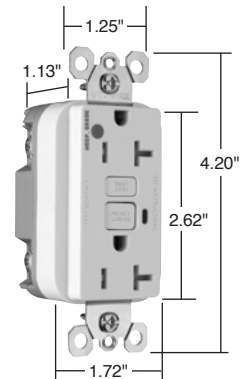


2095HGTRW

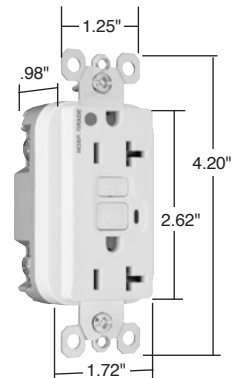

2095HGW

2 Pole, 3 Wire



NEMA 5-15R


NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Tamper-Resistant 15 Amp Duplex GFCI							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•
15 Amp Duplex GFCI							
1595HGI	15	125	Ivory	5-15R	•	•	•
1595HGW	15	125	White	5-15R	•	•	•
1595HG	15	125	Brown	5-15R	•	•	•
1595HGGRY	15	125	Gray	5-15R	•	•	•
1595HGRED	15	125	Red	5-15R	•	•	•
1595HGCLA	15	125	Light Almond	5-15R	•	•	•
20 Amp Duplex GFCI							
2095HGI	20	125	Ivory	5-20R	•	•	•
2095HGW	20	125	White	5-20R	•	•	•
2095HG	20	125	Brown	5-20R	•	•	•
2095HGGRY	20	125	Gray	5-20R	•	•	•
2095HGRED	20	125	Red	5-20R	•	•	•
2095HGCLA	20	125	Light Almond	5-20R	•	•	•

For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour

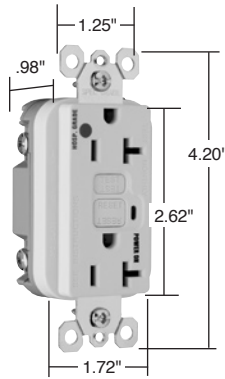

2095HGWL

Hospital Grade Devices Illuminated GFCI Receptacles

15 & 20A, 125VAC

Features

- Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Illuminated 15 Amp Duplex GFCI							
1595HGIL	15	125	Ivory	5-15R	•	•	•
1595HGWL	15	125	White	5-15R	•	•	•
1595HGL	15	125	Brown	5-15R	•	•	•
1595HGGRYL	15	125	Gray	5-15R	•	•	•
1595HGREDL	15	125	Red	5-15R	•	•	•
1595HGLAL	15	125	Light Almond	5-15R	•	•	•
Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGL	20	125	Brown	5-20R	•	•	•
2095HGGRYL	20	125	Gray	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•
2095HGLAL	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R




NEMA 5-20R

For Configurable Solutions, see Page U-1.

Hospital Grade Devices Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

15 & 20A, 125VAC

Pass & Seymour

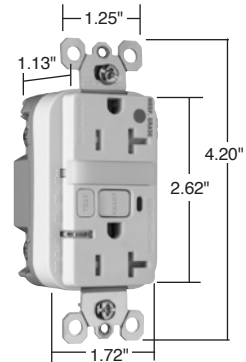

2095HGNTLTRW

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance		
						UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
NEW Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTR	20	125	0.180	Brown	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R


NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-55 for more information.



Hospital Grade Devices PlugTail™ GFCI Receptacles

15 & 20A, 125VAC

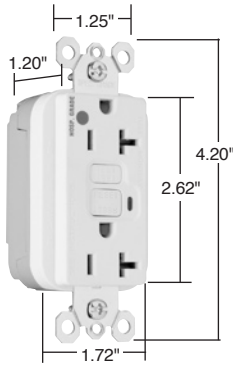

PT2095HGW




Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW 15 Amp Duplex GFCI						
PT1595HGI	15 125	Ivory	5-15R	•	•	•
PT1595HGW	15 125	White	5-15R	•	•	•
PT1595HG	15 125	Brown	5-15R	•	•	•
PT1595HGGRY	15 125	Gray	5-15R	•	•	•
PT1595HGRED	15 125	Red	5-15R	•	•	•
PT1595HGLA	15 125	Light Almond	5-15R	•	•	•
NEW 20 Amp Duplex GFCI						
PT2095HGI	20 125	Ivory	5-20R	•	•	•
PT2095HGW	20 125	White	5-20R	•	•	•
PT2095HG	20 125	Brown	5-20R	•	•	•
PT2095HGGRY	20 125	Gray	5-20R	•	•	•
PT2095HGRED	20 125	Red	5-20R	•	•	•
PT2095HGLA	20 125	Light Almond	5-20R	•	•	•




PTR66STR

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page F-11.

All PlugTail Connectors are available in any wire length up to 25 inches, use Configurable Solutions to order.

Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

Hospital Grade Devices PlugTail™ Tamper-Resistant GFCI Receptacles


15 & 20A, 125VAC

Pass & Seymour




Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets 2008 National Electrical Code® Tamper-Resistant requirements.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

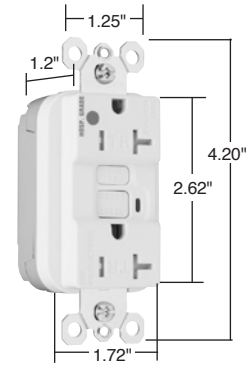

PT2095HGTRW




PTR6STR

For PlugTail Connector catalog numbers, see Page F-11.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					cUL _{us} UL943 C22.2 No. 144	cUL _{us} UL498 C22.2 No. 42	FSUL WC596
Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




Configurable Solutions and Metal Box Kits for PlugTail Receptacles and Connectors, see Pages U-1 – U-3.

Pass & Seymour




Hospital Grade Devices PlugTail™ Nightlight/GFCI Receptacles

15 & 20A, 125VAC

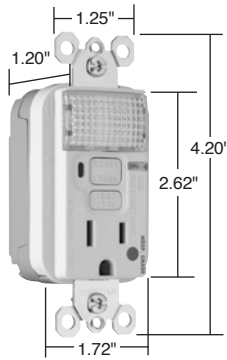

PT1595HGNTLLA



PTR6STR

For PlugTail Connector catalog numbers, see Page F-11.

Features

- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photozell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLW	15	125	White	5-15R	•	•	•
PT1595HGNTLGRY	15	125	Gray	5-15R	•	•	•
PT1595HGNTLRED	15	125	Red	5-15R	•	•	•
PT1595HGNTLLA	15	125	Light Almond	5-15R	•	•	•
NEW 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLW	20	125	White	5-20R	•	•	•
PT2095HGNTLGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNTLRED	20	125	Red	5-20R	•	•	•
PT2095HGNTLLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire

NEMA
5-15RNEMA
5-20R

Hospital Grade Devices Extra Heavy-Duty TVSS Duplex Receptacles

15 & 20A, 125VAC

Pass & Seymour




Hospital Grade Devices


Extra Heavy-Duty TVSS Duplex Receptacles

Specifications

- UL1449 (latest revision). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 280 joules of energy absorption in each of the three modes.
- 18,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground.
- 1 filtering capacitor for 7 to 1 average noise reduction.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Electronic components potted for electrical, mechanical and thermal stability.
- Audible alarm able to be turned on/off.
- LED indicator light.
- Thermal protection in all 3 modes.
- Leakage current: 0.5mA at 25°C/120VAC.
- 3 18mm dual pack MOVs to suppress transients in all modes – equally.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 35dB (50 ohm source impedance)
- Varistor voltage: 150V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)
- Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.
- Isolated Ground version complies with NEC 410-56 (C) and 250-74 exception 4.

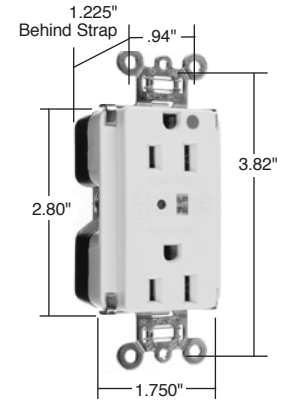

8200ISP

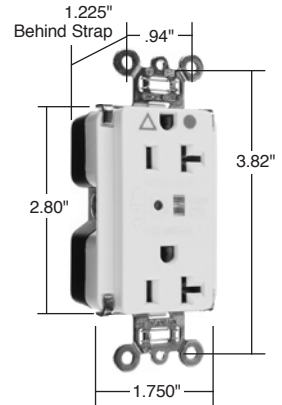


IG8300ISP

Audible Alarm with LED Indicator

Catalog Number	Rating		NEMA Config. No.	Color	3rd Party Compliance			
	A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•

2 Pole, 3 Wire



All devices listed on this page conform to NEMA WD-1 and WD-6.


Pass & Seymour




Hospital Grade Devices Straight Blade Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20
Suitability




PS5266XHG




PS5269XHG



PS5266HGAN



PS8115




PS8119

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596	C22.2 No. 42
Hospital Grade – Extra-Hard Use (EHU)							
PS5266XHG	15 125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15 125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15 125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20 125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20 125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20 125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15 250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15 250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15 250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20 250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20 250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20 250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
Hospital Grade MaxGrip® M³							
PS8115	15 125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15 125	Connector, Gray	.230"-.720"	5-15R	•	•	•

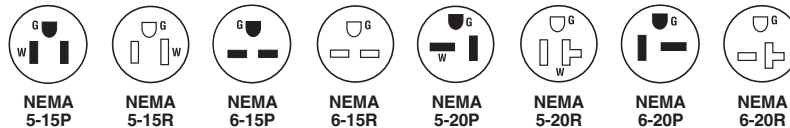

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® Section L.

Hospital Grade Devices Quad Receptacles

20A, 125V


Pass & Seymour



Application
Pass & Seymour/Legrand's quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

- Features**
- Rugged nylon face and body withstands impacts and hard use.
 - Built-in wire stripping gauge.
 - Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
 - Heavy-duty, phosphor bronze contacts.
 - Shielding walls guard against live-circuit-to-ground shorts.
 - Split circuit break-off tabs.
 - UL and CSA listed.

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL498	UL1449	CSA
Isolated Ground TVSS Quads							
IG420HISP	20	125	Ivory	5-20R	•	•	
IG420HGRYSP	20	125	Gray	5-20R	•	•	
IG420HBLSP	20	125	Blue	5-20R	•	•	
Quads							
420HI	20	125	Ivory	5-20R	•	•	
420HW	20	125	White	5-20R	•	•	
420H	20	125	Brown	5-20R	•	•	
420HGRY	20	125	Gray	5-20R	•	•	
420HRED	20	125	Red	5-20R	•	•	

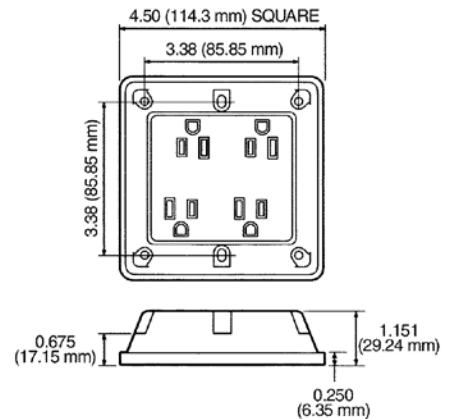

Quad Receptacle

Consult Straight Blade Device Section B for non-Hospital Grade Tamper-Resistant Receptacles, and Quad Adapter Plates.

Hard Use Spec Grade & Hard Use TVSS Spec Grade Quads	
<ul style="list-style-type: none"> • Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4 • Conforms to NEMA WD-1, WD-6. 	
Electrical	
Frequency	60Hz
Voltage	125V
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – #12 AWG copper and copper-clad
Product Identification	Ratings are permanent part of device
Weight	10.75 oz.
Environmental	
Flammability	UL94 V2
Operating Temperature	-40°C to 65°C (-40°F to 150°F) continuous without impact
Materials	
Face	Nylon
Body	Nylon
Line Terminals	.035" T-type Triple-Wipe Phosphor Bronze
Terminal Screws	Brass #8-32
Hex Head Grounding Screw	Steel (Green)
Mounting Screws	Zinc-plated steel
Additional Specifications for Hard Use TVSS Spec Grade Quads	
<ul style="list-style-type: none"> • ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45 • Installation Categories "A" (ring wave) and "B" (unidirectional impulse) 	
Electrical	
MOV Rating	18mm
UL1449 Suppressed Voltage Rating	500V (L-N, L-G, N-G)
Noise Attenuation	-35db Noise Filtering at 5kHz-50MHz
Thermal Protection	Fused
Green LED Indicator	ON when protection is active, OFF when protection is inactive



All devices listed on this page conform to NEMA WD-1 and WD-6.