

Product Selection Guide

RELAYS

SENSORS

CONNECTORS

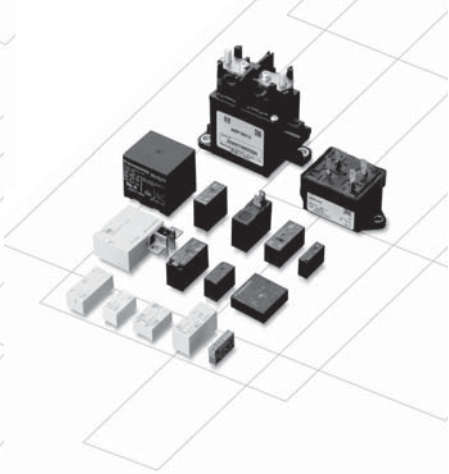
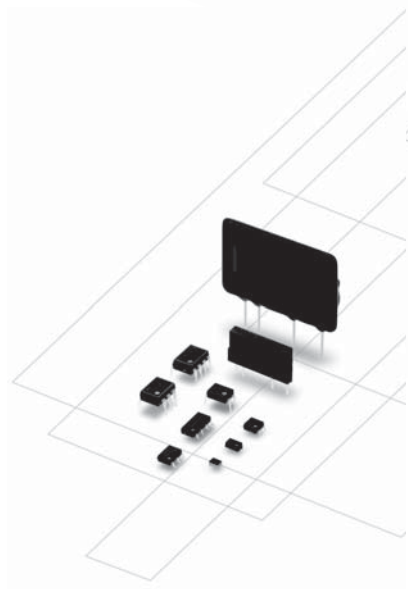
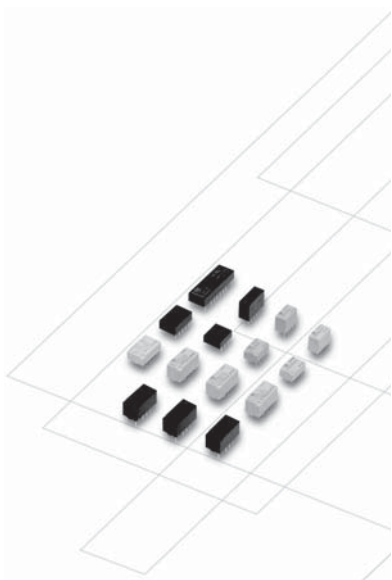
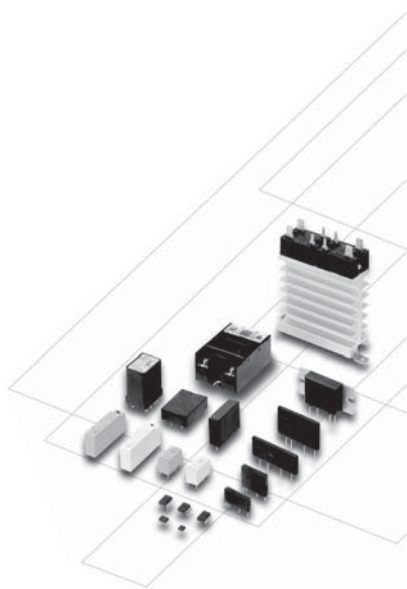


Panasonic Electric Works Corporation of America

<http://pewa.panasonic.com> 1-800-276-6289

RELAYS	Signal Relays	5-7
	Power Relays	8-16
	Control Panel Relays	17-18
	Safety Relays	19
	PhotoMOS Relays	20-48
	Photovoltaic MOSFET Driver	49
	Automotive Relays	50-54
	Phototriac Coupler	55-56
	Solid State Relays	57-67
	Microwave Devices	68-69
	Interface Terminals	70-72
SENSORS	Passive Infrared Sensors	74
	Acceleration, Light & Motion Sensors	75
	Pressure Sensors	76
	3D Image Sensor	77
CONNECTORS	Narrow Pitch Connectors	79-86
	Micro Coaxial Connectors	87
	FPC Connectors	88-89

RELAYS



• Products	Signal Relays				
	GN RELAY (AGN)	GQ RELAY (AGQ)	HY RELAY	TN RELAY	
• Type of relay					
mm inch					
• Features	<ul style="list-style-type: none"> • Compact slim body saves space • Outstanding surge resistance • High sensitivity of 100 mW type 	<ul style="list-style-type: none"> • Compact flat body saves space • Outstanding surge resistance • High sensitivity of 100 mW type 	<ul style="list-style-type: none"> • High sensitivity: 150mW/200mW 	<ul style="list-style-type: none"> • Slim size • 1,500V FCC 	
• Sealed types availability	●	●	●	●	
• Latching types availability	●	●	—	●	
• Contact material (Optional material)	Stationary: AgPd+Au clad Movable: AgPd	Stationary: AgPd+Au clad Movable: AgPd	Ag + Au clad	Ag + Au clad	
• Contact rating chart Maximum (cos φ = 1)	15 A 10 A 8 A 5 A 3 A 2 A 1 A				
Minimum (For Reference)					
• Max. switching voltage	110V DC, 125V AC	110V DC, 125V AC	60V DC	110V DC, 125V AC	
• Contact arrangement	2c	2c	1c	2c	
• Life (Min. operation)	Electrical	10 ⁶	10 ⁵ (at 1A 30V DC)	2 × 10 ⁵ (at 1A 30V DC) 10 ⁵ (at 0.5A 125V AC)	
	Mechanical	5 × 10 ⁷	5 × 10 ⁷	10 ⁷	
• Break-down voltage	Between open contacts	750Vrms	750Vrms	500Vrms	750Vrms
	Between contacts sets	1,000Vrms	1,000Vrms	—	1,000Vrms
	Between contacts and coil	1,500Vrms	1,500Vrms	1,000Vrms	1,000Vrms
	Between live parts and ground	—	—	—	—
• Surge breakdown voltage	1,500V FCC 2,500V Telcordia	1,500V FCC 2,500V Telcordia	—	1,500V FCC	
• Coil voltage	(DC) 1.5, 3, 4.5, 6, 9, 12, 24V	(DC) 1.5, 3, 4.5, 6, 9, 12, 24V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24V	(DC) 3, 4.5, 5, 6, 9, 12, 24, 48V	
• Nominal operating power	(Single) 1.5 to 12V DC: 140mW 24V DC: 230mW	(Single) 1.5 to 12V DC: 140mW 24V DC: 230mW	Standard: 200mW High sensitivity: 150mW	(Single) 3 to 12V DC: 140mW 24V DC: 200mW 48V DC: 300mW	
• Terminal layout (Bottom View) • coil terminal (100 inch grid)	PC board terminal 	PC board terminal 			
	SMD 	SMD 			
mm inch					
• Standards	UL, CSA, BSI	UL, CSA, BSI	UL, CSA	UL, CSA	
• Mounting method					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

SIGNAL RELAYS

• Products	Signal Relays					
	TQ RELAY	TX-S RELAY	DS2Y-RELAY	DS RELAY	TK RELAY	
• Type of relay						
• Features	<ul style="list-style-type: none"> 1,500V FCC 4 pole model available 	<ul style="list-style-type: none"> High sensitivity Nominal operating power, 50 mW 1,500 V FCC Added New pin layout (LT type) in 2 coil latching type 	<ul style="list-style-type: none"> High sensitivity 2 Form C contact 1,500V FCC Sealed construction 	<ul style="list-style-type: none"> 1,500V FCC High switching power 	<ul style="list-style-type: none"> Low profile 4 mm .157 inch High contact capacity: 2 A Surge breakdown voltage between contact and coil: 2,500 V 	
• Sealed types availability	●	●	●	●	●	
• Latching types availability	●	●	—	●	●	
• Contact material (Optional material)	Ag + Au clad	Ag + Au clad	Ag + Au clad	Ag + Au clad	Ag + Au clad	
• Contact rating chart Maximum (cos φ = 1)						
• Minimum (For Reference)						
• Max. switching voltage	110V DC, 125V AC	110V DC	220V DC, 250V AC	220V DC, 250V AC	220V DC	
• Contact arrangement	2c, 4c	2c	2c	1c, 2c	1c	
• Life (Min. operation)	Electrical	2×10^7 (at 1A 30V DC) 10^7 (at 0.5A 125V AC)	2×10^7 (at 1A 30V DC)	5×10^7	5×10^7	10^8 (at 2A 30V DC)
	Mechanical	10^8	5×10^7	10^8	10^8	10^8 (Single side stable) 5×10^7 (Latching)
• Breakdown voltage	Between open contacts	750Vrms	750Vrms	750Vrms	1,000Vrms (500Vrms for DS1E-S)	750Vrms
	Between contacts sets	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between contacts and coil	1,000Vrms	1,800Vrms	1,000Vrms	1,500Vrms (1,000Vrms for DS1E-S)	1,500Vrms
	Between live parts and ground	—	—	—	—	—
• Surge breakdown voltage	1,500V FCC	1,500V FCC 2,500V Telcordia	1,500V FCC	1,500V FCC	1,500V FCC 2,500V Telcordia	
• Coil voltage	(DC) 3, 4.5, 5, 6, 9, 12, 24, 48V	(DC) 1.5, 3, 4.5, 6, 9, 12, 24V	(DC) 1.5, 3, 5, 6, 9, 12, 24V	(DC) 1.5, 3, 5, 6, 9, 12, 24, 48V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24V	
• Nominal operating power	(Single) 3 to 12V DC: 140mW 24V DC: 200mW 48V DC: 300mW	(Single) 1.5 to 12V DC: 50mW 24V DC: 70mW	(Single) 200mW (300mW: 48V) (-L2) 180mW (360mW: 48V)	M type (Single) 400mW (-L2) 360mW S type (Single) 200mW (-SL2) 180mW	(Single) 1.5 to 12V DC: 140mW 24V DC: 270mW	
• Terminal layout (Bottom View) coil terminal (100 inch grid)						
• Standards	UL, CSA	UL, CSA, BSI	UL, CSA	UL, CSA	UL, CSA	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

• Products	Signal Relays				
	TQ-SMD RELAY	TX RELAY	TX-D RELAY	TX RELAY TH type	
• Type of relay					
mm inch					
• Features	<ul style="list-style-type: none"> • Ultra low profile: 5.8mm .228inch • Surge voltage: 2,500 V • 3 types of surface-mount terminal available 	<ul style="list-style-type: none"> • Surge voltage: 2,500V • Breakdown voltage between contacts and coil: 2,000 V • Added New pin layout (LT type) in 2 coil latching type 	<ul style="list-style-type: none"> • High-insulation relay that conforms to the insulation level provided for in the EN60950 • 3 types of surface-mount terminal available 	<ul style="list-style-type: none"> • Small size, controlled 7.5A inrush current possible 	
• Sealed types availability	●	●	●	●	
• Latching types availability	●	●	●	●	
• Contact material (Optional material)	AgNi type + Au clad	Ag + Au clad	Ag + Au clad	Ag + Au plating	
• Contact rating chart Maximum (cos φ = 1)	15 A 10 A 8 A 5 A 3 A 2 A 1 A				
Minimum (For Reference)					
• Max. switching voltage	220V DC, 125V AC	220V DC	220V DC	220V DC, 250V AC	
• Contact arrangement	2c	2c	2c	2c	
• Life (Min. operation)	Electrical	2×10^8 (at 2 A 30V DC) 10^8 (at 1 A 30V DC) 10^8 (at 0.5A 125V AC)	10^8 (at 2 A 30 V DC) 2×10^8 (at 1 A 30 V DC)	10^8 (at 2 A 30 V DC) 5×10^8 (at 1 A 30 V DC)	2×10^8
	Mechanical	10^8	10^8	10^8	10^8
• Breakdown voltage	Between open contacts	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between contacts sets	1,500Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between contacts and coil	1,500Vrms	2,000Vrms	2,000Vrms	2,000Vrms
	Between live parts and ground	—	—	—	—
• Surge breakdown voltage	1,500V FCC 2,500V Telcordia	1,500V FCC 2,500V Telcordia	1,500V FCC 2,500V Telcordia	1,500V FCC 2,500V Telcordia	
• Coil voltage	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V	
• Nominal operating power	(Single) 1.5 to 12V DC: 140mW 24V DC: 200mW 48V DC: 300mW	(Single) 1.5 to 24V DC: 140mW 48V DC: 270mW	(Single) 1.5 to 12V DC: 200mW 24V DC: 230mW	(Single) 1.5 to 24V DC: 140mW 48V DC: 270mW	
• Terminal layout (Bottom View) * coil terminal (.100 inch grid)					
	mm inch				
• Standards	UL, CSA	UL, CSA, BSI	UL, CSA, BSI	—	
• Mounting method					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

















Notes:

POWER RELAYS

• Products	Power Relays (2A or more)				
	LD RELAY (ALD)	LJ RELAY (ALJ)	S RELAY	LA RELAY (ALA)	
• Type of relay					
mm/inch					
• Features	• 1a 3A slim power relays	• 1a 3A slim power relay class minimum	• 2a2b/3a1b/4a 4A polarized power relays	• TV-4 rated. • 2a 3A/5A power relays	
• Sealed types availability	●	—	●	—	
• Latching types availability	—	—	●	—	
• Contact material (Optional material)	AgNi type	AgNi type	Au clad silver alloy (cadmium free)	AgNi type + Au clad AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)					
Minimum (For Reference)					
• Max. switching voltage	30V DC, 277V AC	250V AC	48V DC, 250V AC	125V AC, 277V AC	
• Contact arrangement	1a	1a	2a2b, 3a1b, 4a	2a	
• Life (Min. operation)	Electrical	2 × 10 ⁶ (3A 125V AC, 3A 30V DC) 10 ⁶ (3A 250V AC)	5 × 10 ⁶ (5A 250V AC) 10 ⁶ (3A 250V AC)	10 ⁶ (AC) 2 × 10 ⁶ (DC)	5 × 10 ⁶
	Mechanical	5 × 10 ⁶	2 × 10 ⁶	10 ⁶	10 ⁶
• Break-down voltage	Between open contacts	750Vrms	750Vrms	750Vrms	1,000Vrms
	Between contacts sets	—	—	1,000Vrms	1,000Vrms
	Between contacts and coil	4,000Vrms	3,000Vrms	1,500Vrms	4,000Vrms
	Between live parts and ground	—	—	—	—
• Surge withstand voltage	Min. 10,000V	Min. 6,000V	—	Min. 10,000V	
• Coil voltage	(DC) 4.5, 5, 6, 9, 12, 18, 24V	(DC) 5, 9, 12, 18, 24V	(DC) 3, 5, 6, 12, 24, 48V	(DC) 12, 24V	
• Nominal operating power	200mW	200mW	200mW	530mW	
• Terminal layout (Bottom View) *: coil terminal (.100 inch grid)					
mm/inch					
• Standards	UL, CSA, TÜV, VDE	UL, C-UL, VDE	UL, CSA	UL, CSA, TÜV, SEMKO, VDE	
• Mounting method					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

• Products	Power Relays (2A or more)			
	LD-P RELAY (ALDP)	LK-S RELAY	LK-T RELAY	NC RELAY
• Type of relay				
mm inch				
• Features	• 1a 5A slim power relay	• TV-5 rated. • High sensitivity: 250mW • 1a 5A power relays	• TV-8 rated. • 1a 5A power relays	• Transistor drive • 2c/4c 5A slim power relays
• Sealed types availability	●	—	—	●
• Latching types availability	—	—	—	—
• Contact material (Optional material)	AgNi type	AgSnO ₂ type	AgSnO ₂ type	Au clad AgNi type
• Contact rating chart Maximum (cos φ = 1)				
Minimum (For Reference)	100mA 5V DC	100mA 5V DC	100mA 5V DC	100μA 1V DC
• Max. switching voltage	277V AC	277V AC	277V AC	250V AC
• Contact arrangement	1a	1a	1a	2c, 4c
• Life (Min. operation)	Electrical: 2 × 10 ⁶ (5A 125V AC) 10 ⁷ (5A 250V AC) Mechanical: 5 × 10 ⁶	10 ⁶	10 ⁶	10 ⁶ (5A 250V AC) 5 × 10 ⁶ (5A 30V DC) (AC) 10 ⁷ (DC) 5 × 10 ⁷
• Break-down voltage	Between open contacts: 750Vrms Between contacts sets: — Between contacts and coil: 4,000Vrms Between live parts and ground: —	1,000Vrms	1,000Vrms	1,000Vrms 1,000Vrms 2,000Vrms —
• Surge withstand voltage	Min. 10,000V	Min. 10,000V	Min. 10,000V	—
• Coil voltage	(DC) 5, 6, 9, 12, 18, 24V	(DC) 5, 9, 12, 24V	(DC) 5, 9, 12, 24V	(DC) 3, 5, 6, 12, 24, 48, 100V (AC) 12, 24, 48, 100V
• Nominal operating power	200mW	250mW	250mW	(2c) 1.05VA (4c) 1.30VA (2c) 360mW (4c) 720mW
• Terminal layout (Bottom View) * coil terminal (.100 inch grid)				
mm inch				
• Standards	UL, CSA, VDE	UL, CSA, TÜV, SEMKO, VDE	UL, C-UL, TÜV, SEMKO, VDE	UL, CSA
• Mounting method				

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

POWER RELAYS

• Products	Power Relays (2A or more)					
	PA RELAY	PQ RELAY	PF RELAY (APF)	DS-P RELAY	LK-Q RELAY	
• Type of relay						
mm (inch)						
• Features	• 1a 5A slim power relay for interface	• 1a 5A small size power relay for interface	• Compliant with European standards • 1a/1c 6A Slim power relays	• 1a 8A, 1a1b/2a 5A small polarized power relays	• TV-5/TV-8 rated. • 1a 5A/8A silent type power relays	
• Sealed types availability	●	●	●	●	—	
• Latching types availability	—	—	—	●	—	
• Contact material (Optional material)	Au clad AgNi type	Au clad AgNi type	AgNi type, Au plated AgNi type	Au flashed AgSnO ₂ type	AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)	30 A 20 A 15 A 10 A 5 A 5 A 3 A	5A 250V AC 5A 30V DC	5A 250V AC 5A 30V DC	6A 250V AC 8A 250V AC 5A 30V DC 5A 250V AC 5A 30V DC	5A 277V AC 8A 277V AC	
• Minimum (For Reference)	100µA 100mV DC	100µA 100mV DC	1mA 1V DC (Au plating)	10mA 5V DC 10mA 5V DC	100mA 5V DC	
• Max. switching voltage	110V DC, 250V AC	110V DC, 250V AC	250V AC	125V DC, 380V AC	277V AC	
• Contact arrangement	1a	1a	1a, 1c	1a, 1a1b, 2a	1a	
• Life (Min. operation)	Electrical	10 ⁷ (3A 250V AC, 30V DC) 5 × 10 ⁷ (5A 250V AC, 30V DC)	2 × 10 ⁷ (5A 125V AC) 10 ⁸ (5A 250V AC)	5 × 10 ⁷ (N.O.) 3 × 10 ⁷ (N.C.)	10 ⁷	10 ⁷
	Mechanical	2 × 10 ⁷	2 × 10 ⁷	5 × 10 ⁶	5 × 10 ⁷	10 ⁶
• Break-down voltage	Between open contacts	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between contacts sets	—	—	—	2,000Vrms (1a1b, 2a)	—
	Between contacts and coil	2,000Vrms	4,000Vrms	4,000Vrms	3,000Vrms	4,000Vrms
	Between live parts and ground	—	—	—	—	—
• Surge withstand voltage	—	—	Min. 6,000V	Min. 5,000V	Min. 10,000V	
• Coil voltage	(DC) 5, 6, 9, 12, 18, 24V	(DC) 3, 5, 6, 9, 12, 18, 24V	(DC) 4.5, 5, 6, 9, 12, 18, 24, 48, 60V	(DC) 3, 5, 6, 9, 12, 24V	(DC) 5, 9, 12, 24V	
• Nominal operating power	120mW, 180mW	200mW	170mW, 217mW, 175mW	300mW	250mW	
• Terminal layout (Bottom View) • coil terminal (.100 inch grid)						
mm (inch)						
• Standards	UL, CSA, TÜV	UL, CSA, VDE, TÜV, SEMKO	UL, C-UL, VDE	UL, CSA, TÜV	UL, C-UL, TÜV, SEMKO	
• Mounting method						

Note: Meaning of symbol marks : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

• Products	Power Relays (2A or more)					
	LK-F RELAY	ST RELAY	DE RELAY (ADE)	DK RELAY	DY RELAY (ADY)	
• Type of relay						
• Features	<ul style="list-style-type: none"> TV-5, TV-8 rated 10mm flat power relays Silent type is available 	<ul style="list-style-type: none"> 1a1b/2a 8A polarized power relays 	<ul style="list-style-type: none"> Compliant with European standards 1a1b 10A/8A polarized power relays 	<ul style="list-style-type: none"> 1a 10A, 1a1b/2a 8A small polarized power relays 	<ul style="list-style-type: none"> Electrical life: Min. 2×10^7 1a 10A, 1a1b 8A small polarized power relays 	
• Sealed types availability	—	●	●	●	●	
• Latching types availability	—	●	●	●	●	
• Contact material (Optional material)	AgSnO ₂ type	Au flashed AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type / Au flashed AgNi type	Au flashed AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)						
• Minimum (For Reference)	100mA 5V DC	100mA 5V DC		10mA 5V DC / 10mA 5V DC	10mA 5V DC / 10mA 5V DC	
• Max. switching voltage	277V AC	250V DC, 380V AC	230V DC, 440V AC	125V DC, 250V AC	125V DC, 380V AC	
• Contact arrangement	1a	1a1b, 2a	1a, 1a1b, 2a	1a, 1a1b, 2a	1a, 1a1b	
• Life (Min. operation)	Electrical	10 ⁷ (TV-5) 5 × 10 ⁷ (TV-8)	10 ⁷	10 ⁷	10 ⁷	
	Mechanical	10 ⁷	10 ⁷	10 ⁷	5 × 10 ⁷	
• Break-down voltage	Between open contacts	1,000Vrms	1,200Vrms	1,000Vrms	1,000Vrms	
	Between contacts sets	—	2,000Vrms	4,000 Vrms (2a, 1a1b)	—	
	Between contacts and coil	4,000Vrms	3,750Vrms	5,000Vrms	4,000Vrms	4,000Vrms
	Between live parts and ground	—	—	—	—	—
• Surge withstand voltage	Min. 10,000V	Min. 6,000V	Min. 12,000V	Min. 10,000V	Min. 10,000V	
• Coil voltage	(DC) 5, 9, 12, 24V	(DC) 3, 5, 6, 9, 12, 24, 48V	(DC) 5, 12, 24V	(DC) 3, 5, 6, 9, 12, 24V	(DC) 3, 5, 6, 12, 24V	
• Nominal operating power	250mW	240mW	200mW	200mW	200mW	
• Terminal layout (Bottom View)						
• Standards	UL, C-UL, SEMKO, TÜV	UL, CSA, VDE, SEV, TV rating	UL, CSA, VDE	UL, CSA, TÜV	UL, CSA, TÜV	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

















Notes:


POWER RELAYS

• Products	Power Relays (2A or more)					
	JQ RELAY	JS RELAY	JW RELAY	LK-G RELAY	LK-P RELAY	
• Type of relay						
• Features	• 1a/1c 5A/10A small power relays	• 1a/1c 10A cubic type power relays	• Ideal for power supply • 1a/1c/2a/2c/5A/10A power relays	• 1mm contact gap. 1a 10A/16A power relays • TV-5 rated	• 1a 10A TV-5 rated power relays	
• Sealed types availability	●	● (1a, 1c)	●	—	—	
• Latching types availability	—	—	—	—	—	
• Contact material (Optional material)	AgSnO ₂ type	AgSnO ₂ type	1a: AgSnO ₂ type 1a, 2a, 2c: AgNi type	AgSnO ₂ type	AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)						
• Minimum (For Reference)	Standard 100mA 5V DC	High capacity 100mA 5V DC	Standard (1a, 1c) 100mA 5V DC	High capacity (1a, 1c) 100mA 5V DC	Standard 100mA 5V DC	
• Max. switching voltage	110V DC (0.3A), 250V AC	100V DC (0.5A), 250V AC	30V DC, 250V AC	277V AC	30V DC, 277V AC	
• Contact arrangement	1a, 1c	1a, 1c, 1a (Long life type)	Standard: 1a, 1c, 2a, 2c High capacity: 1a, 1c	1a	1a	
• Life (Min. operation)	Electrical	5 × 10 ⁶ (1a standard, 5A 125V AC)	10 ⁷ 2 × 10 ⁷ (Long life type)	10 ⁶	10 ⁶ (10A type) 5 × 10 ⁶ (16A type)	10 ⁶
	Mechanical	10 ⁷	10 ⁷	5 × 10 ⁶	2 × 10 ⁶	2 × 10 ⁶
• Break-down voltage	Between open contacts	1a: 1,000Vrms 1c: 750Vrms	750Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between contacts sets	—	—	3,000Vrms (2a, 2c)	—	—
	Between contacts and coil	4,000Vrms	1,500Vrms	5,000Vrms	4,000Vrms	4,000Vrms
	Between live parts and ground	—	—	—	—	—
• Surge withstand voltage	Min. 8,000V	—	Min. 10,000V	Min. 10,000V	Min. 10,000V	
• Coil voltage	(DC) 5, 6, 9, 12, 18, 24, 48V	(DC) 5, 6, 9, 12, 18, 24, 48V	(DC) 6, 9, 12, 24, 48V	(DC) 5, 9, 12, 24V	(DC) 5, 9, 12, 24V	
• Nominal operating power	1a: 200mW 1c: 400mW	360mW	530mW	530mW	530mW	
• Terminal layout (Bottom View) * coil terminal (.100 inch grid)						
• Standards	UL, CSA, TÜV, VDE, SEMKO	UL, CSA, TÜV, VDE	UL, CSA, VDE, SEMKO, FIMKO, TÜV, SEV	UL, C-UL, TÜV	UL, CSA, TÜV, SEMKO, VDE	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting





















Notes:

• Products	Power Relays (2A or more)			
	JC RELAY	SP RELAY	DJ RELAY (ADJ)	JV-N RELAY
• Type of relay				
• Features	• Wide variation • 1a 15A, 2a 10A power relays	• 2c 15A, 4c 10A polarized power relays	• 1-pole/2-pole 16A polarized power relays	• Ideal for heater control • 1a 16A, 10.9 mm height flat power relays
• Sealed types availability	—	—	●	●
• Latching types availability	—	●	●	—
• Contact material (Optional material)	AgSnO ₂ type	Stationary: Au flashed AgSnO ₂ type Movable: AgSnO ₂ type	AgSnO ₂ type Au flashed AgSnO ₂ type	AgSnO ₂ type
• Contact rating chart Maximum (cos φ = 1)				
• Minimum (For Reference)	100mA 5V DC	100mA 5V DC	100mA 5V DC 100mA 5V DC	100mA 5V DC
• Max. switching voltage	250V AC	30V DC, 250V AC	250V AC	30 V DC, 277 V AC
• Contact arrangement	1a, 2a	2c, 4c	1a, 1b, 1c, 1a1b, 2a, 2b, 2c	1a
• Life (Min. operation)	Electrical	10 ⁶	10 ⁶	10 ⁶
	Mechanical	5 × 10 ⁶	5 × 10 ⁷	5 × 10 ⁶
• Break-down voltage	Between open contacts	2,000Vrms	1,500Vrms	1,000Vrms
	Between contacts sets	2,000Vrms (2a)	3,000Vrms	—
	Between contacts and coil	4,000Vrms	3,000Vrms	4,000Vrms
	Between live parts and ground	—	—	—
• Surge withstand voltage	Min. 10,000V	—	Min. 10,000V	Min. 4,500V
• Coil voltage	(DC) 6, 12, 24V	(DC) 3, 5, 6, 12, 24, 48V	(DC) 5, 6, 12, 24, 48V	(DC) 4.5, 6, 9, 12, 18, 24, 48, 100V
• Nominal operating power	(1a) 900mW (2a) 1,000mW	300mW	250mW	(DC) 4.5V to 48V: 200mW (DC) 100V: 600mW
• Terminal layout (Bottom View)				
• Standards	UL, CSA, VDE, SEMKO, TÜV	UL, CSA, TÜV	UL, C-UL, VDE	UL, CSA, TÜV
• Mounting method				

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

POWER RELAYS

• Products	Power Relays (2A or more)					
	LE RELAY (ALE)	LZ RELAY (ALZ)	JM RELAY	LF RELAY (ALF)	LF-G RELAY (ALFG)	
• Type of relay						
• Features	• 1a 16A power relay for micro wave oven	• Low profile: 15.7mm height • 1a/1c 16A power relay	• Ideal for compressor and motor control • Inrush 80A, 1a 20A power relay	• Load for air conditioner • 1a 20A power relays	• Ideal for solar inverter compact size, 1a 22A/31A power relays	
• Sealed types availability	—	●	—	—	—	
• Latching types availability	—	—	—	—	—	
• Contact material (Optional material)	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)						
Minimum (For Reference)	100mA 5V DC	100mA 5V DC	100mA 5V DC	100mA 5V DC	100mA 5V DC	
• Max. switching voltage	277V AC	440V AC	250V AC	250V AC	250V AC	
• Contact arrangement	1a	1a, 1c	1a	1a	1a	
• Life (Min. operation)	Electrical	10 ⁶	10 ⁶ (NO) 5 × 10 ⁶ (NC)	10 ⁶	10 ⁶	3 × 10 ⁶
	Mechanical	2 × 10 ⁶	10 ⁶	10 ⁶	2 × 10 ⁶	10 ⁶
• Break-down voltage	Between open contacts	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms	2,500Vrms
	Between contacts sets	—	—	—	—	—
	Between contacts and coil	4,000Vrms	5,000Vrms	5,000Vrms	5,000Vrms	4,000Vrms
	Between live parts and ground	—	—	—	—	—
• Surge withstand voltage	Min. 10,000V	Min. 10,000V	Min. 10,000V	Min. 10,000V	Min. 6,000V	
• Coil voltage	(DC) 5, 6, 9, 12, 18, 24, 48V	(DC) 5, 9, 12, 18, 24, 48V	(DC) 5, 6, 9, 12, 24, 48V	(DC) 5, 6, 9, 12, 18, 24V	(DC) 9, 12, 18, 24V	
• Nominal operating power	200mW 400mW	400mW	0.9 W	900mW	1,400mW	
• Terminal layout (Bottom View) * : coil terminal (.100 inch grid)						
mm (inch)	(PC board type, TMP type are also available)		Slim TMP type			
• Standards	UL, CSA, TÜV, VDE, SEMKO	UL, C-UL, VDE	UL, CSA, VDE	UL, C-UL, TÜV, VDE	UL, C-UL, VDE	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

• Products	Power Relays (2A or more)				
	DQ RELAY (ADQ)	HE RELAY	JT-V RELAY	JT-N RELAY	HE RELAY PV TYPE
• Type of relay					
• Features	• 1a 30A polarized power relays	• TV-10/TV-15 rated • 1a 30A, 2a 20A power relays	• Surge withstand voltage: 6kV • 1a/1c 30A power relays	• High switching capacity • 1a/1c 30A power relays	• Ideal for solar inverter compact size, 1a 35A/48A power relays
• Sealed types availability	●	—	●	●	—
• Latching types availability	● (Latching type only)	—	—	—	—
• Contact material (Optional material)	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type	AgSnO ₂ type / AgNi type
• Contact rating chart Maximum (cos φ = 1)					
• Minimum (For Reference)	100mA 5V DC	100mA 5V DC / 100mA 5V DC	100mA 5V DC / 100mA 5V DC / 100mA 5V DC	100mA 5V DC / 100mA 5V DC / 100mA 5V DC	100mA 5V DC
• Max. switching voltage	250V AC	30VDC, 277V AC	277V AC	277V AC	250V AC
• Contact arrangement	1a	1a, 2a	1a, 1c	1a, 1c	1a
• Life (Min. operation)	Electrical: 10 ⁶ Mechanical: 10 ⁶	Electrical: 2 × 10 ⁶ Mechanical: DC: 10 ⁷ AC: 5 × 10 ⁶	10 ⁶ (20A 277V AC) 10 ⁷ (N.O./120A 277V A) 10 ⁶ (N.C./10A 277V A)	10 ⁶ (20A 277V AC) 10 ⁷ (N.O./120A 277V A) 10 ⁶ (N.C./10A 277V A)	3 × 10 ⁶
• Break-down voltage	Between open contacts: 1,500Vrms Between contacts sets: — Between contacts and coil: 4,000Vrms Between live parts and ground: —	2,000Vrms 4,000Vrms (2a)	1,200Vrms 3,500Vrms	1,200Vrms 2,500Vrms	2,000Vrms 5,000Vrms
• Surge withstand voltage	Min. 10,000V	Min. 10,000V	6,000V	—	Min. 10,000V
• Coil voltage	(DC) 4.5, 6, 9, 12, 24V	(AC) 12, 24, 48, 100/120, 200/240V (DC) 6, 12, 24, 48, 100, 110V	(DC) 12, 18, 24, 48V	(DC) 5, 6, 9, 12, 15, 18, 24V	(DC) 6, 9, 12, 24V (Standard type DC9V only)
• Nominal operating power	500mW (1 coil latching) 1,000mW (2 coil latching)	(AC) 1.7 to 2.7VA (DC) 1.92W	1,000mW	800mW	1,920mW
• Terminal layout (Bottom View)					
• Standards	UL, C-UL	UL, CSA, VDE, TÜV	UL/C-UL	UL, CSA	UL, CSA, VDE / C-UL, VDE
• Mounting method					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

POWER RELAYS

• Products	Power Relays (2A or more)		High-capacity DC cutoff Relays			
	DQ-M RELAY (ADQM)		EP RELAY (AEP)		EJ RELAY (AEJ)	
• Type of relay						
• Features	• 60A power latching relays	• High capacity DC cutoff 10 A to 300 A at 400V DC			• High capacity DC cutoff 100A at 100V DC	
• Sealed types availability	—	●			—	
• Latching types availability	—	—			—	
• Contact material (Optional material)	AgNi type	Molybdenum type	Tungsten type/ Copper type alloy	Copper type alloy	AgCuO type	
• Contact rating chart Maximum (cos φ = 1)	40 A 30 A 20 A 15 A 10 A 5 A	10A 400V DC	80A 400V DC	300A 400V DC	100A 100V DC	
• Minimum (For Reference)	100mA 5V DC	1A 6V DC			1A 12V DC	
• Max. switching voltage	250V AC	10A 400V DC	80A 400V DC	300A 400V DC	100A 100V DC	
• Contact arrangement	1a	1a	1a	1a	1a	
• Life (Min. operation)	Electrical	10 ⁵ (60A 250V AC) 10 ⁴ (50A 250V AC)	7.5 × 10 ⁵ 10A 400V DC (L/R ≤ 1ms)	10 ⁵ 80A 400V DC (L/R ≤ 1ms)	10 ⁵ 300A 400V DC (L/R ≤ 1ms)	10 ⁴ (100A 100V DC)
	Mechanical	10 ⁶	10 ⁶	2 × 10 ⁵	2 × 10 ⁵	10 ⁶
• Break-down voltage	Between open contacts	1,500Vrms	2,500Vrms		1,500Vrms	
	Between contacts sets	—	—		—	
	Between contacts and coil	4,000Vrms	2,500Vrms		2,500Vrms	
	Between live parts and ground	—	—	—	—	
• Surge withstand voltage	Min. 10,000V	—	—	—	—	
• Coil voltage	(DC) 4.5, 6, 9, 12, 24V	(DC) 12, 24, 48, 100V	(DC) 12, 24V	(DC) 12, 24V	(DC) 12, 24V	
• Nominal operating power	500mW (1 coil latching) 1,000mW (2 coil latching)	Max. 1.4W	Max. 4.5W	Max. 4 to 40W	5W	
• Terminal layout (Bottom View) * : coil terminal (.100 inch grid)		PC board type After doing through-hole plating 2.0±0.1mm (0.0787±0.0039 inch) Mounting hole 3.4±0.2 dia. (±.1339 inch) TM type After doing through-hole plating 2.0±0.1mm (0.0787±0.0039 inch) 				
• Standards	—	UL, C-UL	UL, C-UL	—	—	
• Mounting method			Screw terminal blocks	Screw terminal blocks	Screw terminal blocks	

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
















Notes:



• Products	Control Panel Relays			
	HN RELAY (AHN)	HJ RELAY	HC RELAY	HK RELAY (AHK)
• Type of relay				
mm (inch)				
• Features	• Relay for control panel of 1c 10A, 2c 5A and 1a 16A	• Relay for control panel of 2c 7A and 4c 5A	• Relay for control panel of 1A to 10A (1c/2c/3c/4c)	• Relay for control panel of 1c 15A, and 2c 10A
• Sealed types availability	—	—	●	—
• Latching types availability	—	—	(Keep)	—
• Contact material (Optional material)	AgSnO ₂ type Au flashed AgNi type AgSnO ₂ type	Ag		1c, 2c, 3c: Au flashed Ag alloy (Cadmium free) 4c: Au clad AgNi type AgSnO ₂ type
• Contact rating chart Maximum (cos φ = 1)				
Minimum (For Reference)	100mA 5V DC 1mA 1V DC	100mA 5V DC	1mA 1V DC (Au plating) 1mA 1V DC (Au plating)	100mA 5V DC 100mA 5V DC
• Max. switching voltage	250V AC, 30V DC		250V AC	125V DC, 250V AC
• Contact arrangement	1c, 2c, 1a (TM type)		2c, 4c	1c, 2c, 3c, 4c, 4c twin
• Life (Min. operation)	Electrical	10 ⁵	10 ⁵	2 × 10 ⁵ (1c, 2c, 4c) 10 ⁵ (3c)
	Mechanical	(DC) 2 × 10 ⁷ (AC) 10 ⁷	2 × 10 ⁷	(DC) 10 ⁷ (AC) 5 × 10 ⁷
• Break-down voltage	Between open contacts	1,000Vrms	1,000Vrms	700Vrms
	Between contacts sets	3,000Vrms (2c)	2,000Vrms	700Vrms
	Between contacts and coil	5,000Vrms	2,000Vrms	2,000Vrms
	Between live parts and ground	—	—	—
• Surge withstand voltage	—	—	—	—
• Coil voltage	(AC) 12, 24, 100/110, 200/220V (DC) 5, 6, 12, 24, 48, 100, 110V	(AC) 12, 24, 48, 100/110, 200/220V (DC) 12, 24, 48, 100/110V	(AC) 6, 12, 24, 48, 100/110, 110/120, 200/220, 220/240V (DC) 6, 12, 24, 48, 100/110V	(AC) 12, 24, 48, 100/110, 110/120, 200/220, 220/240V (DC) 6, 12, 24, 48, 100/110V
• Nominal operating power	(AC) 1.2 to 1.4VA (DC) 0.53W	(AC) 1.2 to 1.3VA (DC) 0.9W	(AC) 1.2 to 1.3VA (DC) 0.9 to 1.1W	(AC) 1.2 to 1.3VA (DC) 0.9W
• Terminal layout (Bottom View) * coil terminal (.100 inch grid)	Plug-in type 	Plug-in type 		
	mm (inch)			
• Standards	UL/C-UL, VDE (TM type is pending)	UL, C-UL, TÜV	UL, CSA, VDE (1c, 2c, 4c single only)	UL, C-UL, TÜV
• Mounting method				

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting













Notes:

CONTROL PANEL RELAYS

• Products	Control Panel Relays			
	HL RELAY	HP RELAY	HG RELAY	
• Type of relay				
mm (inch)				
• Features	• Relay for control panel of 1c 15A, and 2c 10A	• Relay for control panel of 10A (2c/3c/4c)	• Relay for control panel of 20A (2c/3c/4c)	
• Sealed types availability	—	—	—	
• Latching types availability	—	—	—	
• Contact material (Optional material)	AgSnO ₂ type	2c, 3c: Ag 4c: Ag alloy (Cadmium-free)	AgSnO ₂ type	
• Contact rating chart Maximum (cos φ = 1)				
Minimum (For Reference)	100mA 5V DC 100mA 5V DC	100mA 5V DC	100mA 5V DC	
• Max. switching voltage	30V DC, 250V AC	—	—	
• Contact arrangement	1c, 2c	2c, 3c, 4c	2c, 3c, 4c	
• Life (Min. operation)	Electrical	5 × 10 ⁶	2 × 10 ⁶	2 × 10 ⁶
	Mechanical	(DC) 10 ⁶ (AC) 5 × 10 ⁷	10 ⁷	(DC) 10 ⁶ (AC) 10 ⁷
• Break-down voltage	Between open contacts	1,000Vrms	(2c, 4c) 1,000Vrms (3c) 2,000Vrms	2,000Vrms
	Between contacts sets	1,500Vrms	(2c, 4c) 1,500Vrms (3c) 2,000Vrms	2,000Vrms
	Between contacts and coil	2,000Vrms	(2c,4c) 1,500Vrms (3c) 2,000Vrms	2,000Vrms
	Between live parts and ground	—	—	—
• Surge withstand voltage	—	—	—	
• Coil voltage	(AC) 6, 12, 24, 48, 100/110, 110/120, 200/220, 240V (DC) 6, 12, 24, 48 100/110V	(AC) 24, 48, 100, 115, 200, 220, 240V (DC) 12, 24, 48, 100, 110V	(AC) 24, 48, 100, 115, 200, 220, 240V (DC) 12, 24, 48, 100, 110, 200V	
• Nominal operating power	(AC) 1.2 to 1.3VA (DC) 0.9W	(2c) Approx. 2.0VA (AC) Approx. 1.5W (DC) (3c) Approx. 3.1VA (AC) Approx. 1.9W (DC) (4c) Approx. 4.8VA (AC) Approx. 1.5W (DC)	(2c) Approx. 3.6VA (AC) Approx. 1.4W (DC) (3c) Approx. 5.2VA (AC) Approx. 1.6W (DC) (4c) Approx. 7.6VA (AC) Approx. 2.0W (DC)	
• Terminal layout (Bottom View) *: coil terminal (.100 inch grid)				
	mm (inch)			
• Standards	UL, CSA	UL, CSA (With operation indication type is excluded)	UL, CSA	
• Mounting method	  	 		

Note: Meaning of symbol marks: : PC board terminal; : Surface-mounting; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting





Notes:

• Products	Safety Relays			
	SF RELAY Slim type	SF RELAY	SF RELAY Double Contact Type	
• Type of relay				
mm (inch)				
• Features	• Slim type safety relays	• Flat type safety relays	• Flat type safety relays (double contact)	
• Sealed types availability	—	●	●	
• Latching types availability	—	—	—	
• Contact material (Optional material)	Au flashed AgSnO ₂ type	AgSnO ₂ type + Au flashed	AgSnO ₂ type + Au flashed	
• Contact rating chart Maximum (cos φ = 1)	30 A 20 A 15 A 10 A 9 A 5 A 3 A	30 A 20 A 15 A 10 A 9 A 5 A 3 A	30 A 20 A 15 A 10 A 9 A 5 A 3 A	
Minimum (For Reference)				
• Max. switching voltage	30V DC, 250V AC	30V DC, 250V AC	440V AC, 30V DC	
• Contact arrangement	2a2b, 3a1b (4-pole) 4a2b, 5a1b, 3a3b (6-pole)	3a1b	2a2b, 4a4b	
• Life (Min. operation)	Electrical	10 ⁷	10 ⁷	
	Mechanical	10 ⁷	10 ⁷	
• Break-down voltage	Between open contacts	1,500Vrms	2,500Vrms	1,300Vrms
	Between contacts sets	2,500Vrms, 4,000Vrms	2,500Vrms	2,500Vrms
	Between contacts and coil	4,000Vrms	2,500Vrms	2,500Vrms
	Between live parts and ground	—	—	—
• Surge withstand voltage	—	—	—	
• Coil voltage	(DC) 12, 24, 48V	(DC) 5, 12, 24, 48, 60V	(DC) 5, 12, 24, 48, 60V	
• Nominal operating power	360mW (4-pole) 500mW (6-pole)	500mW	500mW	
• Terminal layout (Bottom View) * : coil terminal (.100 inch grid)				
mm (inch)				
• Standards	UL/C-UL, TÜV	UL, CSA, TÜV, SEV	UL, CSA, TÜV, SEV	
• Mounting method				

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

PHOTO MOS RELAYS

Product name		GU SOP								
		1 Form A (4-pin)			1 Form A (6-pin)					
		AC/DC			AC/DC					
Appearance configuration *Standoff height included										
		mm inch								
Part No.		AQY212S	AQY210S	AQY214S	AQV212S	AQV215S	AQV217S	AQV210S	AQV214S	AQV216S
Load voltage	Peak AC	60V	350V	400V	60V	100V	200V	350V	400V	600V
	DC	60V	350V	400V	60V	100V	200V	350V	400V	600V
Output	Continuous load current	1A			0.5A					
	*6-pin type: in case of A connection	0.5A	0.12A	0.1A	0.5A	0.3A	0.16A	0.12A	0.1A	0.04A
Peak load current		1.5A	0.3A	0.24A	1.0A	0.9A	0.48A	0.3A	0.3A	0.12A
Power dissipation		300mW			450mW					
On resistance	Typ.	0.83Ω	17Ω	25Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω
	Max.	2.5Ω	25Ω	35Ω	2.5Ω	4.0Ω	15Ω	35Ω	50Ω	120Ω
Output capacitance (Typ.)		80pF	45pF		80pF	110pF	70pF	45pF		
Off state leakage current (Max.)		1μA			1μA					
LED forward current		50mA			50mA					
LED reverse voltage		5V			5V					
Peak forward current		1A			1A					
Power dissipation		75mW			75mW					
LED operate current	Typ.	0.9mA			0.7mA					
	Max.	3mA			3mA					
LED turn off current	Min.	0.4mA			0.4mA					
	Typ.	0.85mA			0.65mA					
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)			1.25V (1.14V at I _f = 5mA)					
	Max.	1.5V			1.5V					
Turn on time	Typ.	0.65ms	0.23ms	0.21ms	0.65ms	0.60ms	0.25ms	0.25ms		
	Max.	2ms	0.5ms	0.5ms	2ms	2ms	1ms	0.5ms		
Turn off time	Typ.	0.06ms	0.04ms		0.08ms	0.06ms	0.05ms			
	Max.	0.2ms	0.2ms		0.2ms	0.2ms	0.2ms			
Total power dissipation		350mW			500mW					
I/O isolation voltage		1,500V AC			1,500V AC					
Operating temperature		-40°C to +85°C -40°F to +185°F			-40°C to +85°C -40°F to +185°F					
Storage temperature		-40°C to +100°C -40°F to +212°F			-40°C to +100°C -40°F to +212°F					
I/O capacitance	Typ.	—			0.8pF					
	Max.	1.5pF			1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ					
Terminal layout										
• Tolerance: ±0.1 ±0.04 mm inch		TOP VIEW			TOP VIEW					
Standards		UL, C-UL, BSI			UL, C-UL					
Mass (weight) (approx.)		0.084g .003oz			0.125g .004oz					
Packing style		Tube packing, Tape and reel packing								

Notes:

Product name		GU SOP High Capacity		GU SOP High Capacity Voltage-sensitive		GU High Capacity	
		1 Form A (4-pin)		1 Form A (4-pin)		1 Form A (4-pin)	
		AC/DC		AC/DC		AC/DC	
Appearance configuration *Standoff height included							
mm inch							
Part No.		AQY212GS		AQY212G2S		AQY212FG2S	
Load voltage	Peak AC	60V		60V		60V	
	DC	60V		60V		60V	
Continuous load current	1A	1A		1.25A		1.25A	
	0.5A	0.5A		0.5A		0.5A	
Peak load current		3.0A		3.0A		3.0A	
Power dissipation		300mW		300mW		500mW	
On resistance	Typ. Max.	0.34Ω 0.7Ω	0.2Ω 0.5Ω	0.2Ω 0.5Ω		0.34Ω 0.7Ω	
Output capacitance (Typ.)		220pF		150pF		220pF	
Off state leakage current (Max.)		1μA		1μA		1μA	
LED forward current		50mA		Input voltage: 6V		50mA	
LED reverse voltage		5V		Input reverse voltage: 5V		5V	
Peak forward current		1A		—		1A	
Power dissipation		75mW		65mW		75mW	
LED operate current	Typ. Max.	1.1mA 3mA	1mA	Operate voltage: 1.4V 4V		1.1mA 3mA	
LED turn off current	Min. Typ.	0.3mA 1mA	1mA	Turn off voltage: 0.8V 1.4V		0.3mA 1mA	
LED dropout voltage	Typ. Max.	1.32V (1.14V at I _F = 5mA) 1.5V	1.5V	Input current: 8.5mA (V _{IN} = 5V) —		1.25V (1.14V at I _F = 5mA) 1.5V	
Turn on time	Typ. Max.	1.3ms 5ms	1.3ms 5ms	0.7ms 5ms		1.3ms 5ms	
Turn off time	Typ. Max.	0.1ms 0.5ms	0.1ms 0.5ms	0.1ms 0.5ms		0.1ms 0.5ms	
Total power dissipation		350mW		350mW		550mW	
I/O isolation voltage		1,500V AC		500V AC		5,000V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ. Max.	0.8pF 1.5pF	0.8pF	0.8pF 1.5pF		0.8pF 1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout							
• Tolerance: ±0.1 ±.004 mm inch		TOP VIEW		TOP VIEW		BOTTOM VIEW TOP VIEW	
Standards		UL, C-UL, VDE		—		UL, C-UL, VDE	
Mass (weight) (approx.)		0.084g .003oz		0.084g .003oz		0.19g .007oz	
Packing style		Tube packing, Tape and reel packing					

Notes:

PHOTOMOS RELAYS














Product name		GU							
		1 Form A (6-pin)							
Appearance configuration *Standoff height included		AC/DC							
Part No.		AQV212	AQV215	AQV217	AQV210	AQV214	AQV216	AQV214H	
Load voltage	Peak AC	60V	100V	200V	350V	400V	600V	400V	
	DC	60V	100V	200V	350V	400V	600V	400V	
Output	Continuous load current *6-pin type: in case of A connection								
	Peak load current	1.2A	0.96A	0.54A	0.4A	0.3A	0.15A	0.3A	
	Power dissipation	500mW							
	On resistance *6-pin type: in case of A connection	Typ. Max.	0.83Ω 2.5Ω	2.3Ω 4Ω	11Ω 15Ω	23Ω 35Ω	30Ω 50Ω	70Ω 120Ω	30Ω 50Ω
	Output capacitance (Typ.)	80pF		110pF	70pF	45pF			
	Off state leakage current (Max.)	1μA							
	LED forward current	50mA							
	LED reverse voltage	5V							
	Peak forward current	1A							
	Power dissipation	75mW							
Input	LED operate current	Typ. Max.	1mA 3mA				1.3mA 3mA		
	LED turn off current	Min. Typ.	0.4mA 0.79mA				0.4mA 1.2mA		
	LED dropout voltage	Typ. Max.	1.25V (1.14V at I _r = 5mA) 1.5V						
	Turn on time	Typ. Max.	0.65ms 2ms	0.60ms 2ms	0.25ms 1ms	0.25ms 0.5ms	0.21ms 0.5ms	0.28ms 0.5ms	0.6ms 0.8ms
Turn off time	Typ. Max.	0.08ms 0.2ms	0.06ms 0.2ms	0.05ms 0.2ms	0.05ms 0.2ms	0.05ms 0.2ms	0.04ms 0.2ms	0.05ms 0.2ms	
Total power dissipation	550mW								
I/O isolation voltage	1,500V AC							5,000V AC	
Operating temperature	-40°C to +85°C -40°F to +185°F								
Storage temperature	-40°C to +100°C -40°F to +212°F								
I/O capacitance	Typ. Max.	0.8pF 1.5pF							
Initial I/O isolation resistance (Min.)	1,000MΩ								
Terminal layout	Through hole terminal			Surface mount terminal					
• Tolerance: ±0.1 ±.004 mm inch									
Standards	UL, C-UL							UL, C-UL, BSI	
Mass (weight) (approx.)	0.453g .016oz								
Packing style	Tube packing, Tape and reel packing								

Notes:

Product name		GU SOP				GU					
		2 Form A				2 Form A					
		AC/DC				AC/DC					
Appearance configuration *Standoff height included											
		mm		inch		mm		inch			
Part No.		AQW212S	AQW210S	AQW214S	AQW212	AQW215	AQW217	AQW210	AQW214	AQW216	
Load voltage	Peak AC	60V	350V	400V	60V	100V	200V	350V	400V	600V	
	DC	60V	350V	400V	60V	100V	200V	350V	400V	600V	
Output	Continuous load current	1A									
		0.5A									
	Peak load current	1.5A	0.3A	0.24A	1.0A	0.9A	0.48A	0.36A	0.3A	0.12A	
	Power dissipation	600mW				800mW					
On resistance	Typ.	0.83Ω	16Ω	30Ω	0.83Ω	2.3Ω	11Ω	23Ω	30Ω	70Ω	
	Max.	2.5Ω	35Ω	50Ω	2.5Ω	4Ω	15Ω	35Ω	50Ω	120Ω	
Output capacitance (Typ.)		80pF	45pF		80pF	110pF	70pF	45pF			
Off state leakage current (Max.)		1μA				1μA					
LED forward current		50mA				50mA					
LED reverse voltage		5V				5V					
Peak forward current		1A				1A					
Power dissipation		75mW				75mW					
Input	LED operate current	Typ.	0.9mA		0.9mA			1mA	0.9mA		
		Max.	3mA		3mA			3mA	3mA		
	LED turn off current	Min.	0.4mA		0.4mA			0.4mA	0.4mA		
		Typ.	0.8mA		0.8mA			0.79mA	0.8mA		
LED dropout voltage	Typ.	1.25V (1.14V at Ir = 5mA)				1.25V (1.14V at Ir = 5mA)					
	Max.	1.5V				1.5V					
Turn on time	Typ.	0.65ms	0.23ms	0.21ms	0.65ms	0.60ms	0.25ms	0.25ms	0.31ms	0.28ms	
	Max.	2ms	0.5ms	0.5ms	2ms	2ms	1.0ms	0.5ms	0.5ms	0.5ms	
Turn off time	Typ.	0.08ms	0.04ms		0.08ms	0.06ms	0.05ms		0.04ms		
	Max.	0.2ms	0.2ms		0.2ms	0.2ms	0.2ms		0.2ms		
Total power dissipation		650mW				850mW					
I/O isolation voltage		1,500V AC				1,500V AC					
Operating temperature		-40°C to +85°C -40°F to +185°F				-40°C to +85°C -40°F to +185°F					
Storage temperature		-40°C to +100°C -40°F to +212°F				-40°C to +100°C -40°F to +212°F					
I/O capacitance	Typ.	0.8pF				0.8pF					
	Max.	1.5pF				1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ					
Terminal layout											
		TOP VIEW				BOTTOM VIEW				TOP VIEW	
		• Tolerance: ±0.1 ±.004 mm inch									
Standards		UL, C-UL, BSI				UL, C-UL					
Mass (weight) (approx.)		0.195g .007oz				0.5g .017oz					
Packing style		Tube packing, Tape and reel packing									

Notes:

PHOTOMOS RELAYS

Product name		GU SOP						GU			
		1 Form B (4-pin)			1 Form B (6-pin)			1 Form B (6-pin)			
		AC/DC			AC/DC			AC/DC			
Appearance configuration *Standoff height included								 			
mm inch											
Part No.		AQY412S		AQY410S		AQY414S		AQV414S		AQV414	
Load voltage	Peak AC	60V		350V		400V		400V		400V	
	DC	60V		350V		400V		400V		400V	
Continuous load current	1A										
	0.5A										
Peak load current		1.5A		0.3A		0.24A		0.3A		0.3A	
Power dissipation		300mW		300mW		450mW		450mW		500mW	
On resistance *6-pin type: in case of A connection	Typ.	1Ω		18Ω		26Ω		26Ω		26Ω	
	Max.	2.5Ω		25Ω		35Ω		50Ω		50Ω	
Output capacitance (Typ.)		500pF		110pF		100pF		100pF		100pF	
Off state leakage current (Max.)		1μA		1μA		1μA		1μA		1μA	
LED forward current		50mA		50mA		50mA		50mA		50mA	
LED reverse voltage		5V		5V		5V		5V		5V	
Peak forward current		1A		1A		1A		1A		1A	
Power dissipation		75mW		75mW		75mW		75mW		75mW	
LED operate (OFF) current	Typ.	0.9mA		0.6mA		0.6mA		0.6mA		1mA	
	Max.	3mA		3mA		3mA		3mA		3mA	
LED reverse (ON) current	Min.	0.4mA		0.4mA		0.4mA		0.4mA		0.4mA	
	Typ.	0.85mA		0.85mA		0.55mA		0.55mA		0.95mA	
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)	
	Max.	1.5V		1.5V		1.5V		1.5V		1.5V	
Operate (OFF) time	Typ.	0.9ms		0.52ms		0.47ms		0.47ms		0.47ms	
	Max.	3ms		1ms		1ms		1ms		1ms	
Reverse (ON) time	Typ.	0.21ms		0.23ms		0.28ms		0.28ms		0.28ms	
	Max.	1ms		1ms		1ms		1ms		1ms	
Total power dissipation		350mW		350mW		500mW		500mW		550mW	
I/O isolation voltage		1,500V AC		1,500V AC		1,500V AC		1,500V AC		1,500V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF		0.8pF		0.8pF	
	Max.	1.5pF		1.5pF		1.5pF		1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout											
	• Tolerance: ±0.1 ±0.04 mm inch	TOP VIEW			TOP VIEW			BOTTOM VIEW		TOP VIEW	
Standards		UL, C-UL, VDE		UL, C-UL, BSI		UL, C-UL		UL, C-UL		UL, C-UL	
Mass (weight) (approx.)		0.084g .003oz		0.084g .003oz		0.125g .004oz		0.125g .004oz		0.453g .016oz	
Packing style		Tube packing, Tape and reel packing									

Notes:







Product name		GU SOP		GU		GU SOP	
		2 Form B		2 Form B		Form A & B combination	
		AC/DC		AC/DC		AC/DC	
Appearance configuration *Standoff height included mm inch							
Part No.		AQW414S		AQW414		AQW612S	
Load voltage	Peak AC	400V		400V		60V	
	DC	400V		400V		60V	
Continuous load current	1A						
	0.5A					0.45A	
Peak load current		0.24A		0.3A		1.5A	
Power dissipation		600mW		800mW		600mW	
On resistance	Typ. Max.	26Ω 50Ω		26Ω 50Ω		1Ω 2.5Ω	
Output capacitance (Typ.)		100pF		100pF		80pF (N.O.) 500pF(N.C.) 45pF (N.O.) 100pF (N.C.)	
Off state leakage current (Max.)		1μA		1μA		1μA	
LED forward current		50mA		50mA		50mA	
LED reverse voltage		5V		5V		5V	
Peak forward current		1A		1A		1A	
Power dissipation		75mW		75mW		75mW	
LED operate current	Typ. Max.	0.9mA 3mA		0.9mA 3mA		0.9mA 3mA	
LED reverse current	Min. Typ.	0.4mA 0.8mA		0.4mA 0.64mA		0.4mA 0.8mA	
LED dropout voltage	Typ. Max.	1.25V (1.14V at I _f = 5mA) 1.5V		1.25V (1.14V at I _f = 5mA) 1.5V		1.25V (1.14V at I _f = 5mA) 1.5V	
Operate time	Typ. Max.	0.43ms 1ms		0.46ms 1ms		0.65ms (N.O.) 0.9ms (N.C.) 0.28ms (N.O.) 0.52ms (N.C.) 3ms 1ms	
Reverse time	Typ. Max.	0.3ms 1ms		0.40ms 1ms		0.08ms (N.O.) 0.2ms (N.C.) 0.04ms (N.O.) 0.23ms (N.C.) 1ms 1ms	
Total power dissipation		650mW		850mW		650mW	
I/O isolation voltage		1,500V AC		1,500V AC		1,500V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ. Max.	0.8pF 1.5pF		0.8pF 1.5pF		0.8pF 1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout							
		• Tolerance: ±0.1 ±.004 mm inch					
Standards		UL, C-UL, BSI		UL, C-UL		UL, C-UL, VDE UL, C-UL, BSI	
Mass (weight) (approx.)		0.195g .007oz		0.5g .017oz		0.195g .007oz	
Packing style		Tube packing, Tape and reel packing					

Notes:

PHOTOMOS RELAYS

Product name		GU		GU SOP Short Circuit Protection (Latch type)		GU Short Circuit Protection (Non-latch type)	
		Form A & B combination		1 Form A (4-pin)		1 Form A (6-pin)	
		AC/DC		AC/DC		DC	
Appearance configuration *Standoff height included							
mm inch							
Part No.		AQW614		AQY210KS		AQV112KL	
Load voltage	Peak AC	400V		350V		—	
	DC	400V		350V		60V	
Continuous load current	1A						
	0.5A					0.5A	
Peak load current		0.3A		0.2A (Cut off current [typ.])		—	
Power dissipation		800mW		300mW		550mW	
On resistance	Typ.	27Ω		23.5Ω		0.55Ω	
	Max.	50Ω		35Ω		2Ω	
Output capacitance (Typ.)		45pF (N.O.) 100pF (N.C.)		42pF		300pF	
Off state leakage current (Max.)		1μA		1μA		1μA	
LED forward current		50mA		50mA		50mA	
LED reverse voltage		5V		5V		5V	
Peak forward current		1A		1A		1A	
Power dissipation		75mW		75mW		75mW	
LED operate current	Typ.	0.9mA		1.1mA		0.8mA	
	Max.	3mA		3mA		10mA	
LED turn off current	Min.	0.4mA		0.3mA		0.3mA	
	Typ.	0.8mA		1mA		0.7mA	
LED dropout voltage	Typ.	1.25V (1.14V at I _F = 5mA)		1.13V (1.32V at I _F = 50mA)		1.17V (1.35V at I _F = 5mA)	
	Max.	1.5V		1.5V		1.5V	
Turn on time		Typ. 0.28ms (N.O.) 0.43ms (N.C.) Max. 1ms		Typ. 0.7ms Max. 2.0ms		Typ. 2.0ms Max. 5.0ms	
Turn off time		Typ. 0.04ms (N.O.) 0.3ms (N.C.) Max. 1ms		Typ. 0.07ms Max. 1ms		Typ. 0.1ms Max. 1ms	
Total power dissipation		850mW		350mW		550mW	
I/O isolation voltage		1,500V AC		1,500V AC		1,500VAC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF	
	Max.	1.5pF		1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout							
• Tolerance: ±0.1 ±0.04 mm inch		BOTTOM VIEW TOP VIEW		TOP VIEW		BOTTOM VIEW TOP VIEW	
Standards		UL, C-UL		UL, C-UL, BSI		UL, C-UL, VDE	
Mass (weight) (approx.)		0.5g .017oz		0.087g .003oz		0.453g .016oz	
Packing style		Tube packing, Tape and reel packing					

Notes:

Product name		GU GOP Current Limiting		GU Current Limiting			
		1 Form A (4-pin)		1 Form A (4-pin)		2 Form A	
		AC/DC		AC/DC		AC/DC	
Appearance configuration *Standoff height included mm inch							
Part No.		AQY210LS		AQY210HL		AQW210HL	
Load voltage	Peak AC	350V		350V		350V	
	DC	350V		350V		350V	
Continuous load current	1A						
	0.5A						
Peak load current		0.18A (Output Limit Current [typ.])		0.18A (Output Limit Current [typ.])		0.18A (Output Limit Current [typ.])	
Power dissipation		300mW		500mW		800mW	
On resistance	Typ.	20Ω		20Ω		20Ω	
	Max.	25Ω		25Ω		25Ω	
Output capacitance (Typ.)		45pF		45pF		45pF	
Off state leakage current (Max.)		1μA		1μA		1μA	
LED forward current		50mA		50mA		50mA	
LED reverse voltage		5V		5V		5V	
Peak forward current		1A		1A		1A	
Power dissipation		75mW		75mW		75mW	
LED operate current	Typ.	1.2mA		1.2mA		1.2mA	
	Max.	3mA		3mA		3mA	
LED turn off current	Min.	0.4mA		0.4mA		0.4mA	
	Typ.	1.1mA		1.1mA		1.1mA	
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)	
	Max.	1.5V		1.5V		1.5V	
Turn on time	Typ.	0.5ms		0.5ms		0.5ms	
	Max.	2ms		2ms		2ms	
Turn off time	Typ.	0.08ms		0.08ms		0.08ms	
	Max.	1ms		1ms		1ms	
Total power dissipation		350mW		550mW		850mW	
I/O isolation voltage		1,500V AC		5,000V AC		5,000V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF	
	Max.	1.5pF		1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout		 <p>• Tolerance: ±0.1 ±.004 mm inch</p> <p>TOP VIEW</p>		 <p>Through hole terminal Surface mount terminal</p> <p>BOTTOM VIEW TOP VIEW</p>		 <p>Through hole terminal Surface mount terminal</p> <p>BOTTOM VIEW TOP VIEW</p>	
Standards		UL, C-UL, BSI		UL, C-UL, BSI		UL, C-UL, BSI	
Mass (weight) (approx.)		0.084g .003oz		0.19g .007oz		0.4g .014oz	
Packing style		Tube packing, Tape and reel packing					

Notes:

PHOTOMOS RELAYS

Product name		GU-E				
		1 Form A (4-pin)				
		AC/DC				
Appearance configuration *Standoff height included						
		mm inch				
Part No.		AQY211EH	AQY212EH	AQY210EH	AQY214EH	AQY216EH
Load voltage	Peak AC	30V	60V	350V	400V	600V
	DC	30V	60V	350V	400V	600V
Output	Continuous load current	1A	0.55A	0.13A	0.12A	0.05A
		0.5A				
	Peak load current	3A	1.5A	0.4A	0.3A	0.15A
	Power dissipation	500mW				
	On resistance	Typ. Max.	0.25Ω 0.5Ω	0.85Ω 2.5Ω	18Ω 25Ω	26Ω 35Ω
Output capacitance (Typ.)		240pF	80pF	45pF		35pF
Off state leakage current (Max.)		1μA				
LED forward current		50mA				
LED reverse voltage		5V				
Peak forward current		1A				
Power dissipation		75mW				
Input	LED operate current	Typ. Max.	1.2mA 3mA			
	LED turn off current	Min. Typ.	0.4mA 1.1mA			
	LED dropout voltage	Typ. Max.	1.25V (1.14V at I _F = 5mA) 1.5V			
Turn on time	Typ.	1.5ms	1ms	0.5ms		
	Max.	5ms	4ms	2ms		
Turn off time	Typ.	0.1ms	0.05ms	0.08ms		0.04ms
	Max.	1ms	1ms	1ms		1ms
Total power dissipation		550mW				
I/O isolation voltage		5,000V AC				
Operating temperature		-40°C to +85°C -40°F to +185°F				
Storage temperature		-40°C to +100°C -40°F to +212°F				
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Terminal layout		Through hole terminal		Surface mount terminal		
		BOTTOM VIEW		TOP VIEW		
*Tolerance: ±0.1 ±0.04	mm inch					
Standards		UL, C-UL		UL, C-UL, BSI		
Mass (weight) (approx.)		0.19g .007oz				
Packing style		Tube packing, Tape and reel packing				

Notes:

Product name		GU-E				
		1 Form A (6-pin) AC/DC				
Appearance configuration *Standoff height included mm inch						
		Part No.				
Load voltage	Peak AC	AQV210E 350V	AQV214E 400V	AQV210EH 350V	AQV214EH 400V	
	DC	350V	400V	350V	400V	
Output	Continuous load current *6-pin type: in case of A connection		1A 0.5A			
	Peak load current		0.13A 0.4A	0.12A 0.3A	0.13A 0.4A	0.12A 0.3A
	Power dissipation		500mW			
	On resistance *5-pin type: in case of A connection	Typ.	23Ω	30Ω	23Ω	30Ω
		Max.	35Ω	50Ω	35Ω	50Ω
	Output capacitance (Typ.)		45pF			
	Off state leakage current (Max.)		1μA			
	LED forward current		50mA			
	LED reverse voltage		5V			
	Peak forward current		1A			
Input	Power dissipation		75mW			
	LED operate current	Typ.	1.1mA		1.6mA	
		Max.	3mA		3mA	
	LED turn off current	Min.	0.3mA		0.4mA	
Typ.		1mA		1.5mA		
LED dropout voltage		1.25V (1.14V at I _f = 5mA) 1.5V				
Turn on time	Typ.	0.5ms		0.7ms		
	Max.	2ms		2ms		
Turn off time	Typ.	0.05ms				
	Max.	1ms				
Total power dissipation		550mW				
I/O isolation voltage		1,500V AC		5,000V AC		
Operating temperature		-40°C to +85°C -40°F to +185°F				
Storage temperature		-40°C to +100°C -40°F to +212°F				
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Terminal layout • Tolerance: ±0.1 ±.004 mm inch		Through hole terminal		Surface mount terminal		
		 BOTTOM VIEW		 TOP VIEW		
Standards		UL, C-UL		UL, C-UL, BSI		
Mass (weight) (approx.)		0.453g .016oz				
Packing style		Tube packing, Tape and reel packing				

Notes:

PHOTOMOS RELAYS

Product name		GU-E				
		2 Form A				
		AC/DC				
Appearance configuration *Standoff height included						
						mm
Part No.		AQW212EH	AQW210EH	AQW214EH	AQW216EH	
Load voltage	Peak AC	60V	350V	400V	600V	
	DC	60V	350V	400V	600V	
Output	Continuous load current	1A				
		0.5A	0.5A	0.12A	0.1A	0.04A
	Peak load current	1.5A	0.36A	0.3A	0.12A	
	Power dissipation	800mW				
	On resistance	Typ.	0.83Ω	18Ω	26Ω	52Ω
		Max.	2.5Ω	25Ω	35Ω	120Ω
Output capacitance (Typ.)		80pF		45pF	35pF	
Off state leakage current (Max.)		1μA				
LED forward current		50mA				
LED reverse voltage		5V				
Peak forward current		1A				
Power dissipation		75mW				
Input	LED operate current	Typ.	1.2mA			
		Max.	3mA			
	LED turn off current	Min. Typ.	0.4mA 1.1mA			
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)				
	Max.	1.5V				
Turn on time	Typ.	1.0ms		0.5ms		
	Max.	4.0ms		2ms		
Turn off time	Typ.		0.08ms		0.04ms	
	Max.		1ms		1ms	
Total power dissipation		850mW				
I/O isolation voltage		5,000V AC				
Operating temperature		-40°C to +85°C -40°F to +185°F				
Storage temperature		-40°C to +100°C -40°F to +212°F				
I/O capacitance	Typ.	0.8pF				
	Max.	1.5pF				
Initial I/O isolation resistance (Min.)		1,000MΩ				
Terminal layout						
		BOTTOM VIEW		TOP VIEW		
• Tolerance: ±0.1 ±.004 mm inch						
Standards		UL, C-UL, BSJ				
Mass (weight) (approx.)		0.4g .014oz				
Packing style		Tube packing, Tape and reel packing				

Notes:

Product name		GU-E							
		1 Form B (4-pin)				1 Form B (6-pin)			
		AC/DC				AC/DC			
Appearance configuration *Standoff height included									
		mm		inch		mm		inch	
Part No.		AQY412EH	AQY410EH	AQY414EH	AQV414E	AQV412EH	AQV410EH	AQV414EH	
Load voltage	Peak AC	60V	350V	400V	400V	60V	350V	400V	
	DC	60V	350V	400V	400V	60V	350V	400V	
Output	Continuous load current *6-pin type: in case of A connection	1A							
		0.5A							
Peak load current		1.5A	0.4A	0.3A	0.3A	1.5A	0.4A	0.3A	
Power dissipation		500mW				500mW			
On resistance *5-pin type: in case of A connection	Typ.	1Ω	18Ω	26Ω	26Ω	1Ω	18Ω	25.2Ω	
	Max.	2.5Ω	25Ω	35Ω	50Ω	2.5Ω	35Ω	50Ω	
Output capacitance (Typ.)		500pF	110pF	100pF	100pF	500pF	110pF	100pF	
Off state leakage current (Max.)		10μA			1μA	10μA			
LED forward current		50mA				50mA			
LED reverse voltage		5V				5V			
Peak forward current		1A				1A			
Power dissipation		75mW				75mW			
LED operate (OFF) current	Typ.	1.4mA			1.45mA	1.9mA			
	Max.	3mA			3mA	3mA			
LED reverse (ON) current	Min.	0.4mA			0.3mA	0.4mA			
	Typ.	1.3mA			1.4mA	1.8mA			
LED dropout voltage	Typ.	1.25V (1.14V at I _F = 5mA)				1.25V (1.14V at I _F = 5mA)			
	Max.	1.5V				1.5V			
Operate (OFF) time		Typ. 3ms Max. 10ms	Typ. 1ms Max. 3ms	Typ. 0.8ms Max. 3ms	Typ. 0.7ms Max. 2ms	Typ. 3ms Max. 8ms	Typ. 1.5ms Max. 3ms	Typ. 1.3ms Max. 3ms	
Reverse (ON) time		Typ. 0.2ms Max. 1ms	Typ. 0.3ms Max. 1ms	Typ. 0.2ms Max. 1ms	Typ. 0.1ms Max. 1ms	Typ. 0.3ms Max. 1.5ms			
Total power dissipation		550mW				550mW			
I/O isolation voltage		5,000V AC				1,500V AC	5,000V AC		
Operating temperature		-40°C to +85°C -40°F to +185°F				-40°C to +85°C -40°F to +185°F			
Storage temperature		-40°C to +100°C -40°F to +212°F				-40°C to +100°C -40°F to +212°F			
I/O capacitance	Typ.	0.8pF				0.8pF			
	Max.	1.5pF				1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ				1,000MΩ			
Terminal layout	Through hole terminal		Surface mount terminal		Through hole terminal		Surface mount terminal		
• Tolerance: ±0.1 ±0.04 mm inch		BOTTOM VIEW		TOP VIEW		BOTTOM VIEW		TOP VIEW	
Standards		UL, C-UL, VDE		UL, C-UL, BSI		UL, C-UL	UL, C-UL, VDE	UL, C-UL, BSI	
Mass (weight) (approx.)		0.19g .007oz				0.453g .016oz			
Packing style		Tube packing, Tape and reel packing							

Notes:

PHOTOMOS RELAYS

Product name		GU-E					
		2 Form B		Form A & B combination			
		AC/DC		AC/DC			
Appearance configuration *Standoff height included							
mm inch							
Part No.		AQW414EH		AQW612EH	AQW610EH	AQW614EH	
Load voltage	Peak AC	400V		60V	350V	400V	
	DC	400V		60V	350V	400V	
Continuous load current	1A						
	0.5A			0.5A			
Peak load current		0.1A		1.5A	0.12A	0.1A	
Power dissipation		800mW			800mW		
On resistance	Typ.	26Ω		1Ω	18Ω	26Ω	
	Max.	35Ω		2.5Ω	25Ω	35Ω	
Output capacitance (Typ.)		100pF		80pF (N.O.), 500pF (N.C.)	45pF (N.O.), 100pF (N.C.)		
Off state leakage current (Max.)		10μA		1μA (N.O.), 10μA (N.C.)			
LED forward current		50mA		50mA			
LED reverse voltage		5V		5V			
Peak forward current		1A		1A			
Power dissipation		75mW		75mW			
LED operate current	Typ.	1.3mA		1.4mA			
	Max.	3mA		3mA			
LED reverse current	Min.	0.4mA		0.4mA			
	Typ.	1.2mA		1.3mA			
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)			
	Max.	1.5V		1.5V			
Operate time	Typ.	0.8ms		1ms (N.O.), 3ms (N.C.)	0.5ms (N.O.), 1ms (N.C.)	0.5ms (N.O.), 0.8ms (N.C.)	
	Max.	3ms		4ms (N.O.), 10ms (N.C.)	3ms	3ms	
Reverse time	Typ.	0.2ms		0.05ms (N.O.), 0.2ms (N.C.)	0.08ms (N.O.), 0.3ms (N.C.)	0.08ms (N.O.), 0.2ms (N.C.)	
	Max.	1ms		1ms	1ms	1ms	
Total power dissipation		850mW		850mW			
I/O isolation voltage		5,000V AC		5,000V AC			
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F			
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F			
I/O capacitance	Typ.	0.8pF		0.8pF			
	Max.	1.5pF		1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ			
Terminal layout							
		BOTTOM VIEW	TOP VIEW	BOTTOM VIEW	TOP VIEW	TOP VIEW	
• Tolerance: ±0.1 ±.004 mm inch							
Standards		UL, C-UL, BSI		UL, C-UL, VDE	UL, C-UL, BSI		
Mass (weight) (approx.)		0.5g .018oz		0.5g .018oz			
Packing style		Tube packing, Tape and reel packing					

Notes:







Product name		RF		RF SON CxR5	RF SSOP CxR5	RF SON CxR10	
		1 Form A (6-pin)		1 Form A	1 Form A	1 Form A	
		AC/DC		AC/DC	AC/DC	AC/DC	
Appearance configuration *Standoff height included							
mm inch							
Part No.		AQV221	AQV225	AQV221N3M	AQV221N3V	AQV221R2M	AQV221N2M
Load voltage	Peak AC	40V	80V	25V	25V	40V	40V
	DC	40V	80V	25V	25V	40V	40V
Continuous load current *6-pin type: in case of A connection	1A						
	0.5A						
Peak load current		0.18A	0.15A	—	0.4A	0.25A	0.12A
Power dissipation		230mW		250mW	250mW	250mW	
On resistance *6-pin type: in case of A connection	Typ.	22Ω	36Ω	5.5Ω	5.5Ω	0.8Ω	9.5Ω
	Max.	35Ω	50Ω	7.5Ω	7.5Ω	1.25Ω	12.5Ω
Output capacitance (Typ.)		5.6pF	4.8pF	1.1pF	1pF	14pF	1.1pF
Off state leakage current (Max.)		10nA		10nA	10nA	10nA	10nA
LED forward current		50mA		50mA	50mA	50mA	
LED reverse voltage		5V		5V	5V	5V	
Peak forward current		1A		1A	1A	1A	
Power dissipation		75mW		75mW	75mW	75mW	
LED operate current	Typ.	0.9mA	3mA	1mA	3mA	0.8mA	1mA
	Max.	3mA	3mA	3mA	3mA	3mA	3mA
LED turn off current	Min.	0.4mA	0.85mA	0.2mA	0.2mA	0.2mA	0.2mA
	Typ.	0.85mA	0.85mA	0.9mA	0.9mA	0.9mA	0.9mA
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.35V (1.14V at I _f = 5mA)	1.35V (1.14V at I _f = 5mA)	1.35V (1.14V at I _f = 5mA)	
	Max.	1.5V		1.5V	1.5V	1.5V	
Turn on time	Typ.	0.1ms	0.3ms	0.02ms	0.02ms	0.2ms	0.02ms
	Max.	0.3ms	0.3ms	0.2ms	0.2ms	0.5ms	0.2ms
Turn off time	Typ.	0.03ms	0.1ms	0.02ms	0.02ms	0.04ms	0.02ms
	Max.	0.1ms	0.1ms	0.2ms	0.2ms	0.2ms	0.2ms
Total power dissipation		280mW		300mW	300mW	300mW	
I/O isolation voltage		1,500V AC		200V AC	1,500VAC	200V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	-40°C to +85°C -40°F to +185°F	-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF	1.5pF	0.8pF	0.8pF	0.8pF	0.8pF
	Max.	1.5pF	1.5pF	1.5pF	1.5pF	1.5pF	1.5pF
Initial I/O isolation resistance (Min.)		1,000MΩ		—	1,000MΩ	—	
Terminal layout	Through hole terminal						
	Surface mount terminal						
• Tolerance: ±0.1 ±.004 mm inch		BOTTOM VIEW				TOP VIEW	
Standards		UL, C-UL		—	—	—	
Mass (weight) (approx.)		0.453g .016oz		0.024g .001oz	0.064g .002oz	0.024g .001oz	
Packing style		Tube packing, Tape and reel packing		Tape and reel packing			

Notes:

PHOTO MOS RELAYS

Product name		RF SSOP CxR10			RF SSOP CxR10 Voltage-sensitive	
		1 Form A			1 Form A	
		AC/DC			AC/DC	
Appearance configuration *Standoff height included						
Part No.		AQY221R2V	AQY221R4V	AQY221N2V	AQY221FR2V	AQY221FN2V
Load voltage	Peak AC	40V	40V	40V	40V	40V
	DC	40V	40V	40V	40V	40V
Continuous load current	1A					
	0.5A					
Peak load current		0.75A	1A	0.3A	0.75A	0.2A
Power dissipation		250mW			250mW	
On resistance	Typ.	0.75Ω	0.55Ω	9.5 Ω	0.75Ω	9.5Ω
	Max.	1.25Ω	1Ω	12.5Ω	1.25Ω	12.5Ω
Output capacitance (Typ.)		12.5pF	24pF	1pF	12.5pF	1pF
Off state leakage current (Max.)		10nA			10nA	
LED forward current		50mA			Input voltage: 6V	
LED reverse voltage		5V			Input reverse voltage: 5V	
Peak forward current		1A			—	
Power dissipation		75mW			65mW	
LED operate current	Typ.	0.9mA		1mA	Operate voltage: 1.3V	
	Max.	3mA		3mA	4V	
LED turn off current	Min.	0.1mA		0.2mA	Turn off voltage: 0.8V	
	Typ.	0.8mA		0.9mA	1.3V	
LED dropout voltage		1.35V (1.14V at I _F = 5mA)			Input current (typ.): 8.5mA (V _{IN} = 5V)	
Turn on time	Typ.	0.1ms	0.25ms	0.02ms	0.05ms	0.01ms
	Max.	0.5ms	0.75ms	0.5ms	0.5ms	0.5ms
Turn off time	Typ.	0.08ms		0.02ms	0.06ms	0.03ms
	Max.	0.2ms		0.2ms	0.2ms	0.2ms
Total power dissipation		300mW			300mW	
I/O isolation voltage		1,500VAC			500VAC	
Operating temperature		-40°C to +85°C -40°F to +185°F			-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F			-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF			0.8pF	
	Max.	1.5pF			1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ			1,000MΩ	
Terminal layout						
• Tolerance: ±0.1 ±.004 mm inch						
Standards		—			—	
Mass (weight) (approx.)		0.064g .002oz			0.064g .002oz	
Packing style		Tape and reel packing				

Notes:

Product name		RF SOP C×R10		RF SOP C×R10		RF SOP C×R10 Voltage-sensitive			
		1 Form A (4-pin)		4 Form A		4 Form A			
		AC/DC		AC/DC		AC/DC			
Appearance configuration *Standoff height included mm inch									
		Part No.		Part No.		Part No.			
Output	Load voltage	Peak AC	40V	40V	40V	40V	40V	40V	
		DC	40V	40V	40V	40V	40V	40V	
	Continuous load current	1A							
		0.5A							
	Peak load current	0.25A		0.12A		0.06A		0.16A	
	Power dissipation	300mW		600mW		600mW		600mW	
	On resistance	Typ.	0.8Ω	9.5Ω	9.5Ω	0.8Ω	0.75Ω	9.5Ω	
		Max.	1.25Ω	12.5Ω	12.5Ω	1.25Ω	12.5Ω	12.5Ω	
	Output capacitance (Typ.)	13pF		1pF		13pF		12.5pF	
	Off state leakage current (Max.)	10nA		10nA		10nA		10nA	
	LED forward current	50mA		50mA		Input voltage: 6V			
	LED reverse voltage	5V		5V		Input reverse voltage: 5V			
	Peak forward current	1A		1A		—			
	Power dissipation	75mW		75mW		260mW (65mW per channel)			
	LED operate current	Typ.	0.5mA	0.9mA	0.9mA	0.5mA	Operate voltage: 4V		
Max.		3mA	3mA	3mA	3mA				
LED turn off current	Min.	0.1mA	0.2mA	0.1mA	0.1mA	Turn off voltage: 0.8V			
	Typ.	0.4mA	0.85mA	0.85mA	0.4mA	1.3V			
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		Input current (typ.): 8.5mA (V _{IN} = 5V)			
Turn on time	Typ.	0.1ms	0.03ms	0.03ms	0.15ms	0.07ms	0.02ms		
	Max.	0.5ms	0.5ms	0.2ms	0.5ms	0.5ms	0.5ms		
Turn off time	Typ.	0.06ms	0.03ms	0.03ms	0.06ms	0.07ms	0.02ms		
	Max.	0.2ms	0.2ms	0.2ms	0.2ms	0.2ms	0.2ms		
Total power dissipation	350mW		650mW		650mW				
I/O isolation voltage	500V AC		500V AC		500V AC		500V AC		
Operating temperature	-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F				
Storage temperature	-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F				
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF			
	Max.	1.5pF		1.5pF		1.5pF			
Initial I/O isolation resistance (Min.)	1,000MΩ		1,000MΩ		1,000MΩ				
Terminal layout									
	• Tolerance: ±0.1 ±.004 mm inch		TOP VIEW		TOP VIEW		TOP VIEW		
Standards	—		—		—		—		
Mass (weight) (approx.)	0.084g .003oz		0.195g .007oz		0.195g .007oz				
Packing style	Tube packing, Tape and reel packing								

Notes:

PHOTOMOS RELAYS

Product name		RF SSOP C×R		RF SOP C×R	
		1 Form A		1 Form A (4-pin)	
		AC/DC		AC/DC	
Appearance configuration *Standoff height included					
		mm inch			
Part No.		AQY225R2V	AQY222R1S	AQY225R1S	AQY225R2S
Load voltage	Peak AC	80V	60V	80V	80V
	DC	80V	60V	80V	80V
Output	Continuous load current	1A			
		0.5A			
		0.12A	0.5A	0.35A	0.15A
	Peak load current	0.3A	1A	0.7A	0.45A
	Power dissipation	250mW		300mW	
On resistance	Typ.	10.5Ω	0.8Ω	0.8Ω	10.5Ω
	Max.	15Ω	1.2Ω	1.2Ω	15Ω
Output capacitance (Typ.)		4.5pF	24.5pF	37.5pF	4.5pF
Off state leakage current (Max.)		10nA		10nA	
LED forward current		50mA		50mA	
LED reverse voltage		5V		5V	
Peak forward current		1A		1A	
Power dissipation		75mW		75mW	
Input	LED operate current	Typ.	0.5mA	0.5mA	0.5mA
		Max.	3mA	3mA	3mA
	LED turn off current	Min. Typ.	0.1mA 0.45mA		0.1mA 0.45mA
LED dropout voltage	Typ. Max.	1.32V (1.14V at I _f = 5mA) 1.5V		1.32V (1.14V at I _f = 5mA) 1.5V	
Turn on time	Typ.	0.05ms	0.15ms	0.25ms	0.05ms
	Max.	0.5ms	0.5ms	0.75ms	0.5ms
Turn off time	Typ.	0.05ms	0.06ms	0.08ms	0.05ms
	Max.	0.2ms	0.2ms	0.2ms	0.2ms
Total power dissipation		300mW		350mW	
I/O isolation voltage		1,500V AC		1,500V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF		0.8pF	
	Max.	1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ	
Terminal layout					
		* Tolerance: ±0.1 ±.004 mm inch		TOP VIEW	
Standards		—		—	
Mass (weight) (approx.)		0.064g .002oz		0.084g .003oz	
Packing style		Tape and reel packing		Tube packing, Tape and reel packing	

Notes:

Product name		RF SOP CxR		RF SOP Low on-resistance		RF Low on-resistance	
		2 Form A		1 Form A (6-pin)		1 Form A (6-pin)	
		AC/DC		AC/DC		AC/DC	
Appearance configuration *Standoff height included							
mm inch							
Part No.		AQW223R2S		AQV227NS		AQV224NS	
Load voltage	Peak AC	250V		200V		400V	
	DC	250V		200V		400V	
Continuous load current	1A						
	0.5A						
Peak load current		0.42A		0.15A		0.12A	
Power dissipation		600mW		450mW		360mW	
On resistance	Typ.	11Ω		30Ω		70Ω	
	Max.	15Ω		50Ω		100Ω	
Output capacitance (Typ.)		33pF		10pF		10pF	
Off state leakage current (Max.)		10nA		10nA		10nA	
LED forward current		50mA		50mA		50mA	
LED reverse voltage		5V		5V		5V	
Peak forward current		1A		1A		1A	
Power dissipation		75mW		75mW		75mW	
LED operate current	Typ.	0.5mA		0.7mA		0.9mA	
	Max.	3mA		3mA		3mA	
LED turn off current	Min.	0.1mA		0.4mA		0.4mA	
	Typ.	0.45mA		0.65mA		0.85mA	
LED dropout voltage	Typ.	1.32V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)	
	Max.	1.5V		1.5V		1.5V	
Turn on time		Typ. 0.15ms Max. 0.5ms		0.12ms 0.5ms		0.1ms 0.5ms	
Turn off time		Typ. 0.05ms Max. 0.2ms		0.05ms 0.2ms		0.08ms 0.2ms	
Total power dissipation		650mW		500mW		410mW	
I/O isolation voltage		1,500V AC		1,500V AC		1,500V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF		0.8pF		0.8pF	
	Max.	1.5pF		1.5pF		1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		1,000MΩ	
Terminal layout							
• Tolerance: ±0.1 ±.004 mm inch		TOP VIEW		TOP VIEW		BOTTOM VIEW TOP VIEW	
Standards		—		UL, C-UL		UL, C-UL	
Mass (weight) (approx.)		0.195g .007oz		0.125g .004oz		0.453g .016oz	
Packing style				Tube packing, Tape and reel packing			

Notes:

PHOTOMOS RELAYS







Product name		RF SOP Low on-resistance	RF Low on-resistance		RF SOP CxR
		2 Form A AC/DC	2 Form A AC/DC		4 Form A AC/DC
Appearance configuration *Standoff height included					
mm inch					
Part No.		AQW227NS	AQW227N	AQW224N	AQS225R2S
Load voltage	Peak AC	200V	200V	400V	80V
	DC	200V	200V	400V	80V
Continuous load current	1A				
	0.5A				
Peak load current		0.05A	0.05A	0.04A	0.07A
Power dissipation		600mW	800mW	600mW	600mW
On resistance	Typ.	30Ω	30Ω	70Ω	10.5Ω
	Max.	50Ω	50Ω	100Ω	15Ω
Output capacitance (Typ.)		10pF	10pF	4.5pF	
Off state leakage current (Max.)		10nA	10nA	10nA	
LED forward current		50mA	50mA	50mA	
LED reverse voltage		5V	5V	5V	
Peak forward current		1A	1A	1A	
Power dissipation		75mW	75mW	75mW	
LED operate current	Typ.	0.7mA	0.9mA	0.9mA	
	Max.	3mA	3mA	3mA	
LED turn off current	Min.	0.4mA	0.4mA	0.3mA	
	Typ.	0.65mA	0.8mA	0.85mA	
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)	1.25V (1.14V at I _f = 5mA)	1.25V (1.14V at I _f = 5mA)	
	Max.	1.5V	1.5V	1.5V	
Turn on time	Typ.	0.25ms	0.2ms	0.04ms	
	Max.	0.5ms	0.5ms	0.3ms	
Turn off time	Typ.	0.08ms	0.08ms	0.07ms	
	Max.	0.2ms	0.2ms	0.2ms	
Total power dissipation		650mW	850mW	650mW	
I/O isolation voltage		1,500V AC	1,500V AC	1,500V AC	
Operating temperature		-40°C to +85°C -40°F to +185°F	-40°C to +85°C -40°F to +185°F	-40°C to +85°C -40°F to +185°F	
Storage temperature		-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	
I/O capacitance	Typ.	0.8pF	0.8pF	0.8pF	
	Max.	1.5pF	1.5pF	1.5pF	
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ	1,000MΩ	
Terminal layout					
• Tolerance: ±0.1 ±0.04 mm inch					
Standards		UL, C-UL	UL, C-UL	—	
Mass (weight) (approx.)		0.195g .007oz	0.5g .018oz	0.195g .007oz	
Packing style		Tube packing, Tape and reel packing			

Notes:

Product name		HE											
		1 Form A (6-pin)											
Appearance configuration *Standoff height included		AC/DC											
Part No.		AQV251	AQV252	AQV255	AQV257	AQV253	AQV254	AQV259	AQV258	AQV253H	AQV254H	AQV256H	
Load voltage	Peak AC	40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V	
	DC	40V	60V	100V	200V	250V	400V	1,000V	1,500V	250V	400V	600V	
Continuous load current *6-pin type: in case of A connection	1A												
	0.5A												
Peak load current		1.8A	1.5A	1.0A	0.75A	0.6A	0.5A	0.09A	0.06A	0.6A	0.5A	0.4A	
Power dissipation		360mW											
On resistance *6-pin type: in case of A connection	Typ. Max.	0.6Ω 1Ω	0.74Ω 1.4Ω	1.8Ω 2.5Ω	2.6Ω 4Ω	5.5Ω 8Ω	12.4Ω 16Ω	85Ω 200Ω	345Ω 500Ω	5.5Ω 8Ω	12.4Ω 16Ω	20Ω 30Ω	
Output capacitance (Typ.)		350pF			170pF			80pF		170pF		70pF	
Off state leakage current (Max.)		1μA						10μA		1μA			
LED forward current		50mA											
LED reverse voltage		5V											
Peak forward current		1A											
Power dissipation		75mW											
Input	LED operate current	Typ. Max.	0.9mA 3mA						1.4mA 3mA				
	LED turn off current	Min. Typ.	0.4mA 0.8mA						0.4mA 1.3mA				
	LED dropout voltage	Typ. Max.	1.25V (1.14V at I _f = 5mA) 1.5V										
	Turn on time	Typ. Max.	1.7ms 3ms	1.4ms 3ms	0.9ms 2ms	1.5ms 3ms	0.8ms 2ms	0.6ms 1ms	0.35ms 1ms	2.4ms 4ms	1.8ms 3ms	1.2ms 3ms	
Turn off time	Typ. Max.	0.07ms 0.2ms	0.09ms 0.2ms	0.1ms 0.2ms	0.06ms 0.2ms	0.05ms 0.2ms	0.04ms 0.2ms	0.04ms 0.2ms	0.06ms 0.2ms	0.05ms 0.2ms	0.06ms 0.2ms		
Total power dissipation		410mW											
I/O isolation voltage		1,500V AC						5,000V AC					
Operating temperature		-40°C to +85°C -40°F to +185°F											
Storage temperature		-40°C to +100°C -40°F to +212°F											
I/O capacitance	Typ. Max.	1.3pF 3pF						1.3pF 3pF					
Initial I/O isolation resistance (Min.)		1,000MΩ											
Terminal layout													
Standards		UL, C-UL									UL, C-UL, BSI		—
Mass (weight) (approx.)		0.453g .016oz											
Packing style		Tube packing, Tape and reel packing											

Notes:

PHOTOMOS RELAYS

Product name		HE SOP High Capacity		HE High Capacity		
		1 Form A (6-pin)		1 Form A (6-pin)		
		AC/DC		AC/DC		
Appearance configuration *Standoff height included mm inch						
Part No.		AQV255GS		AQV251G	AQV252G	
Load voltage	Peak AC	80V		30V	60V	
	DC	80V		30V	60V	
Output	Continuous load current *6-pin type: in case of A connection	3A		3.5A		
		2A			2.5A	
1A						
Peak load current		2.5A		6.0A		
Power dissipation		450mW		500mW		
On resistance *6-pin type: in case of A connection	Typ.	0.09Ω		0.035Ω	0.08Ω	
	Max.	0.15Ω		0.08Ω	0.12Ω	
Output capacitance (Typ.)		300pF		330pF	240pF	
Off state leakage current (Max.)		1μA		1μA		
LED forward current		50mA		50mA		
LED reverse voltage		5V		5V		
Peak forward current		1A		1A		
Power dissipation		75mW		75mW		
Input	LED operate current	Typ.	0.5mA		0.55mA	0.5mA
		Max.	3mA		3mA	3mA
	LED turn off current	Min.	0.2mA		0.2mA	
		Typ.	0.4mA		0.45mA	
LED dropout voltage	Typ.	1.32V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)		
	Max.	1.5V		1.5V		
Turn on time	Typ.	1.3ms		1.1ms		
	Max.	5.0ms		5.0ms		
Turn off time	Typ.	0.1ms		0.1ms	0.25ms	
	Max.	0.5ms		0.5ms	0.5ms	
Total power dissipation		500mW		550mW		
I/O isolation voltage		1,500V AC		1,500V AC		
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		
I/O capacitance	Typ.	0.8pF		0.8pF		
	Max.	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		
Terminal layout				Through hole terminal		
						
				Surface mount terminal		
						
• Tolerance: ±0.1 ±0.04 mm inch		TOP VIEW		BOTTOM VIEW	TOP VIEW	
Standards		UL, C-UL, VDE		—	UL, C-UL, VDE	
Mass (weight) (approx.)		0.125g .004oz		0.453g .016oz		
Packing style		Tube packing, Tape and reel packing				

Notes:

Product name		HE				
		2 Form A		1 Form B (6-pin)		
		AC/DC		AC/DC		
Appearance configuration *Standoff height included mm inch						
		Part No.		AQW254	AQV453	AQV454
Output	Load voltage	Peak AC	400V	250V	400V	400V
		DC	400V	250V	400V	400V
	Continuous load current *6-pin type: in case of A connection	1A				
		0.5A				
	Peak load current		0.36A	0.6A	0.5A	0.15A
	Power dissipation		800mW		360mW	
	On resistance *6-pin type: in case of A connection	Typ.	10.2Ω	5.5Ω		11Ω
		Max.	16Ω	8Ω		16Ω
	Output capacitance (Typ.)		170pF	350pF		170pF
	Off state leakage current (Max.)		1μA		1μA	10μA
Input	LED forward current		50mA		50mA	
	LED reverse voltage		5V		5V	
	Peak forward current		1A		1A	
	Power dissipation		75mW		75mW	
	LED operate current [LED operate (OFF) current]	Typ.	0.9mA	1mA	0.9mA	1.4mA
		Max.	3mA	3mA	3mA	3mA
	LED turn off current [LED reverse (ON) current]	Min.	0.4mA	0.4mA	0.4mA	0.4mA
		Typ.	0.8mA	0.9mA	0.8mA	1.3mA
	LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)		1.25V (1.14V at I _f = 5mA)	
		Max.	1.5V		1.5V	
Turn on time [Operate (OFF) time]	Typ.	0.8ms	1.52ms	1.2ms	1.8ms	
	Max.	2ms	3ms	2ms	3ms	
Turn off time [Reverse (ON) time]	Typ.	0.04ms	0.4ms	0.36ms	0.4ms	
	Max.	0.2ms	1ms	1ms	1ms	
Total power dissipation		850mW		410mW		
I/O isolation voltage		1,500V AC		1,500V AC	5,000V AC	
Operating temperature		-40°C to +85°C		-40°C to +85°C		
		-40°F to +185°F		-40°F to +185°F		
Storage temperature		-40°C to +100°C		-40°C to +100°C		
		-40°F to +212°F		-40°F to +212°F		
I/O capacitance	Typ.	0.8pF		1.3pF		
	Max.	1.5pF		3pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		
Terminal layout						
		BOTTOM VIEW	TOP VIEW	BOTTOM VIEW	TOP VIEW	
• Tolerance: ±0.1 ±.004 mm inch						
Standards		UL, C-UL		UL, C-UL, BSI		
Mass (weight) (approx.)		0.5g .018oz		0.453g .016oz		
Packing style		Tube packing, Tape and reel packing				

Notes:

PHOTO MOS RELAYS

Product name		HE	
		2 Form B AC/DC	Form A & B combination AC/DC
Appearance configuration *Standoff height included mm inch			
Part No.		AQW454	AQW654
Load voltage	Peak AC	400V	400V
	DC	400V	400V
Continuous load current	1A		
	0.5A		
Peak load current		0.12A	0.12A
Power dissipation		800mW	800mW
On resistance	Typ.	11Ω	11Ω
	Max.	16Ω	16Ω
Output capacitance (Typ.)		170pF	170pF
Off state leakage current (Max.)		1μA	1 μA
LED forward current		50mA	50mA
LED reverse voltage		5V	5V
Peak forward current		1A	1A
Power dissipation		75mW	75mW
LED operate current	Typ.	0.9mA	0.9mA
	Max.	3mA	3mA
LED reverse current	Min.	0.4mA	0.4mA
	Typ.	0.8mA	0.8mA
LED dropout voltage	Typ.	1.25V (1.14V at I _f = 5mA)	1.25V (1.14V at I _f = 5mA)
	Max.	1.5V	1.5V
Operate time	Typ.	1.2ms	0.8ms (N.O.), 1.2ms (N.C.)
	Max.	2ms	2ms
Reverse time	Typ.	0.36ms	0.04ms (N.O.), 0.36ms (N.C.)
	Max.	1ms	1ms
Total power dissipation		850mW	850mW
I/O isolation voltage		1,500V AC	1,500V AC
Operating temperature		-40°C to +85°C -40°F to +185°F	-40°C to +85°C -40°F to +185°F
Storage temperature		-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F
I/O capacitance	Typ.	0.8pF	0.8pF
	Max.	1.5pF	1.5pF
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ
Terminal layout	Through hole terminal	Surface mount terminal	Through hole terminal
	Surface mount terminal	Through hole terminal	Surface mount terminal
• Tolerance: ±0.1 ±.004 mm inch			
Standards		UL, C-UL	UL, C-UL
Mass (weight) (approx.)		0.5g .018oz	0.5g .018oz
Packing style		Tube packing, Tape and reel packing	

Notes:

Product name		HF								
		DC				1 Form A (6-pin)				
Appearance configuration *Standoff height included										
		mm		inch		mm		inch		
Part No.		AQV101	AQV102	AQV103	AQV104	AQV201	AQV202	AQV203	AQV204	
Load voltage	Peak AC	—				40V	60V	250V	400V	
	DC	40V	60V	250V	400V	40V	60V	250V	400V	
Continuous load current *6-pin type: in case of A connection	1A									
	0.5A									
Peak load current		1.8A	1.5A	0.6A	0.5A	1.8A	1.5A	0.6A	0.5A	
Power dissipation		360mW				360mW				
On resistance *6-pin type: in case of A connection	Typ.	0.3Ω	0.37Ω	2.7Ω	6.3Ω	0.6Ω	0.74Ω	5.5Ω	12.4Ω	
	Max.	0.5Ω	0.7 Ω	4 Ω	8 Ω	1 Ω	1.4Ω	8Ω	16Ω	
Output capacitance (Typ.)		600pF		300pF		350pF		170pF		
Off state leakage current (Max.)		—				1μA				
LED forward current		50mA								
LED reverse voltage		10V								
Peak forward current		1A								
Power dissipation		—				150mW				
Input	LED operate current	2.3mA 5mA				2.4mA 5mA				
	LED turn off current	Min.	—				0.8mA			
		Typ.	—				2.2mA			
LED dropout voltage	Typ.	—				2.3V				
	Max.	—				3V				
Turn on time	Typ.	0.23ms	0.22ms	0.13ms	0.09ms	0.38ms	0.41ms	0.21ms	0.18ms	
	Max.	1ms	1ms	1ms	1ms	1ms	1ms	1ms	1ms	
Turn off time	Typ.	0.07ms	0.07ms	0.07ms	0.08ms	0.08ms	0.08ms	0.07ms	0.07ms	
	Max.	1ms	1ms	1ms	1ms	1ms	1ms	1ms	1ms	
Total power dissipation		410mW								
I/O isolation voltage		1,500V AC								
Operating temperature		-40°C to +85°C -40°F to +185°F								
Storage temperature		-40°C to +100°C -40°F to +212°F								
I/O capacitance	Typ.	1.3pF								
	Max.	3pF								
Initial I/O isolation resistance (Min.)		1,000MΩ								
Terminal layout										
• Tolerance: ±0.1 ±.004 mm inch										
Standards		UL, C-UL								
Mass (weight) (approx.)		0.453g .016oz								
Packing style		Tube packing, Tape and reel packing								

Notes:

PHOTOMOS RELAYS

Product name		HS		HS SOP		
		1 Form A (6-pin)		1 Form A (4-pin)		
		AC/DC		AC/DC		
Appearance configuration *Standoff height included mm inch						
Part No.		AQV234		AQV232S	AQV230S	AQV234S
Load voltage	Peak AC	400V		60V	350V	400V
	DC	400V		60V	350V	400V
Output	Continuous load current *6-pin type: in case of A connection	2A				
		1A				
		0.5A				
	Peak load current	0.12A		0.5A	0.12A	0.1A
Power dissipation		500mW		1.5A	0.3A	0.24A
On resistance *6-pin type: in case of A connection	Typ.	30Ω		0.85Ω	19Ω	27Ω
	Max.	50Ω		2.5Ω	25Ω	35Ω
Output capacitance (Typ.)		45pF		80pF	32pF	35pF
Off state leakage current (Max.)		1μA		1μA		
LED forward current		50mA		50mA		
LED reverse voltage		5V		5V		
Peak forward current		1A		1A		
Power dissipation		75mW		75mW		
Input	LED operate current	Typ.	0.31mA		0.35mA	
		Max.	0.5mA		0.5mA	
	LED turn off current	Min.	0.1mA		0.1mA	
		Typ.	0.29mA		0.3mA	
LED dropout voltage	Typ. Max.	1.25V (1.1V at I _f = 2mA) 1.5V		1.25V (1.1V at I _f = 2mA) 1.5V		
Turn on time	Typ.	0.89ms		1.5ms	1.2ms	0.8ms
	Max.	2ms		5ms	5ms	5ms
Turn off time	Typ.	0.22ms		0.15ms	0.1ms	0.1ms
	Max.	1ms		2ms	2ms	2ms
Total power dissipation		550mW		350mW		
I/O isolation voltage		1,500V AC		1,500V AC		
Operating temperature		-40°C to +85°C -40°F to +185°F		-40°C to +85°C -40°F to +185°F		
Storage temperature		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		
I/O capacitance	Typ.	0.8pF		0.8pF		
	Max.	1.5pF		1.5pF		
Initial I/O isolation resistance (Min.)		1,000MΩ		1,000MΩ		
Terminal layout		Through hole terminal Surface mount terminal 				
• Tolerance: ±0.1 ±.004 mm inch		BOTTOM VIEW TOP VIEW		TOP VIEW		
Standards		UL, C-UL		—		
Mass (weight) (approx.)		0.453g .016oz		0.084g .003oz		
Packing style		Tube packing, Tape and reel packing				

Notes:





Product name		PD			
		1 Form A			
		AC/DC			
Appearance configuration *Standoff height included					
		mm inch			
Part No.		AQY272	AQY275	AQY277	AQY274
Load voltage	Peak AC	60V	100V	200V	400V
	DC	60V	100V	200V	400V
Continuous load current *6-pin type: in case of A connection	2A	2A	1.3A	0.65A	0.35A
	1A				
Peak load current	6A	4A	2A	1A	
	700mW				
On resistance *6-pin type: in case of A connection	Typ.	0.11Ω	0.23Ω	0.7Ω	2.1Ω
	Max.	0.18Ω	0.34Ω	1.1Ω	3.2Ω
Output capacitance (Typ.)		1,400pF		600pF	
Off state leakage current (Max.)		10μA			
LED forward current		50mA			
LED reverse voltage		5V			
Peak forward current		1A			
Power dissipation		75mW			
LED operate current	Typ.	1mA			
	Max.	3mA			
	Min.	0.4mA			
LED turn off current	Typ.	0.9mA			
	Max.	1.5V			
LED dropout voltage	Typ.	1.16V (1.25V at I _F = 50mA)			
	Max.	1.5V			
Turn on time	Typ.	2.46ms	2.4ms	1.12ms	1.65ms
	Max.	5ms	5ms	5ms	5ms
Turn off time	Typ.	0.22ms	0.21ms	0.1ms	0.08ms
	Max.	3ms	3ms	3ms	3ms
Total power dissipation		750mW			
I/O isolation voltage		2,500V AC			
Operating temperature		-40°C to +85°C -40°F to +185°F			
Storage temperature		-40°C to +100°C -40°F to +212°F			
I/O capacitance	Typ.	0.8pF			
	Max.	1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ			
Terminal layout					
	*Tolerance: ±0.1 ±.004 mm inch				
Standards		UL, C-UL			
Mass (weight) (approx.)		0.62g .022oz			
Packing style		Tube packing, Tape and reel packing			

Notes:

PHOTO MOS RELAYS

Product name		Power							
		1 Form A							
		DC				AC/DC			
Appearance configuration *Standoff height included									
Part No.		AQZ102	AQZ105	AQZ107	AQZ104	AQZ202	AQZ205	AQZ207	AQZ204
Load voltage	Peak AC	—				60V	100V	200V	400V
	DC	60V	100V	200V	400V	60V	100V	200V	400V
Continuous load current	3A								
	1A								
Peak load current		9.0A	6.0A	3.0A	1.5A	9.0A	6.0A	3.0A	1.5A
Power dissipation		1.35W				1.6W			
On resistance	Typ.	0.05Ω	0.081Ω	0.34Ω	1.06Ω	0.11Ω	0.23Ω	0.71Ω	2.1Ω
	Max.	0.09Ω	0.17Ω	0.55Ω	1.6Ω	0.18Ω	0.34Ω	1.1Ω	3.2Ω
Output capacitance (Typ.)		1,700pF		900pF		1,400pF		600pF	
Off state leakage current (Max.)						10μA			
LED forward current		50mA							
LED reverse voltage		5V							
Peak forward current		1A							
Power dissipation		75mW							
LED operate current	Typ.	1mA							
	Max.	3mA							
LED turn off current	Min.	0.4mA							
	Typ.	0.9mA							
LED dropout voltage		1.25V (1.16V at I _F = 10mA)							
		1.5V							
Turn on time	Typ.	1.66ms	1.89ms	0.83ms	1.01ms	2.46ms	2.4ms	1.12ms	1.65ms
	Max.	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
Turn off time	Typ.	0.15ms	0.19ms	0.10ms	0.08ms	0.22ms	0.21ms	0.10ms	0.08ms
	Max.	3ms	3ms	3ms	3ms	3ms	3ms	3ms	3ms
Total power dissipation		1.35W				1.6W			
I/O isolation voltage		2,500V AC							
Operating temperature		-40°C to +85°C -40°F to +185°F							
Storage temperature		-40°C to +100°C -40°F to +212°F							
I/O capacitance	Typ.	0.8pF							
	Max.	1.5pF							
Initial I/O isolation resistance (Min.)		1,000MΩ							
Terminal layout									
• Tolerance: ±0.1 ±.004 mm inch									
Standards		UL, C-UL							
Mass (weight) (approx.)		1.65g .058oz							
Packing style		PA relay socket							

Notes:

Product name		Power	Power Voltage-sensitive			
		1 Form B AC/DC	1 Form A DC			
Appearance configuration *Standoff height included mm inch						
Part No.		AQZ404	AQZ102D	AQZ105D	AQZ107D	AQZ104D
Load voltage	Peak AC	400V	—			
	DC	400V	60V	100V	200V	400V
Continuous load current	3A	—				
	1A	0.5A	3.6A	2.3A	1.1A	0.6A
Peak load current		1.5A	9A	6A	3A	1.5A
Power dissipation		1.6W	1.35W			
On resistance	Typ.	2.8Ω	0.033Ω	0.090Ω	0.33Ω	1.23Ω
	Max.	4.0Ω	0.09Ω	0.17Ω	0.55Ω	1.6Ω
Output capacitance (Typ.)		2,000pF	1,700pF		900pF	
Off state leakage current (Max.)		10μA	10μA			
LED forward current		50mA	Input voltage: 30V			
LED reverse voltage		5V	Input reverse voltage: 5V			
Peak forward current		1A	—			
Power dissipation		75mW	300mW			
LED operate current [LED operate (OFF) current]	Typ.	1mA	Operate voltage: 1.4V			
	Max.	3mA	4V			
LED turn off current [LED reverse (ON) current]	Min.	0.4mA	Turn off voltage: 0.8V			
	Typ.	0.9mA	1.3V			
LED dropout voltage	Typ. Max.	1.25V (1.16V at I _f = 10mA) 1.5V	Input current (typ.): 6.5mA			
Turn on time [Operate (OFF) time]	Typ.	3.9ms	3.3ms	2.2ms	1.5ms	1.2ms
	Max.	7.5ms	10ms	10ms	10ms	10ms
Turn off time [Reverse (ON) time]	Typ.	0.8ms	0.2ms		0.1ms	
	Max.	3ms	3ms		3ms	
Total power dissipation		1.6W	1.35W			
I/O isolation voltage		2,500V AC	2,500V AC			
Operating temperature		-40°C to +85°C -40°F to +185°F	-40°C to +85°C (4V _{IN} ≤6V), -40°C to +75°C (6V _{IN} ≤15V), -40°C to +60°C (15V _{IN} ≤30V) -40°F to +185°F (4V _{IN} ≤6V), -40°F to +187°F (6V _{IN} ≤15V), -40°F to +140°F (15V _{IN} ≤30V)			
Storage temperature		-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F			
I/O capacitance	Typ.	0.8pF	0.8pF			
	Max.	1.5pF	1.5pF			
Initial I/O isolation resistance (Min.)		1,000MΩ	1,000MΩ			
Terminal layout						
• Tolerance: ±0.1 ±.004 mm inch						
Standards		UL, C-UL	UL, C-UL			
Mass (weight) (approx.)		1.65g .058oz	1.65g .058oz			
Packing style		PA relay socket	PA relay socket			








Notes:

PHOTOMOS RELAYS

Product name		Power Voltage-sensitive				Power High Capacity	
		1 Form A				1 Form A	
		AC/DC				AC/DC	
Appearance configuration *Standoff height included mm inch							
		Part No.	AQZ202D	AQZ205D	AQZ207D	AQZ204D	AQZ262
Load voltage	Peak AC	60V	100V	200V	400V	60V	400V
	DC	60V	100V	200V	400V	60V	400V
Output	Continuous load current	6A	2.7A	1.8A	0.9A	6A	1A
		1A					
		0.5A					
	Peak load current	9A	6A	3A	1.5A	10A	3A
	Power dissipation	1.6W				3W	
On resistance	Typ. Max.	0.066Ω 0.18Ω	0.180Ω 0.34Ω	0.64Ω 1.1Ω	2.4Ω 3.2Ω	0.036Ω 0.05Ω	1Ω 1.4Ω
Output capacitance (Typ.)	1,400pF		600pF		1,400pF		600pF
Off state leakage current (Max.)	10μA				10μA		
LED forward current	Input voltage: 30V				50mA		
LED reverse voltage	Input reverse voltage: 5V				5V		
Peak forward current	—				1A		
Power dissipation	300mW				75mW		
LED operate current	Typ. Max.	Operate voltage: 1.4V 4V				1mA 3mA	
LED turn off current	Min. Typ.	Turn off voltage: 0.8V 1.3V				0.4mA 0.9mA	
LED dropout voltage	Typ. Max.	Input current (typ.): 6.5mA				1.25V 1.5V	
Turn on time	Typ. Max.	5.8ms 10ms	4.2ms 10ms	2.7ms 10ms	2.3ms 10ms	5ms 10ms	4ms 10ms
	Turn off time	Typ. Max.	0.2ms 3ms	0.1ms 3ms		0.32ms 3ms	0.14ms 3ms
Total power dissipation	1.6W				3W		
I/O isolation voltage	2,500V AC				1,500V AC		
Operating temperature	-40°C to +85°C (4V≤Vh≤6V), -40°C to +75°C (8V≤Vh≤15V), -40°C to +60°C (15V≤Vh≤30V) -40°F to +185°F (4V≤Vh≤6V), -40°F to +167°F (8V≤Vh≤15V), -40°F to +140°F (15V≤Vh≤30V)				-40°C to +85°C -40°F to +185°F		
Storage temperature	-40°C to +100°C -40°F to +212°F				-40°C to +100°C -40°F to +212°F		
I/O capacitance	Typ. Max.	0.8pF 1.5pF		2pF 4pF			
Initial I/O isolation resistance (Min.)	1,000MΩ				1,000MΩ		
Terminal layout							
• Tolerance: ±0.1 ±.004 mm inch							
Standards	UL, C-UL				—		
Mass (weight) (approx.)	1.65g .058oz				10.6g .374oz		
Packing style	PA relay socket				—		

Notes:

PHOTOVOLTAIC MOSFET DRIVER

Product name		Photovoltaic MOSFET driver					
Appearance configuration *Standoff height included mm inch							
		Part No.	APV1122	APV1121S	APV2121S	APV2111V	
Output	Open voltage	Min.	6V		5V		
		Typ.	8.7V		8.2V		
	Short current	Min.	5μA		3μA		
		Typ.	14μA		8μA		
Input	LED forward current		50mA				
	LED reverse voltage		5V				
	Peak forward current		1A				
	Power dissipation		75mA				
	LED operate current	Typ.	0.6mA		0.85mA		
		Max.	3mA				
	LED turn off current	Min.	0.2mA				
		Typ.	0.5mA		0.75mA		
LED dropout voltage	Typ.	1.15V					
	Max.	1.5V					
Turn on time		Typ.	0.4mA		0.8mA		
Turn off time		Typ.	0.1ms				
I/O capacitance	Typ.	0.8pF					
	Max.	1.5pF					
Initial I/O isolation resistance (Min.)		1,000MΩ					
I/O isolation voltage		5,000V AC	2,500V AC	2,500V AC	1,500V AC		
Operating temperature		-40°C to +85°C -40°F to +185°F					
Storage temperature		-40°C to +100°C -40°F to +212°F					
Terminal layout	Through hole terminal  BOTTOM VIEW Surface mount terminal  TOP VIEW		 TOP VIEW		 TOP VIEW		
	• Tolerance: ±0.1 ±.004 mm inch						
Standards		UL, C-UL					
Mass (weight) (approx.)		0.45g	0.08g .003oz		0.06g		

Notes:

AUTOMOTIVE RELAYS

• Products	Double make contact Automotive Relay JJ-M RELAY (AJJM) Double make type	Global Standard Terminal Pitch Automotive Power Relay JS-M RELAY	Compact size Automotive Relay JJ-M RELAY	Miniature, Low Profile Automotive Relay CP RELAY	Power type, Miniature, Low profile Automotive Relay CP RELAY <Power type>
• Type of relay					
mm (inch)					
• Features	<ul style="list-style-type: none"> • Small size • Standard terminal pitch employed • Plastic sealed type • For security 	<ul style="list-style-type: none"> • Designed for automotive applications • Low pick-up voltage for high ambient use 	<ul style="list-style-type: none"> • Compact • Perfect for automobile electrical systems 	<ul style="list-style-type: none"> • Low profile • High capacity • Simple footprint pattern enables ease of PC board layout 	<ul style="list-style-type: none"> • Compact flat type • 35A maximum carrying current • Supports capacitor loads required for power supply applications
• Sealed types availability	●	●	●	●	●
• Latching types availability	—	—	—	—	—
• Contact material (Optional material)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)
• Contact rating chart Maximum (cos φ = 1)	35 A (Lamp load) 30 A 25 A 20 A 15 A 10 A 5 A 17A 14V DC 15A 1 contact	10A 16V DC 15A 16V DC	20A 14V DC 30A 14V DC	20A 14V DC 1c 1c 10A 14V AC 1c 1c	35A 1h (at 20°C, 450mW) Max. carrying current
Minimum (For Reference)	1A 12V DC	Standard 1A 12V DC High capacity	1A 12V DC	1A 12V DC	1A 12V DC
• Max. switching voltage	—	16V DC	14V DC	—	—
• Contact arrangement	Double make contact	1a, 1c	1a, 1c	1a, 1c	1a, 1c
• Life (Min. operation)	Electrical 10 ⁷ (lamp load) Mechanical 10 ⁷	Standard 10 ⁷ High capacity 10 ⁷ (N.O.) > 10 ⁷ (N.C.)	2 × 10 ⁷ (at 14V DC, inrush 25A, steady 5A)	2 × 10 ⁷ (at 14V DC, inrush 25A, steady 5A)	10 ⁷ (Capacitor load)
• Break-down voltage	Between open contacts 500Vrms Between contacts sets — Between contacts and coil 500Vrms Between live parts and ground —	750Vrms 1,500Vrms	500Vrms	500Vrms	500Vrms
• Surge withstand voltage	—	—	—	—	—
• Coil voltage	12V DC	12V DC	12V DC	12V DC	12V DC
• Nominal operating power	1,000mW	640mW	640mW	640mW	450mW 640mW
• Terminal layout (Bottom View) + coil terminal (100 inch grid)		1a 1c	1a 1c	PCB type Surface mount type	
mm (inch)					
• Standards	—	—	—	—	—
• Mounting method					

Note: Meaning of symbol marks: PC board terminal; Plug-in; Top-mounting; Top-mounting with PC board terminals; Surface-mounting

Notes:

✱: Products to be discontinued

















• Products	1 Form C Automotive Silent Relay	Super Miniature Twin Type Automotive Relay	Small & Slim Automotive Relay	Automotive Low Profile Relay	
	CQ RELAY (ACQ)	CJ RELAY (ACJ)	CT RELAY (ACT)	CV RELAY (ACV)	
• Type of relay					
• Features	<ul style="list-style-type: none"> • Silent type • Less space required • Sealed construction • Next-generation standard terminal pitch employed 	<ul style="list-style-type: none"> • Super miniature size • High capacity (25A) in a compact body • Twin (1 Form C x 2) 	<ul style="list-style-type: none"> • Small & Slim size • Twin (1 Form C x 2) • Simple footprint enables ease of PC board layout (8 or 10 terminals) 	<ul style="list-style-type: none"> • Low profile • Low temperature rise • Low sound pressure level 	
• Sealed types availability	●	●	●	●	
• Latching types availability	—	—	—	—	
• Contact material (Optional material)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	
• Contact rating chart Maximum (cos φ = 1)					
Minimum (For Reference)	1A 12V DC	1A 12V DC	1A 12V DC	1A 12V DC	
• Max. switching voltage	—	14V DC (N.O.) 14V DC (N.C.)	—	14V DC (N.O.) 14V DC (N.C.)	
• Contact arrangement	1c	1c, 1c x 2	1c, 1c x 2	1a, 1c	
• Life (Min. operation)	Electrical	3 × 10 ⁷ (at 14V DC, inrush 30A, steady 5A)	2 × 10 ⁷ (at 14V DC, inrush 25A, steady 5A, 10° (Motor lock))	2 × 10 ⁷ (at 14V DC, inrush 25A, steady 5A, 10° (Motor lock))	10 ⁷ (Resistive load)
	Mechanical	10 ⁷	10 ⁷ (Operating frequency: 120 cpm)	10 ⁷	10 ⁷ (Operating frequency: 120 cpm)
• Break-down voltage	Between open contacts	500Vrms	500Vrms	500Vrms	500Vrms
	Between contacts sets	—	—	—	—
	Between contacts and coil	500Vrms	500Vrms	500Vrms	500Vrms
• Surge withstand voltage	Between live parts and ground	—	—	—	—
• Coil voltage	12V DC	12V DC	12V DC	12V DC	
• Nominal operating power	640mW	640mW, 800mW	800mW	800mW	
• Terminal layout (Bottom View) • coil terminal (100 inch grid)		 	 		
• Standards	—	—	—	—	
• Mounting method					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

AUTOMOTIVE RELAYS

*: Products to be discontinued

• Products	Automotive Power Relay	Power type, Small and Slim Automotive Relay	High load Relay for Smart J/IB	Middle load Relay for Smart J/IB
	CA RELAY	CT RELAY (ACTP) -Power type-	CN-H RELAY (ACNH)	CN-M RELAY (ACNM)
• Type of relay				
• Features	<ul style="list-style-type: none"> • Small size • Light weight • Automotive direct plug-in 	<ul style="list-style-type: none"> • Compact type for automobiles • 35A maximum switching capacity • Still top-of-its-class for silent operation 	<ul style="list-style-type: none"> • Large capacity switching despite small size • Can replace micro ISO terminal type relays 	<ul style="list-style-type: none"> • Compact and high-capacity 30A load switching
• Sealed types availability	●	●	●	●
• Latching types availability	—	—	—	—
• Contact material (Optional material)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)
• Contact rating chart (Maximum (cos φ = 1))				
• Minimum (For Reference)	1.4W (Type 1), 1.8W (Type 1c)	1.0W (Type 1c)	450mW (Type 1a)	640mW (Type 1a)
• Max. switching voltage	16V DC (Type 1a, 1b), 12V DC (Type 1c)	—	16V DC	16V DC
• Contact arrangement	1a, 1b, 1c	1c, 1c x 2	1a	1a, 1c
• Life (Min. operation)	Electrical: 10 ⁷ Mechanical: 10 ⁶ (Type 1a, 1b), 5 x 10 ⁵ (Type 1c)	10 ⁷ (at 14V DC, inrush 30A, steady 7A, 5 x 10 ⁵ (Wear test))	10 ⁷ (Resistive load) 3 x 10 ⁶ (Motor load)	10 ⁷ (Resistive load) 2 x 10 ⁶ (Motor load)
• Break-down voltage	Between open contacts: 500Vrms Between contacts sets: — Between contacts and coil: 500Vrms Between live parts and ground: —	500Vrms	500Vrms	500Vrms
• Surge withstand voltage	—	—	—	—
• Coil voltage	12, 24V DC	12V DC	12V DC	12V DC
• Nominal operating power	1.4W (1a) 1.8W (1a, 1b, 1c)	1,000mW	450mW (for pick-up voltage max. 6.5V DC) 640mW (for pick-up voltage max. 5.5V DC)	640mW
• Terminal layout (Bottom View) + coil terminal (100 inch grid)				
• Standards	—	—	—	—
• Mounting method				

Note: Meaning of symbol marks: □: PC board terminal; ▭: Plug-in; ▲: Top-mounting; ■: Top-mounting with PC board terminals; □: Surface-mounting

Notes:

*: Products to be discontinued

• Products	Compact, Space-Saving Automotive Relay	High Power Automotive	Automotive Relay for High Output 3-phase Motor	A Relay for 42V
	CM RELAY	CB RELAY	CW RELAY (ACW)	EB RELAY (AEB)
• Type of relay				
• Features	<ul style="list-style-type: none"> Compact and high-capacity 35 A load switching Micro ISO terminals 	<ul style="list-style-type: none"> 40 A rating at 85°C (185°F) ISO type terminals High shock resistance for drop test requirements Low temperature rise 	<ul style="list-style-type: none"> High current cutoff High carrying current performance High heat resistance properties 	<ul style="list-style-type: none"> Automotive high capacity DC cutoff relay Supports even 42 V vehicles
• Sealed types availability	●	●	●	—
• Latching types availability	—	—	—	—
• Contact material (Optional material)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)	Ag alloy (Cadmium free)
• Contact rating chart Maximum (cos φ = 1)				
• Minimum (For Reference)	1A 12V DC (Coil rating 12V type)	High capacity 1A 12V DC	1A 14V DC	1A 12V DC
• Max. switching voltage	16V DC	16V DC (12 V type) 32V DC (24 V type)	16V DC	100A 42V DC
• Contact arrangement	1a, 1c	1a, 1c	2a	1a
• Life (Min. operation)	Electrical	10 ⁷ (Resistive load) (Sealed type: 5 × 10 ⁷)	10 ⁷ (Sealed type: 5 × 10 ⁷)	10 ⁷ (100A, 42V DC, resistive load)
	Mechanical	10 ⁶ (Operating frequency: 120 cpm)	10 ⁶	2 × 10 ⁶ (at 60 cpm)
• Break-down voltage	Between open contacts	500Vrms	500Vrms	1,500Vrms
	Between contacts sets	—	—	—
	Between contacts and coil	500Vrms	500Vrms	2,500Vrms
• Surge withstand voltage	Between live parts and ground	—	—	—
	—	—	—	—
• Coil voltage	12, 24V DC	12, 24V DC	12V DC	12, 24, 36V DC
• Nominal operating power	1.5W (12V type) 1.8W (24V type)	1.4W (12V type) 1.8W (24V type) 1.8W (1a High capacity type)	1.4W	5.0W
• Terminal layout (Bottom View) * coil terminal (1.03 inch gnd)				
• Standards	—	—	—	—
• Mounting method			Welding terminal	Screw terminal blocks

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting




















Notes:

AUTOMOTIVE RELAYS

• Products	Power Capsule Contact Relay					
	EV RELAY (AEV)					
• Type of relay						
• Features	<ul style="list-style-type: none"> • High-capacity DC cutoff achieved in a compact relay • Relay for electric cars with the "EVPC" power capsule mechanism 					
• Sealed types availability	●	●	●	●	●	
• Latching types availability	—	—	—	—	—	
• Contact material (Optional material)	Molybdenum type	Copper type alloy	Tungsten type/ Copper type alloy	Copper type alloy	Copper type alloy	
• Contact rating chart Maximum (cos φ = 1)						
• Minimum (For Reference)	1A 12V DC	1A 12V DC		1A 12V DC		
• Max. switching voltage	10A 400V DC	20A 400V DC	80A 400V DC	120A 400V DC	300A 400V DC	
• Contact arrangement	1a	1a	1a	1a	1a	
• Life (Min. operation)	Electrical	7.5 ¹ 10A 400V DC LJR ± 1ms	3 × 10 ⁷ 20A 400V DC LJR ± 1ms	10 ⁸ 80A 400V DC LJR ± 1ms	3 × 10 ⁷ 30A 400V DC LJR ± 1ms	10 ⁷ 300A 400V DC LJR ± 1ms
	Mechanical	10 ⁵	2 × 10 ⁵	2 × 10 ⁵	2 × 10 ⁵	2 × 10 ⁵
• Break-down voltage	Between open contacts	2,500Vrms				
	Between contacts sets	—				
	Between contacts and coil	2,500Vrms				
• Surge withstand voltage	Between live parts and ground	—				
		—				
• Coil voltage	(DC) 12, 24V					
• Nominal operating power	Max. 1.24W	Max. 3.9W	Max. 4.2W	Max. 4.2W	12V: Max. 37.9W (Inrush, approx 0.1s) Max. 3.0W (Stable) 24V: Max. 44.4W (Inrush, approx 0.1s) Max. 3.0W (Stable)	
• Mounting dimensions (Top View)						
• Standards	—	—	—	—	—	
• Mounting method	Screw terminal blocks					

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

		APT Phototriac Coupler										
		Phototriac										
		Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	
		0.05 A		0.1 A		0.1 A		0.1 A		0.1 A		
• Type of relay												
	mm inch	SOP 4 pin		DIP 4 pin		DIP 6 pin		DIP 4 pin wide		DIP 6 pin wide		
• Part No.	APT1211S APT1221S		APT1211 APT1221		APT1212 APT1222		APT1211W APT1221W		APT1212W APT1222W			
• Out-put	Repetitive peak OFF-state voltage	600 V		600 V		600 V		600 V		600 V		
	ON-state RMS current	0.4 A										
		0.3 A										
		0.2 A										
		0.1 A										
Non-repetitive surge current	0.6 A		1.2 A		1.2 A		1.2 A		1.2 A			
Peak ON-state voltage	Max. 2.5 V		Max. 2.5 V		Max. 2.5 V		Max. 2.5 V		Max. 2.5 V			
Peak OFF-state current	Max. 1 μA		Max. 1 μA		Max. 1 μA		Max. 1 μA		Max. 1 μA			
• In-put	LED forward current	50 mA		50 mA		50 mA		50 mA		50 mA		
	LED reverse voltage	6 V		6 V		6 V		6 V		6 V		
	Peak forward current	1 A		1 A		1 A		1 A		1 A		
	LED dropout voltage (IF=20 mA)	Max. 1.3 V		Max. 1.3 V		Max. 1.3 V		Max. 1.3 V		Max. 1.3 V		
• Trigger LED current	Max. 10 mA		Max. 10 mA		Max. 10 mA		Max. 10 mA		Max. 10 mA			
• Zero-cross voltage	Max. 50 V	—	Max. 50 V	—	Max. 50 V	—	Max. 50 V	—	Max. 50 V	—		
• Turn on time	Max. 0.1 ms		Max. 0.1 ms		Max. 0.1 ms		Max. 0.1 ms		Max. 0.1 ms			
• I/O isolation voltage	3,750 V AC		5,000 V AC		5,000 V AC		5,000 V AC		5,000 V AC			
• Temperature limits operating	-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F		-40°C to +100°C -40°F to +212°F			
• Temperature limits storage	-40°C to +125°C -40°F to +257°F		-40°C to +125°C -40°F to +257°F		-40°C to +125°C -40°F to +257°F		-40°C to +125°C -40°F to +257°F		-40°C to +125°C -40°F to +257°F			
• I/O capacitance	Typical	0.8 pF		0.8 pF		0.8 pF		0.8 pF		0.8 pF		
	Maximum	1.5 pF		1.5 pF		1.5 pF		1.5 pF		1.5 pF		
• I/O isolation resistance	Min. 50 GΩ		Min. 50 GΩ		Min. 50 GΩ		Min. 50 GΩ		Min. 50 GΩ			
• Terminal layout (Bottom View)		Recommended mounting pad (Top view) 		Through hole terminal (Bottom view)  Surface mount terminal recommended mounting pad (Top view) 		Through hole terminal (Bottom view)  Surface mount terminal recommended mounting pad (Top view) 		PC board pattern (Bottom view)  Recommended mounting pad (Top view) 		PC board pattern (Bottom view)  Recommended mounting pad (Top view) 		
	mm inch					Tolerance: ±0.1 ±.004		Tolerance: ±0.1 ±.004		Tolerance: ±0.1 ±.004		
• Standards	UL, C-UL, *VDE		UL, C-UL, *VDE		UL, C-UL, *VDE		UL, C-UL, *VDE		UL, C-UL, *VDE			
• Mounting method												

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
 * Normal part number is taken UL, C-UL standards. About VDE standard, please inquire.

Notes:

PHOTOTRIAC COUPLER

		APT Phototriac Coupler				
		Phototriac				
		Zero-cross (Low zero-cross type)				
• Type of relay		0.05 A	0.1 A	0.1 A	0.1 A	0.1 A
mm inch						
		SOP 4 pin	DIP 4 pin	DIP 6 pin	DIP 4 pin wide	DIP 6 pin wide
• Part No.		APT1231S	APT1231	APT1232	APT1231W	APT1232W
• Out-put	Repetitive peak OFF-state voltage	600 V	600 V	600 V	600 V	600 V
	ON-state RMS current	0.4 A	0.4 A	0.4 A	0.4 A	0.4 A
		0.3 A	0.3 A	0.3 A	0.3 A	0.3 A
		0.2 A	0.2 A	0.2 A	0.2 A	0.2 A
		0.1 A	0.1 A	0.1 A	0.1 A	0.1 A
	Non-repetitive surge current	0.6 A	1.2 A	1.2 A	1.2 A	1.2 A
	Peak ON-state voltage	Max. 2.0 V	Max. 2.0 V	Max. 2.0 V	Max. 2.0 V	Max. 2.0 V
	Peak OFF-state current	Max. 1 μA	Max. 1 μA	Max. 1 μA	Max. 1 μA	Max. 1 μA
• In-put	LED forward current	50 mA	50 mA	50 mA	50 mA	50 mA
	LED reverse voltage	6 V	6 V	6 V	6 V	6 V
	Peak forward current	1 A	1 A	1 A	1 A	1 A
	LED dropout voltage (IF=20 mA)	Max. 1.3 V	Max. 1.3 V	Max. 1.3 V	Max. 1.3 V	Max. 1.3 V
• Trigger LED current		Max. 10 mA	Max. 10 mA	Max. 10 mA	Max. 10 mA	Max. 10 mA
• Zero-cross voltage		Max. 15 V	Max. 15 V	Max. 15 V	Max. 15 V	Max. 15 V
• Turn on time		Max. 0.1 ms	Max. 0.1 ms	Max. 0.1 ms	Max. 0.1 ms	Max. 0.1 ms
• I/O isolation voltage		3,750 V AC	5,000 V AC	5,000 V AC	5,000 V AC	5,000 V AC
• Temperature limits operating		-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F	-40°C to +100°C -40°F to +212°F
• Temperature limits storage		-40°C to +125°C -40°F to +257°F	-40°C to +125°C -40°F to +257°F	-40°C to +125°C -40°F to +257°F	-40°C to +125°C -40°F to +257°F	-40°C to +125°C -40°F to +257°F
• I/O capacitance	Typical	0.8 pF	0.8 pF	0.8 pF	0.8 pF	0.8 pF
	Maximum	1.5 pF	1.5 pF	1.5 pF	1.5 pF	1.5 pF
• I/O isolation resistance		Min. 50 GΩ	Min. 50 GΩ	Min. 50 GΩ	Min. 50 GΩ	Min. 50 GΩ
• Terminal layout (Bottom View)	Recommended mounting pad (Top view)		Through hole terminal (Bottom view)	Through hole terminal (Bottom view)	PC board pattern (Bottom view)	PC board pattern (Bottom view)
	mm inch		 Surface mount terminal recommended mounting pad (Top view)	 Surface mount terminal recommended mounting pad (Top view)	 Recommended mounting pad (Top view)	 Recommended mounting pad (Top view)
			Tolerance: ±0.1 ±0.04			Tolerance: ±0.1 ±0.04
• Standards		UL, C-UL, *VDE	UL, C-UL, *VDE	UL, C-UL, *VDE	UL, C-UL, *VDE	UL, C-UL, *VDE
• Mounting method						

Note: Meaning of symbol marks □: Surface-mounting

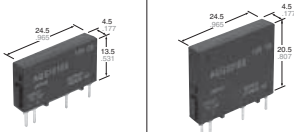
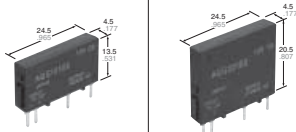




Notes:

• Type of relay		AQ-H Relays							
		Phototriac							
		Zero-cross	Random	Zero-cross	Random	Zero-cross	Random	Zero-cross	Random
		0.3 A		0.6 A		0.9 A		1.2 A	
mm inch									
• Part No.		AQH0213	AQH0223	AQH1213	AQH1223	AQH2213	AQH2223	AQH3213	AQH3223
• Out-put		Repetitive peak OFF-state voltage: 600 V ON-state RMS current: 0.1 A to 1.2 A Non-repetitive surge current: 3 A, 6 A, 9 A, 12 A Peak ON-state voltage: Max. 2.5 V Peak OFF-state current: Max. 100 µA							
• In-put		LED forward current: 50 mA LED reverse voltage: 6 V Peak forward current: 1 A LED dropout voltage (IF=20 mA): Max. 1.3 V							
• Trigger LED current		Max. 10 mA							
• Zero-cross voltage		Max. 50 V	—	Max. 50 V	—	Max. 50 V	—	Max. 50 V	—
• Turn on time		Max. 0.1 ms							
• I/O isolation voltage		5,000 V AC							
• Temperature limits operating		-30°C to +85°C -22°F to +155°F							
• Temperature limits storage		-40°C to +125°C -40°F to +212°F							
• I/O capacitance, typ.		2.1 pF							
• I/O isolation resistance		Min. 50 GΩ							
• Terminal layout (Bottom View)		Through hole terminal (Bottom view) and Surface mount terminal (Top view) diagrams with dimensions in mm and inches. Through hole terminal (Bottom view) dimensions: 7.08 dia, 7.62 (0.300), 2.54 (0.100), 6.4 (0.252), 7.62 (0.300). Surface mount terminal (Top view) dimensions: 8.3 (0.327), 1.9 (0.075), 7.62 (0.300), 1.5 (0.059), 2.54 (0.100), 2.54 (0.100). Tolerance: ±0.1 ±.004							
• Standards		UL, C-UL, VDE							
• Mounting method									

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

SOLID STATE RELAYS

• Types of relay		AQ-G Relays						
		Phototriac Zero-cross			Phototriac Random			
		1A	2A	1A	2A	1A	2A	
								
mm (inch)								
• Load side	Load voltage	AC	75 to 264 V		75 to 264 V		75 to 264 V	
		DC	—		—		—	
	Max. load current	20 A						
		15 A						
10 A								
8 A								
5 A								
Off state leakage current, max.	1.5 mA (applied 200 V)							
	Non-repetitive surge current	8 A		30 A		8 A		30 A
• Input side	Input voltage	4 to 6 V	9.6 to 14.4 V	19.2 to 28.8 V	4 to 6 V	9.6 to 14.4 V	19.2 to 28.8 V	
	Input impedance, approx.	0.3 kΩ	0.8 kΩ	1.6 kΩ	0.3 kΩ	0.8 kΩ	1.6 kΩ	
	Pick-up voltage, max.	4 V	9.6 V	19.2 V	4 V	9.6 V	19.2 V	
	Drop-out voltage, min.	1 V			1 V			
• Operate time, max.	1/2 cycle of voltage sine wave+1 ms			1 ms				
• Release time, max.	1/2 cycle of voltage sine wave+1 ms			1/2 cycle of voltage sine wave+1 ms				
• Breakdown voltage	3,000 V AC			3,000 V AC				
• Ambient temperature	-30°C to +80°C -22°F to +176°F			-30°C to +80°C -22°F to +176°F				
• Snubber circuit integrated	●			●				
• LED operation indicator	—			—				
• Terminal layout (Bottom view)								
mm (inch)								
• Standards	UL, C-UL, VDE			UL, C-UL, VDE				
• Mounting method								

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

• Types of relay		AQ1 Relays					
		Phototransistor, Phototriac					
		Zero-cross*1					
		1 A (DC output)	2 A (DC output)	3 A	10 A		
mm (inch)							
• Load side	Load voltage	AC	75 to 250 V				
		DC	10 to 200 V	3 to 60 V	—	—	
• Input side	Max. load current	20 A				(Heat sink/Panel heat)	
		15 A					
		10 A					10 A
		8 A					
		5 A					
	Off state leakage current, max.	1 mA		5 mA			
	Non-repetitive surge current	5 A (1 sec.)		80 A	100 A		
• Operate time, max.	Input voltage	3 to 28 V DC		4 to 32 V DC	4 to 32 V DC		
	Input impedance, approx.	1.6 kΩ		—	—		
	Pick-up voltage, max.	3 V		4 V	4 V		
	Drop-out voltage, min.	0.8 V		1.0 V	1.0 V		
• Release time, max.		0.5 ms	1/2 cycle of voltage sine wave+1 ms				
• Breakdown voltage		3,000 V AC	4,000 V AC (between input and output) 2,500 V AC (between input, output and case)		4,000 V AC (between input and output) 2,500 V AC (between input, output and case)		
• Ambient temperature		-30°C to +80°C -22°F to +176°F		-30°C to +80°C -22°F to +176°F			
• Snubber circuit integrated		—	—	●	●		
• LED operation indicator		—	—	—	—		
• Terminal layout (Bottom view)							
mm (inch)							
• Standards		UL, CSA, TÜV		UL, C-UL, VDE	UL, C-UL, VDE		
• Mounting method							

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
 * Normal part number is taken UL, CSA standards. About TÜV standard, please inquire. *1 Random type is also available by custom order.

Notes:

SOLID STATE RELAYS

Types of relay		AQ8 Relays																																		
		Phototriac																																		
		Zero-cross				Random				Random																										
		2 A		3 A		2 A		3 A		2 A		3 A																								
mm (inch)																																				
		<table border="1"> <tr> <th rowspan="2">Load voltage</th> <th colspan="12">75 to 125 V</th> </tr> <tr> <th colspan="12">75 to 250 V</th> </tr> </table>												Load voltage	75 to 125 V												75 to 250 V									
Load voltage	75 to 125 V																																			
	75 to 250 V																																			
Load side	Max. load current	20 A																																		
		15 A																																		
		10 A																																		
		8 A																																		
5 A																																				
3 A				3 A																																
2 A		2 A																																		
1 A												3 A																								
Off state leakage current, max.		5 mA						5 mA																												
Non-repetitive surge current		30 A		80 A		30 A		80 A		30 A		80 A																								
Input side	Input voltage	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V																							
	Input impedance, approx.	0.18 kΩ	0.55 kΩ	1.4 kΩ	0.18 kΩ	0.55 kΩ	1.4 kΩ	0.3 kΩ	0.8 kΩ	1.8 kΩ	0.3 kΩ	0.8 kΩ	1.8 kΩ																							
	Pick-up voltage, max.	4 V	9.6 V	21.6 V	4 V	9.6 V	21.6 V	4 V	9.6 V	21.6 V	4 V	9.6 V	21.6 V																							
	Drop-out voltage, min.	0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V																							
Operate time, max.		1/2 cycle of voltage sine wave +1 ms						1 ms																												
Release time, max.		1/2 cycle of voltage sine wave +1 ms						1/2 cycle of voltage sine wave +1 ms																												
Breakdown voltage		3,000 V AC																																		
Ambient temperature		-30°C to +80°C -22°F to +176°F																																		
Snubber circuit integrated		●						●																												
LED operation indicator		—						—																												
Terminal layout (Bottom view)	Between input terminal 5.08mm .200inch				Between input terminal 5.08mm .200inch				Between input terminal 5.08mm .200inch				Between input terminal 5.08mm .200inch																							
	Between input terminal 7.62mm .300inch				Between input terminal 7.62mm .300inch				Between input terminal 7.62mm .300inch				Between input terminal 7.62mm .300inch																							
	mm (inch)																																			
	Standards		UL, CSA, *TUV																																	
Mounting method																																				

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
 * Normal part number is taken UL, CSA standards. About TUV standard, please inquire.

Notes:

• Types of relay		AQ-F Relays				
		Phototransistor				
		Zero-cross		—		
		2 A (AC output)	3 A (AC output)	2 A (DC output)	3 A (DC output)	
mm (inch)						
• Load side	Load voltage	AC	75 to 250 V		—	—
		DC	—	—	3 to 60 V	
	Max. load current	40 A				
		20 A				
		10 A				
		8 A				
5 A						
3 A						
2 A	2 A		2 A		2 A	
1 A						
	Off state leakage current, max.	5 mA		1 mA		
	Non-repetitive surge current	80 A		5 A	6 A	
• Input side	Input voltage	3 to 28 V				
	Input impedance, approx.	1.6 kΩ				
	Pick-up voltage, max.	3 V				
	Drop-out voltage, min.	0.8 V				
• Operate time, max.	1/2 cycle of voltage sine wave+1 ms		0.5 ms			
• Release time, max.	1/2 cycle of voltage sine wave+1 ms		2 ms			
• Breakdown voltage	2,000 V AC					
• Ambient temperature	-30°C to +80°C -22°F to +176°F					
• Snubber circuit integrated	●		●		—	—
• LED operation indicator	—		—		—	—
• Terminal layout (Bottom view)						
mm (inch)						
• Standards	UL, CSA					
• Mounting method						

Note: Meaning of symbol marks: ▽: PC board terminal; □: Plug-in; ■: Top-mounting; ■: Top-mounting with PC board terminals; □: Surface-mounting

Notes:

SOLID STATE RELAYS

• Types of relay		AQ-J Relays								
		Phototriac								
		Zero-cross*1								
		10 A			15 A			25 A		
		Input terminal: #110 type Output terminal: #250 type								
		mm (inch)								
• Load side	Load voltage	AC			75 to 264 V			75 to 264 V		
		DC			—			—		
• Load side	Max. load current	40 A			15 A			25 A		
		20 A			15 A			25 A		
		10 A			15 A			25 A		
		5 mA			5 mA			5 mA		
		100 A			150 A			250 A		
• Input side	Input voltage	4 to 6 V	10 to 18 V	18 to 28 V	4 to 6 V	10 to 18 V	18 to 28 V	4 to 6 V	10 to 18 V	18 to 28 V
	Input impedance, approx.	0.26 kΩ	0.8 kΩ	1.6 kΩ	0.26 kΩ	0.8 kΩ	1.6 kΩ	0.26 kΩ	0.8 kΩ	1.6 kΩ
	Pick-up voltage, max.	4 V	10 V	18 V	4 V	10 V	18 V	4 V	10 V	18 V
	Drop-out voltage, min.	1 V								
• Operate time, max.		1/2 cycle of voltage sine wave + 1ms								
• Release time, max.		1/2 cycle of voltage sine wave + 1ms								
• Breakdown voltage		3,000 Vrms between input and output 2,500 Vrms between input, output and case								
• Ambient temperature		-30 to +80°C -22 to +176°F								
• Snubber circuit integrated		●								
• LED operation indicator		—								
• Terminal layout (Bottom view)										
		mm (inch)								
• Standards		UL, C-UL, TÜV								
• Mounting method		—								

Note: Meaning of symbol marks: ▽: PC board terminal; □: Plug-in; ■: Top-mounting; ■: Top-mounting with PC board terminals; □: Surface-mounting
 *1 Random type is available by custom order. *2 When mounting a standard heat sink (AQP-HS-J10A) When mounting on 100 × 100 × 11.6 (mm) iron plate
 *3 When mounting a standard heat sink (AQP-HS-J10A) When mounting on 200 × 200 × 12 (mm) iron plate *4 When mounting a standard heat sink (AQP-HS-J25A)

Notes:

• Types of relay		AQ-J Relays												
		Phototriac												
		Zero-cross*												
		10 A (Output arrangement: 1a)			20 A (Output arrangement: 1a)			10 A (Output arrangement: 1a×2)			15 A (Output arrangement: 1a×2)			
mm (inch)														
		Input terminal: #110 type Output terminal: #250 type						Input terminal: #110 type Output terminal: #250 type						
• Load side	Load voltage	AC	75 to 264 V											
		DC	—											
	Max. load current	40 A												
		25 A												
20 A				20 A										
15 A	10 A						10 A			15 A				
10 A														
5 A														
2 A														
1 A														
Off state leakage current, max.	5 mA													
Non-repetitive surge current	100 A			250 A			100 A			250 A				
• Input side	Input voltage	4 to 6 V	10 to 18 V	18 to 28 V	4 to 6 V	10 to 18 V	18 to 28 V	4 to 6 V	10 to 18 V	18 to 28 V	4 to 6 V	10 to 18 V	18 to 28 V	
	Input impedance, approx.	0.26 kΩ	0.8 kΩ	1.6 kΩ	0.26 kΩ	0.8 kΩ	1.6 kΩ	0.26 kΩ	0.8 kΩ	1.6 kΩ	0.26 kΩ	0.8 kΩ	1.6 kΩ	
	Pick-up voltage, max.	4 V	10 V	18 V	4 V	10 V	18 V	4 V	10 V	18 V	4 V	10 V	18 V	
	Drop-out voltage, min.	1 V												
• Operate time, max.	1/2 cycle of voltage sine wave + 1ms													
• Release time, max.	1/2 cycle of voltage sine wave + 1ms													
• Breakdown voltage	3,000 Vrms between input and output 2,500 Vrms between input, output and case													
• Ambient temperature	-30 to +80°C -22 to +176°F													
• Snubber circuit integrated	●													
• LED operation indicator	—													
• Terminal layout (Bottom view)														
mm (inch)														
• Standards	—													
• Mounting method	—													

Note: Meaning of symbol marks : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
* Random type is available by custom order.

Notes:

SOLID STATE RELAYS

• Types of relay		AQ-A Relays			
		Phototriac			
		Zero-cross/Random			
		15 A	25 A	40 A	
		mm (inch)			
• Load side	Load voltage	AC	75 to 250 V		
		DC	—		
	Max. load current	40 A			
		20 A			
		10 A	15 A	25 A	40 A
8 A					
5 A					
3 A					
2 A					
1 A					
Off state leakage current, max.	10 mA				
Non-repetitive surge current	150 A	250 A	400 A		
• Input side	Input voltage	4 to 32 V			
	Input impedance, approx.	—			
	Pick-up voltage, max.	4 V			
	Drop-out voltage, min.	1 V			
• Operate time, max.	1/2 cycle of voltage sine wave+1 ms				
• Release time, max.	1/2 cycle of voltage sine wave+1 ms				
• Breakdown voltage	4,000 V AC between input and output/ 2,500 V AC between input, output and case				
• Ambient temperature	-20°C to +85°C -4°F to +185°F				
• Snubber circuit integrated	●				
• LED operation indicator	● (LED indication type)				
• Terminal layout (Bottom view)					
	mm (inch)				
• Standards	—				
• Mounting method	—				

Note: Meaning of symbol marks: ▽: PC board terminal; □: Plug-in; ■: Top-mounting; ■: Top-mounting with PC board terminals; □: Surface-mounting










Notes:






• Types of relay		AQ-K Relays		
		Phototriac		
		Zero-cross		
		15 A	25 A	
mm (inch)				
• Load side	Load voltage	AC	75 to 250 V	75 to 250 V
		DC	—	—
	Max. load current	40 A	—	—
		25 A	—	25 A
		20 A	—	—
		15 A	15 A	—
		10 A	—	—
1 A		—	—	
Off state leakage current, max.	9 mA (applied 200 V)	9 mA (applied 200 V)		
Non-repetitive surge current	150 A	250 A		
• Input side	Input voltage	4.5 to 30 V	4.5 to 30 V	
	Input impedance, approx.	—	—	
	Pick-up voltage, max.	4.5 V	4.5 V	
	Drop-out voltage, min.	1 V	1 V	
• Operate time, max.		1/2 cycle of voltage sine wave+1 ms	1/2 cycle of voltage sine wave+1 ms	
• Release time, max.		1/2 cycle of voltage sine wave+1 ms	1/2 cycle of voltage sine wave+1 ms	
• Breakdown voltage		2,500 V AC/4,000 VAC	2,500 V AC/4,000 VAC	
• Ambient temperature		-30°C to +80°C -22°F to +176°F	-30°C to +80°C -22°F to +176°F	
• Snubber circuit integrated		●	●	
• LED operation indicator		●	●	
• Terminal layout (Bottom view)	35mm 1.378inch DIN rail mounting hole or 2-4.6 dia. 2-.181 dia. hole or M4 hole.		35mm 1.378inch DIN rail mounting hole or 2-4.6 dia. 2-.181 dia. hole or M4 hole.	
mm (inch)				
• Standards		UL, C-UL, *TÜV		
• Mounting method		—	—	

Note: Meaning of symbol marks : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
 * TÜV standard is taken in case breakdown voltage 2,500 V AC.

Notes:

SOLID STATE RELAYS

		AQ-C Relays												
		Phototransistor				Phototriac				Phototransistor				
		—		—		Zero-cross		Random		—				
• Types of relay		AC input		DC input		1 A (AC output)						1 A (DC output)		
														
		mm (inch)												
• Load voltage	AC	—		—		75 to 125 V 75 to 250 V						—		
	DC	4 to 32 V		4 to 32 V		—		—		—		3 to 60 V		
• Load side	Max. load current	20 A	
		15 A	
		10 A	
		8 A	
		5 A	
		1 A		1 A		1 A		1 A		1 A	
Off state leakage current, max.		25 mA		25 mA		1.1 mA		1.1 mA		0.1 mA		0.1 mA		
Non-repetitive surge current		—		—		20 A						1.5 A		
• Input side	Input voltage	80 to 250 V AC		3 to 32 V DC		4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V	4 to 6 V	9.6 to 14.4 V	21.6 to 26.4 V
	Input impedance, approx.	—		—		0.3 kΩ	0.8 kΩ	1.8 kΩ	0.3 kΩ	0.8 kΩ	1.8 kΩ	0.43 kΩ	1.2 kΩ	2.8 kΩ
	Pick-up voltage, max.	80 V AC		3 V DC		4 V	9.6 V	21.6 V	4 V	9.6 V	21.6 V	4 V	9.6 V	21.6 V
	Drop-out voltage, min.	10 V AC		1 V DC		0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V	0.8 V		
• Operate time, max.		20 ms		0.5 ms		1/2 cycle at voltage sine wave+1 ms			1 ms			0.5 ms		
• Release time, max.		20 ms		0.5 ms		1/2 cycle of voltage sine wave+1 ms						1 ms		
• Breakdown voltage		2,500 V AC				2,500 V AC								
• Ambient temperature		-30°C to +80°C -22°F to +176°F				-30°C to +80°C -22°F to +176°F								
• Snubber circuit integrated		—				●						—		
• LED operation indicator		—				—						—		
• Terminal layout (Bottom view)														
		mm (inch)												
• Standards		UL, CSA, *TUV				UL, CSA, *TUV								
• Mounting method														

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting
 * Normal part number is taken UL, CSA standards. About TUV standard, please inquire.

Notes:

• Types of relay		I/O Relays				
		Phototransistor				
		—	—	Zero-cross	—	
		AC Input modules	DC Input modules	AC Output modules	DC Output modules	
mm (inch)						
• Load side	Load voltage	AC	—	—	75 to 125 V 75 to 250 V	—
		DC	4 to 15 V 10 to 32 V		—	3 to 60 V 10 to 200 V
	Max. load current	20 A				
		15 A				
		10 A				
		8 A				
5 A						
3 A						
2 A			2 A	2 A	1 A	
1 A						
Off state leakage current, max.		100 µA		5 mA	1 mA	
Non-repetitive surge current		—	—	30 A	5 A (1 s)	
• Input side	Input voltage	80 to 140 V AC	160 to 280 V AC	3 to 32 V DC	3 to 15, 4 to 15, 10 to 32 V DC	
	Input impedance, approx.	—	—	—	1.6, 1.7, 5.6 kΩ	
	Pick-up voltage, max.	80 V AC	160 V AC	3 V	3 V (4 V)	
	Drop-out voltage, min.	10 V AC	20 V AC	0.8 V	0.8 V	
• Operate time, max.		20 ms	5 ms	1/2 cycle of voltage sine wave+1 ms	0.5 ms	
• Release time, max.		20 ms	5 ms	1/2 cycle of voltage sine wave+1 ms	2 ms	
• Breakdown voltage		4,000 V AC			4,000 V AC	
• Ambient temperature		-30°C to +80°C -22°F to +176°F			-30°C to +80°C -22°F to +176°F	
• Snubber circuit integrated		—			●	—
• LED operation indicator		● (optional)			● (optional)	
• Terminal layout (Bottom view)						
mm (inch)						
• Standards		UL, CSA			UL, CSA	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting











Notes:

MICROWAVE DEVICES

• Products	8GHz microwave	3GHz microwave	3GHz microwave	3GHz microwave	2.6GHz microwave	
	RJ RELAY (ARJ)	RX-P RELAY (ARXP)	RX RELAY (ARX)	RS RELAY (ARS)	RE RELAY (ARE)	
• Type of relay						
• Features	<ul style="list-style-type: none"> • Excellent high frequency characteristics (50Ω, at 5GHz) • Surface mount terminal • Small size 	<ul style="list-style-type: none"> • 3GHz Microwave relay with 60W carrying power 	<ul style="list-style-type: none"> • Insertion loss: Max. 0.2dB (2.5GHz) • Isolation Min. 60dB (2.5GHz) • V.S.W.R.; Max. 1.2 (2.5GHz) 	<ul style="list-style-type: none"> • 3GHz Microwave relays miniature size line up includes 50/75Ω type 	<ul style="list-style-type: none"> • Small microwave relay (2.6GHz) • 50Ω, 75Ω 	
• Sealed types availability	—	●	●	●	●	
• Latching types availability	●	●	●	●	—	
• Contact material (Optional material)	Gold plating	Stationary: Gold plating Movable: Gold clad (twin)	Stationary: Gold plating Movable: Gold clad (twin)	Gold plating (twin)	Gold plating (twin)	
• Contact rating chart Maximum (cos φ = 1)	70 A 60 A 50 A 40 A 30 A 20 A 10 A	Contact input power: 1W (at 5GHz)	Contact input power: 60W (at 2.5GHz)	Contact input power: 20W (at 2.5GHz)	Contact input power: 10W (at 3GHz)	
• Minimum (For Reference)						
• Max. switching voltage	30V DC	30V DC	30V DC	30V DC	30V DC	
• Contact arrangement	2 Form C (DPDT)	1 Form C	1 Form C	1 Form C	1 Form C	
• Life (Min. operation)	Electrical	10 ⁶	10 ⁶	10 ⁶	3 × 10 ⁵ (75Ω) 10 ⁵ (50Ω)	3 × 10 ⁵
	Mechanical	10 ⁷	10 ⁶	5 × 10 ⁶	5 × 10 ⁶	10 ⁶
• Break-down voltage	Between open contacts	500Vrms	500Vrms	500Vrms	500Vrms	500Vrms
	Between contacts sets	500Vrms	—	—	—	—
	Between contacts and coil	500Vrms	1,000Vrms	1,000Vrms	1,000Vrms	1,000Vrms
	Between live parts and ground	500Vrms	500Vrms	500Vrms	500Vrms	500Vrms
• Surge withstand voltage	—	—	—	—	—	
• Coil voltage	(DC) 3, 4.5, 12, 24V	(DC) 3, 4.5, 6, 9, 12, 24V	(DC) 3, 4.5, 6, 9, 12, 24V	(DC) 3, 4.5, 9, 12, 24V	(DC) 3, 4.5, 6, 9, 12, 24V	
• Nominal operating power	200mW	(Single) 200mW (-L) 200mW (-L2) 400mW	(Single) 200mW (-L) 200mW (-L2) 400mW	(Single) 200mW (-L) 200mW (-L2) 400mW	200mW	
• Terminal layout (Bottom View) ●: coil terminal (100 inch grid)	—				—	
• Standards	—	—	—	—	—	
• Mounting method						

Note: Meaning of symbol marks: : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting





Notes:

• Products	1.5GHz microwave	1GHz microwave	1.8GHz microwave	Coaxial switch	
	RK RELAY (ARK)	RA RELAY (ARA)	RP RELAY	RD Coaxial Switch (ARD)	
• Type of relay					
• Features	<ul style="list-style-type: none"> • Isolation Min. 60dB (1.5GHz) • Insertion loss Max. 0.2dB (900MHz)(75Ω) • V.S.W.R. Max. 1.2 (900MHz)(75Ω) 	<ul style="list-style-type: none"> • Insertion loss: Max. 0.3dB (1GHz) • Isolation: Min. 20dB (1GHz) (Between open contacts) • Min. 30dB (1GHz) (Between contact sets) • V.S.W.R. Max. 1.2 (1GHz) 	<ul style="list-style-type: none"> • High frequency with the low profile of 4mm .157inch • High sensitivity • Isolation: Min. 10dB (1.8GHz) 	<ul style="list-style-type: none"> • High power control • Small size • 18GHz, 26.5GHz 	
• Sealed types availability	●	●	●		
• Latching types availability	●	●		●	
• Contact material (Optional material)	Stationary: Gold plating Movable: Gold clad (twin)	Stationary: AgPd + Au clad Movable: AgPd (twin)	Stationary: Ag + Au clad Movable: AgPd (twin)	Gold plating	
• Contact rating chart Maximum (cos φ = 1)	15 A 10 A 8 A 5 A 3 A 2 A 1 A	15 A 10 A 8 A 5 A 3 A 2 A 1 A	15 A 10 A 8 A 5 A 3 A 2 A 1 A	15 A 10 A 8 A 5 A 3 A 2 A 1 A	
• Minimum (For Reference)	Contact input power: 10W (at 1.2GHz)	Contact input power: 3W (at 1GHz)	Contact input power: 3W (at 1.2GHz)	Contact input power: 120W (at 3GHz)	
• Max. switching voltage	30V DC	30V DC	30V DC	30V 100mA (indicator)	
• Contact arrangement	1 Form C	2 Form C	1 Form C	SPDT, Transfer, SP6T	
• Life (Min. operation)	Electrical	3 × 10 ⁶	10 ⁷	10 ⁶	5 × 10 ⁶ (SPDT, Transfer, SP6T)
	Mechanical	5 × 10 ⁶	10 ⁶	5 × 10 ⁶	5 × 10 ⁶ (SPDT, Transfer, SP6T)
• Break-down voltage	Between open contacts	500Vrms	750Vrms	750Vrms	500Vrms
	Between contacts sets	—	1,000Vrms	—	—
	Between contacts and coil	1,000Vrms	1,000Vrms	1,500Vrms	500Vrms
	Between live parts and ground	500Vrms	1,000Vrms	—	500Vrms
• Surge withstand voltage	—	—	—	—	
• Coil voltage	(DC) 3, 4.5, 5, 6, 9, 12, 24V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V	(DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24V	(DC) 4.5 (Single side stable only), 5 (TTL-drive type only), 12, 24V	
• Nominal operating power	(Single) 200mW (-L) 200mW (-L2) 400mW	140mW (1.5 to 12V) 200mW (24V) 300mW (48V)	140mW (1.5 to 12 V) 270mW (24 V)	(SPDT, SP6T) 840mW (Transfer) 1,540mW * Fallsafe type 4.5, 12V DC	
• Terminal layout (Bottom View) • coil terminal (.100 inch grid)		—		—	
	Single side stable 1 coil latching				
• Standards	—	—	—	—	
• Mounting method					

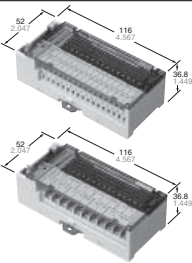
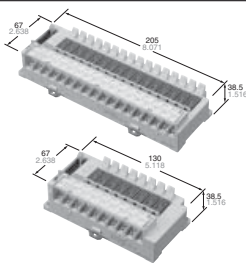


Note: Meaning of symbol marks : PC board terminal; : Plug-in; : Top-mounting; : Top-mounting with PC board terminals; : Surface-mounting

Notes:

INTERFACE TERMINALS

• Products		Interface Terminal					
		RT-3 UNIT RELAY (Power PhotoMOS type)		RT-3 UNIT RELAY (PA Relay type)		4 point terminal	
• Types							
mm inch							
• Features		• Slim, Space-saving, 4-point Unit Relay		• Possible to select relay for use in interface in accordance with load [Possible relays: PA relay and Power PhotoMOS (voltage sensitive type)]			
• I/O points		4 points		4 points			
• Contact rating		Recommended voltage	AQZ102 type: 0 to 30V DC AQZ204 type: 0 to 200V DC, 0 to 125V AC	Rated control capacity (resistive load)	PA relay	Rated control capacity (resistive load)	3A 250V AC, 3A 30V DC
		Continuous load current	AQZ102 type: 2A (DC) AQZ204 type: 0.3A (DC, AC peak value)				
		Peak load current (100ms 1shot)	AQZ102 type: 9A AQZ204 type: 1.5A	Min. switching capacity (ref. value)	100mV 100µA	PhotoMOS	Peak load current (100ms 1shot)
• Life (Min. operation)	Mechanical	—		2 × 10 ⁷		PA relay	2 × 10 ⁷
	Electrical (resistive load)	—		3A 250V AC : 3 × 10 ⁶ 3A 30V DC : 3 × 10 ⁶ 2A 250V AC : 10 ⁷ 2A 30V DC : 10 ⁷		PhotoMOS	—
• Rated input voltage		12, 24V DC		12, 24V DC		12, 24V DC	
• Break-down voltage	Between input and output	2,000Vrms for 1 min.		2,000Vrms for 1 min.		2,000Vrms for 1 min.	
	Between different terminals (between relays, both ways)	1,500Vrms for 1 min.		1,500Vrms for 1 min.		1,500Vrms for 1 min.	
	Between contacts	Max. load voltage	AQZ102 type: 60V (DC) AQZ204 type: 400V (DC, AC peak value)	1,000Vrms for 1 min.		PA relay	1,000Vrms for 1 min.
						PhotoMOS	AQZ102D type: 60V (DC) AQZ202D type: 60V (AC/DC) AQZ105D type: 100V (DC) AQZ205D type: 100V (AC/DC) AQZ107D type: 200V (DC) AQZ207D type: 200V (AC/DC) AQZ104D type: 400V (DC) AQZ204D type: 400V (AC/DC)
• Ambient temperature		-20°C to +55°C -4°F to +131°F		-20°C to +55°C -4°F to +131°F		-20°C to +55°C -4°F to +131°F	
• Terminal layout (Bottom View)							
mm inch							
• Option		Power PhotoMOS Relays internal varistor type, Power PhotoMOS Relays 1b type, short circuit plate		Power PhotoMOS Relays voltage sensitive type, short circuit plate		PA Relay, Relays voltage sensitive type, short circuit plate	

Notes:

• Products		Interface Terminal			
		RT-2 RELAY TERMINAL		RT-1 PC RELAY TERMINAL RT-1 PC TERMINAL	
• Types					
mm inch					
• Features		• Palm-sized, 16-channel Relay Terminals		• Wide variation relay terminal	
• I/O type		Input device	Output device	Input device	Output device
• I/O points		16 points	16 points	16, 8, 4 points	16, 8, 4, 2 points
• Rating	Nominal switching capacity (resistive)	2A 250V AC, 2A 30V DC		5A 250V AC, 5A 30V DC	
	Min. switching capacity (ref. value)	100mV 100μA		100mV 100μA	
• Expected life (Min. operation)	Mechanical	2×10^7		10^6	
	Electrical (resistive load)	1A 250V AC: 3×10^5 2A 250V AC: 10^5	1A 30V DC: 3×10^5 2A 30V DC: 10^5	5A 250V AC: 10^5	5A 30V DC: 10^5
• Rated input voltage		12, 24V DC		12, 24V DC	
• Break-down voltage	Between connector terminals	2,000Vrms for 1 min. (excluding battery)		2,000Vrms for 1 min. (excluding battery)	
	Between unlike poles on the terminals	1,500Vrms for 1 min.		1,500Vrms for 1 min.	
	Between connector unlike poles (for input)	—	—	250Vrms for 1 min.	
	Between like poles on the terminals (for output)	—	1,000Vrms for 1 min.	1,000Vrms for 1 min.	
• Ambient temperature		0°C to +55°C +32°F to +131°F		0°C to +55°C +32°F to +131°F	
• Terminal layout (Bottom View)					
mm inch		DIN rail mounting type and direct mounting type		2 way type of DIN rail mounting and direct mounting are available	
• Option		Power PhotoMOS Relays voltage sensitive type, various cables		AQ-C Solid State Relays, jumper relay, short circuit plate, various cables	

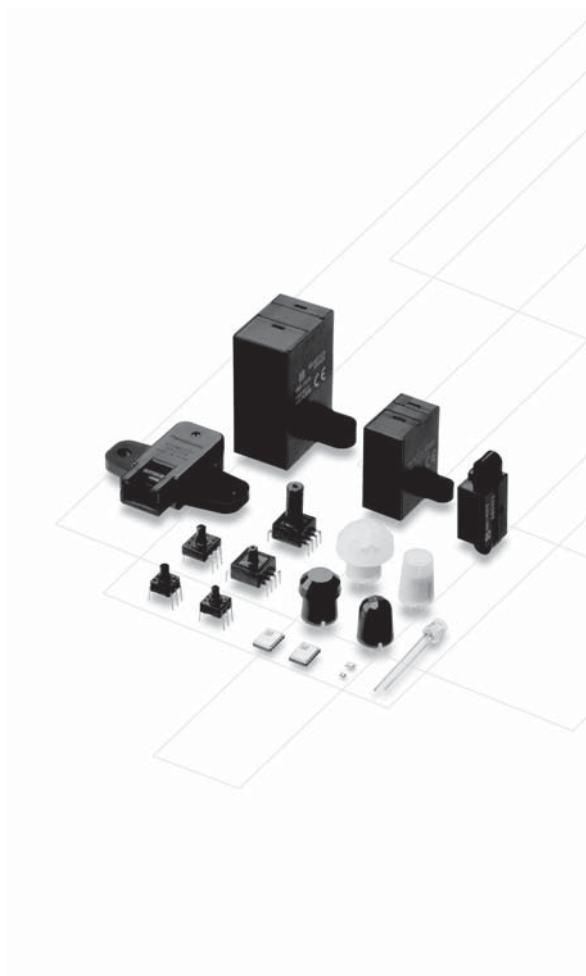
Notes:

INTERFACE TERMINALS

























• Products	Interface Terminal	
	CT-2 CONNECTOR TERMINAL	
• Types		
mm inch		
• Features	• Connector terminal for PLCs, PCs and various controllers	
• No. of poles	20P, 30P, 34P, 40P	
• Rated voltage	125V AC	
• Rated current	1A	
• Breakdown voltage	250Vrms for 1 min.	
• Insulation resistance	100MΩ (at 500V DC megger)	
• Fasten torque	Pressure connector connect type: 0.3 to 0.5 N·m (3 to 5 kgf·cm) Wire-direct connect type: 0.2 to 0.4 N·m (2 to 4 kgf·cm)	
• Ambient temperature	0°C to +55°C +32°F to +131°F	
• Terminal layout (Bottom View)		
mm inch		
• Option	Direct mounting type DIN rail mounting, and direct mounting type available	
• Option	Various cables	

Notes:



SENSORS




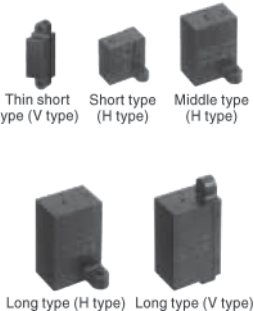
PASSIVE INFRARED SENSORS

Current Range	Digital				Analog
	1µA <i>Sleep Mode</i>	2µA	6µA	170µA	170µA
2M				 11.9mm ø 15.2mm (H) Slight motion	 11.9mm ø 15.2mm (H) Slight motion
3m	A  3mm ø 6mm (H)	A  3mm ø 6mm (H)	A  3mm ø 6mm (H)		
5m				 9.5 mm ø 14.5mm (H) Standard	 9.5 mm ø 14.5mm (H) Standard
	A  9.7mm ø 10.1mm (H)	A  9.7mm ø 10.1mm (H)	A  9.7mm ø 10.1mm (H)	 8.9 mm ø 15.1 (H) Spot	 8.9 mm ø 15.1(H) Spot
	B  9.5mm ø 14.4 mm(H)	B  9.5mm ø 14.4 mm(H)	B  9.5mm ø 14.4 mm(H)	C  9.5mm ø 14.4 mm(H) Standard	B  9.5mm ø 14.4 mm(H) Standard
10m				 18.5mm ø 17.4mm (H)	 18.5mm ø 17.4mm (H)
12m	B  20.7mm ø 15.9mm (H)	B  20.7mm ø 15.9mm (H)	B  20.7mm ø 15.9mm (H)	C  20.7mm ø 15.9mm (H)	B  20.7mm ø 15.9mm (H)










PaPIRs			NaPiOn			
EKMA:	A	EKMB:	B	EKM C:	C	AMN:
<ul style="list-style-type: none"> • Lowest Profile • Silicon Lens w/ 3mm Aperture • Polyethylene Lens w/ Smooth Surface • Low Current: (1, 2, 6µA) 		<ul style="list-style-type: none"> • Standard Profile • Polyethylene Lens Only w/ Smooth Surface • Low Current: (1, 2, 6µA) 		<ul style="list-style-type: none"> • Standard Profile • Polyethylene Lens Only w/ Smooth Surface • Current: (170µA) 		<ul style="list-style-type: none"> • Standard Profile • Polyethylene Lens • Current: (170µA) • Spot detection w/ small angle opening (option)

Acceleration Sensor	Product	Detection Range	Characteristics
	GS2: 2-Axis 	$+2g$ $\pm 1.5g$	High precision and high sensitivity High reliability: Detection errors due to temperature fluctuation reduced to a minimum Product lineup covers range of operating voltage and acceleration detection
GS1: 1-Axis 			


Light Sensor	Product	Peak Sensitivity Wave Length	Characteristics
	NaPiCa 	580nm 560nm (Chip)	Cadmium-free Built-in optical filter for spectral response similar to the human eye Photocurrent is proportional to illumination (linear output) Chip style is miniaturized

Motion Sensor	Product	Detection Method	Type	Features
	MA Motion Sensor 	Detecting the presence of a human body (or other object) by the reflected beam of LED light from the sensor.	Built-In Oscillation Circuit Detection Distance: 5 ~ 200 cm 1.969 ~ 78.74 inch	Sensors are ready for immediate use by connecting to a DC power supply The built-in oscillation circuit removes the need for a start signal Can be used w/ different supply voltages • 5V DC type • Free-range: 6.5 ~ 27VDC
	External Trigger Detection Distance: 5 ~ 200 cm 1.969 ~ 78.74 inch		Sensors can be used in adjacent positions & can save energy. Can be used w/ different supply voltages • 5V DC type • Free-range: 6.5 ~ 27VDC	

PRESSURE SENSORS

Product	Pressure Medium	Type		Terminal Direction	Press Inlet Hole Length	Characteristics
		Rated Pressure				
PS-A 	Air	$\pm 100, -100, 25, 50, 100, 200, 500, 1,000$ *40kPa		Opposite the pressure inlet direction	 3mm	Compact pressure sensor with built-in amplification and temperature compensation circuit
		Low pressure: 6kPa			 5mm	
						 5mm 3mm dia.
PS-A  Direct Water Pressure Detection	Air Water	-19.6 to 49kPa		 8mm 6mm dia.		Not only air, now water pressure can be detected directly
PS  PF 	Air	Rated Pressure	Bridge Resistance	Opposite the pressure inlet direction	—	Ultra-miniature Base area 7.2 (W) x 7.2 (D) mm .283 (W) x .283 (D) inch
		4.9, 14.7, 34.3, *49.0, 98.1, 196.1, 343.2, 490.3, 833.6, 980.7 kPa	5k Ω			
		*40kPa 98.1, 980.7kPa (PS only)	3.3k Ω			A wide range of rated pressure, including a minute pressure

Pressure Sensors

Parameter		Value
Part Number		EKL-3104
Operating Range		1.2m ~ 9.0m 3.94ft ~ 29.53ft
Field of View	Horizontal	60°
	Vertical	44°
Pixel Array Size	Horizontal	160 Pixels
	Vertical	120 Pixels
Frame Rate		30 FPS (frames/sec)
Range Resolution		1. $\sigma = 3\text{cm}$ (1.18in.) (max.) (Ambient Illumination: 0lx) 2. $\sigma = 14\text{cm}$ (5.51in.) (max.) (Ambient Illumination: 20,000lx)
Absolute Accuracy		$\pm 4\text{cm}$ ($\pm 1.57\text{in.}$) (Ambient Illumination: 0lx)
Modulation Frequency		3 Modes
Operating Ambient Illumination		20,000lx or less (sunlight)
Output Type	Range Data	11 bit
	Image Data	8 bit
Connector		Mini USB 2.0 *
Dimensions		D-IMager 

The D-IMager does not include application specific software.

AC Adapter and Mini-USB 2.0 Cable are NOT included.

Minimum System Requirements:

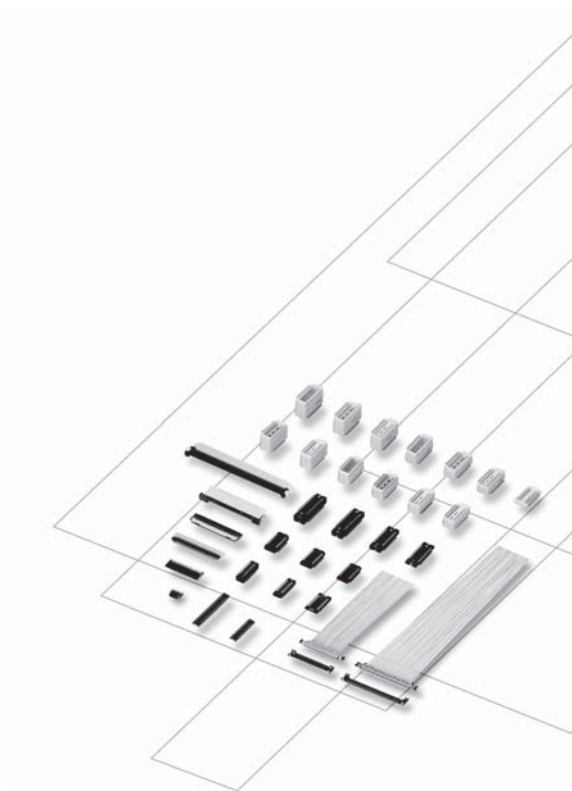
- Microsoft Windows XP
- CPU: Pentium 4 or M 1GHz
- USB 2.0 Standard Connector
- Device Driver: Dimagerusb.SYS

Available Documentation:




- Display Software User Manual
- User Manual
- Instructions for Dimagerdll.dll

Notes:

CONNECTORS














NARROW PITCH CONNECTORS

Series	0.35 mm pitch series		
Types	Connector for board-to-FPC		Connector for board-to-FPC/board-to-board
Product name	A35S	F35S	P35S
Part No.	Socket: AXE7*** Header: AXE8***	Socket: AXT7*** Header: AXT8***	Socket: AXT1*** Header: AXT2***
Shape			
Features	<ul style="list-style-type: none"> ● Ultra-small type (width: 2.5 mm, Terminal pitch: 0.35 mm and Mated height: 0.8 mm) ● The world's first* low-profile connector with up to 120 contacts ● Strong resistance to various environments TOUGH CONTACT ADVANCED construction 	<ul style="list-style-type: none"> ● Space-saving design (width: 3.4 mm, Terminal pitch: 0.35 mm and Mated height: 1.0 mm) ● Strong resistance to various environments TOUGH CONTACT construction 	<ul style="list-style-type: none"> ● 1.5 mm low-profile mated height Narrower pitch version of P4S Narrow-Pitch Connectors ● Strong resistance to various environments TOUGH CONTACT construction ● Pattern wiring possible on PC board below connectors ● Connectors for inspection are also available
Terminal pitch	0.35mm	0.35mm	0.4mm
Mated height	0.8mm	1.0mm	1.5mm
Dimensions (short width) (Include terminal)	Socket: 2.5mm Header: 2.0mm	Socket: 3.4mm Header: 2.6mm	Socket: 3.6mm Header: 2.35mm
No. of contacts	100		100
	90		90
	80	80	80
	70	70	70
	60	60	60
	50	50	50 52
	40	40	40
	30	34	30 32 34 36 38
	20		20 22 24 26 28
	10		
Rated current	0.25A/contact (Max.4 A at total contacts)	0.25A/contact (Max.4 A at total contacts)	0.25A/contact (Max.4 A at total contacts)
Rated voltage	AC,DC 60V	AC,DC 60V	AC,DC 60V
Ambient temperature	-55°C to +85°C	-55°C to +85°C	-55°C to +85°C
Insertion and removal life	30 times	50 times	50 times
Terminal shape	SMD	SMD	SMD
RoHS directive	Compliance	Compliance	Compliance

Notes:

NARROW PITCH CONNECTORS

0.4 mm pitch series			
Connector for board-to-FPC			
A4US	A4S		A4F
Socket: AXE1*** Header: AXE2***	Socket: AXE5*** Header: AXE6***		Socket: AXE3*** Header: AXE4***
			
<ul style="list-style-type: none"> ●The ultra-slim size (2.2 mm in width) contributes to space saving design. (The footprint is down 12% from A4S, an existing model) ●Strong resistance to various environments TOUGH CONTACT ADVANCED construction ●The ultra-slim body has a sufficient suction face. (Sockets: 0.6 mm, Headers: 0.7mm) 	<ul style="list-style-type: none"> ●Ultra-slim connectors (width: 2.5 mm) ●Mated heights of 0.8 and 1.0 mm are available for the same foot pattern ●Strong resistance to various environments TOUGH CONTACT ADVANCED construction ●Connectors for inspection are also available 		<ul style="list-style-type: none"> ●Ultra-low profile connectors (Mated height: 0.6 mm) ●Strong resistance to various environments TOUGH CONTACT ADVANCED construction ●Connectors for inspection are also available
0.4mm	0.4mm		0.4mm
0.8mm	0.8mm	1.0mm	0.6mm
			
Socket: 2.2mm Header: 1.8mm	Socket: 2.5mm Header: 2.0mm		Socket: 3.0mm Header: 2.4mm
			
0.3A/contact (Max.5 A at total contacts)	0.3A/contact (Max.5 A at total contacts)		0.3A/contact (Max.5 A at total contacts)
AC,DC 60V	AC,DC 60V		AC,DC 60V
-55°C to +85°C	-55°C to +85°C		-55°C to +85°C
30 times	30 times		30 times
SMD	SMD		SMD
Compliance	Compliance		Compliance

Notes: