

# MI3, CM



## Noncontact Temperature Measurement for Industrial Applications



## Fast Measurements

Infrared thermometers measure the energy radiated from an object, without touching it. This measurement technique is important in applications where contact would damage or alter the surface, such as a sheet of plastic film, or contaminate the product, such as food processing.


Unlike contact sensors, there is no delay while the infrared thermometer reaches the correct temperature. This makes it ideal for measuring moving or discrete processes. The result is fast, accurate noncontact temperature measurement and tighter control of your process.

## Standard Features MI3

- Extended temperature range up to 1650°C
- Optical resolution up to 22:1
- Dedicated close focus lens for spot sizes down to 0.5 mm
- Short response time down to 20 ms
- Industrial rugged cable: Silicone and Halogen free, resistant against oil, bases, and acids
- USB 2.0 interface as standard and selectable field busses

## Process Software

More MI3 features are available with the USB or optional RS485 communications and the DataTemp® MultiDrop Software including remote control and monitoring of all sensor variables, an 8-position "recipe" table that can be easily interfaced to an external control system, and even external inputs for analog emissivity adjustment or reflected energy compensation.

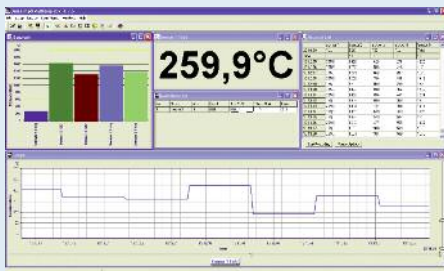

Plot temperature values of multiple sensors simultaneously. High and low alarms are shown, making it easy to identify an out-of-range condition.

## Compact. Accurate. Affordable.

Bring the advantages of a complete infrared temperature measurement system to your process.

Raytek Compact Series temperature monitoring systems make infrared temperature measurement an economical alternative. The systems are easy-to-install and to integrate into your existing process control system.

Compact Series Models		
MI3	CM	GP Monitor with CM
<b>Temperature Range</b>		
-40 ... 1650°C	-20 ... 500°C	-20 ... 500°C
<b>Accuracy</b>		
1%	1.5%	1.5%
<b>Signal Processing</b>		
MAX MIN AVG	No	MAX MIN AVG
<b>Optics</b>		
22:1 10:1 2:1	13:1	13:1
<b>Power Supply</b>		
8-32 VDC	24 VDC	110-230 VAC
<b>Outputs</b>		
0-5/10 V 0/4-20 mA, J, K, R, S* USB RS485, Alarm	J, K* or 0 - 5V RS232 Alarm	4-20 mA, J, K, R, S* 2 Alarms

\* Thermocouple type

## MI3 - The World's Smallest Stand-alone Pyrometer

The Raytek MI3 is a rugged, IP65 stainless steel miniature pyrometer with integrated electronics measuring in the temperature range from -40 to 1650°C. Just 14 mm in diameter and 28 mm long, the single piece OEM version is the smallest fully functional, stand-alone infrared temperature sensor for fixed installation on the market today.



Compared to most IR temperature sensors on the market, where the measurements are transferred from the head to the electronics as interference-prone analog signals in a very sensitive  $\mu\text{V}$  range, the new MI3 sensors allow calibrated, digital temperature output directly from each sensor head.



For use with standard industrial outputs the MI3 sensor comes with the separate **communication box MI3COMM**, which provides all the functionality of the proven MI series sensors with numerous exciting new features.

The **Multi-channel MI3MCOMM communication box** for multiple sensing head application with USB and RS485 digital communication is available in a convenient **DIN-rail mountable** package.

**4 sensing heads can be directly connected** to the MI3MCOMM box .



**Multi-channel Sensor Interface Box** for connecting up to **8 individually addressable heads** to the communication box.

The **OEMMI3 version** allows direct digital connection to the host machine controller. No communication box is required. This is ideal for high volume OEM applications requiring MI3 performance with the best possible value and minimum installation costs.



## CM - The Thermocouple Alternative

When a low-maintenance solution to thermocouples is required, consider the CM. The CM is a rugged, integrated unit with the same output impedance as a thermocouple. It functions accurately without offset errors when used in conjunction with the thermocouple break protection circuitry in most controllers, displays, and transmitters. Combine the CM with the GP monitor to add a display and power supply.

The CM has a rugged stainless steel housing to ensure continuous, long-term performance, even in hostile environments.

*The compact CM is an integrated, stainless steel sensor that makes a low-cost thermocouple replacement.*



## Highlights: MI3 Series

- Lowest installation costs per measurement point due to multiple sensing head system design
- Self diagnostic features: break of a head wire, head internal temperature
- Plug & Play exchangeability for sensing heads (no heads parameter anymore; patent pending)
- Robust EMI immunity due to digital head-to-box communication
- No cable bending/moving effects allowing continuous reliable measurement in moving installations (robotic arms, linear drives, chains etc)
- OEM version allows direct digital communication with the host machine controller without the need for an additional communication box

### MI3 digital



*Multiple sensing head design for the digital MI3 saves installation costs.*

### Sensor analog



*Conventional analog sensors require one box for one sensing head.*

## Highlights: CM Sensor

- IP 65 stainless steel electronics housing
- Ambient temperatures to 70°C without cooling
- Accessories for cooling and air purging
- RS232 digital communications
- 150 ms (95%) response time
- One model covers temperature range from -20 to 500°C

## The GP Monitor

The 1/8 DIN GP Monitor provides a compact, easy-to-use interface and display for process instruments. The GP Monitor accepts inputs from any 0-5 V sensor, 4-20 mA sensor or thermocouple type J, K, E, N, R, S, T. For signal processing requirements, the monitor provides Peak Hold, Valley Hold, and Averaging and a user adjustable offset. Best of all, there are no internal jumpers used for setup, as all monitor functions are configured via the front panel. The GP Monitor accepts 110-220 VAC power and provides a 24 VDC/50 mA excitation voltage, capable of providing loop power to external sensors.



*The 1/8 DIN GP Monitor provides a compact display for a wide variety of Raytek sensing heads.*

## Raytek Service Ensures Long Use

With over forty years experience, Raytek knows infrared temperature measurement. Our application specialists are located around the world to help answer your technical questions. Each Compact product includes a two year warranty. In addition, maintenance, training, calibration, and other customized services are available to ensure that you receive the maximum benefits from your Raytek infrared, noncontact thermometer. For more information on Raytek infrared temperature measurement solutions, contact your Raytek application specialist today.



*Monitoring edge temperature and drying uniformity for paper production results in higher yields and reduced downtime.*



*From paint curing to thermoforming, noncontact temperature measurement provides consistent product quality in the automobile industry.*

---

## The Worldwide Leader in Noncontact Temperature Measurement

### Worldwide Headquarters

Raytek Corporation  
Santa Cruz, CA USA  
Tel: +1 800 227 8074 (USA/Canada, only)  
+1 831 458 3900  
solutions@raytek.com

### China Headquarters

Raytek China Company  
Beijing, China  
Tel: +8610 6438 4691  
info@raytek.com.cn

### European Headquarters

Raytek GmbH  
Berlin, Germany  
Tel: +49 30 4780080  
raytek@raytek.de

### France

info@raytek.fr

### United Kingdom

ukinfo@raytek.com

[www.raytek.com](http://www.raytek.com)



© 2010 Raytek (55006 A4 Rev. H) 12/2010  
Raytek and the Raytek logo are registered trademarks of Raytek Corporation.  
Windows NT, Windows 2000, Windows XP are registered trademarks of Microsoft Corporation.  
Specifications subject to change without notice. Raytek is ISO 9001 certified.