

2010 Commercial Equipment Catalog

Effective January 1, 2010




KÄRCHER ADVANTAGE | Efficient Burner Technology



Pays for itself quickly

Innovative Kärcher burner delivers 25% fuel savings with dramatic combustion efficiency

Kärcher invented the hot water pressure washer in the 1950's and has Know perfected the heating of water under high pressure with several patented innovations that deliver significant heating efficiency resulting in 25% or more fuel savings—enough to pay for the equipment in two to three years, depending the price of fuel and equipment usage. Among the innovations: [1] a high-efficiency burner shoots the flame down onto a firebrick floor that deflects the heat evenly back up and around the coil tubing; [2] a double-pass coil forces the water to pass through the heating chamber twice; and [3] outside air is used to create a thermal insulation barrier around the heating coil while simultaneously pre-heating the air for optimum combustion.

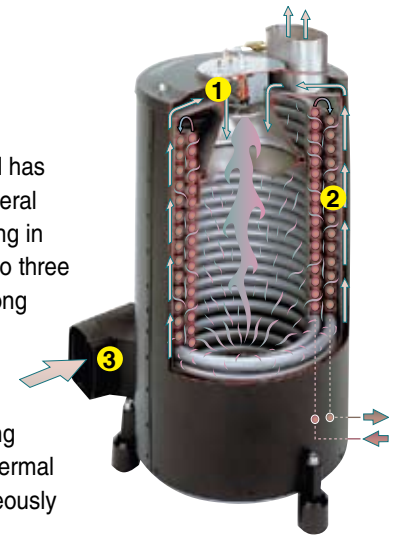

HOT WATER | Electric Powered | Diesel Heated

CLASSIC SERIES



Compact "C" models: Electric-powered, diesel/oil-heated



Full-size models: Electric-powered, diesel/oil-heated

Kärcher's German-built electric hot water machines are the most advanced on the market, featuring Kärcher's patented axial pump integrated with a 4-pole water-cooled motor for optimum efficiency. Kärcher's efficient and compact downdraft-fired burner uses far less fuel than standard coils. Units come standard with anti-scale system, low-fuel shut-off, low-water protection, high-temperature shut-off, thermal overload protection, pivoting spray lance, soft-grip gun, 50' hose, and high-impact Power Nozzle. Also unique to Kärcher are variable water flow, pressure, temperature, and detergent metering. All units are ETL certified to UL and CSA standards.

Features

- Industrial-grade axial pump
- Efficient burner uses less fuel
- Complete machine shut-down at the gun
- Low fuel shut-off / low water protection
- High temperature protection
- Variable flow, PSI, temp, & soap
- Steam capable at the turn of a dial
- ETL certified to UL and CSA standards

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Ship Wt
HDS 2.3/12 C Ed**	1.170-606.0	1.2-2.3	450-1200	2.8	120V / 1ph	20	Kärcher Axial	270 lbs
HDS 3.0/20 C Ea*	1.170-612.0	1.3-3.0	450-2000	5.7	230V / 1ph	20	Kärcher Axial	279 lbs
HDS 4.0/20-4M Ea	1.027-352.0	2.0-4.0	450-2000	8.0	230V / 1ph	30	Kärcher Axial	396 lbs
HDS 4.5/22-4M Ea	1.027-354.0	2.4-4.5	450-2250	9.5	230V / 1ph	30	Kärcher Axial	443 lbs
HDS 3.5/30-4M Ea	1.027-350.0	2.0-3.5	450-3000	9.5	230V / 1ph	30	Kärcher Axial	405 lbs
HDS 3.5/23-4M Eg	1.027-356.0	2.0-3.5	450-2300	8.1	208V / 1ph	30	Kärcher Axial	368 lbs
HDS 895 M Eco**	1.027-317.0	2.2-4.3	450-2500	8.6	230V / 3ph	21	Kärcher Axial	363 lbs
HDS 5.0/30-4S Eb	1.028-341.0	2.6-5.0	450-3000	11	230V / 3ph	30	Kärcher Axial	423 lbs
HDS 5.0/30-4S Ec	1.028-342.0	2.6-5.0	450-3000	11	460V / 3ph	21	Kärcher Axial	413 lbs

*Feature air-cooled motors ** Comes with 33 ft. hose; does not come with low-water shutoff or high-temperature shutoff

*HDS 2.3/12 C Ed doesn't have high-pressure soap or RM110 anti-scale system

Dimensions: Full-size 51"L x 27"W x 33"H; Compact 37"L x 24"W x 29"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
2.637-998.0	Hose Reel, Full Size Models, 66 ft ID8, No Hose	9.558-013.0*	Rapid Reel, 100 ft Non-Pivot, No Hose
8.735-001.0*	Hose Reel Mounting Bracket, Compact Models	9.558-016.0*	Rapid Reel, 100 ft Pivot Reel; No Hose
9.558-006.0	Mounting Kit, Full Size, Rapid Reel Non-Pivot	• Jumper hose not included (jumper hose included in mounting kits)	
9.558-012.0	Mounting Kit, Full Size, Rapid Reel Pivot		



HOT WATER | Electric Powered | Diesel Heated

SHARK SERIES



Roll cage design: Electric-powered, diesel/oil-heated

Built on a rugged 1 1/4" powder coated steel frame, these compact electric roll cage models are designed for construction sites, farms and factories where electricity is available. The three models deliver hot water cleaning of up to 2000 PSI using 120V or 230V/1ph. Each features a Kärcher direct-drive crankcase-style pump with 7-year warranty, industrial-grade Baldor motor and 1/2" Schedule 80 heating coil with stainless steel wrap. All are certified to UL and CSA standards.

Features

- Available in 120V and 230V
- Direct-drive crankcase style pumps
- Stainless steel coil wrap standard
- Oil-water separator and hour meter
- 1725 RPM motors on 1.5-2 HP models

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Ship Wt
HDS 2.0/10 Ed Cage	1.575-511.0	2.0	1000	1.5	120V / 1 ph	15	Kärcher KE	480 lbs
HDS 1.9/15 Ed Cage	1.575-512.0	1.9	1500	2	120V / 1 ph	20	Kärcher KE	480 lbs
HDS 3.5/20 Ea Cage	1.575-513.0	3.5	2000	5	230V / 1 ph	22	Kärcher KE	500 lbs

Dimensions: 39"L x 27"W x 44"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-024.0	E-Z Hose Reel Kit, 100 ft.; no hose	9.804-570.0	Hose Reel Kit, Pivot, 100 ft.; no hose

SHARK SERIES



1.5 HP model: Electric-powered, diesel/oil-heated

Kärcher offers 9 North American models with their unique hand truck design, all-metal frame, heavy-duty vertical heating coil with stainless steel wrap, water-resistant control box and tubed pneumatic tires. Units come with direct-drive or belt-drive Kärcher crankcase pumps. All are ETL certified to UL and CSA safety standards.

Features

- Available in 120V, 230V and 460V
- Belt- or direct-drive Kärcher pump
- 1/2-inch Schedule 80 heating coil
- Stainless steel coil wrap
- Upright hand truck design

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Drive	Pump	Ship Wt
HDS 2.0/10 Ed*	1.575-500.0	2.0	1000	1.5	120V / 1 ph	20	Direct	Kärcher KE	368 lbs
HDS 2.0/14 Ed	1.575-501.0	2.0	1400	2	120V / 1 ph	20	Direct	Kärcher KE	400 lbs
HDS 2.5/10 Ed	1.575-502.0	2.5	1000	2	120V / 1 ph	20	Direct	Kärcher KE	486 lbs
HDS 2.5/16 Ea	1.575-503.0	2.5	1600	3	230V / 1 ph	18	Direct	Kärcher KE	490 lbs
HDS 3.5/20 Ea	1.575-504.0	3.5	2000	5	230V / 1 ph	23	Direct	Kärcher KE	475 lbs
HDS 3.9/20 Ea	1.575-505.0	3.9	2000	6	230V / 1 ph	29	Belt	Kärcher KM	660 lbs
HDS 3.5/30 Ea	1.575-508.0	3.5	3000	7.5	230V / 1 ph	36	Belt	Kärcher KM	690 lbs
HDS 3.5/30 Eb	1.575-509.0	3.5	3000	7.5	230V / 3 ph	25	Belt	Kärcher KM	605 lbs
HDS 3.5/30 Ec	1.575-510.0	3.5	3000	7.5	460V / 3 ph	13	Belt	Kärcher KM	605 lbs

* Does not accept options listed below

Dimensions: 1.5HP 31"L x 23"W x 40"H • 2-5HP 28"L x 28"W x 43"H • 6-7.5HP 41"L x 32"W x 44"H

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-007.0	Hour Meter	9.801-045.0	Steam Combination (2-5 HP models)
9.801-008.0	Float Tank (6 - 7.5 HP units, with soap valve)	9.804-515.0	Steam Combination (6-7 HP, if w/ float tank)
9.801-041.0	Fuel Filter / Water Separator	9.801-009.0	Steam Combination (6-7 HP, if no float tank)
9.801-005.0	Auto Start/Stop (2 - 5 HP models)*	9.801-000.0	Time Delay Shutdown (2 - 5 HP models)*
9.801-006.0	Auto Start/Stop (6 - 7.5 HP models)*	9.801-001.0	Time Delay Shutdown (6 - 7.5 HP models)*
9.801-046.0	Auto Start/Stop & Steam Combo (2 - 5 HP)*	9.801-023.0	E-Z Hose Reel Kit, 100 ft, no hose**
9.804-512.0	Auto Start/Stop & Steam Combo (6 - 7.5 HP)*		
9.804-513.0	Auto Start/Stop & Float Tank (6 - 7.5 HP)*		
9.804-514.0	Auto Start/Stop, Steam & Float Tank (6 - 7.5 HP)*		

* Time Delay Shutdown and Auto Start/Stop are mutually exclusive
** Field installed only

2 to 7.5 HP models: Electric-powered, diesel/oil-heated

HOT WATER | Gasoline Powered | Diesel Heated

CLASSIC SERIES



HDS 1000 BE



HDS Pe cage models



HDS high-volume skid

These durable, skid-mounted models are designed for optimum cleaning performance at remote locations and feature Kärcher's unique 12V DC downdraft burner system. The highly compact burner is more than 92% efficient, resulting in better heat transfer using much less fuel. They feature direct-drive axial pumps or belt-drive crankcase-style pumps. Certified to UL and CSA safety standards.

Features

- Rugged frame construction
- Reliable belt-drive crankcase or direct-drive axial pumps
- Compact and highly-efficient burner
- Low-fuel cut off and steam stage
- Anti-scale system

Model	Order No.	GPM	PSI	Engine / CC	HP	Drive	Pump	Ship Wt
HDS 1000 BE**	1.811-935.0	2.0-4.0	870-3000	Honda / 389	13E	Direct	Kärcher Axial	444 lbs
HDS 4.0/32 Pe Cage	1.575-615.0	4.0	3200	Honda / 389	13E*	Belt	Kärcher KT	692 lbs
HDS 5.0/32 Pe Cage	1.575-616.0	5.0	3200	Vanguard / 479	16E*	Belt	Kärcher KT	762 lbs
HDS 5.5/35 Pe Cage	1.575-617.0	5.5	3500	Honda / 614	20E*	Belt	Kärcher KT	741 lbs

* E = Electric start engine; battery not included

** Call for availability and lead time. Units feature engine idle down; battery included.

Dimensions: 1000 BE 45"L x 30"W x 34"H • Pe Cage 51"L x 33"W x 43"H

The most fuel-efficient, high-volume hot water pressure washer available!

Model	Order No.	GPM	PSI	Engine / CC	HP	Fuel	Pump	Ship Wt
HDS 8.0/30 Pe Cage	1.110-573.0	7.8	3000	Honda / 670	24E*	Gas	Kärcher KX	1710 lbs
HDS 10/25 Pe Cage	1.110-572.0	10.3	2500	Kawasaki / 745	27E*	Gas	Kärcher KX	1680 lbs
HDS 8.0/30 De Cage	1.110-570.0	7.8	3000	Kohler / 1028	27E*	Diesel	Kärcher KX	1965 lbs
HDS 10/25 De Cage	1.110-571.0	10.3	2500	Kohler / 1028	27E*	Diesel	Kärcher KX	1965 lbs

Dimensions: 60"L x 42"W x 53"H

* E = Electric start engine; battery not included

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
8.902-421.0	Two-gun T-adapter	8.707-680.0	Dual-gun Nozzle, 25°, 8 GPM
8.707-711.0	Dual-gun Nozzle, 25°, 10.3 GPM		

SHARK SERIES



HDS 2.5 and 2.8 compact:
Gas-powered, diesel/oil-heated



HDS 2.6 and 3.5 full-size:
Gas-powered, diesel/oil-heated

These portable gas-powered hot water units are built using heavy-duty components and rugged steel chassis to withstand the most rigorous conditions. Their compact frame design and tubed pneumatic wheels provide easy maneuvering in all terrains. Each unit is ETL certified and comes with a leak free Schedule 80 heating coil surrounded by a standard stainless steel wrap.

Features

- Direct-drive tri-plunger pumps
- Stainless steel coil wrap standard
- Rugged frame with powder finish
- Tubed pneumatic tires
- Schedule 80 heating coil
- ETL certified to UL & CSA Standards

Model	Order No.	GPM	PSI	Engine / CC	HP	Start	Pump	Burner	Ship Wt
HDS 2.5/20 P Cage	1.575-554.0	2.5	2000	Subaru / 169	6	Recoil	Kärcher KG	12V DC	390 lbs
HDS 2.8/25 P Cage	1.575-555.0	2.7	2400	Subaru / 211	7	Recoil	Kärcher KG	12V DC	404 lbs
HDS 2.6/30 P Cage	1.575-550.0	2.6	3000	Honda / 270	9	Recoil	Kärcher KG	12V DC	500 lbs
HDS 3.5/30 P Cage	1.575-551.0	3.5	3000	Honda / 337	11	Recoil	Kärcher KS	12V DC	550 lbs
HDS 3.5/30 Pe Cage	1.575-552.0	3.5	3000	Honda / 337	11E*	Electric	Kärcher KS	12V DC	560 lbs
HDS 3.5/35 Pe Cage	1.575-553.0	3.5	3500	Honda / 389	13E*	Electric	Kärcher KS	12V DC	595 lbs

Dimensions: Full-size 46"L x 28"W x 44"H • Compact 39"L x 28"W x 42"H

* E = Electric start engine;

Battery included on
13 HP model only

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-024.0	E-Z Hose Reel Kit, 100 ft, No Hose
9.804-570.0	Hose Reel Kit, Pivot, 100 ft.; no hose

HOT WATER | Gasoline or Diesel Powered | Diesel Heated

SHARK SERIES



7 YEAR PUMP WARRANTY



Skid design: Gasoline-powered, diesel/oil-heated

Shark Series oil-fired skids are the workhorses of the pressure washer industry. Delivering up to 5.6 GPM of hot water at up to 3500 PSI, these rugged gas- and diesel-powered machines are built on an open frame using heavy-gauge 1¼” powder coated steel and are ideal for mounting to a truck or on a trailer. The electric-start engine and powerful belt-drive Kärcher KT pump are isolated from the rest of the machine on a shock-mounted sub-frame to reduce vibration. Steam combination comes standard with all models.

Features

- Honda, Vanguard, Kohler engines
- 1¼” full steel skid frame
- Burner available in 12V DC or 120V AC
- Kärcher belt-drive tri-plunger pumps
- 1/2” Schedule 80 heating coil
- North American-style accessories
- Stainless steel coil wrap
- Power generator on four models

Model	Order No.	GPM	PSI	Engine / CC	HP	Fuel	Pump	Burner	Ship Wt
HDS 3.9/30 Pe Cage	1.575-600.0	3.9	3000	Honda / 389	13E*	Gas	Kärcher KT	12V DC	805 lbs
HDS 4.8/30 Pe Cage	1.575-601.0	4.8	3000	Vanguard / 479	16E*	Gas	Kärcher KT	12V DC	854 lbs
HDS 4.8/30 Pe Cage	1.575-602.0	4.8	3000	Vanguard /479	16E*	Gas	Kärcher KT	120V AC	945 lbs
HDS 4.7/35 Pe Cage	1.575-603.0	4.7	3500	Honda / 614	20E*	Gas	Kärcher KT	12V DC	855 lbs
HDS 4.7/35 Pe Cage	1.575-604.0	4.7	3500	Honda / 614	20E*	Gas	Kärcher KT	120V AC	905 lbs
HDS 5.6/35 Pe Cage	1.575-605.0	5.6	3500	Honda / 670	24E*	Gas	Kärcher KT	12V DC	852 lbs
HDS 5.6/35 Pe Cage	1.575-606.0	5.6	3500	Honda / 670	24E*	Gas	Kärcher KT	120V AC	970 lbs
HDS 5.6/35 De Cage	1.575-609.0	5.6	3500	Kohler / 1028	27E*	Diesel	Kärcher KT	12V DC	1200 lbs
HDS 5.6/35 De Cage	1.575-610.0	5.6	3500	Kohler / 1028	27E*	Diesel	Kärcher KT	120V AC	1315 lbs

* E = Electric start engine; battery not included

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-003.0	Wheel Kit Assembly (gas engine skid only)
8.903-430.0	Stackless Flue Adapter
8.904-051.0	Battery Installed (20 & 24 HP models only)

Machine Dimensions:

Gas-powered 41”L x 41”W x 41”H;
Diesel-powered 44”L x 51”W x 41”H

HOT WATER | Electric Powered | Diesel Heated



7 YEAR PUMP WARRANTY



Skid design: Electric-powered, diesel/oil-heated

For customers with AC current available on the job site, four Shark Series electric skid models are an attractive alternative to gas-powered units. Models come with all the industrial ruggedness of our gasoline series and are built with an open design on a 1¼” powder-coated steel frame. The powerful Kärcher KT belt-drive crankcase pump and Baldor motor are isolated from the rest of the machine on a shock-mounted sub-frame to reduce vibration.

Features

- Electric powered, 230V and 460V
- 1/2” Schedule 80 heating coil
- Belt-drive Kärcher crankcase pump
- Rugged steel frame with shock-mounted sub-frame to reduce vibration
- ETL certified to stringent UL and CSA safety standards

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Drive	Pump	Ship Wt
HDS 4.8/30 Ea Cage	1.575-620.0	4.8	3000	10	230V / 1 ph	45	Belt	Kärcher KT	900 lbs
HDS 4.8/30 Eb Cage	1.575-621.0	4.8	3000	10	230V / 3 ph	30	Belt	Kärcher KT	830 lbs
HDS 4.8/30 Ec Cage	1.575-622.0	4.8	3000	10	460V / 3 ph	16	Belt	Kärcher KT	820 lbs

Dimensions: 41”L x 41”W x 41”H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-003.0	Wheel Kit Assembly
8.903-430.0	Stackless Flue Adapter

HOT WATER | Electric Powered | Natural Gas Heated

CLASSIC SERIES



Shown with stainless steel option

Cabinet design: Electric-powered, natural gas/LP-heated

These natural gas and propane gas units feature German-engineered Kärcher components, including the renowned Kärcher water-cooled electric motor and axial pump. Steam function, electronic ignition, complete trigger shut-off and our proprietary anti-scale system all come standard on these feature-rich models. All are certified to stringent UL and CSA safety standards.

Features

- Water-cooled electric motor
- Complete trigger shut-off
- Kärcher axial pump
- Reliable burner with electronic ignition
- Infinitely variable water pressure, temperature control and soap metering

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	BTU	Ship Wt
HDS NG 4.5/22 Ea ST	1.575-715.0	2.4 - 4.5	450-2250	9.5	230V / 1 ph	30	Kärcher Axial	455,883	780 lbs
HDS NG 3.5/30 Ea ST	1.575-719.0	2.4 - 3.5	450-3000	9.5	230V / 1 ph	27	Kärcher Axial	353,125	775 lbs
HDS NG 5.0/30 Eb ST	1.575-717.0	2.6 - 5.0	450-3000	11	230V / 3 ph	27	Kärcher Axial	455,883	760 lbs
HDS NG 5.0/30 Ec ST	1.575-721.0	2.6 - 5.0	450-3000	11	460V / 3 ph	19	Kärcher Axial	455,883	760 lbs

Dimensions: 44"L x 28"W x 49"H

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-019.0	Convert Natural Gas to LP Gas	2.744-008.0*	Remote Kit, Single Station
9.801-044.0	Stainless Steel Wrap and Cabinet Cover	6.685-195.0*	Chemical Solenoid (for use with remote kit)
9.801-040.0*	10-Inch Draft Diverter	8.708-846.0*	Continuous Use Chemical Solenoid
9.801-032.0*	Wheel Kit with LP Bottle Rack	9.802-633.0*	LP Regulator Assembly

* Field installed only

HOT WATER | Electric Powered | Electric Heated



Classic design: Portable all-electric hot water

This Classic Series unit is an electric powered machine that provides electrically-generated heat for those special applications where hot water is required but where gas or oil-fired ignition is prohibited. The 801E is optimal for use in hospitals, food factories, and other areas where indoor emissions present a concern. Models are ETL certified to UL & CSA safety standards.

Features

- No fossil fuel emissions or fumes
- Quiet, clean and user friendly
- 90°F temperature rise under full load; 130°F rise under partial load
- Infinitely variable water pressure, temperature control and soap metering

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Heated By	Ship Wt
HDS 801E	1.030-681.0	3.3	2200	7.5	460V / 3ph	48	Kärcher Axial	Electricity	290 lbs
HDS 801E	1.030-701.0	3.3	2200	7.5	550V / 3ph	54	Kärcher Axial	Electricity	292 lbs

Dimensions: 46"L x 28"W x 44"H

SHARK SERIES



Cabinet design: All-electric hot water

This Shark Series all-electric hot water pressure washer introduces hot-water tank technology to deliver hot water on demand ideal for indoor cleaning. Water is heated by flowing through a coil inside an 80-gallon water tank. Nine 4500W heating elements generate 138,000 BTU to produce hot water of up to 180°F. Both models are ETL certified.

Features

- Quiet, enviro-clean and user friendly
- Rust-free stainless steel coil enhances high-efficiency heat transfer
- Auto start-stop for on-demand cleaning
- Belt-drive pump with 7-year warranty

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Ship Wt
HDS 4.0/20 E Ec	1.109-075.0	4.2	2000	6.2	460V / 3ph	55	Kärcher KM	640 lbs
HDS 4.0/30 E Ec	1.109-076.0	3.5	3000	7.5	460V / 3ph	59	Kärcher KM	640 lbs

Dimensions: 32"L x 24"W x 52"H

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
TBD	Time-Delay Shutdown* *Replaces Auto start-stop	9.801-002.0	Pressure Washer Stainless Steel Cabinet

HOT WATER | Electric Powered | Natural Gas Heated

SHARK SERIES



Cabinet design: Electric-powered, natural gas/LP-heated

For indoor cleaning with hot water, our Shark Series natural gas and propane gas models are ideal. They pack cleaning power of up to 3000 PSI and yet fit within a small footprint. Powered by electricity and heated by natural gas or liquid propane, all 10 models are driven by industrial belt-drive high-pressure Kärcher crank-style pumps and feature Schedule 80 heating coils. All units come with North American fittings and accessories and are ETL certified to UL and CSA safety standards.

Features

- Available in 230V, 460V and 575V
- High-efficiency burner with standing pilot
- Industrial belt-drive Kärcher crankcase pump
- 1/2" Schedule 80 heating coil
- Enclosed cabinet with powder coat finish

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	BTU	Ship Wt
HDS NG 3.5/20 Ea ST	1.575-701.0	3.5	2000	5	230V / 1 ph	22	Kärcher KD	353,125	760 lbs
HDS NG 3.9/20 Ea ST	1.575-702.0	3.9	2000	6.2	230V / 1 ph	29	Kärcher KM	407,754	801 lbs
HDS NG 5.0/20 Ea ST	1.575-705.0	5.0	2000	8.2	230V / 1 ph	36	Kärcher KM	478,134	844 lbs
HDS NG 5.0/20 Eb ST	1.575-706.0	5.0	2000	7.5	230V / 3 ph	25	Kärcher KM	478,134	814 lbs
HDS NG 5.0/20 Ec ST	1.575-707.0	5.0	2000	7.5	460V / 3 ph	13	Kärcher KM	478,134	795 lbs
HDS NG 3.5/30 Ea ST	1.575-708.0	3.5	3000	8.2	230V / 1 ph	36	Kärcher KM	353,125	835 lbs
HDS NG 3.5/30 Eb ST	1.575-709.0	3.5	3000	7.5	230V / 3 ph	25	Kärcher KM	353,125	810 lbs
HDS NG 4.8/30 Eb ST	1.575-711.0	4.8	3000	10	230V / 3 ph	28	Kärcher KM	455,883	810 lbs
HDS NG 4.8/30 Ec ST	1.575-712.0	4.8	3000	10	460V / 3 ph	15	Kärcher KM	455,883	823 lbs
HDS NG 4.8/30 Ef ST	1.575-713.0	4.8	3000	10	575V / 3 ph	13	Kärcher KM	455,883	817 lbs

Dimensions: 44"L x 28"W x 49"H

OPTIONS [Factory Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-014.0	Electronic Ignition	9.801-017.0	Remote, One Station, Time Delay Shutdown
9.801-015.0	Time Delay Shutdown	9.801-018.0	Remote, One Station, Auto Start Stop
9.801-038.0	Auto Start / Stop Control	9.801-021.0	Extra Remote Box with Time Delay Shutdown
9.801-042.0	Convert Natural Gas to LP Gas (millivolt units)	9.801-022.0	Extra Remote Box with Auto Start Stop
9.801-019.0	Convert Natural Gas to LP Gas (electric units)	9.801-039.0	Stainless Steel Wrap and Cabinet Cover
9.801-020.0	Steam Combination	9.801-032.0*	Wheel Kit with LP Bottle Rack
9.801-016.0	Remote, One Station	9.801-040.0*	10-Inch Draft Diverter
	* Field installed only	9.802-633.0*	LP Regulator Assembly

HOT WATER HEATER | No Pump | Diesel Heated

FOR ATTACHING TO A COLD WATER PRESSURE WASHER



Portable heating module: Diesel/oil-heated

Our Shark Series water heater provides supplemental heat to cold water machines, giving users the benefits of hot water cleaning when it's needed. An electric-powered diesel heated unit, the Heater 5.0/30 Ed effectively heats water at a rate of up to 5 gallons per minute.

Features

- Leak-free steel-pipe heating coil
- Effective heating of up to 5 GPM
- ETL certified to UL & CSA standards

Model	Order No.	GPM	PSI	Electrical	Amps	Heated By	Ship Wt
Heater 5.0/30 Ed	1.575-650.0	Up to 5.0	Up to 3000	120V / 1ph	5	Diesel	320 lbs

Dimensions: 29"L x 41"W x 47"H

COLD WATER | Gasoline or Diesel Powered | Belt Drive

SHARK SERIES



Double-axle, cage design:
Gasoline- or diesel-powered,
belt-drive



Single-axle, cage design:
Gasoline-powered, belt-drive

These Shark Series roll cage models are the most powerful units in our cold water line, with cleaning power of up to 5000 PSI. Protected by a rugged powder coated roll cage built of 1¼" steel, the PB Cage units feature powerful Vanguard, Honda or Kohler engines, tri-plunger oil bath Kärcher pumps, 13-inch tubed pneumatic tires, and an extra rugged belt-drive assembly with notched V belts and cast iron pulleys. All single- and double-axle models are ETL safety certified.

Features

- Rugged steel chassis & roll cage
- Powerful Honda or Kohler engine
- Cleaning power up to 5000 PSI
- Electric start on dual-axle models
- Industrial belt-drive Kärcher pump with 7-year warranty
- 13" tubed pneumatic tires

Model	Order No.	GPM	PSI	Engine / CC	HP	Fuel	Pump	Axles	Ship Wt
HD 3.5/32 PB Cage	1.575-204.0	3.5	3200	Honda / 389	13	Gas	Kärcher KM	1	350 lbs
HD 3.7/35 PB Cage	1.575-205.0	3.7	3500	Honda / 389	13	Gas	Kärcher KM	1	350 lbs
HD 4.0/40 PB Cage	1.575-207.0	4.0	4000	Vanguard / 479	16	Gas	Kärcher KM	2	470 lbs
HD 4.0/50 PB Cage	1.575-200.0	4.0	5000	Honda / 614	20E*	Gas	Kärcher KH	2	495 lbs
HD 4.5/50 PB Cage	1.575-201.0	4.5	5000	Honda / 670	24E*	Gas	Kärcher KH	2	500 lbs
HD 3.4/30 DB Cage	1.575-202.0	3.5	3000	Kohler / 401	9.8E*	Diesel	Kärcher KM	2	410 lbs

Dimensions: Single Axle: 42"L x 26"W x 30"H; Double Axle: 42"L x 26"W x 36"H

*E = Electric Start

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-028.0	E-Z Hose Reel Kit, 100 ft., single axle	9.801-029.0	Rapid Reel Hose Reel Kit, 100 ft., 5000 psi, double axle

Note: Hose not included with hose reel kit



Cart design: Gasoline-powered, belt-drive

Our Shark cold-water belt-drive series provides a broad selection of rugged belt-drive units, all with reliable Honda GX engines, which deliver cleaning volume of up to 3.7 GPM. Each model is ETL certified to UL-1776 safety standards and comes with a rugged steel chassis, cast iron belt pulley system, tubed pneumatic tires, and industrial-grade Kärcher crankcase pump.

Features

- Chrome handles
- Powder coated steel chassis
- Reliable Honda GX engine
- Water volume up to 3.7 GPM
- Industrial belt-drive Kärcher pump
- Tubed pneumatic tires

Model	Order No.	GPM	PSI	Engine / CC	HP	Pump	Ship Wt
HD 2.8/20 PB	1.575-150.0	2.8	2000	Honda / 163	5.5	Kärcher KD	155 lbs
HD 2.5/27 PB	1.575-151.0	2.5	2700	Honda / 196	6.5	Kärcher KD	163 lbs
HD 3.0/30 PB	1.575-152.0	3.0	3000	Honda / 270	9	Kärcher KD	225 lbs
HD 3.7/35 PB	1.575-154.0	3.7	3500	Honda / 389	13	Kärcher KM	250 lbs
HD 3.0/40 PB	1.575-155.0	3.0	4000	Honda / 389	13	Kärcher KM	250 lbs

Dimensions: 5.5/6.5 HP: 37"L x 21"W x 24"H; 9/13 HP: 45"L x 26"W x 24"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-025.0	E-Z Hose Reel Kit, 100 ft. 5000 psi; no hose

COLD WATER | Gasoline Powered | Direct Drive

XPERT SERIES



Xpert-HD 3.8/35 P
Dimensions: 36.5"L x 23.5"W x 30.5"H



*7-year warranty on Xpert-HD 2.5/27 P and Xpert-HD 3.8/35 P pumps only

Kärcher's Xpert series is a professional-grade line of cold water pressure washers. Powered by reliable Honda engines, Kärcher offers your choice of 160CC (5 HP) units with axial pumps or 196CC (6.5 HP) and 389CC (13 HP) units with Kärcher crankcase pumps. These Xpert units feature commercial-duty guns and wands and come with downstream chemical injection, four hardened stainless steel quick-couple nozzles and feature 25 or 50-ft of contractor-grade hose rated for 4,000 PSI. The precision welded frames and pneumatic tires make these pressure washers easy to maneuver on any terrain yet they are compact enough to fit in the trunk of most cars.

Features

- Reliable Honda engines
- Axial or crankcase pumps
- Welded steel chassis protected by all weather, epoxy powder coat finish
- Ergonomic design
- E-Z pull starting
- Pneumatic tires
- UL-1776 safety certification

Model	Order No.	GPM	PSI	Engine / CC	HP	Pump	Ship Wt
Xpert-HD 2.3/23 P KA	1.107-104.0	2.3	2300	Honda GC / 160	5	Kärcher Axial*	72 lbs
Xpert-HD 2.3/23 P CO	1.107-103.0	2.3	2300	Honda GC / 160	5	Comet Axial*	73 lbs
Xpert-HD 2.5/27 P	1.107-106.0	2.5	2700	Honda GX / 196	6.5	KG2530G.1**	99 lbs
Xpert-HD 3.8/35 P	1.107-108.0	3.8	3500	Honda GX / 389	13	KS4040G.2**	157 lbs

*Axial pumps come with 1-year warranty.

**Crankcase pumps come with 7-year warranty.



Xpert-HD 2.5/27 P
Dimensions: 23"L x 22"W x 25"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.103-055.0	Non-pivoting hose reel, 100 ft.; no hose

SAVE BY PURCHASING PALLETS

Kärcher's Xpert series is available for purchase in pallets. Choose from a pallet of a single model, or choose one of our mixed pallet options. Price per unit is as low as \$630 List Price!



Xpert-HD 2.3/23 P
Dimensions: 23"L x 22"W x 25"H

Pallet Part Numbers	Description
8.917-676.0	Pallet of 8 Xpert-HD 2.3/23 P Kärcher
8.917-675.0	Pallet of 8 Xpert-HD 2.3/23 P Comet
8.917-678.0	Pallet of 8 Xpert-HD 2.5/27 P
8.917-680.0	Pallet of 2 Xpert-HD 3.8/35 P
8.917-681.0	Mixed Pallet, 5 Xpert-HD 2.3/23 P Comet & 3 Xpert-HD 2.5/27 P
8.917-682.0	Mixed Pallet, 5 Xpert-HD 2.3/23 P Kärcher & 3 Xpert-HD 2.5/27 P

COLD WATER | Gasoline Powered | Direct Drive

CLASSIC SERIES



FREE
Hose Reel on
9 & 13 HP
Models



Handtruck design: Gasoline-powered, direct-drive

This series of commercial-duty, gas-powered cold water pressure washers offers the ideal balance between professional performance and value. Powered by reliable Honda engines, all four models have Kärcher's German-engineered, direct-drive commercial axial pump, rugged steel frame with handtruck design, tubed pneumatic tires and 50' of commercial-duty hose (9 and 13 HP models come with a 100 ft. hose reel).

Features

- Reliable Honda engines
- Commercial-duty Kärcher axial pump with 5-year warranty
- Reinforced upright steel frame
- Unmatched value

Model	Order No.	GPM	PSI	Engine / CC	HP	Pump	Ship Wt
HD 2.5/24 P	1.575-105.0	2.5	2400	Honda GC / 160	5	Kärcher Axial	115 lbs
HD 2.6/26 P	1.575-106.0	2.6	2600	Honda GC / 190	6	Kärcher Axial	115 lbs
HD 3.1/31 P*	1.575-107.0	3.1	3100	Honda GX / 290	9	Kärcher Axial	175 lbs
HD 4.0/36 P*	1.575-108.0	4.0	3600	Honda GX / 389	13	Kärcher Axial	181 lbs

* 9 and 13 HP units come standard with a 100 ft. hose reel

Dimensions: 22"L x 23"W x 35"H (42"H with hose reel)

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.103-055.0	Non-pivoting hose reel, 100 ft.; no hose

SHARK SERIES



Cart design: Gasoline-powered, direct-drive

These Shark Series models are tough gasoline-powered direct-drive cold water machines that deliver cleaning power of up to 3500 PSI. Built on compact sturdy steel frames, each unit features a dependable industrial-grade Honda engine, Kärcher crankcase pump, hose/gun rack, detergent injection, and tubed pneumatic tires. All models are ETL certified.

Features

- Chrome handles
- Steel frame with powder coat finish
- Commercial grade Honda GX engine
- Cleaning power up to 3500 PSI
- Industrial direct-drive Kärcher crankcase pump

Model	Order No.	GPM	PSI	Engine / CC	HP	Pump	Ship Wt
HD 2.3/24 P	1.575-100.0	2.3	2400	Honda GX / 163	5.5	Kärcher KG	148 lbs
HD 2.5/27 P	1.575-101.0	2.5	2700	Honda GX / 196	6.5	Kärcher KG	155 lbs
HD 3.0/30 P	1.575-102.0	3.0	3000	Honda GX / 270	9	Kärcher KG	175 lbs
HD 3.8/35 P	1.575-104.0	3.8	3500	Honda GX / 389	13	Kärcher KS	180 lbs

Dimensions: 35"L x 21"W x 24"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-026.0	E-Z Hose Reel Kit, 100 ft.; no hose

COLD WATER | Gas Powered | Residential Models



Residential Use: Gas-powered, direct-drive

Kärcher offers a line of gas-powered, direct-drive cold water pressure washers designed for residential use. They are easy to use and transport.

Features

- Durable steel frame
- Portable, easy to transport

Model	Order No.	GPM*	PSI*	Engine / CC	HP	Pump	Ship Wt
HD 2.3/26 CV*	1.107-077.0	2.3	2600	Honda GCV / 160	5.5	Kärcher Axial	78 lbs
HD 2.5/30 CH	1.107-078.0	2.5	3000	Honda GC / 190	6	Kärcher Axial	77 lbs
HD 2.5/30 CS	1.107-080.0	2.5	3000	Subaru EX / 160	6	Kärcher Axial	79 lbs
HD 3.6/40 CH	1.107-079.0	3.6	4000	Honda GX / 389	13	Kärcher Axial	144 lbs

* Vertical shaft pump

+ Performance certified to PWMA standard +/- 20% of advertised specifications

Dimensions: **5.5HP:** 21"L x 23"W x 31"H;

6HP: 22"x23"x35"; **13HP:** 37"x24"x31"



COLD WATER | Electric Powered | Direct Drive

CLASSIC SERIES



HD Compact "C"

HD "C Food"



All Models



HD Mid Class "M"

HD Super Class "S"

Kärcher's Classic Series electric powered cold water units are compact, highly mobile and hard wearing. Built with high grade lightweight polypropylene and designed with usability and ergonomics in mind, these units feature patented direct drive Kärcher axial pumps with corrosion-resistant brass cylinder heads and protected by a 5-year warranty. They can deliver up to 4.5 GPM at 3200 PSI and are ETL certified to UL and CSA standards.

Features

- Lightweight ergonomic design
- Low-pressure soap injection system
- Complete trigger shut off
- Triple changeover nozzle
- Mid- and Super-Class models come with variable flow ServoPress gun
- ETL certified to UL and CSA standards

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD 1.8/13 C Ed	1.514-111.0	1.8	1300	2.2	120V / 1ph	15	Kärcher Axial	63 lbs
HD 2.3/15 C Ed**	1.150-611.0	1.1-2.3	300-1500	3.2	120V / 1ph	20	Kärcher Axial	68 lbs
HD 2.3/14 C Ed Food†	1.150-614.0	1.1-2.3	300-1400	3.2	120V / 1ph	20	Kärcher Axial	68 lbs
HD 3.0/20 C Ea	1.150-610.0	1.1-3.0	300-2000	5.2	230V / 1ph	20	Kärcher Axial	68 lbs
HD 3.0/20-4M Ea*	1.524-110.0	1.1-3.0	300-2000	4.7	230V / 1ph	20	Kärcher Axial	105 lbs
HD 3.8/22-4M Eb*	1.524-202.0	1.1-3.8	300-2200	6.4	230V / 3ph	15	Kärcher Axial	107 lbs
HD 3.5/30-4S Ea**	1.286-110.0	1.8-3.5	450-3000	9	230V / 1ph	30	Kärcher Axial	168 lbs
HD 3.7/22-4S Eg**	1.286-115.0	1.8-3.7	450-2200	6.9	208V / 1ph	25	Kärcher Axial	158 lbs
HD 4.5/32-4S Eb**	1.286-112.0	2.2-4.5	450-3200	10	230V / 3ph	20	Kärcher Axial	182 lbs
HD 4.5/32-4S Ec**	1.286-113.0	2.2-4.5	450-3200	10	460V / 3ph	15	Kärcher Axial	182 lbs



† Accepts inlet water at temperatures of up to 180°F

* Mid class units feature 4-pole air-cooled motor and two-tank SwitchChem system

** Super class units feature 4-pole water-cooled motor and pneumatic tires

Dimensions: Super Class 22"L x 20"W x 43"H

Mid-Class 18"L x 16"W x 40"H

Compact and Food 15"L x 14"W x 37"H

SHARK SERIES



Cart design: Electric-powered, direct-drive

Our electric-powered Shark machines are durable direct-drive units that can deliver cleaning volume of up to 3.5 GPM. Powered by heavy duty industrial-grade Baldor motors, these compact electric units feature tri-plunger oil bath Kärcher pumps, powder coated steel chassis, hose racks, detergent injection, insulated guns and wands, and tubed pneumatic tires. All models are ETL certified to UL and CSA safety standards.

Features

- Chrome handles
- Steel frame and chassis protected by powder coat finish
- Direct-drive Kärcher crankcase pump
- Available in 120V and 230V
- ETL certified to UL and CSA standards

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD 2.0/10 Ed	1.575-250.0	2.0	1000	1.5	120V / 1ph	15	Kärcher KE	140 lbs
HD 1.9/15 Ed	1.575-251.0	1.9	1300	2	120V / 1ph	20	Kärcher KE	150 lbs
HD 2.8/10 Ed	1.575-252.0	2.8	1000	2	120V / 1ph	20	Kärcher KE	150 lbs
HD 3.5/20 Ea	1.575-253.0	3.5	2000	5	230V / 1ph	22	Kärcher KE	167 lbs

Dimensions: 35"L x 21"W x 24"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION
9.801-027.0	E-Z Hose Reel Kit, 100 ft.; no hose

COLD WATER | Electric Powered | Direct Drive | Wall Mount

HE+: Electric-powered with optional wall mount bracket: 8.903-613.0



Kärcher's new wall mount unit has a durable steel frame, amazingly quiet 1725 RPM motor, and is perfect for in-shop uses. A remote on/off switch with a 10' electrical cord allows the machine to be mounted high on a wall away from backspray. ETL certified to UL and CSA safety standards.

Features

- Accepts hot water up to 180°
- Remote on/off switch
- Triplex crankcase pump
- Pressure controlled auto start/stop safety feature
- Reliable industrial motor



HE+: Electric-powered

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD 2.0/14 Ed+	1.107-088.0	1.8	1400	2	120V / 1ph	20	Kärcher KE	120 lbs

Dimensions: 20"L x 19"W x 17"H

OPTIONS

PART NO.	DESCRIPTION
8.903-613.0	Wall mount bracket

COLD WATER | Electric and Gas Powered | Hand Held



Hand held design: Electric-powered

These light-industrial hand held units are significantly more rugged than typical consumer substitutes and are built with durable steel frames. Hand-held models come with a dependable axial pump, high pressure hose, a stainless steel wand and detergent injector with brass soap nozzle.

Features

- Durable steel frame
- Axial pump on most models
- Portable, easy to transport

Electric-Powered Hand Held Models

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD 2.0/10 Ed	1.575-400.0	2.0	1000	1.5	120 V / 1ph	15	Comet Axial	80 lbs
HD 1.8/14 Ed	1.575-401.0	1.8	1400	2	120V / 1ph	20	Comet Axial	95 lbs

Dimensions: 16"L x 24"W x 22"H

Gas-Powered Hand Held Models

This gasoline-powered hand held unit delivers up to 2400 PSI with the added independence afforded by reliable Honda gasoline engines.



Hand held design: Gasoline-powered

Model	Order No.	GPM	PSI	Engine / CC	HP	Pump	Ship Wt
HD 2.3/23 P	1.575-351.0	2.3	2300	Honda GC / 160	5	Kärcher Axial	70 lbs
HD 2.3/24 P	1.575-350.0	2.3	2400	Honda GX / 163	5.5	Kärcher KG	80 lbs

Dimensions: 16"L x 24"W x 22"H

COLD WATER | Electric Powered | Belt Drive | Cabinet



Cabinet design:
Electric-powered,
belt-drive



Wheel Kit with detergent rack
and optional hose reel



Floor stand with caster wheels

Our cold-water cabinet units really take the heat, accepting heated water up to 180°F. Protected in durable steel cabinets, they demonstrate industrial strength throughout, including belt-drive Kärcher crankcase pumps, industrial Baldor motors, and magnetic starters for operator safety. All models are ETL certified to UL and CSA safety standards.

Features

- Accept hot water up to 180°F
- Powder coated steel cabinets
- Belt-drive pump w/ 7-year warranty
- Available in 120V, 208V, 230V, 460V

Model	Order No.	GPM	PSI	HP	Electrical	Amps	Pump	Ship Wt
HD 2.8/10 ST Ed B	1.575-300.0	2.8	1000	2	120V / 1ph	20	Kärcher KD	210 lbs
HD 4.2/20 ST Ea B	1.575-301.0	4.2	2000	6	230V / 1ph	29	Kärcher KM	285 lbs
HD 4.2/20 ST Eb B	1.575-302.0	4.2	2000	6	230V / 3ph	19	Kärcher KM	255 lbs
HD 4.2/20 ST Ec B	1.575-303.0	4.2	2000	6	460V / 3ph	11	Kärcher KM	260 lbs
HD 4.2/20 ST Eh B	1.575-305.0	4.2	2000	6	208V / 3ph	16	Kärcher KM	265 lbs
HD 3.5/30 ST Ea B	1.575-306.0	3.5	3000	7.5	230V / 1ph	36	Kärcher KM	330 lbs
HD 3.5/30 ST Eb B	1.575-307.0	3.5	3000	7.5	230V / 3ph	19	Kärcher KM	275 lbs
HD 3.5/30 ST Ec B	1.575-308.0	3.5	3000	7.5	460V / 3ph	11	Kärcher KM	270 lbs
HD 3.5/30 ST Eg B	1.575-309.0	3.5	3000	7.5	208V / 1ph	38	Kärcher KM	332 lbs
HD 3.5/30 ST Eh B	1.575-310.0	3.5	3000	7.5	208V / 3ph	23	Kärcher KM	271 lbs

Dimensions: 26"L x 20"W x 16"H

OPTIONS [Field Installed]

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
9.801-002.0*	Conversion to Stainless Steel Cabinet & Cover	8.903-040.0	Floor Stand, 24" Tall
9.801-011.0*	Auto Start Stop	9.801-034.0	Floor Stand, 36" Tall
9.801-012.0*	Time-Delay Shutdown	8.903-617.0	Stainless Steel Floor Stand, 36" Tall
9.801-013.0*	Hour Meter	8.941-546.0	Floor Stand, Stainless Steel w/o Hose Hanger
9.801-031.0	Wheel Kit with Detergent Rack	9.801-035.0	Caster Wheels for Floor Stand
9.801-033.0	Wall Mount Kit	9.801-036.0	Hose Reel Kit, Floor Stand Only, 100 ft.**
8.903-043.0	Stainless Steel Wall Mount Kit	8.903-521.0	Hose Reel, For Wheel Kit, 100 ft.**
	* Factory installed only **Hose not included	9.802-265.0	Hose Reel Kit (Cox), Wall Mount, 100 ft.**
		8.903-039.0	Hose Reel Kit w/ Bracket for Stand, Wall Mount Kits, 100 ft.**

COLD WATER | Electric Powered | Belt Drive



Roll-cage design: Electric-powered,
belt-drive

These new Shark Series roll cage models feature cleaning power of 5000 PSI and are available with either 230/3 phase or 460/3 phase. These units are specialty machines perfect for use in the marine market cleaning the bottom of boats or in the concrete industry for cleaning trucks, forms and handling equipment. Hoses, wands, guns and fittings are high-pressure rated and both models are ETL safety certified.

Features

- Rugged steel chassis & roll cage
- Belt-drive crankcase pump
- Cleaning power of 5000 PSI
- 50' high-pressure hose
- 20 HP Baldor motor
- 13" tubed pneumatic tires

Model	Order No.	GPM	PSI	Motor HP	Electrical	Amps	Pump	Ship Wt
HD 5.0/50 Eb Cage	1.107-084.0	5.0	5000	20	230V / 3ph	48	Kärcher KH	480 lbs
HD 5.0/50 Ec Cage	1.107-087.0	5.0	5000	20	460V / 3ph	26	Kärcher KH	480 lbs

Dimensions: 42"L x 26"W x 30"H

TRAILER SYSTEMS | Customized Mobile Wash Packages

CLASSIC AND SHARK SERIES



Hose reel, utility rack and saddle box options available



Swing-away hinge makes for easy storing and shipping



TRS-2500

Shown with optional Shark Series hot water pressure washer skid

Kärcher's new TRS-2500 pressure washer trailer is designed to accommodate a variety of pressure washer skids (see list below). This trailer package is rugged, affordable, versatile, and easy to ship and store. Customizing your trailer package is easy:

- **Step 1:** Select from a list of compatible Kärcher pressure washers (shown below).
- **Step 2:** Customize your trailer with a broad selection of options and accessories, such as hose reels, electric or hydraulic brakes, etc. A full list is below.

The TRS-2500 is made of rugged 10-gauge steel. The wheel and axle assembly features leaf-spring suspension of up to 3,500 lbs. The 39-inch tongue features a swing-away hinge that saves on storage space.

Other features include:

- Electrical wiring recessed within tubular frame;
- Lighted license plate holder and recessed tail lights;
- 1,000 lb. swivel jack with a 2-inch ball coupler for quick and easy hook up of the trailer;
- 3-way ball valve for easy switching of the water flow from the holding tank to a faucet;
- High-density, polyethylene 200-gallon water tank with a 12-inch access port, 1½-inch drain valve, ¾-inch float valve and a 50-mesh inlet filter; and two 5/16-inch chains for additional safety.

Great cleaning solution for:

- Construction sites
- Trucking and transportation
- Marine and shipping
- Mines
- Oil field operation
- Municipalities

Model	Order No.	Axle	Load Capacity	Water Tank	Ship Weight*
TRS-2500*	1.103-819.0	Single	3500 lbs	200 gallon	1072 lbs

Dimensions: 136"L x 66"W x 52"H

*Trailer and water tank only; select a pressure washer below

OPTIONS

PART NO. DESCRIPTION

MOUNTING KITS

8.917-294.0	Shark Series Skid Mounting Kit (Required for Mounting Pressure Washer to Trailer)
8.917-295.0	HDS 3.5/35 Pe Cage Mounting Kit (Required for Mounting Pressure Washer to Trailer)
8.917-296.0	Classic Series Skid Mounting Kit (Required for Mounting Pressure Washer to Trailer)

FIELD INSTALLED

8.917-558.0	Saddle Box (Ea)
8.917-559.0	Rock Guard
8.917-560.0	Utility Rack

FACTORY INSTALLED

8.917-397.0	Electric Brakes
8.917-553.0	Electric Brake Breakaway Kit
8.917-398.0	Hydraulic Brakes
8.917-554.0	High-Pressure Hose Reel
8.917-555.0	Low-Pressure Hose Reel
8.917-556.0	Saddle Boxes (2)
8.917-557.0	Rock Guard

CHOOSE A COMPATIBLE PRESSURE WASHER

MODEL PART NO. DESCRIPTION

CLASSIC SERIES SKIDS (details on page 4)

HDS 4.0/32 Pe Cage	1.575-615.0	4.0 GPM @ 3,200 PSI, 389CC (13 HP) Honda GX E/S
HDS 5.0/32 Pe Cage	1.575-616.0	5.0 GPM @ 3,200 PSI, 479CC (16 HP) Vanguard E/S
HDS 5.5/35 Pe Cage	1.575-617.0	5.5 GPM @ 3,500 PSI, 614CC (20 HP) Honda GX E/S

SHARK SERIES SKIDS (details on page 5)

HDS 3.9/30 Pe Cage	1.575-600.0	3.9 GPM @ 3,000 PSI, 13 HP, GAS, 12V DC Burner
HDS 4.8/30 Pe Cage	1.575-601.0	4.8 GPM @ 3,000 PSI, 16 HP, GAS, 12V DC Burner
HDS 4.8/30 Pe Cage	1.575-602.0	4.8 GPM @ 3,000 PSI, 16 HP, GAS, 120V AC Burner
HDS 4.7/35 Pe Cage	1.575-603.0	4.7 GPM @ 3,500 PSI, 20 HP, Gas, 12V DC Burner
HDS 4.7/35 Pe Cage	1.575-604.0	4.7 GPM @ 3,500 PSI, 20 HP, Gas, 120V AC Burner
HDS 5.6/35 Pe Cage	1.575-605.0	5.6 GPM @ 3,500 PSI, 24 HP, Gas, 12V DC Burner
HDS 5.6/35 Pe Cage	1.575-606.0	5.6 GPM @ 3,500 PSI, 24 HP, Gas, 120V AC Burner

SHARK SERIES DIRECT-DRIVE MODELS (details on page 4)

HDS 3.5/35 Pe Cage	1.575-553.0	3.5 GPM @ 3,500 PSI, 13E* HP, Electric, 12V DC Burner
--------------------	-------------	---

*Electric start engine, battery included.

TRAILER SYSTEMS | Customized Mobile Wash Packages

SHARK SERIES



TRK-6000
Shown with options and gas-powered hot water pressure washer; accommodates both gasoline- and diesel-powered pressure washers



TRK-3500
Shown with options and gasoline-powered hot water pressure washer; accommodates gasoline-powered pressure washers only

Kärcher has made customizing a mobile wash system for on-site cleaning as easy as 1-2-3:

- **Step 1:** Choose from two rugged trailers—the dual-axle TRK-6000 with 330-gallon water tank or the single-axle TRK-3500 with 200-gallon water tank.

- **Step 2:** Choose a skid-mounted hot water pressure washer from those listed on page 5 to make this a professional cleaner's dream.

- **Step 3:** Customize your trailer with a broad selection of options and accessories, such as hose reels, chrome coverings, etc. A full list is below.

Both trailers are made of extra-rugged 2-by-3 inch structural tubing. The wheel and axle assembly feature leaf-spring suspension of up to 3,500 lbs. per axle and 15-inch, white-spoke wheels.

Other features include:

- Electrical wiring recessed within tubular frame;
- Lighted license plate holder and recessed tail lights;
- 1,000 lb. swivel jack with a 2 5/16-inch ball coupler for quick and easy hook up of the trailer;
- Two 3-way ball valves for easy switching of the water flow from the holding tank to a faucet;
- Rugged steel cage for security while transporting;
- High-density, polyethylene water tank with a 12-inch access port, 1 1/2-inch drain valve, 3/4-inch float valve and a 50-mesh inlet filter; and two 5/16-inch chains for additional safety.

Features

- Single or tandem axle models for customer flexibility
- 200- or 330-gallon water tank made of high-density, polyethylene
- Electrical wiring recessed within rugged tubular frame
- Two 3-way ball valves for easy switching of water flow
- Many accessories and options available

Model	Order No.	Axle	Load Capacity	Water Tank	Ship Weight*
TRK-3500	1.103-806.0	Single	3300 lbs	200 gallon	840 lbs
TRK-6000	1.103-807.0	Tandem	6000 lbs	330 gallon	1980 lbs

Dimensions: **Single Axle:** 130"L x 73"W x 58"H; **Double Axle:** 178"L x 80"W x 62"H

*Trailer and water tank only

OPTIONS [Factory Installed]

PART NO. DESCRIPTION

BATTERY

8.904-051.0 Battery Installed On Pressure Washer

BRAKE: ELECTRIC BRAKE OPTIONS

- 8.902-437.0 Electric Brake, One Axle, TRK-6000
- 8.902-445.0 Electric Brake, Two Axles, TRK-6000
- 8.902-440.0 Electric Brake, TRK-3500
- 8.902-436.0 Height Adjustable Hitch w/ 3-in. Lunette Eye (Replaces Ball Coupler)
- 8.707-532.0 2-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
- 8.707-531.0 2-5/16-inch Ball Coupler (Fits Height Adjustable Hitch 8.902-436.0 above)
- 8.707-506.0 Kit, Breakaway Actuator with Battery

BRAKE: HYDRAULIC BRAKE OPTIONS

- 8.902-438.0 Hydraulic Brake, One Axle, TRK-6000 with 2-in. Ball Coupler
- 8.902-446.0 Hydraulic Brake, Two Axles, TRK-6000 with 2-in. Ball Coupler
- 8.902-441.0 Hydraulic Brake, TRK-3500 with 2-inch Ball Coupler
- 8.902-451.0 Hydr. Brake, One Axle, TRK-6000 w/ Height Adj. Hitch (Specify Coupler below)
- 8.902-452.0 Hydr. Brake, Two Axles, TRK-6000 w/ Height Adj. Hitch (Specify Coupler below)
- 8.902-453.0 Hydraulic Brake, TRK-3500, w/ Height Adjustable Hitch (Specify coupler below)
- 8.707-532.0 Coupler, 2-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453 above)
- 8.707-531.0 Coupler, 2-5/16-inch Ball (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453 above)
- 8.707-534.0 Coupler, 3-inch Lunette Eye (Fits Height Adjustable Hitch 8.902-451.0 & 8.902-453 above)

PART NO. DESCRIPTION

CHEMICAL RACK

8.912-409.0 Dual 5 gal. Bucket Chemical Rack

FUEL TANK AND TOOL BOX [Diesel Only]

- 8.902-464.0 Fuel & Tool, Tank 45 gal., TRK-6000 only
- 8.902-465.0 Fuel & Tool, Tank 24 gal., TRK-6000 only

HOSES INSTALLED

- 8.915-156.0 High-Pressure Hose, 3/8-inch x 100 ft., 2-Wire, Installed
- 8.915-155.0 Garden Hose, 3/4-inch x 50 ft., Installed

HOSE REEL KITS (Hose NOT Included)

- 8.902-447.0 Hose Reel Kit for 100 ft. of 3/8-inch High-Pressure Hose
- 8.902-448.0 Hose Reel Kit for 200 ft. of 3/8-inch High-Pressure Hose
- 8.902-449.0 Hose Reel Kit for 75 ft. of 3/4-inch Industrial Garden Hose

MOUNTING KITS

8.902-455.0 Skid Mounting & Plumbing Kit (Required for Mounting Pressure Washer to Trailer)

SIGNAGE PLATE

8.902-469.0 Signage Plate

WHEELS AND FENDERS

- 8.902-466.0 Chrome Wheels, Pair, w/ ST205/75D15/C Spare Tire (2 Pair Required for TRK-6000)
- 8.902-468.0 Chrome Fenders, Pair, TRK-6000 Tandem Axle
- 8.902-467.0 Chrome Fenders, Pair, TRK-3500 Single Axle

DETERGENTS | Formulated for Pressure Washers
GENERAL CLEANERS
KD-100: All-Purpose Cleaner for Pressure Washers


9.803-791.0



9.803-789.0

- Dilution Ratio: 130:1
- Biodegradable: Yes

KD-100 is a non-caustic, butyl-based blend of ingredients formulated to provide a low-foaming detergent for safe removal of dirt and grime off a broad range of surfaces around the home or shop. It is formulated to pass through a pressure washer without damaging the high-pressure pump. Furthermore, it is safe to use on aluminum, stainless steel, glass, plastic, paint and fine automotive finishes.



Part No.	Description	Container	Ship Wt
9.803-789.0	KD-100 All-Purpose Cleaner	5 Gal Pail	47 lbs
9.803-791.0	KD-100 All-Purpose Cleaner	55 Gal Drum	495 lbs

KD-120: Chlorinated All-Purpose Cleaner for Kitchens


9.803-716.0



9.803-712.0

- Dilution Ratio: 60:1
- Biodegradable: Yes

KD-120 is a high-powered, non-caustic, general purpose cleaner with a bleach additive for extra-effective cleaning of floors, walls, cabinets, ceilings, pens and crates in a variety of applications, particularly kitchens, food processing and animal control. The chlorinated formula of KD-120 attacks stains, dirt, soils with carbon, oils, fats and greases plus removes mildew, mold, soap scum and tough odors. It's safe on aluminum, stainless steel, glass, plastic and paint.

Part No.	Description	Container	Ship Wt
9.803-712.0	KD-120 All-Purpose Cleaner	5 Gal Pail	46 lbs
9.803-716.0	KD-120 All-Purpose Cleaner	55 Gal Drum	495 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

VEHICLE CLEANERS
KD-200: Extra-Strength Vehicle Cleaner


9.803-750.0



9.803-720.0

- Dilution Ratio: 120:1
- Biodegradable: Yes

KD-200 is concentrated, non-butyl, heavy duty vehicle wash formulated to quickly and effectively remove dirt, grime, grease and road film from vehicles. It is distinguished by a special alcohol ingredient that helps restore old vehicle painted surfaces and can even give paint a "newly waxed" appearance. KD-200 is ideal for vehicle wash facilities where it can be used on tractor-trailers, heavy equipment, shop floors, metal or plastic tanks, RVs, trucks, and autos.

Part No.	Description	Container	Ship Wt
9.803-720.0	KD-200 Vehicle Cleaner	5 Gal Pail	45 lbs
9.803-750.0	KD-200 Vehicle Cleaner	55 Gal Drum	496 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-240: Super-Duty Vehicle Cleaner


9.803-754.0



9.803-724.0

- Dilution Ratio: 150:1
- Biodegradable: Yes

KD-240 is a low-alkaline, butyl-based degreaser detergent designed for the toughest of vehicle cleaning tasks. This special emulsifying formula contains high-powered cleaning agents for attacking grease, baked-on grime, road film and smoke trails. It is excellent as a pre-spray for cleaning engines, whitewall tires and vinyl and metal tops. KD-240 is biodegradable and contains Kärcher's exclusive pump and coil protection formula.

Part No.	Description	Container	Ship Wt
9.803-724.0	KD-240 Vehicle Cleaner*	5 Gal Pail	47 lbs
9.803-754.0	KD-240 Vehicle Cleaner*	55 Gal Drum	506 lbs
8.725-470.0	KD-240-NC Vehicle Cleaner	5 Gal Pail	47 lbs
8.725-469.0	KD-240-NC Vehicle Cleaner	55 Gal Drum	506 lbs

**Hazmat product (UPS shipments are subject to UPS Hazmat fee)*

DETERGENTS | Formulated for Pressure Washers

VEHICLE CLEANERS - cont.

KD-260: Heavy-Duty Vehicle Cleaner with Wax



9.803-758.0

- Dilution Ratio: 150:1
- Biodegradable: Yes



9.803-726.0

KD-260 is a highly concentrated vehicle cleaner that produces rich suds to increase dwell time and deep clean any vehicle surface. This formula is highly effective in removing road film and grime, yet is safe enough for use on polished aluminum. The wax additive gives KD-260 the extra performance feature that produces an attractive finish and shine for your vehicle. It also helps prevent dirt from adhering to the surface and reduces water spotting.



Part No.	Description	Container	Ship Wt
9.803-726.0	KD-260 Vehicle Cleaner*	5 Gal Pail	48 lbs
9.803-758.0	KD-260 Vehicle Cleaner*	55 Gal Drum	517 lbs
8.725-472.0	KD-260 NC Vehicle Cleaner	5 Gal Pail	48 lbs
8.725-471.0	KD-260 NC Vehicle Cleaner	55 Gal Drum	517 lbs

* Hazmat product (UPS shipments are subject to UPS Hazmat fee)

CLEANERS - DEGREASERS

KD-300: General Purpose Liquid Cleaner-Degreaser



9.803-730.0

- Dilution Ratio: 150:1
- Biodegradable: Yes

KD-300 is a highly concentrated, non-caustic degreaser ideal for cleaning and removing oil and grease from vehicles and equipment in many applications. Based on its foaming properties, KD-300 works great with cold water pressure washers. Its non-caustic properties make it safe on fine automotive finishes and is especially effective in removing hard-to-clean hydrocarbon-based deposits, such as baked-on carbon, caked-on axle grease and even asphalt or tar.

Part No.	Description	Container	Ship Wt
9.803-730.0	KD-300 Cleaner-Degreaser*	5 Gal Pail	47 lbs
8.725-474.0	KD-300-NC Cleaner-Degreaser	5 Gal Pail	47 lbs

* Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-320: Heavy-Duty Cleaner-Degreaser



9.803-772.0

- Dilution Ratio: 100:1
- Biodegradable: Yes



9.803-732.0

KD-320 is a heavy-duty, non-butyl, non-caustic degreaser that quickly penetrates and removes grime, oil and grease in a variety of applications, including vehicles, equipment, RVs, drilling rigs, trucks and other structures. This high-concentrated blend is formulated to wet, penetrate and suspend soil, oils and grease and yet is safe to use indoors or outdoors on virtually every surface, including aluminum, stainless steel, glass, plastic, paint and fine automotive finishes.

Part No.	Description	Container	Ship Wt
9.803-732.0	KD-320 Cleaner-Degreaser*	5 Gal Pail	48 lbs
9.803-772.0	KD-320 Cleaner-Degreaser*	55 Gal Drum	505 lbs
8.725-476.0	KD-320-NC Cleaner-Degreaser	5 Gal Pail	48 lbs
8.725-475.0	KD-320-NC Cleaner-Degreaser	55 Gal Drum	505 lbs

* Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-330: Brown Soap Cleaner-Degreaser



8.916-140.0

- Dilution Ratio: 50:1
- Biodegradable: Yes



8.916-134.0

KD-330 is an extra-strong, caustic-based cleaner and degreaser. It is ideal for cleaning heavy equipment, over-the-road vehicles and off-road machinery. This non-butyl detergent has just enough caustic to provide excellent cleaning horsepower while displaying the properties and usability of a non-caustic detergent. It is especially effective cleaning exhaust stains, road grime and heavy deposits of dirt and oil.

Part No.	Description	Container	Ship Wt
8.916-134.0	KD-330 Cleaner-Degreaser	5 Gal Pail	42 lbs
8.916-140.0	KD-330 Cleaner-Degreaser	55 Gal Drum	515 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

DETERGENTS | Formulated for Pressure Washers

CLEANERS - DEGREASERS - cont.

KD-340: Extra Heavy-Duty Cleaner-Degreaser



9.803-739.0

- Dilution Ratio: 128:1
- Biodegradable: Yes



9.803-734.0

KD-340 is a highly concentrated, butyl-based degreaser designed for the toughest of vehicle cleaning tasks. The high-caustic formula has proven to be extra-effective in cleaning heavy equipment and off-road vehicles. It has the cleaning horsepower to remove heavy deposits of oil, grease and dirt as well as fifth-wheel grease, hydraulic oils and diesel smoke stains.



Part No.	Description	Container	Ship Wt
9.803-734.0	KD-340 Cleaner-Degreaser	5 Gal Pail	48 lbs
9.803-739.0	KD-340 Cleaner-Degreaser	55 Gal Drum	515 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-360: Super-Duty Cleaner-Degreaser



9.803-779.0

- Dilution Ratio: 30:1
- Biodegradable: Yes



9.803-736.0

KD-360 is a highly concentrated and caustic, non-toxic degreaser that will tackle the toughest of cleaning tasks. It is extremely effective in removing the most difficult-to-clean oil, grease and hydrocarbon-based deposits. It cuts grease, grime, oil, burnt carbon and exhaust trails quickly and can even be used on everything from vent hoods and ovens to engine blocks, heavy equipment and concrete floors. Do not use on aluminum, magnesium, galvanized metal or fine painted surfaces.

Part No.	Description	Container	Ship Wt
9.803-736.0	KD-360 Cleaner-Degreaser	5 Gal Pail	58 lbs
9.803-779.0	KD-360 Cleaner-Degreaser	55 Gal Drum	632 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

SPECIALTY CLEANERS

KD-400: Citrus-Based Cleaner-Degreaser



9.803-741.0

- Dilution Ratio: 50:1
- Biodegradable: Yes



9.803-740.0

KD-400 is formulated with d-Limonene, a product that is derived from the peeling of citrus fruit producing an effective, all-natural degreaser. With d-Limonene as a natural solvent that quickly emulsifies oils and greases, KD-400 is very effective in removing grease, grime and oils from a variety of surfaces. Its deep, penetrating action can also remove baked-on smoke, hydrocarbon-based deposits and exhaust trails. It is biodegradable and safe to use on most surfaces.

Part No.	Description	Container	Ship Wt
9.803-740.0	KD-400 Citrus Cleaner-Degreaser	5 Gal Pail	44 lbs
9.803-741.0	KD-400 Citrus Cleaner-Degreaser	55 Gal Drum	466 lbs

KD-440: Concrete Cleaner



9.803-784.0

- Dilution Ratio: 150:1
- Biodegradable: Yes



9.803-744.0

KD-440 is a non-caustic, butyl-based blend of ingredients formulated for cleaning of stone and concrete surfaces. This popular cleaner is effective in removing grime from concrete but safe enough not to damage painted surfaces. It is effective in removing oil, grease, baked-on carbon, tar and asphalt from floors, walls and stainless steel. As with other Kärcher detergents, KD-440 is engineered to pass through a pressure washer without damaging the high-pressure pump.

Part No.	Description	Container	Ship Wt
9.803-744.0	KD-440 Concrete Cleaner*	5 Gal Pail	47 lbs
9.803-784.0	KD-440 Concrete Cleaner*	55 Gal Drum	505 lbs
8.725-477.0	KD-440-NC Concrete Cleaner	5 Gal Pail	47 lbs
8.725-478.0	KD-440-NC Concrete Cleaner	55 Gal Drum	505 lbs

** Hazmat product (UPS shipments are subject to UPS Hazmat fee)*

DETERGENTS | Formulated for Pressure Washers

ALUMINUM BRIGHTENERS & COIL CLEANER

KD-460: Super-Strength Aluminum Brightener



9.803-747.0

- Dilution Ratio: 5:1 to 20:1
- Biodegradable: Yes



9.803-746.0

KD-460 is an extra-strength, acid-based, aluminum brightener designed to tackle the toughest cleaning of truck trailers, aluminum wheels and for preparing aluminum for painting. Do NOT use on glass, polished aluminum or anodized aluminum. It uses ammonium bifluoride, not hydrofluoric acid, and is non-fuming, yet effective in removing grease, oils, baked-on carbon and diesel smoke.

Part No.	Description	Container	Ship Wt
9.803-746.0	KD-460 Aluminum Brightener	5 Gal Pail	50 lbs
9.803-747.0	KD-460 Aluminum Brightener	55 Gal Drum	537 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-480: Polished Aluminum Cleaner



9.803-749.0

- Dilution Ratio: Undiluted
- Biodegradable: Yes



9.803-748.0

KD-480 is a concentrated, non-etching detergent formulated to quickly penetrate and remove grease, grime, dirt, road film and welding smut from polished aluminum and stainless steel surfaces. This ready-to-use, precise blend of acids, inhibitors and surfactants is biodegradable and is a medium-foaming product that should be applied without dilution.

Part No.	Description	Container	Ship Wt
9.803-748.0	KD-480 Polished Aluminum Clnr	5 Gal Pail	48 lbs
9.803-749.0	KD-480 Polished Aluminum Clnr	55 Gal Drum	521 lbs

Hazmat product (UPS shipments are subject to UPS Hazmat fee)

KD-420: Acid-Based Coil Cleaner



9.803-742.0

- Dilution Ratio: 16:1
- Biodegradable: Yes

KD-420 is a powerful, acid-based coil cleaner that effectively attacks rust and hard water deposits in pressure washer hot water coils. KD-420 does not contain mineral acids, such as hydrochloric (muriatic), sulfuric and hydrofluoric acids that are commonly used in other coil conditioners. Even though it is acid-based, KD-420 is formulated so it can safely pass through a pressure washer without damaging the high-pressure pump. Do NOT use on aluminum or tin.

Part No.	Description	Container	Ship Wt
9.803-742.0	KD-420 Coil Cleaner Powder Concentrate, 2 pound, case of 12	12 x 2 lbs	28 lbs

SPECIALTY CLEANERS

RM-110: Scale Inhibitor



9.556-011.0



9.556-111.0

RM-110 RTU (Ready to Use) is a multi-component product made from heat-resistant organic and inorganic salts. Its stabilizing action on the minerals, which cause hardness in water, is based on its capacity to impede the growth of mineral deposits thus extending both the life of a heating coil and the time between acid cleanings.

Part No.	Description	Container	Ship Wt
9.556-111.0	RM-110 Scale Inhibitor	4 x 1-gal	37 lbs
9.556-011.0	RM-110 Scale Inhibitor	5 Gal Pail	46 lbs

- For units with output of 2.1 - 3.5 GPM: Set pulse generator at 32 - 55 seconds
- For units with output of 3.5 - 5.3 GPM: Set pulse generator at 10 - 50 seconds

DETERGENTS | Formulated for Pressure Washers

GRAFFITI REMOVERS

GRAFFITI REMOVERS: 3 Easy-to-Apply, Fast-Acting Formulas



KÄRCHER Graffiti Remover products are easy-to-apply liquid formulas with deep penetrating action designed for use on many surfaces. There are three strong, fast-acting product formulations that safely penetrate and loosen the graffiti making it easy to remove. No extended soak time is needed and Kärcher Graffiti Remover can be applied and re-applied to wet surfaces without waiting to dry first, as is the case with other graffiti removers.

Brick, Masonry & Concrete Cleaner:

This unique product formulation re-liquefies and dissolves spray paint and marker tracks within seconds. No extended soak time is needed and it can be re-applied to wet surfaces as needed, without waiting for the surface to dry.

Metal Saver:

Metal Saver is an easy to use biodegradable, liquid cleaning agent designed for use on pre-finished metal and powder-coated surfaces such as overhead doors, color bonded fencing, mail boxes, traffic signal boxes, painted metal and other types of metal surfaces.

Sign Saver:

Sign Saver is an easy to use biodegradable, liquid cleaner designed for use on interior and exterior signs including most metal and plastic signs, even those with a reflective coating. It is especially effective on highway and railway metal signs.



**EXCLUSIVE
PUMP
SPRAYER**



8.750-099.0

Finally, a heavy-duty, affordable sprayer to use with acid applications.

- Viton® equipped
- Heavy density tank resists breaking, leaking and chemical corrosion
- Wide funnel top assures easy filling and pouring
- 4' professional-grade hose
- 18" angled unbreakable extension
- Comes with poly fan and pin-to-cone spray tips



- **Fast acting**—removes graffiti in 90 seconds or less!
- **Versatile**—formulas for cleaning signs, metal, brick!
- **No wait time**—apply or re-apply to wet surfaces!

Part No.	Description	Container	Ship Wt
8.749-827.0	Brick, Masonry & Concrete Cleaner*	Case of 12 x 1-Qt Bottles	27 lbs
8.749-835.0	Brick, Masonry & Concrete Cleaner*	Case of 4 x 1-Gal Jugs	34 lbs
8.749-828.0	Brick, Masonry & Concrete Cleaner*	5 Gallon Cube	45 lbs
8.749-832.0	Metal Saver	Case of 12 x 1-Qt Bottles	27 lbs
8.749-833.0	Metal Saver	Case of 4 x 1-Gal Jugs	34 lbs
8.749-834.0	Metal Saver	5 Gallon Cube	45 lbs
8.749-829.0	Sign Saver	Case of 12 x 1-Qt Bottles	27 lbs
8.749-830.0	Sign Saver	Case of 4 x 1-Gal Jugs	34 lbs
8.749-831.0	Sign Saver	5 Gallon Cube	45 lbs
8.750-099.0	Chemically Resistant Sprayer	3 Gallon Sprayer	

*Brick, Masonry & Concrete Cleaner is a hazmat product and cannot be shipped via UPS